

단계1: hello.js 확인

```
docker > samples > 2. 나의 도커컨테이너 생성 > JS hello.js > ...  
1  const http = require('http');  
2  const os = require('os');  
3  console.log("Test server starting ...");  
4  
5  const handler = function(req, res) {  
6    console.log("Received request from "+req.connection.  
7      remoteAddress);  
8    res.writeHead(200);  
9    res.end("Container Hostname: "+os.hostname()+"\n");  
10  };  
11  
12  let www = http.createServer(handler);  
13  www.listen(8080);
```

단계2: Dockerfile 확인

docker > samples > 2. 나의 도커컨테이너 생성 >  Dockerfile > ...

```
1    # base image 정의
2    FROM node:12
3    # 소스 코드 복사
4    COPY hello.js /
5    # 소스 코드 실행
6    CMD ["node", "/hello.js"]
7
```

단계3: Dockerfile과 hello.js이 있는 폴더로 이동

```
ls # 파일 확인
```




A terminal window with a dark background. The top status bar shows '16%' battery and '9.9 GB' memory. The prompt is 'good593' with a monkey emoji. The command prompt is a blue arrow pointing right. The command 'ls' is entered in green. The output shows 'Dockerfile', 'README.md', and 'hello.js'. The prompt is repeated below the output.

```
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ➤ ↵ de
v ±
➤ ls
Dockerfile README.md hello.js
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ➤ ↵ de
v ±
➤
```

단계4: Dockerfile을 이용하여 hellojs 이미지 생성

- 명령어: `docker build -t <이미지명>:<태그> <기준이되는 폴더위치>`

```
docker build -t hellojs:latest .
```

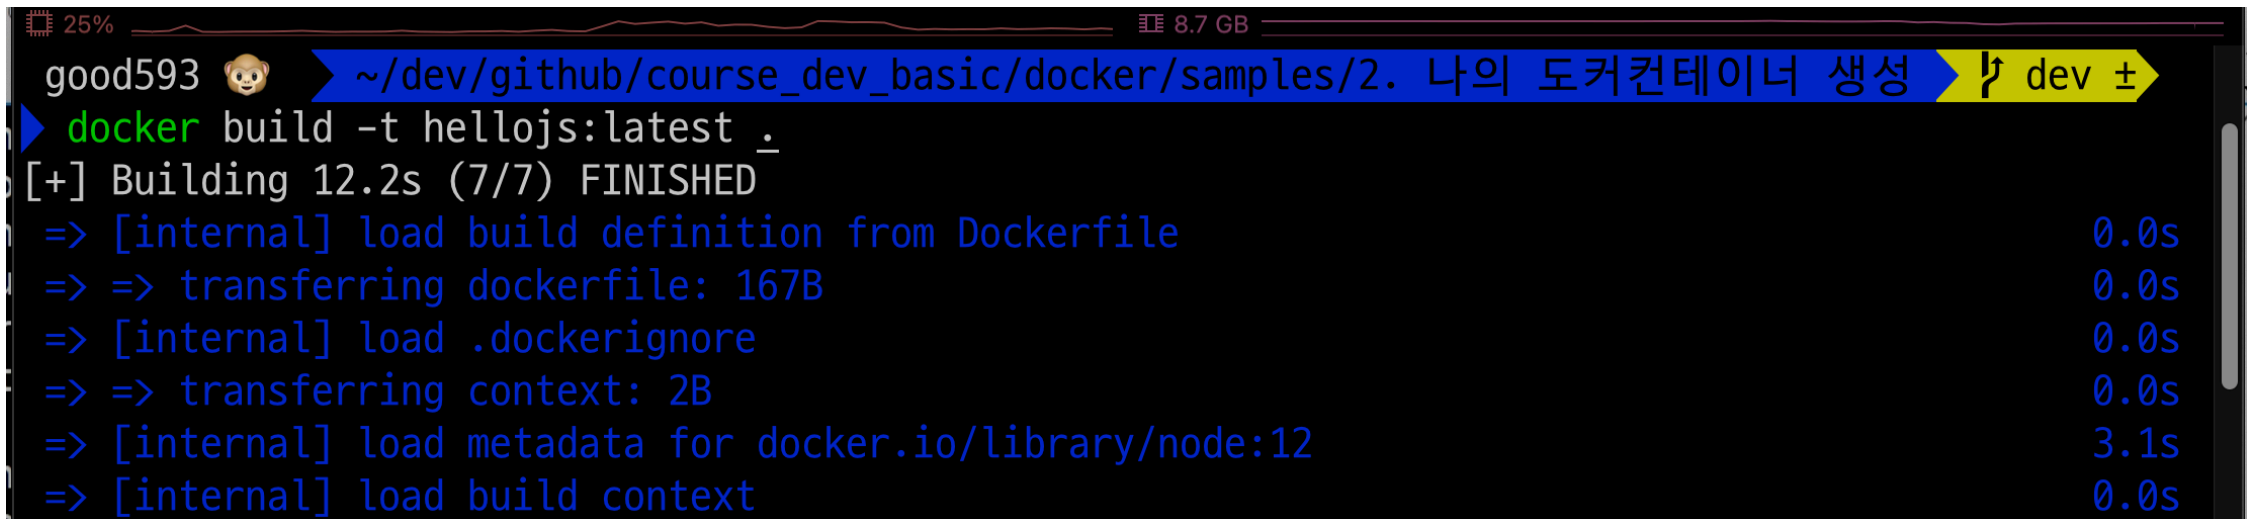

A terminal window screenshot showing the execution of the `docker build -t hellojs:latest .` command. The terminal has a dark background with a status bar at the top showing '25%' battery, '8.7 GB' memory, and a path. The command is entered in green. The output shows the build process steps and their durations.

```
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 dev ±
▶ docker build -t hellojs:latest .
[+] Building 12.2s (7/7) FINISHED
=> [internal] load build definition from Dockerfile 0.0s
=> => transferring dockerfile: 167B 0.0s
=> [internal] load .dockerignore 0.0s
=> => transferring context: 2B 0.0s
=> [internal] load metadata for docker.io/library/node:12 3.1s
=> [internal] load build context 0.0s
```

단계5: 생성된 hellojs 이미지 확인

```
docker image ls
```

```
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ▶ ↗️ dev ±
▶ docker image ls
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE
hellojs       latest    533fcf1c3af1   5 minutes ago  864MB
ubuntu        latest    bf9e5b7213b4   4 months ago   69.2MB
mysql         latest    54fea0bc79f9   6 months ago   599MB
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ▶ ↗️ dev ±
▶ █
```

단계7: hellojs-web 컨테이너 생성

- 태그가 latest인 경우는 생략 가능

```
docker run --name hellojs-web -d -p 8080:8080 hellojs
```

```
good593 🐒 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ▶ dev ±
▶ docker run --name hellojs-web -d -p 8080:8080 hellojs
da6ca8c8d320958de4b63e56a23b6b2a325183cf698f8b20eb3c7b69cf787bac
good593 🐒 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ▶ dev ±
▶
```

단계8: 작동중인 hellojs-web 컨테이너 확인

```
docker ps
```


```
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 > dev ±
> docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS
da6ca8c8d320	hellojs	"docker-entrypoint.s..."	2 minutes ago	Up 2 minutes	0.0.0.0:8080->8080/tcp
fd6f8e571db3	mysql	"docker-entrypoint.s..."	3 months ago	Up 6 hours	0.0.0.0:3306->3306/tcp, 33060/tcp

```
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 > dev ±
> █
```


단계9: hellojs-web에 접속

- <http://localhost:8080/>

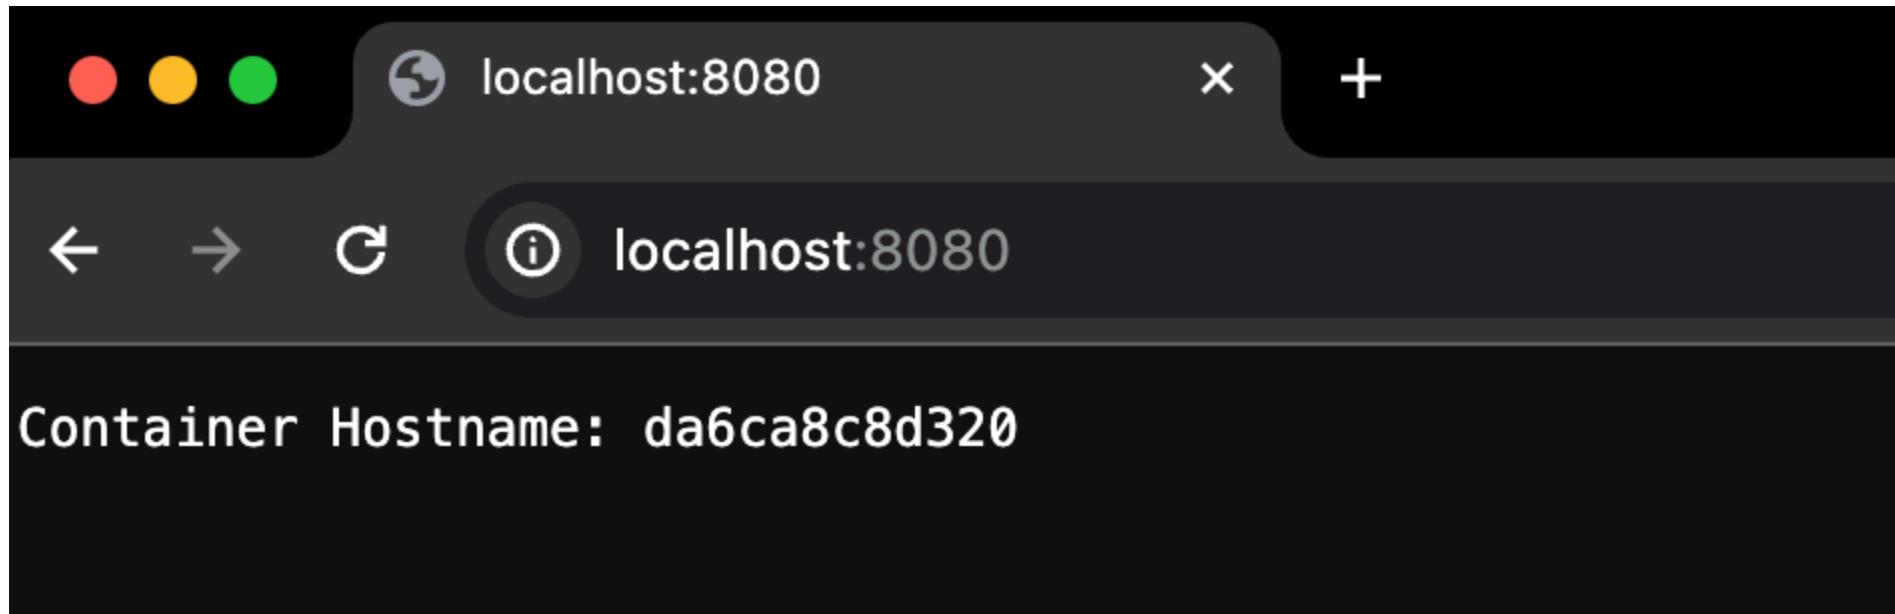

단계10: 실행중인 컨테이너 삭제

```
docker rm -f hellojs-web
docker ps -a
```

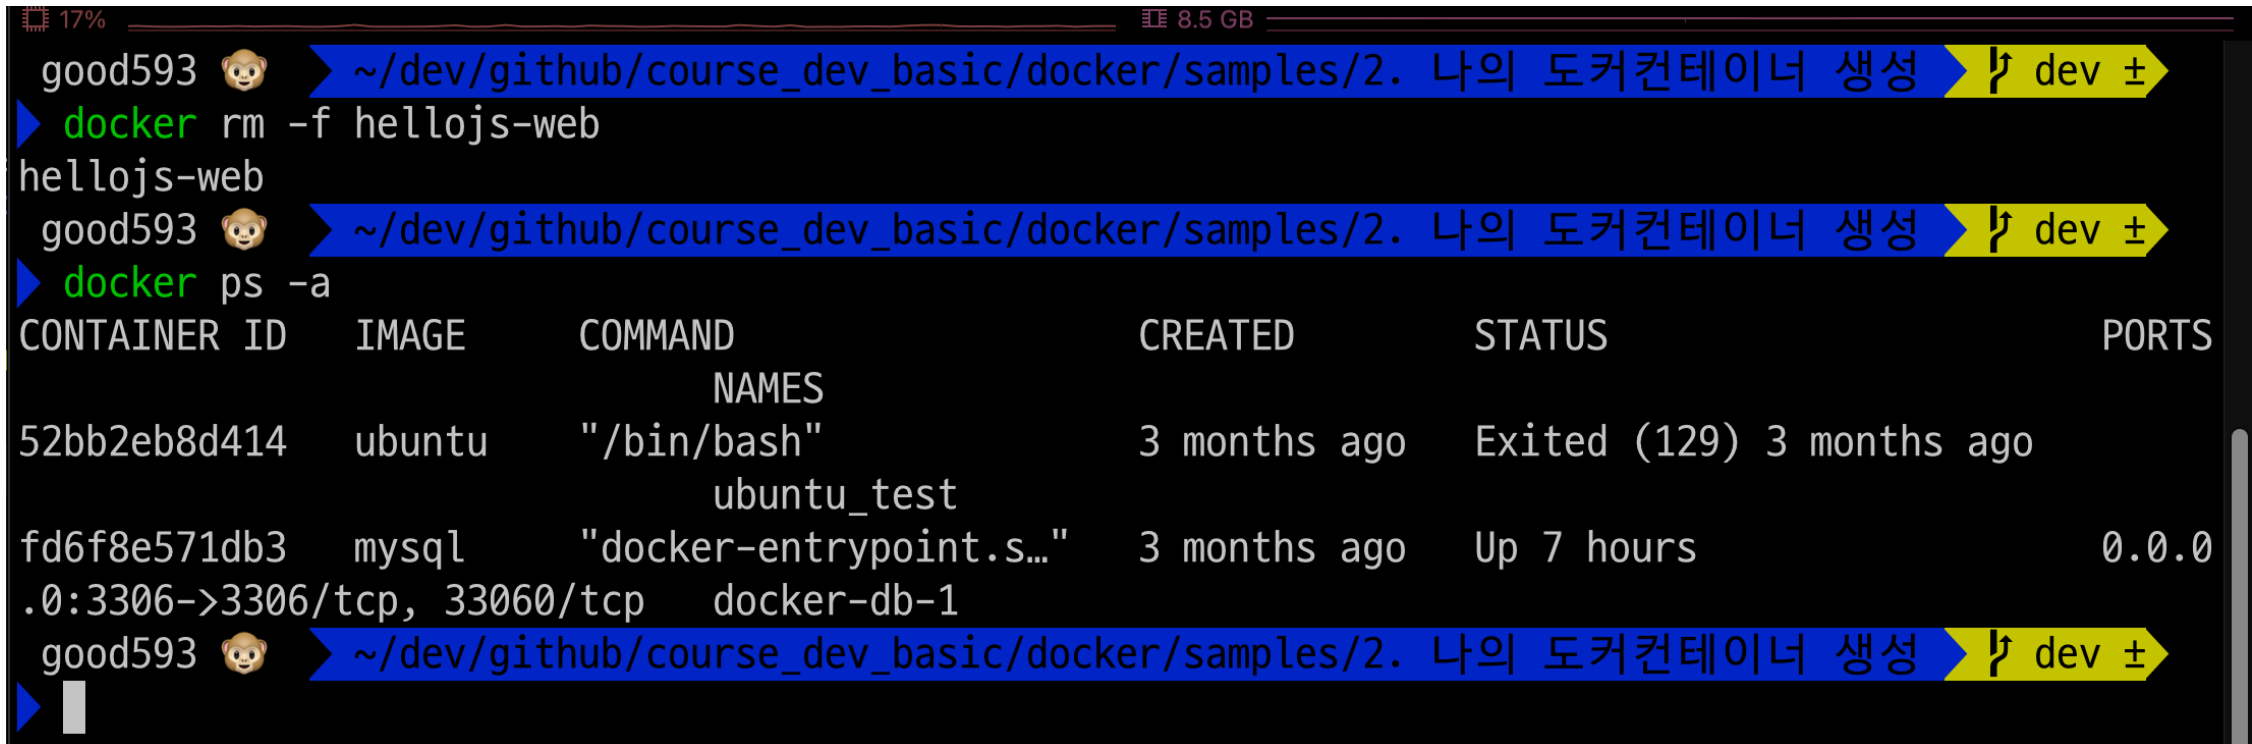


The terminal screenshot shows a user named 'good593' executing Docker commands. The first command is 'docker rm -f hellojs-web', which successfully removes the container. The second command is 'docker ps -a', which lists all containers. The output shows two containers: '52bb2eb8d414' (ubuntu) which has exited, and 'fd6f8e571db3' (mysql) which is running. The terminal also displays the user's path and a navigation bar with a search icon and a 'dev' tab.

```
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
> docker rm -f hellojs-web
hellojs-web
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
> docker ps -a
CONTAINER ID   IMAGE      COMMAND                  CREATED        STATUS        PORTS
NAMES
52bb2eb8d414   ubuntu    "/bin/bash"             3 months ago  Exited (129)  3 months ago
ubuntu_test
fd6f8e571db3   mysql     "docker-entrypoint.s..." 3 months ago  Up 7 hours    0.0.0
.0:3306->3306/tcp, 33060/tcp  docker-db-1
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
>
```


단계11: 도커허브 > repositories > 아이디 확인

- 도커허브: <https://hub.docker.com/>

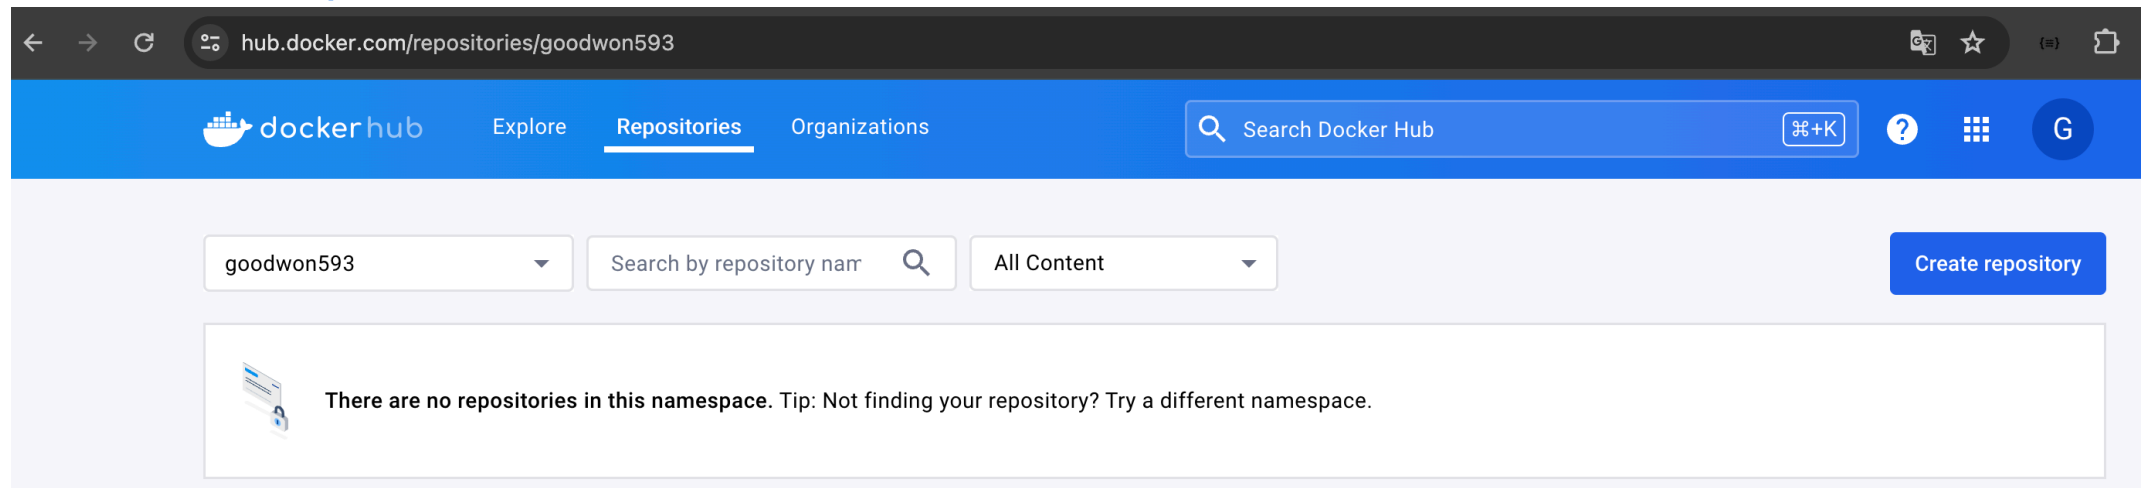

단계12: 도커 로그인

```
docker login
```

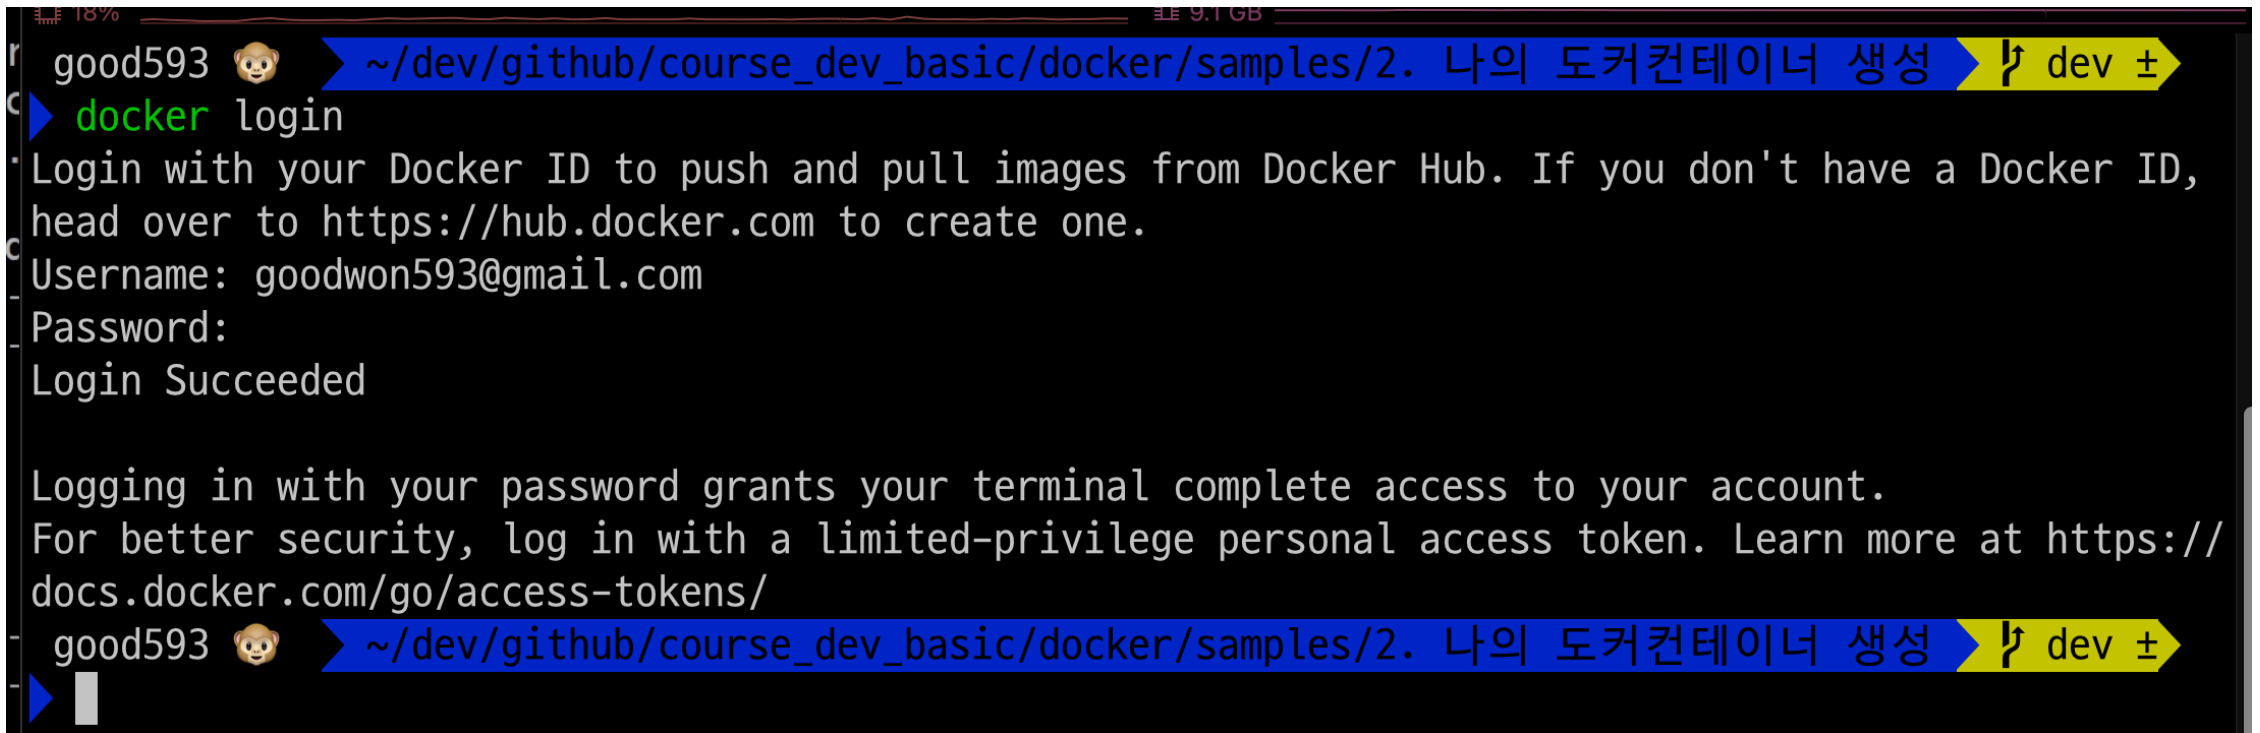
A terminal window with a dark background. At the top, there's a status bar with '18%' on the left and '9.1 GB' on the right. Below it, a blue banner contains the text '~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성' followed by a yellow button with a terminal icon and 'dev ±'. The terminal shows the command 'docker login' in green. The output is: 'Login with your Docker ID to push and pull images from Docker Hub. If you don't have a Docker ID, head over to https://hub.docker.com to create one. Username: goodwon593@gmail.com Password: Login Succeeded'. Below this, a message says: 'Logging in with your password grants your terminal complete access to your account. For better security, log in with a limited-privilege personal access token. Learn more at https://docs.docker.com/go/access-tokens/'. At the bottom, the same blue banner and yellow button are repeated. The prompt 'good593' is followed by a monkey emoji and a blue arrow pointing to a cursor.

```
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ↗ dev ±  
➤ docker login  
Login with your Docker ID to push and pull images from Docker Hub. If you don't have a Docker ID,  
head over to https://hub.docker.com to create one.  
Username: goodwon593@gmail.com  
Password:  
Login Succeeded  
  
Logging in with your password grants your terminal complete access to your account.  
For better security, log in with a limited-privilege personal access token. Learn more at https://  
docs.docker.com/go/access-tokens/  
good593 🐵 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ↗ dev ±  
➤ █
```

단계13: 도커허브아이디/이미지명

- 명령어: `docker tag <이미지명>:<테그> <도커허브아이디>/<이미지명>:<테크>`

```
docker tag hellojs:latest goodwon593/hellojs:latest
docker image ls # 생성된 이미지 확인
```

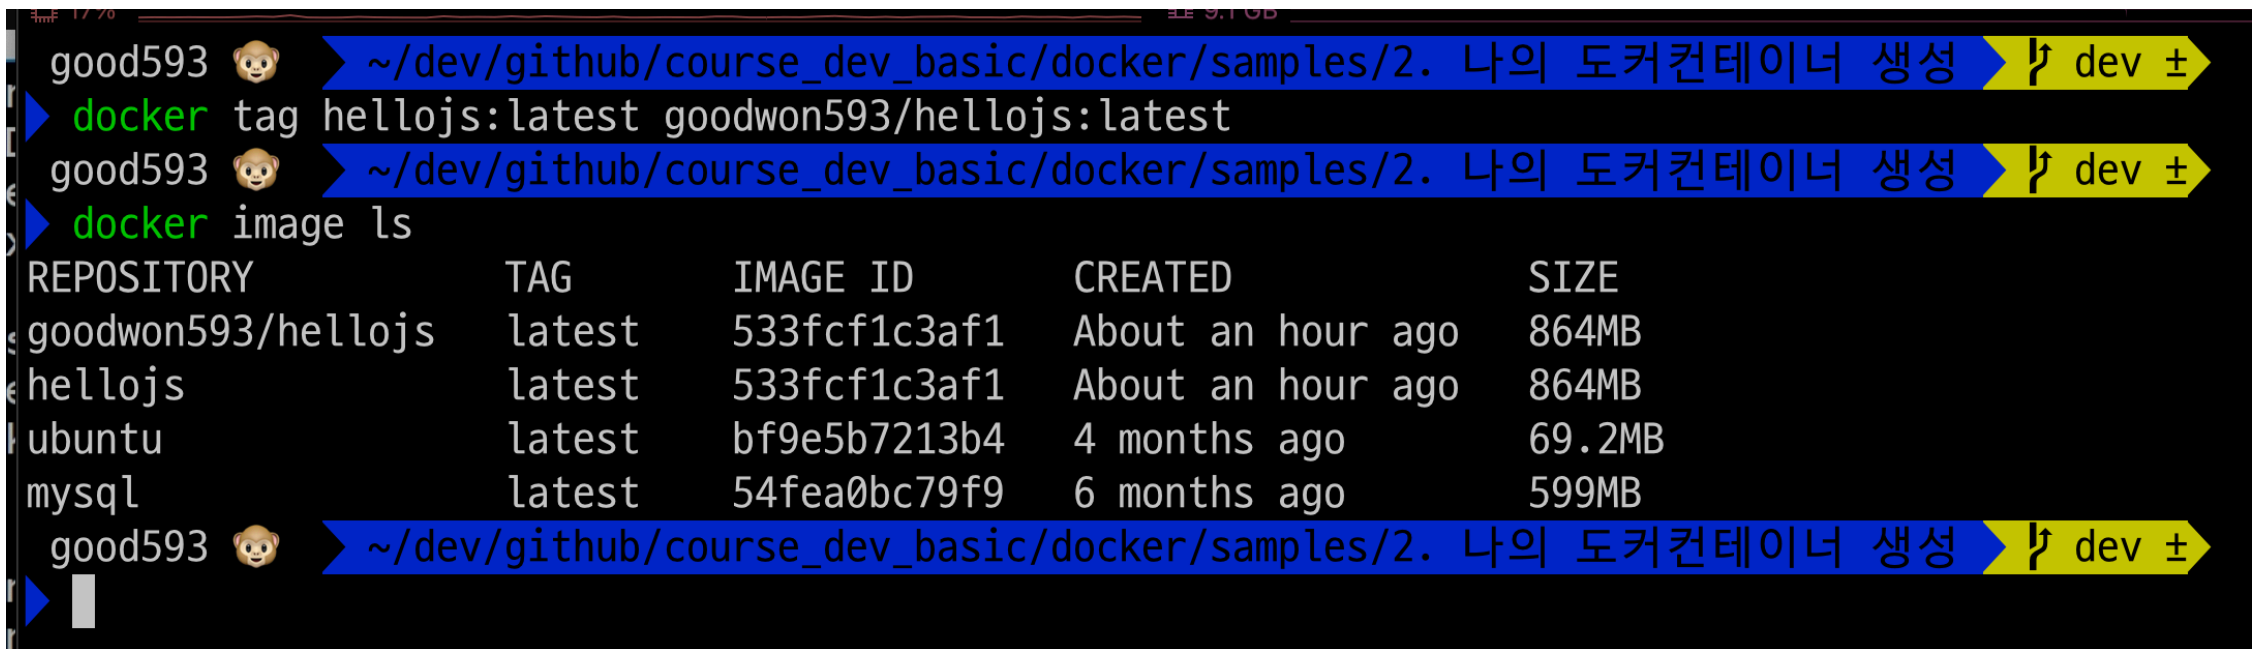

The terminal screenshot shows a user named 'good593' executing Docker commands. The first command is `docker tag hellojs:latest goodwon593/hellojs:latest`. The second command is `docker image ls`, which outputs a table of Docker images. The table has five columns: REPOSITORY, TAG, IMAGE ID, CREATED, and SIZE. The output shows four images: 'goodwon593/hellojs' (latest, 533fcf1c3af1, About an hour ago, 864MB), 'hellojs' (latest, 533fcf1c3af1, About an hour ago, 864MB), 'ubuntu' (latest, bf9e5b7213b4, 4 months ago, 69.2MB), and 'mysql' (latest, 54fea0bc79f9, 6 months ago, 599MB). The terminal also shows the user's prompt and a blue banner with Korean text.

```
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
> docker tag hellojs:latest goodwon593/hellojs:latest
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
> docker image ls
REPOSITORY          TAG          IMAGE ID        CREATED         SIZE
goodwon593/hellojs  latest       533fcf1c3af1    About an hour ago  864MB
hellojs             latest       533fcf1c3af1    About an hour ago  864MB
ubuntu             latest       bf9e5b7213b4    4 months ago     69.2MB
mysql              latest       54fea0bc79f9    6 months ago     599MB
good593 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성
```

단계14: 도커허브로 이미지 업로드

- 명령어: `docker push <도커허브아이디>/<이미지명>:<테크>`

```
docker push goodwon593/hellojs
```

```
good593 🐒 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ➤ dev ±
➤ docker push goodwon593/hellojs
Using default tag: latest
The push refers to repository [docker.io/goodwon593/hellojs]
ec26dda051d3: Pushed
e30d0738b075: Mounted from library/node
255bf83a5bbd: Mounted from library/node
bb080122b2fc: Mounted from library/node
b2bffcfc4be5f: Mounted from library/node
b95747d89040: Mounted from library/node
7a5ddcc261ad: Mounted from library/node
35e626ec2072: Mounted from library/node
abe5ee099fc9: Mounted from library/node
d5bb7390153e: Mounted from library/node
latest: digest: sha256:0ec292f86a0c025cfceb2a7053e750ffa3fa658658b4d6209ce1d5caec672eae size: 2422
good593 🐒 ~/dev/github/course_dev_basic/docker/samples/2. 나의 도커컨테이너 생성 ➤ dev ±
```

단계15: 도커허브에서 이미지 업로드 확인

 dockerhub

Explore

Repositories

Organizations

 Search Docker Hub

 +K





 G

goodwon593 ▼

Search by repository name 

All Content ▼

Create repository

goodwon593 / **hellojs**

Contains: Image | Last pushed: 3 minutes ago

 Inactive

 0

 0

 Public