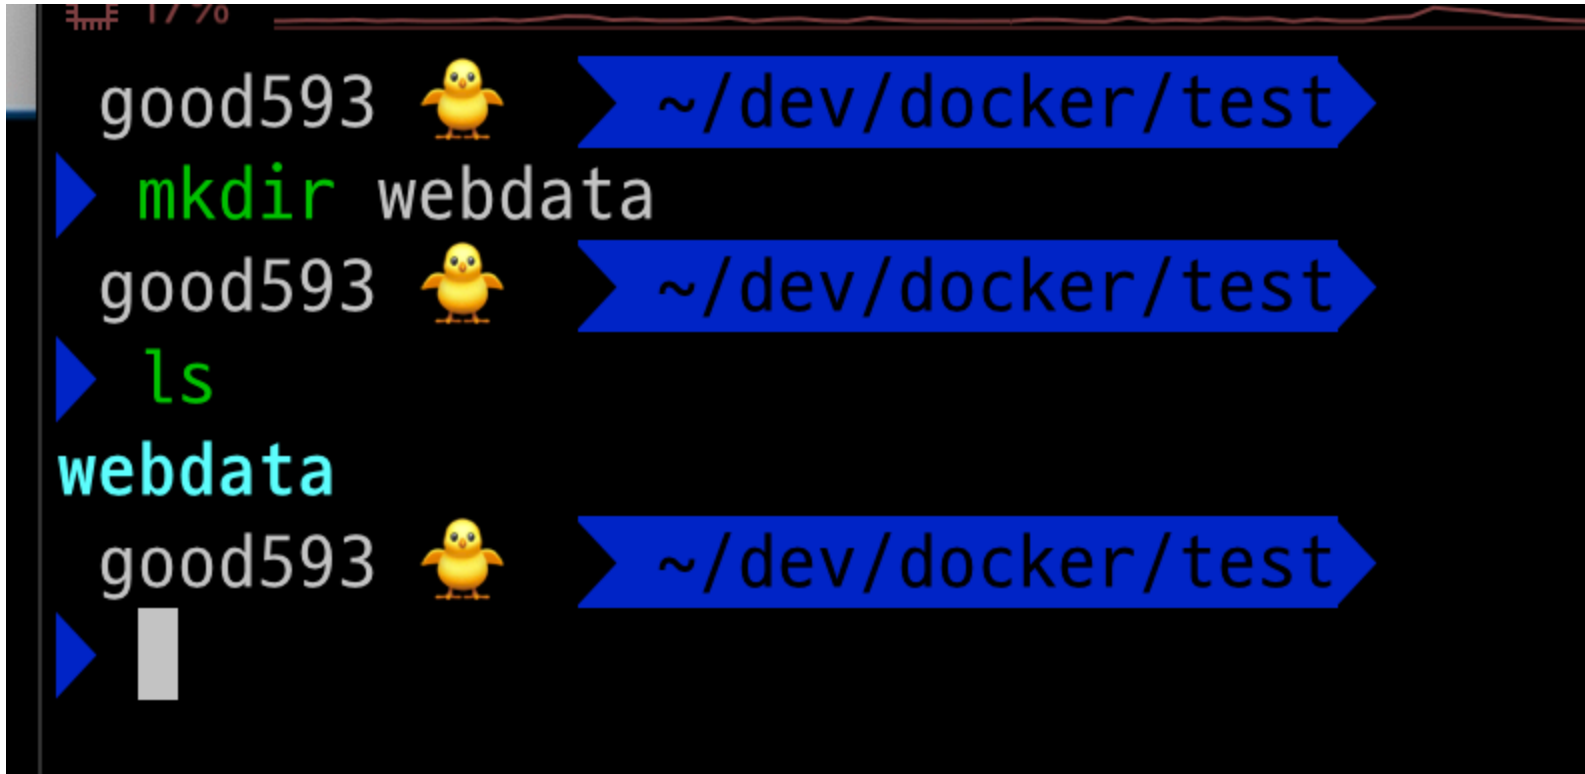


단계1: webdata 폴더 만들기

```
mkdir webdata  
ls
```

A terminal window with a black background and a yellow penguin icon. The prompt is 'good593'. The first command is 'mkdir webdata', which is highlighted with a blue arrow pointing to the right, containing the text '~ /dev/docker/test'. The second command is 'ls', which is also highlighted with a blue arrow pointing to the right, containing the text '~ /dev/docker/test'. The output of the 'ls' command is 'webdata', displayed in cyan. The prompt 'good593' is followed by a cursor.

```
good593 ~ /dev/docker/test  
▶ mkdir webdata  
good593 ~ /dev/docker/test  
▶ ls  
webdata  
good593 ~ /dev/docker/test  
▶
```

단계2: index.html 생성

```
cd webdata  
echo "<h1>Hello World</h1>" > index.html  
cat index.html
```

```
good593 🐥 ~/dev/docker/test  
▶ cd webdata  
good593 🐥 ~/dev/docker/test/webdata  
▶ echo "<h1>Hello World</h1>" > index.html  
good593 🐥 ~/dev/docker/test/webdata  
▶ cat index.html  
<h1>Hello World</h1>  
good593 🐥 ~/dev/docker/test/webdata  
▶
```

단계3: nginx 컨테이너 생성 및 실행


- 명령어: `docker run -d --name <컨테이너이름> -p 80:80 -v <호스트 디렉토리>:<컨테이너 디렉토리>:ro <이미지명>`
 - `ro` : read only

```
docker run -d --name web -p 80:80 -v /Users/gyoungwon-cho/dev/docker/test/webdata:/usr/share/nginx/html:ro nginx:1.14
```

```
good593 🐧 ~/dev/docker/test/webdata
▶ docker run -d --name web -p 80:80 -v /Users/gyoungwon-cho/dev/docker/test/webdata:/usr/share/nginx/html:ro nginx:1.14
Unable to find image 'nginx:1.14' locally
1.14: Pulling from library/nginx
007027d142c8: Pull complete
925342e1fcde: Pull complete
668b9ac9804b: Pull complete
Digest: sha256:f7988fb6c02e0ce69257d9bd9cf37ae20a60f1df7563c3a2a6abe24160306b8d
Status: Downloaded newer image for nginx:1.14
003fdb25fce4783a10c3af37ed31b37a4f25d6ad55196c667108e6868be553a1
good593 🐧 ~/dev/docker/test/webdata
▶
```

단계4: nginx 접속


- <http://localhost:80/>

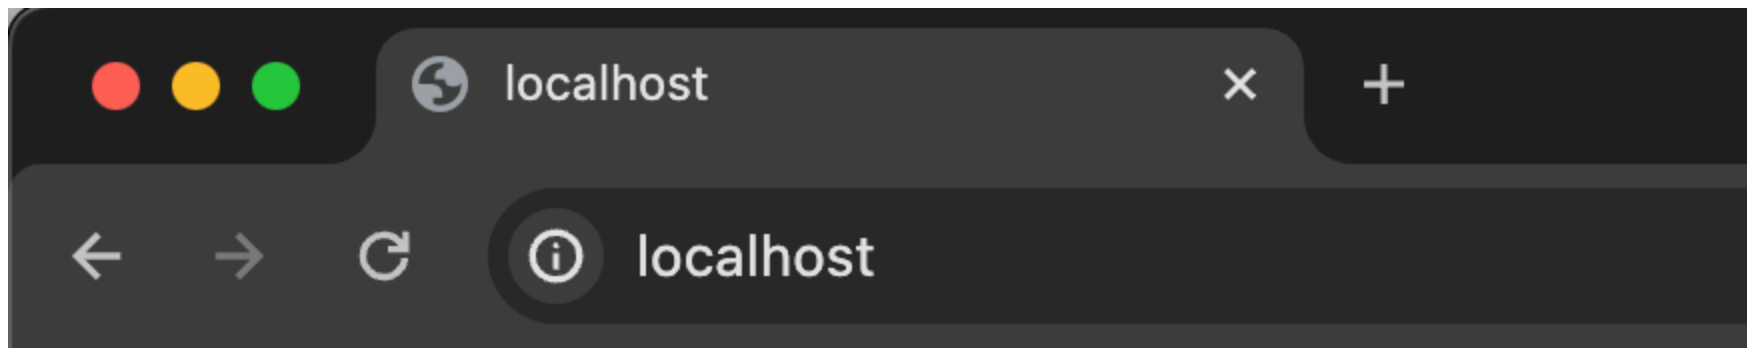

Hello World

단계5: 호스트 OS > index.html 수정


```
cd webdata  
echo "<h1>Good Morning</h1>" > index.html  
cat index.html
```

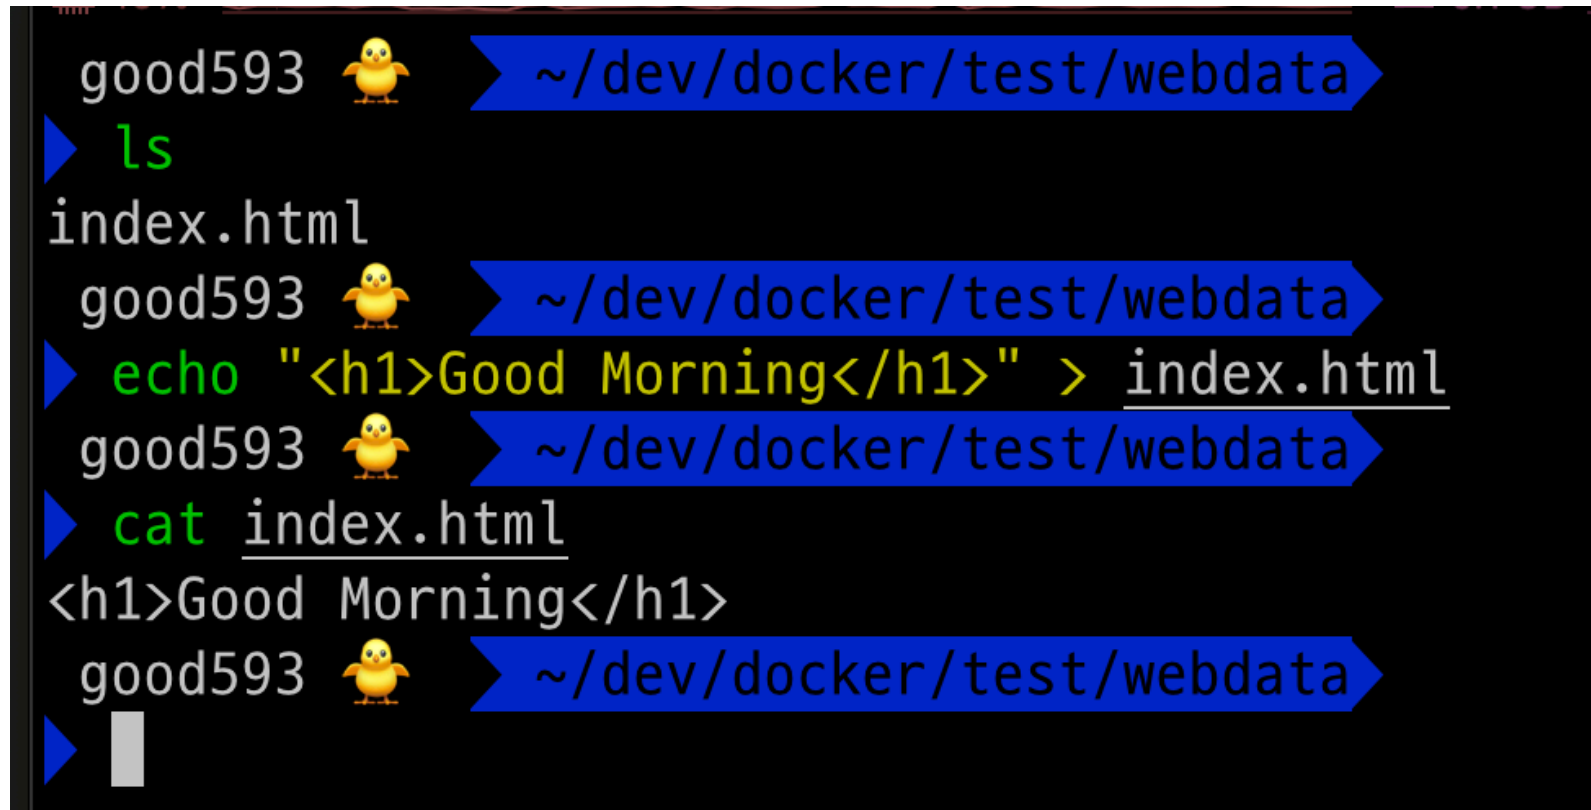

```
good593 🐧 ➤ ~/dev/docker/test/webdata  
➤ ls  
index.html  
good593 🐧 ➤ ~/dev/docker/test/webdata  
➤ echo "<h1>Good Morning</h1>" > index.html  
good593 🐧 ➤ ~/dev/docker/test/webdata  
➤ cat index.html  
<h1>Good Morning</h1>  
good593 🐧 ➤ ~/dev/docker/test/webdata  
➤
```

단계6: nginx 접속 > 수정내용 확인


- <http://localhost:80/>

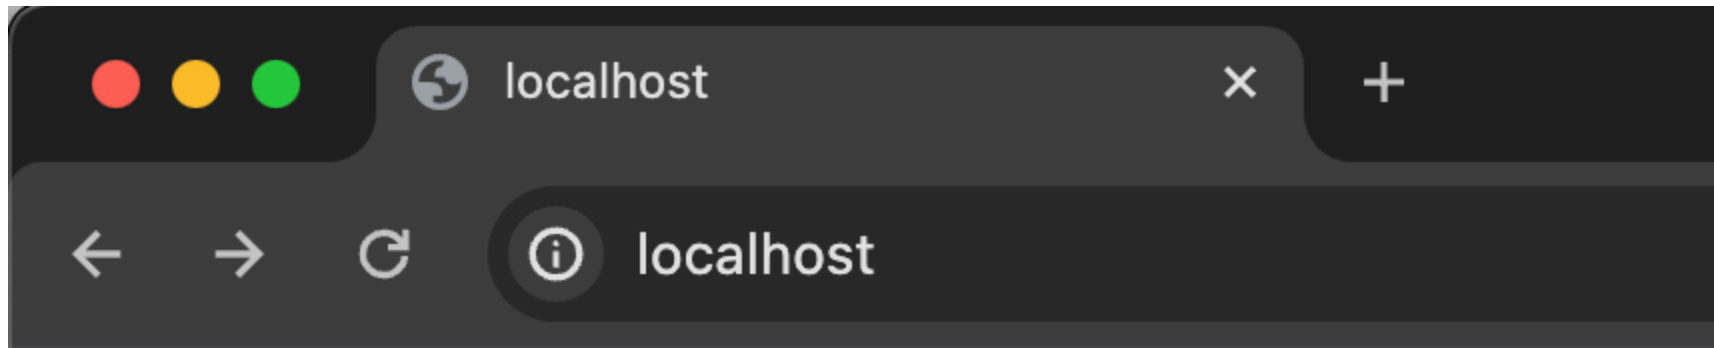

Good Morning

단계7: nginx 컨테이너 접속

```
docker exec -it web /bin/bash  
ls
```

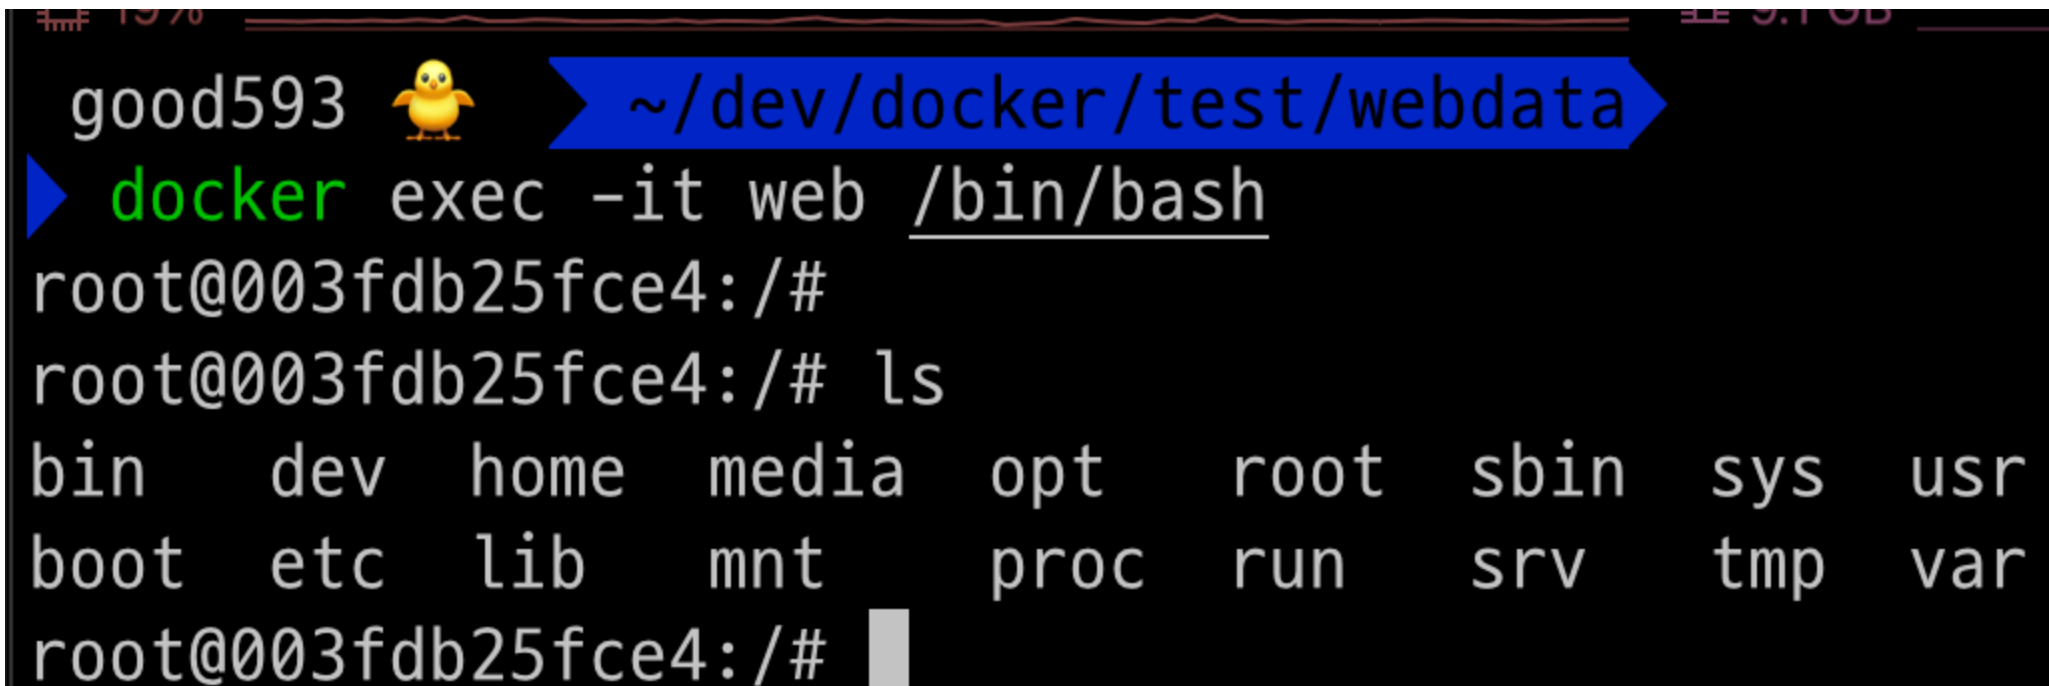

```
good593 🐧 ➤ ~/dev/docker/test/webdata  
➤ docker exec -it web /bin/bash  
root@003fdb25fce4:/#  
root@003fdb25fce4:/# ls  
bin    dev    home  media  opt    root   sbin   sys    usr  
boot   etc    lib    mnt     proc   run    srv    tmp    var  
root@003fdb25fce4:/#
```

단계8: nginx 컨테이너 > index.html 수정시 오류발생

```
cd /usr/share/nginx/html
# index.html 수정시 오류 발생
echo "<h1>Good Evening</h1>" > index.html
exit
```

```
root@003fdb25fce4:~# cd /usr/share/nginx/html/
root@003fdb25fce4:/usr/share/nginx/html#
root@003fdb25fce4:/usr/share/nginx/html# ls
index.html
root@003fdb25fce4:/usr/share/nginx/html#
root@003fdb25fce4:/usr/share/nginx/html# echo "<h1>Good Evening</h1>" > index.html
bash: index.html: Read-only file system
root@003fdb25fce4:/usr/share/nginx/html#
root@003fdb25fce4:/usr/share/nginx/html# exit
exit
```

✖ good593 🐧 ➡ ~/dev/docker/test/webdata