

단계1: docker-compose.yml 디렉토리로 이동


- 디렉토리에 존재해야할 것들
 - docker-compose.yml, Dockerfile, main.py, database(폴더)

```
ls -al
```

```
good593 ♥ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ▶ dev ±
▶ ls -al
total 32
drwxr-xr-x  7 gyoungwon-cho  staff  224  2  2 15:15 .
drwxr-xr-x  9 gyoungwon-cho  staff  288  2  1 17:33 ..
-rw-r--r--  1 gyoungwon-cho  staff  277  2  2 14:47 Dockerfile
-rw-r--r--  1 gyoungwon-cho  staff  384  2  2 15:19 README.md
drwxr-xr-x  2 gyoungwon-cho  staff   64  2  2 15:15 database
-rw-r--r--  1 gyoungwon-cho  staff  427  2  2 15:14 docker-compose.yml
-rw-r--r--  1 gyoungwon-cho  staff  679  2  2 15:13 main.py
good593 ♥ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ▶ dev ±
▶
```

단계2: docker compose 실행

```
docker-compose up -d
```

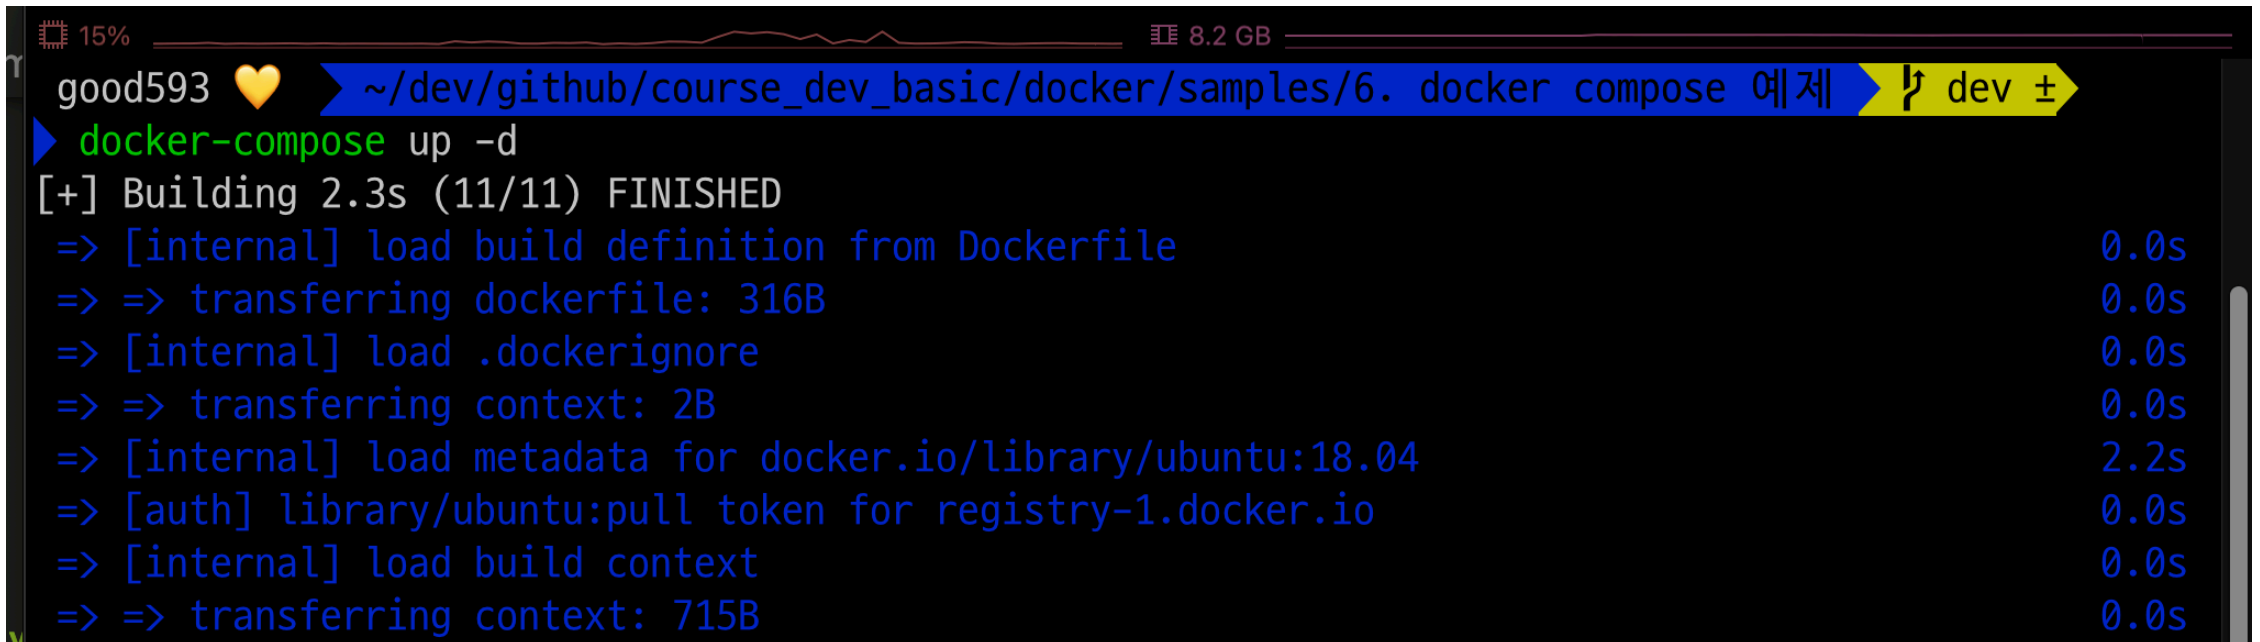

```
good593 ❤️ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 dev ±
▶ docker-compose up -d
[+] Building 2.3s (11/11) FINISHED
=> [internal] load build definition from Dockerfile                                0.0s
=> => transferring dockerfile: 316B                                              0.0s
=> [internal] load .dockerignore                                                  0.0s
=> => transferring context: 2B                                                  0.0s
=> [internal] load metadata for docker.io/library/ubuntu:18.04                  2.2s
=> [auth] library/ubuntu:pull token for registry-1.docker.io                   0.0s
=> [internal] load build context                                                 0.0s
=> => transferring context: 715B                                                0.0s
```

단계3: 생성된 컨테이너 확인

```
docker ps -a
```

```
good593 ♥ ~ /dev/github/course_dev_basic/docker/samples/6. docker compose 예제
dev ±
> docker ps -a
CONTAINER ID   IMAGE                                COMMAND                  CREATED
STATUS        PORTS                    NAMES
823e86139faa   6dockercompose-python-mysql        "python3 main.py"       36 seconds ago
Exited (0) 36 seconds ago                                compose-python-mysql
0853af23ee34   mysql                              "docker-entrypoint.s..." 36 seconds ago
Up 36 seconds    0.0.0.0:3306->3306/tcp, 33060/tcp  compose-mysql-db
good593 ♥ ~ /dev/github/course_dev_basic/docker/samples/6. docker compose 예제
dev ±
```

단계4: compose-python-mysql 실행 결과 확인

```
docker logs compose-python-mysql
```

```
good593 🍷 > ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 > ↩ dev
> docker logs compose-python-mysql
Sleep 5 seconds from now on...
[Docke Compose][main] Start!!
show databases is >>
[{'Database': 'examplesdb'}, {'Database': 'information_schema'}, {'Database': 'mysql'}, {'D
base': 'performance_schema'}, {'Database': 'sys'}]
[Docke Compose][main] End!!
good593 🍷 > ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 > ↩ dev
> █
```

단계5: compose에 포함된 컨테이너 모두 stop

```
docker-compose stop
docker ps -a
```

```
good593 ♥ ~ /dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ↗ dev ±
▶ docker-compose stop
[+] Running 2/2
:: Container compose-python-mysql Stopped 0.0s
:: Container compose-mysql-db Stopped 1.6s
good593 ♥ ~ /dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ↗ dev ±
▶ docker ps -a
```

CONTAINER ID	IMAGE	PORTS	NAMES	COMMAND	CREATED	STATUS
86c264882345	6dockercompose-python-mysql		compose-python-mysql	"python3 main.py"	6 minutes ago	Exited (0)
45aa0982c7d5	mysql		compose-mysql-db	"docker-entrypoint.s..."	6 minutes ago	Exited (0)

```
good593 ♥ ~ /dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ↗ dev ±
▶
```


단계6: compose에 포함된 리소스 모두 제거

```
good593 ♥ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ▶ dev ±
▶ docker-compose down
[+] Running 3/0
:: Container compose-python-mysql Removed 0.0s
:: Container compose-mysql-db Removed 0.0s
:: Network compose_mysql_net Removed 0.0s
good593 ♥ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제 ▶ dev ±
```

단계7: 제거된 리소스 확인

- container

```
docker ps -a
```

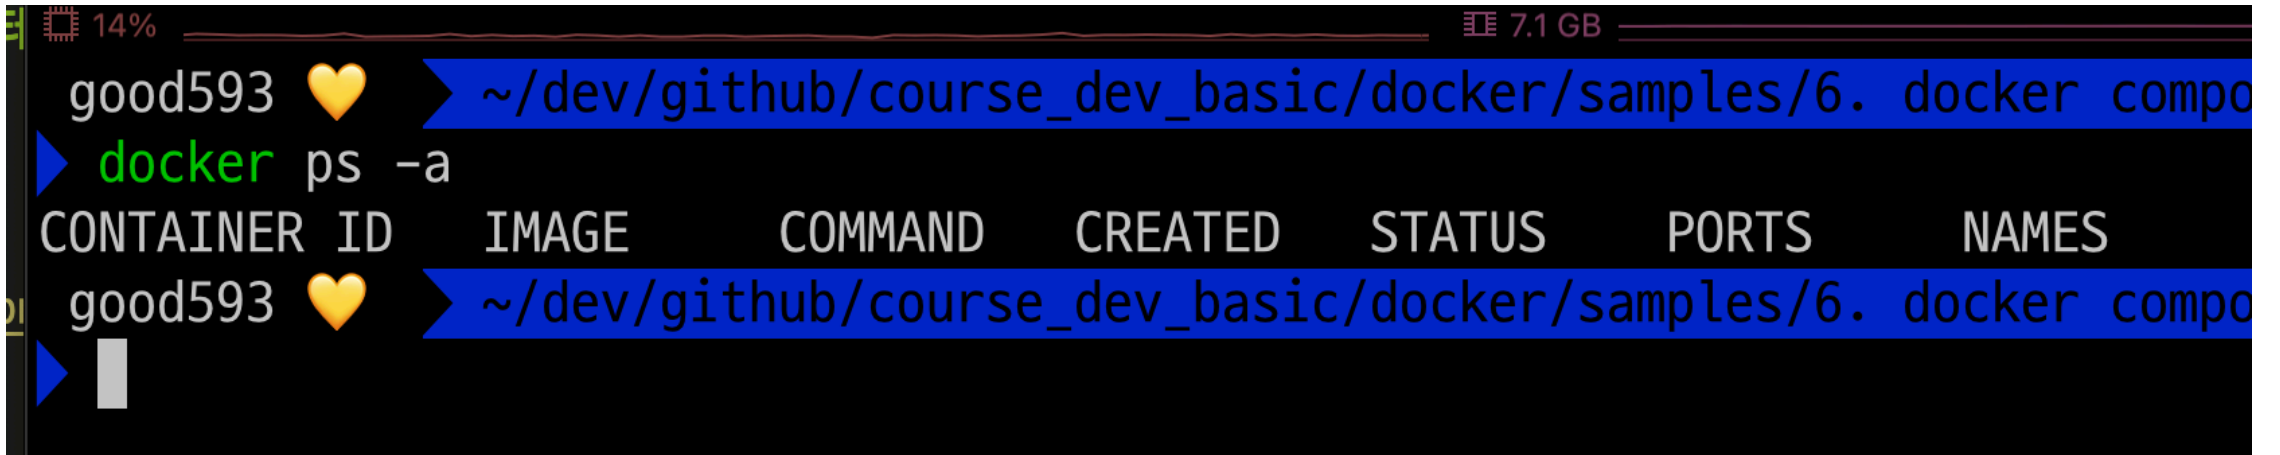A terminal window with a black background. The top status bar shows a battery icon at 14%, a memory icon at 7.1 GB, and a CPU icon. The prompt is 'good593' followed by a yellow heart emoji. The command '~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d' is entered and highlighted in blue. The next prompt is 'good593' followed by a yellow heart emoji, and the command 'docker ps -a' is entered and highlighted in green. The output shows a table with headers: CONTAINER ID, IMAGE, COMMAND, CREATED, STATUS, PORTS, NAMES. The first row shows 'good593' followed by a yellow heart emoji, and the command '~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d' is highlighted in blue. The prompt is 'good593' followed by a yellow heart emoji, and the command 'docker ps -a' is entered and highlighted in green. The output shows a table with headers: CONTAINER ID, IMAGE, COMMAND, CREATED, STATUS, PORTS, NAMES. The first row shows 'good593' followed by a yellow heart emoji, and the command '~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d' is highlighted in blue. The prompt is 'good593' followed by a yellow heart emoji, and the command 'docker ps -a' is entered and highlighted in green. The output shows a table with headers: CONTAINER ID, IMAGE, COMMAND, CREATED, STATUS, PORTS, NAMES. The first row shows 'good593' followed by a yellow heart emoji, and the command '~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d' is highlighted in blue.

```
good593 ❤️ ➤ ~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d
good593 ❤️ ➤ docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS        NAMES
good593 ❤️ ➤ ~/.dev/github/course_dev_basic/docker/samples/6. docker compose up -d
```

- network

```
docker network ls
```

```
good593 ❤️ ➤ ~/dev/github/course_dev_basic/docke
➤ docker network ls
NETWORK ID          NAME                DRIVER              SCOPE
90776f53ad48        bridge             bridge              local
1d7750c43d8e        host               host                local
32eab69fc42d        none               null                local
good593 ❤️ ➤ ~/dev/github/course_dev_basic/docke
➤ █
```

단계8: compose 이미지 삭제

```
docker rmi 6dockercompose-python-mysql
docker image ls
```

```
good593 ❤️ ➤ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제
> docker rmi 6dockercompose-python-mysql
Untagged: 6dockercompose-python-mysql:latest
Deleted: sha256:009f3f42dd97034f05c5c3bcf6b35d846e2dba1877b3e05f18b7c3926810908a
good593 ❤️ ➤ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제
> docker image ls
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE
pymysql       latest    211cb5ac508a   2 hours ago   572MB
mysql         latest    b068ea59c677   2 weeks ago   638MB
nginx         1.14     7bbc8783b8ec   4 years ago   103MB
good593 ❤️ ➤ ~/dev/github/course_dev_basic/docker/samples/6. docker compose 예제
> █
```