


Docker 이미지 빌드 & 배포

1. 이미지 빌드

Dockerfile이 위치한 프로젝트 루트에서 실행합니다.

```
docker build -t <DOCKERHUB_USERNAME>/<IMAGE_NAME>:<TAG> .
```

```
docker build -t goodwon593/django-web:latest .
```

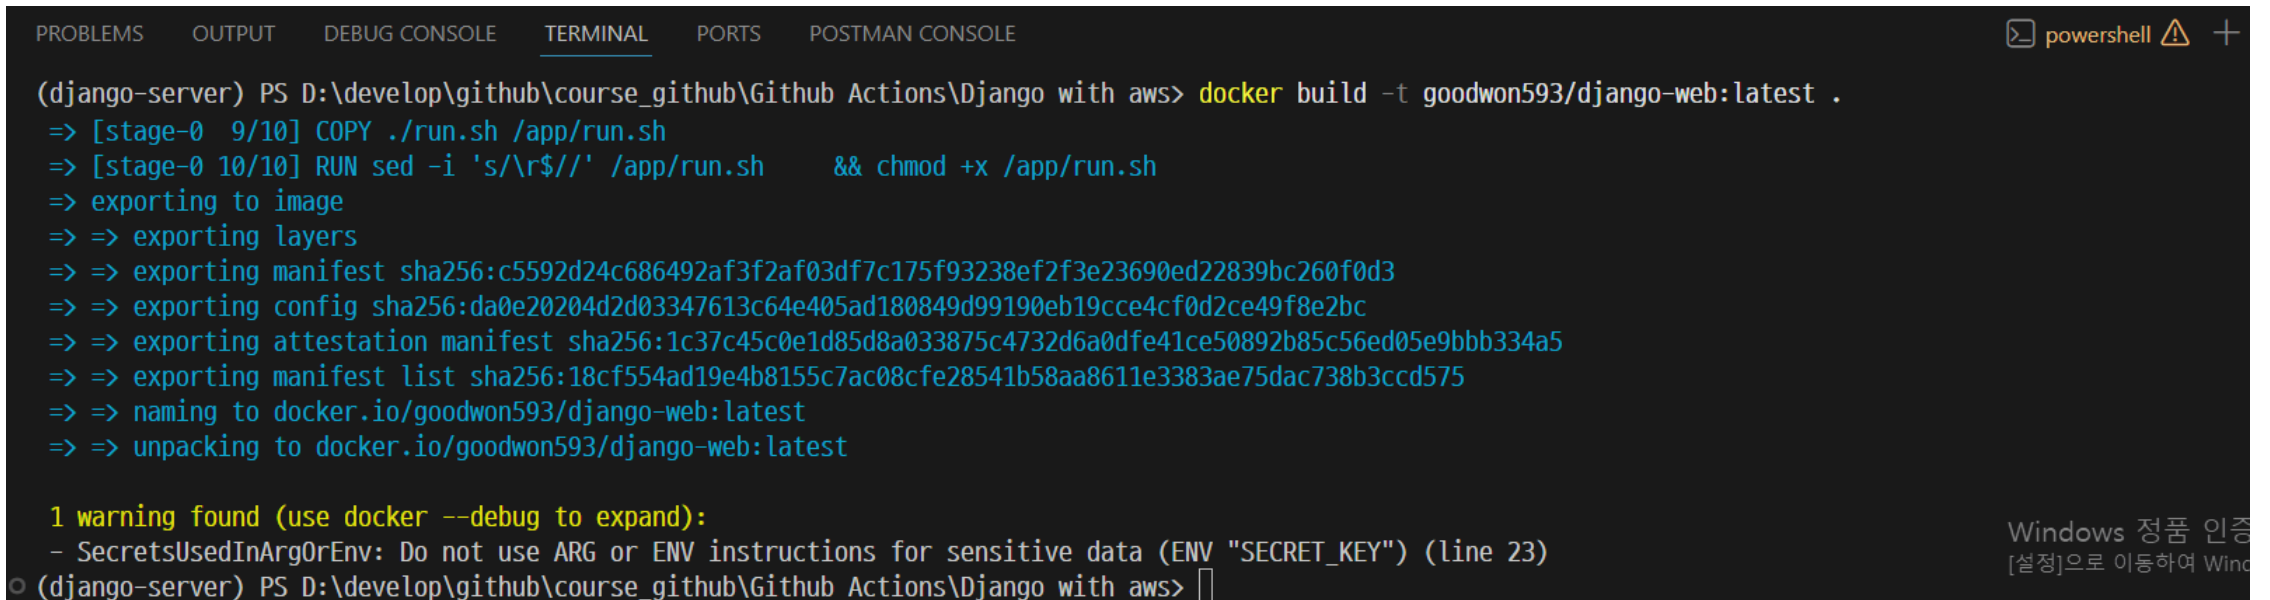

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE powershell ⚠ +
(django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> docker build -t goodwon593/django-web:latest .
=> [stage-0 9/10] COPY ./run.sh /app/run.sh
=> [stage-0 10/10] RUN sed -i 's/\r$//' /app/run.sh && chmod +x /app/run.sh
=> exporting to image
=> => exporting layers
=> => exporting manifest sha256:c5592d24c686492af3f2af03df7c175f93238ef2f3e23690ed22839bc260f0d3
=> => exporting config sha256:da0e20204d2d03347613c64e405ad180849d99190eb19cce4cf0d2ce49f8e2bc
=> => exporting attestation manifest sha256:1c37c45c0e1d85d8a033875c4732d6a0dfe41ce50892b85c56ed05e9bbb334a5
=> => exporting manifest list sha256:18cf554ad19e4b8155c7ac08cfe28541b58aa8611e3383ae75dac738b3ccd575
=> => naming to docker.io/goodwon593/django-web:latest
=> => unpacking to docker.io/goodwon593/django-web:latest

1 warning found (use docker --debug to expand):
- SecretsUsedInArgOrEnv: Do not use ARG or ENV instructions for sensitive data (ENV "SECRET_KEY") (line 23)
(django-server) PS D:\develop\github\course_github\Github Actions\Django with aws>
```

 **docker desktop**

PERSONAL

Ctrl+K

 Containers

 **Images**

 Volumes

 Kubernetes

 Builds

 Models

 MCP Toolkit BETA

 Docker Hub

 Docker Scout

 Extensions

Images [Give feedback](#)

Local

My Hub

475.61 MB / 11.51 GB in use

2 images

Last refresh: 18 minutes ago 


 

☐	Name 	Tag	Image ID	Created	Size	Actions
☐	 goodwon593/django-web	latest	18cf554ad19e	4 minutes ago	863.5 MB	  
☐	 postgres	16	fe03a7605299	25 days ago	635.8 MB	  

2. 컨테이너 실행

nginx가 컨테이너 내부 80번 포트에서 요청을 받아 gunicorn(8000)으로 프록시합니다.

```
docker run -d `
--name django-server `
-p 80:80 `
goodwon593/django-web:latest
```

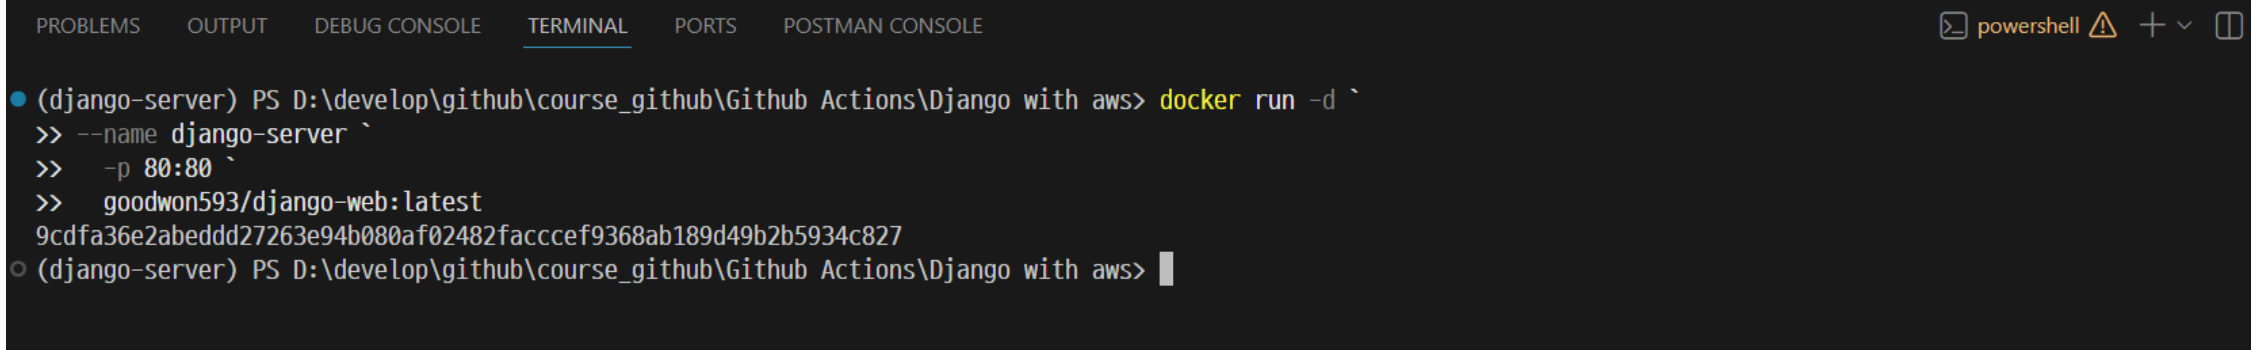


The screenshot shows a PowerShell terminal window with the following content:

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE powershell ⚠ + -
```

```
• (django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> docker run -d `
>> --name django-server `
>> -p 80:80 `
>> goodwon593/django-web:latest
9cdfa36e2abeddd27263e94b080af02482faccecf9368ab189d49b2b5934c827
○ (django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> █
```

브라우저에서 <http://localhost> 접속

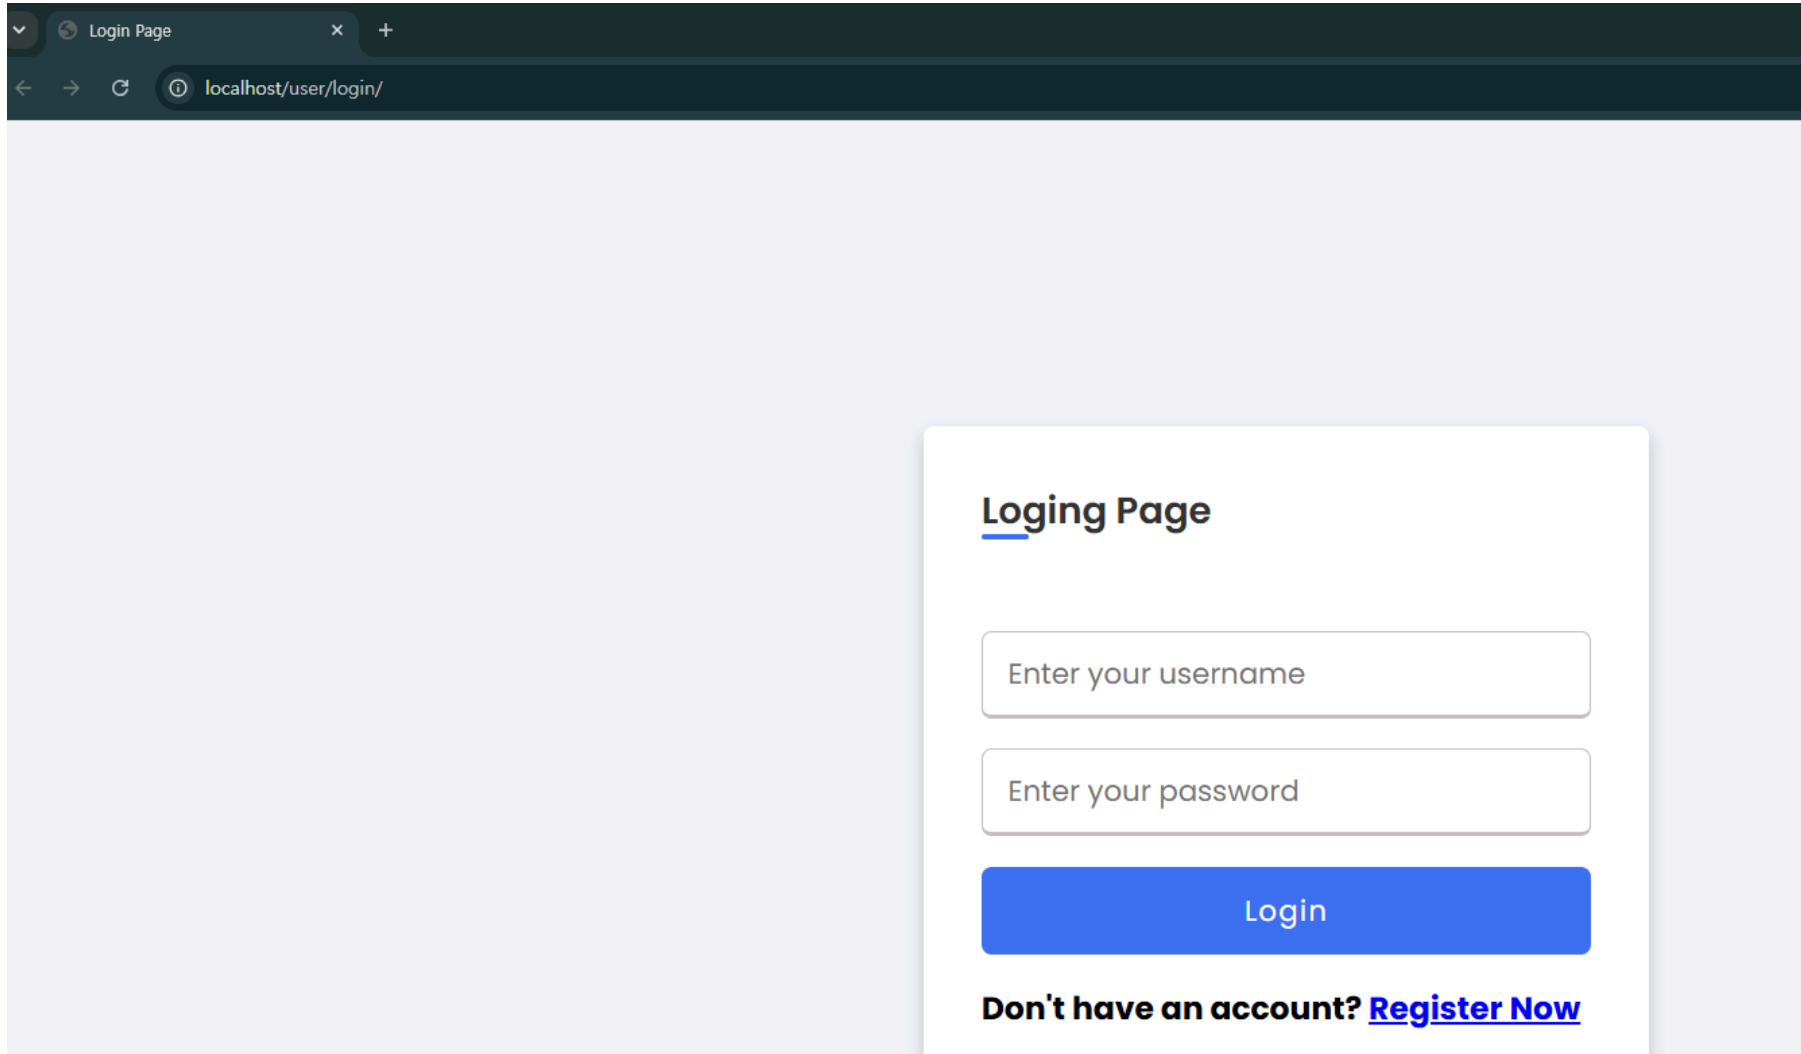

The screenshot shows a web browser window with a single tab titled "Login Page". The address bar displays "localhost/user/login/". The main content area is a light gray background. In the bottom right corner, there is a white login form with a shadow. The form has a title "Login Page" with the "L" underlined. It contains two input fields: "Enter your username" and "Enter your password". Below these fields is a blue "Login" button. At the bottom of the form, it says "Don't have an account? [Register Now](#)".

Login Page

Enter your username


Enter your password

Login

Don't have an account? [Register Now](#)

3. Docker Hub 로그인

```
docker login
```

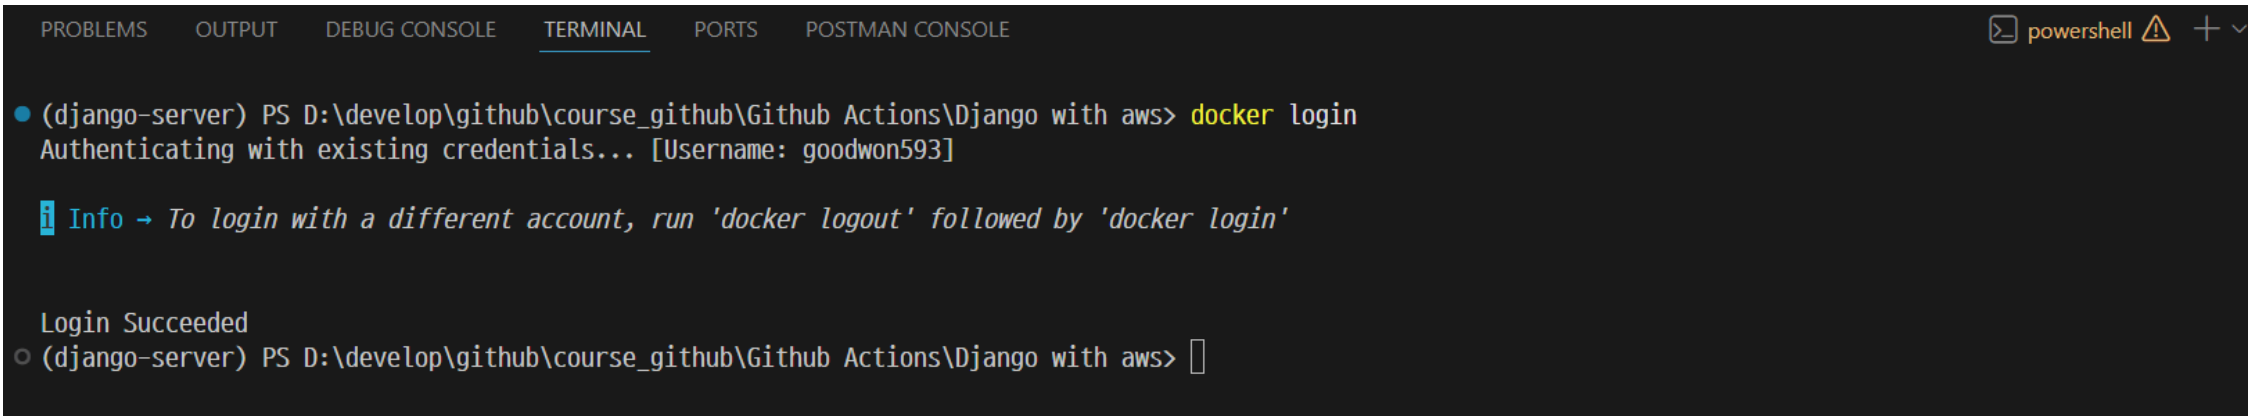

The screenshot shows a VS Code terminal window with the 'TERMINAL' tab selected. The terminal output shows the command 'docker login' being executed in a PowerShell session. The output indicates that the user is authenticated with existing credentials for the username 'goodwon593'. An informational message suggests using 'docker logout' followed by 'docker login' for a different account. The terminal concludes with 'Login Succeeded' and a new prompt line.

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE powershell ⚠ + v
```

- (django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> **docker** login
Authenticating with existing credentials... [Username: goodwon593]

i Info → To login with a different account, run 'docker logout' followed by 'docker login'


Login Succeeded

- (django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> █

4. Docker Hub에 이미지 푸시

```
docker push <DOCKERHUB_USERNAME>/<IMAGE_NAME>:<TAG>
```

```
docker push goodwon593/django-web:latest
```

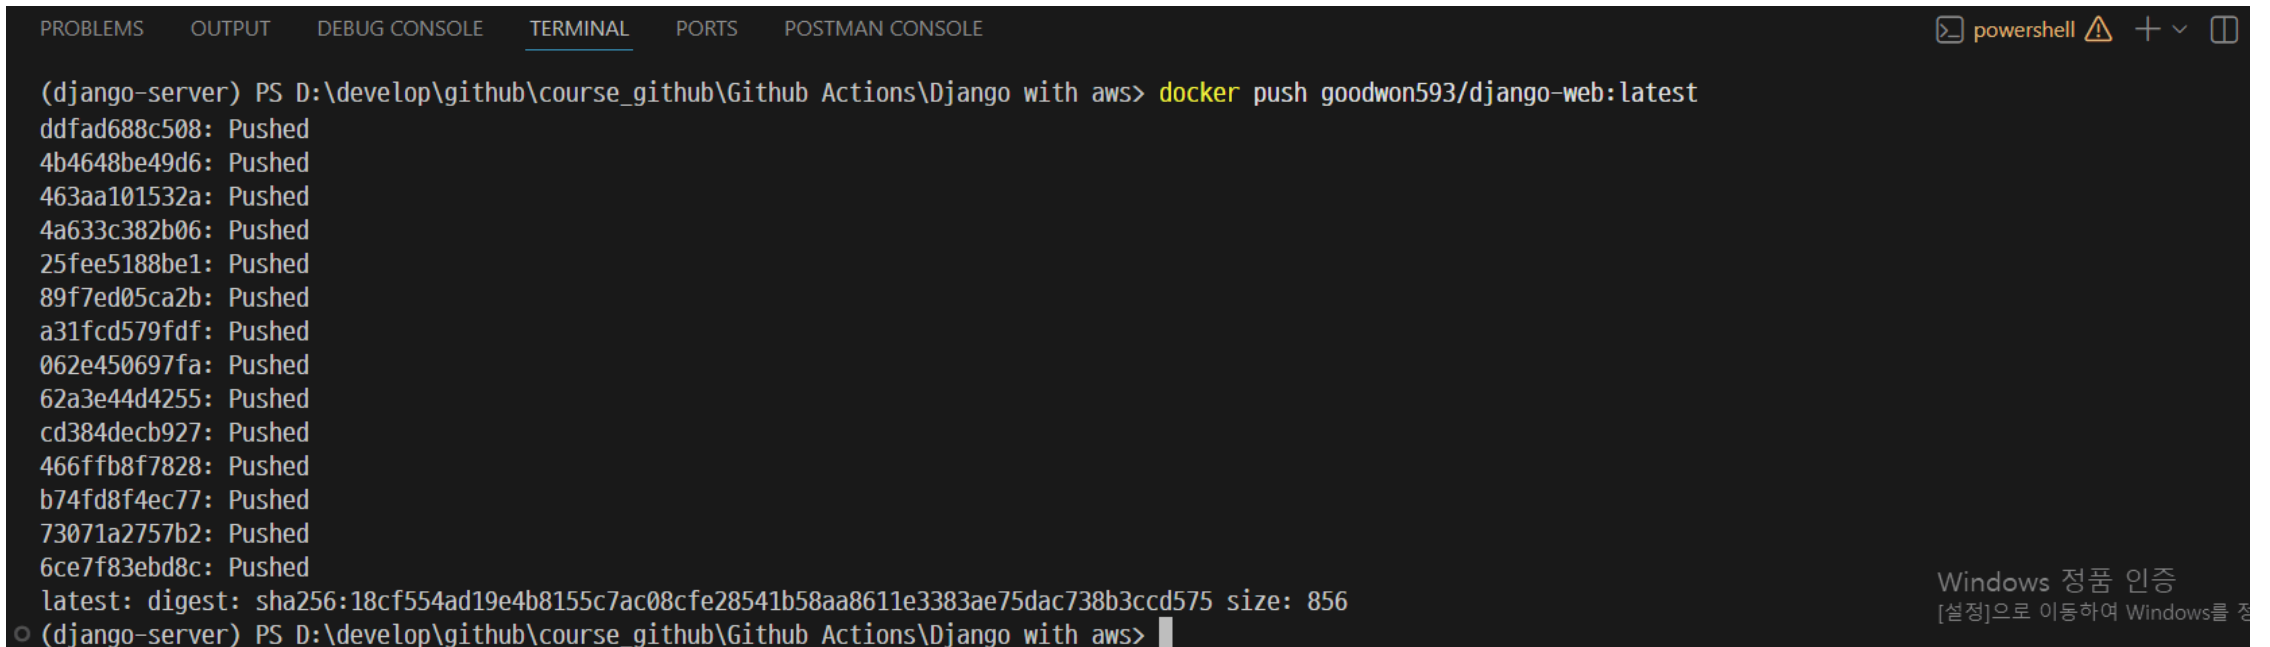

The screenshot shows a PowerShell terminal window with the following content:

```
(django-server) PS D:\develop\github\course_github\Github Actions\Django with aws> docker push goodwon593/django-web:latest
ddfad688c508: Pushed
4b4648be49d6: Pushed
463aa101532a: Pushed
4a633c382b06: Pushed
25fee5188be1: Pushed
89f7ed05ca2b: Pushed
a31fcd579fdf: Pushed
062e450697fa: Pushed
62a3e44d4255: Pushed
cd384dec927: Pushed
466ffb8f7828: Pushed
b74fd8f4ec77: Pushed
73071a2757b2: Pushed
6ce7f83ebd8c: Pushed
latest: digest: sha256:18cf554ad19e4b8155c7ac08cfe28541b58aa8611e3383ae75dac738b3ccd575 size: 856
○ (django-server) PS D:\develop\github\course_github\Github Actions\Django with aws>
```

The terminal window has tabs for PROBLEMS, OUTPUT, DEBUG CONSOLE, TERMINAL (selected), PORTS, and POSTMAN CONSOLE. The top right corner shows a powershell icon and window controls. The bottom right corner has a Windows watermark: "Windows 정품 인증 [설정]으로 이동하여 Windows를 정".

Docker Hub에서 확인

hub

Explore

My Hub

Search Docker Hub

CtrlK

goodwon593

Your personal account

Repositories

Hardened Images

Collaborations

Settings

Default privacy

Notifications

Billing

Usage

Pulls

Storage

Repositories / django-web / General

goodwon593/django-web

Last pushed 1 minute ago · Repository size: 205.3 MB · ☆0 · ↓0

Add a description

Add a category

General

Tags

Image Management

Collaborators

Webhooks

Settings

Tags

This repository contains 1 tag(s).

Tag	OS	Type	Pulled	Pushed
latest		Image	less than 1 day	1 minute

See all

DOCKER SCOUT INACTIVE

Activate

Docker commands

To push a new tag to this repository:

docker push goodwon593/django

buildcloud

Build with Docker Build Cloud

Accelerate image build times with access to cloud-based builders and shared ca

Docker Build Cloud executes builds on optimally-dimensioned cloud infrastru

dedicated per-organization isolation.

Get faster builds through shared caching across your team, native multi-platfor

and encrypted data transfer - all without managing infrastructure.