



1단계: Labels 정의

Repository → Issues → Labels

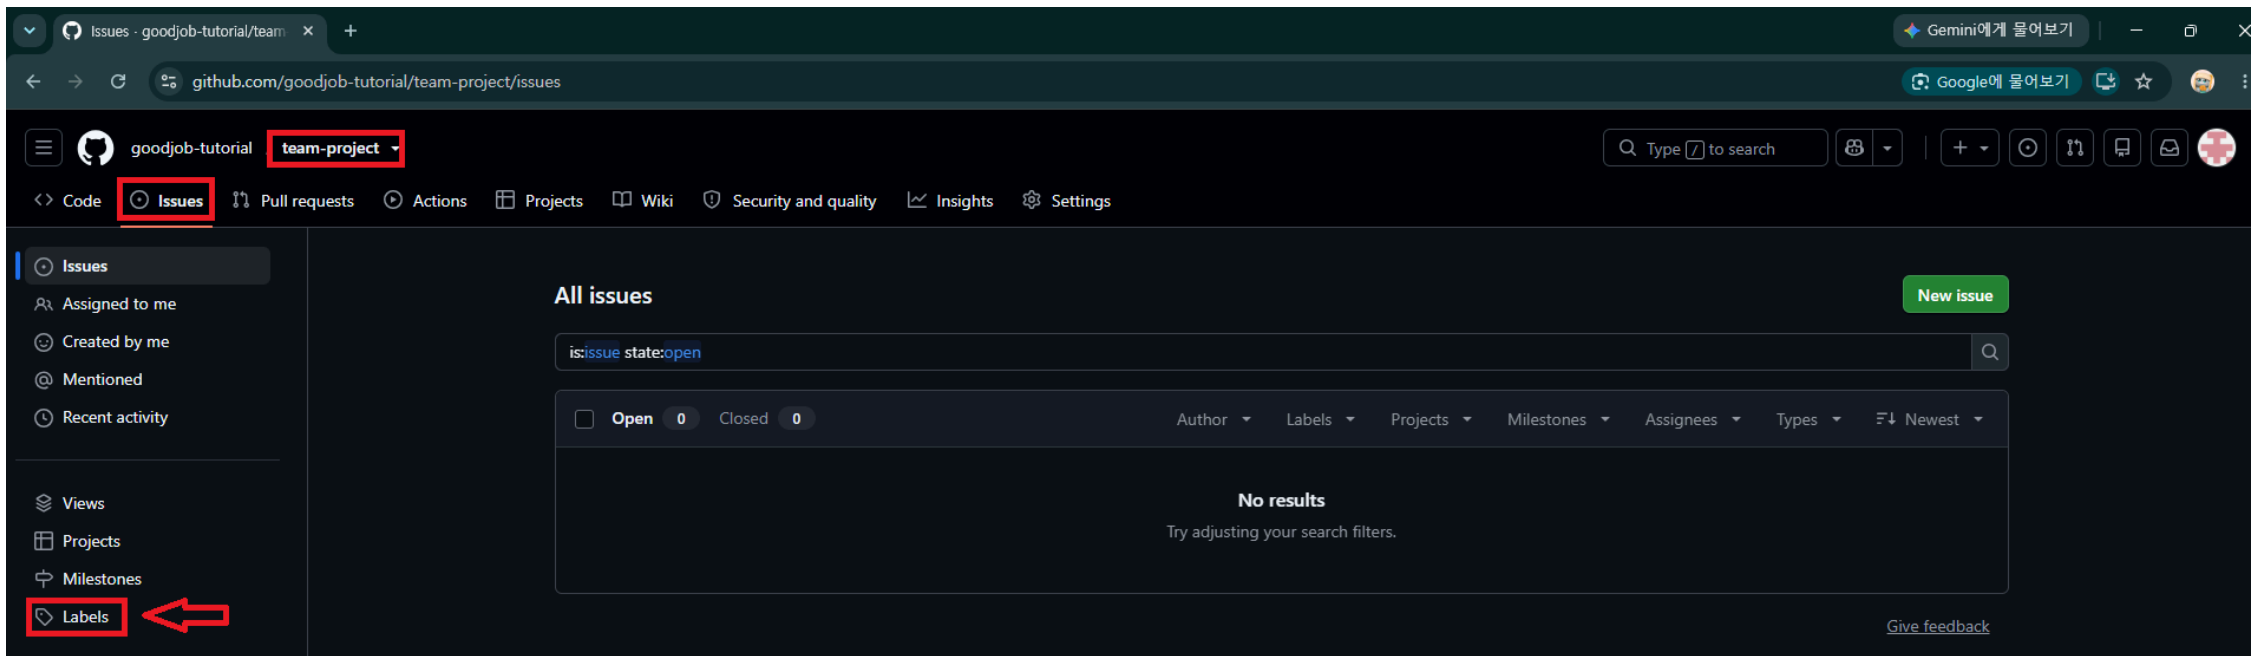


필요없는 Labels 삭제

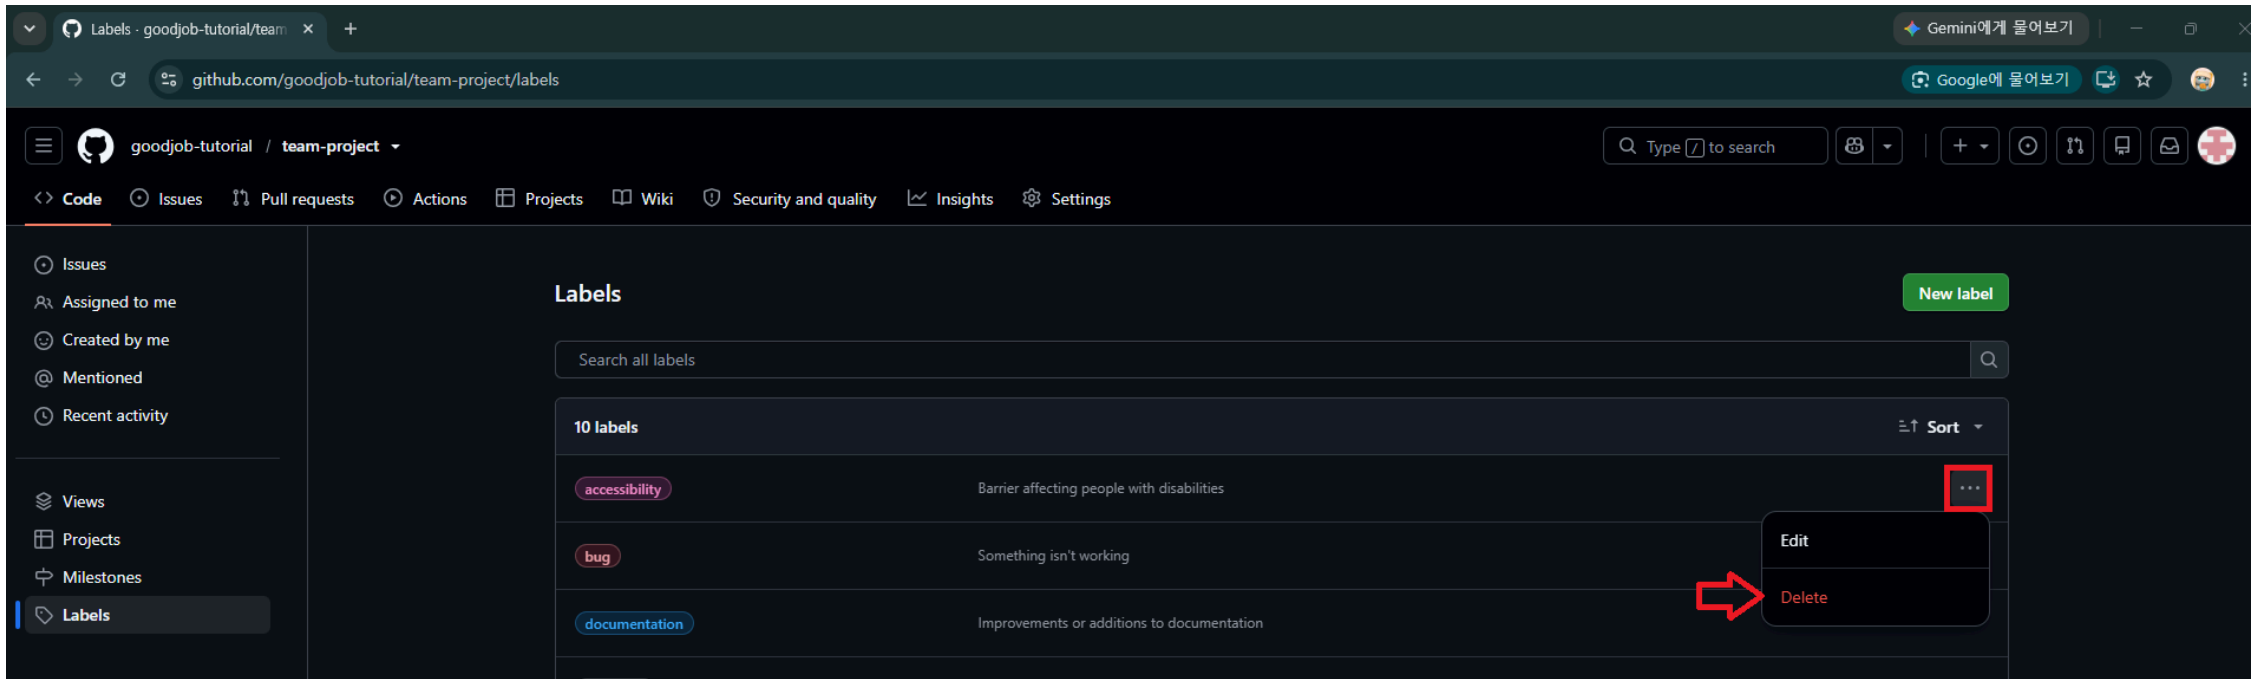

The screenshot shows the GitHub interface for the 'goodjob-tutorial/team-project' repository. The 'Labels' tab is selected in the left sidebar. The main content area displays a list of 10 labels. The first label, 'accessibility', is highlighted with a red box around its three-dot menu icon. A red arrow points to the 'Delete' option in the dropdown menu that appears when the icon is clicked.

Label	Description	Actions
accessibility	Barrier affecting people with disabilities	Edit, Delete
bug	Something isn't working	
documentation	Improvements or additions to documentation	

Labels 생성

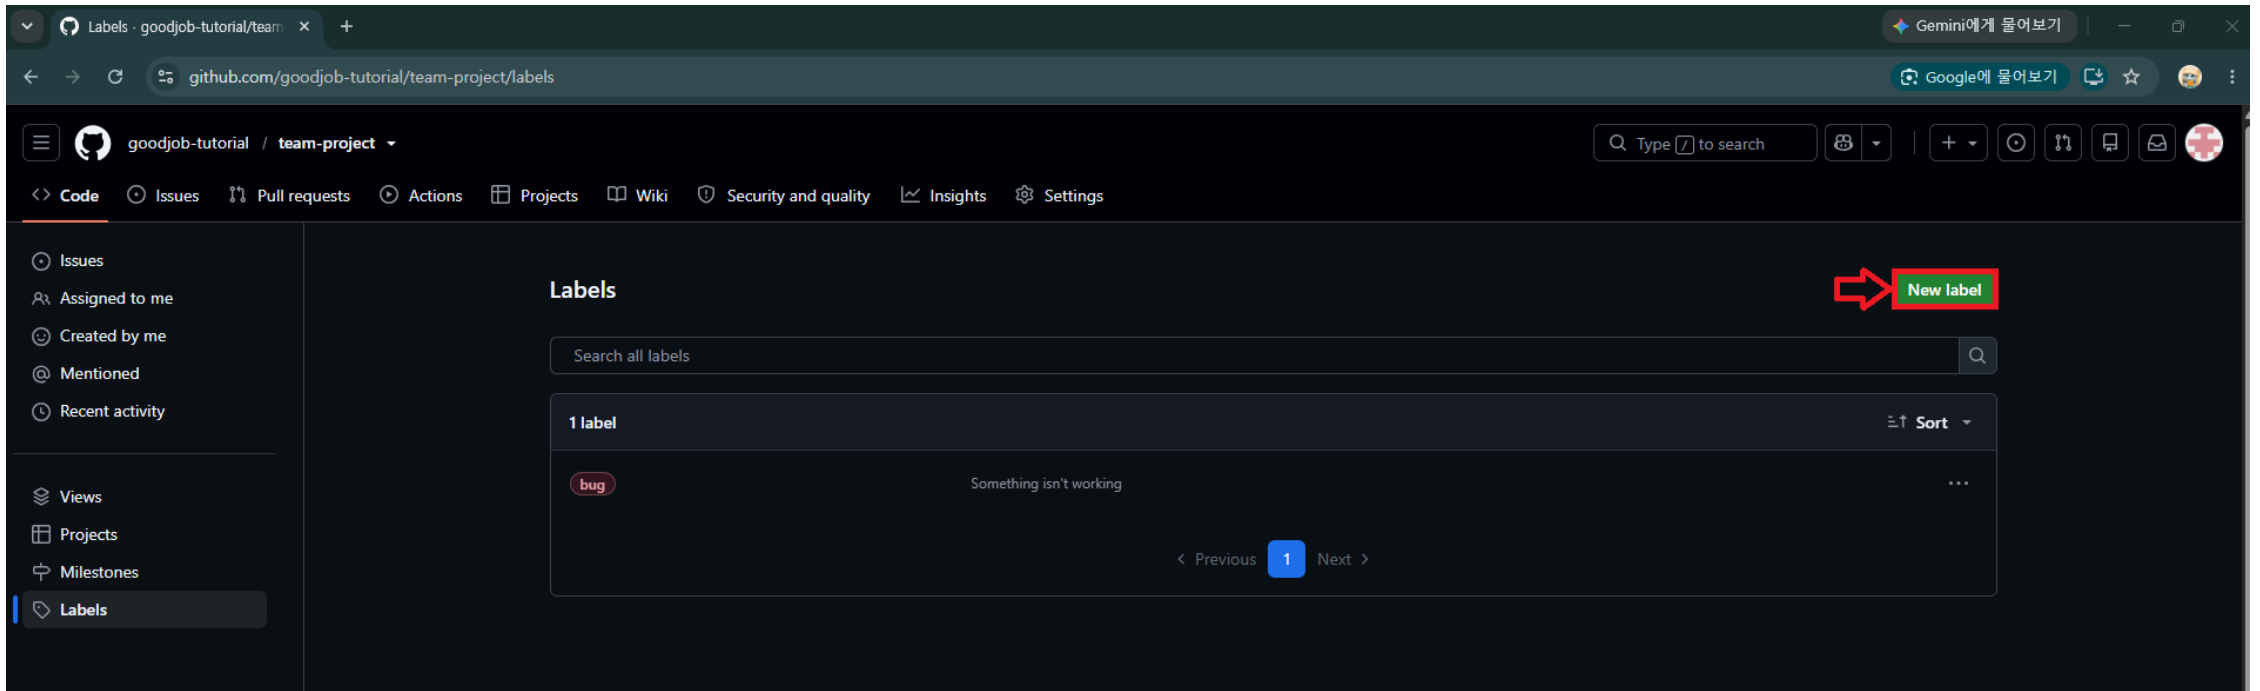

추천 Labels

구분	Label	의미
작업 종류	feature	새로운 기능
작업 종류	bug	버그 수정
작업 종류	docs	문서 작업
영역	frontend	프론트엔드
영역	backend	백엔드
영역	database	DB
영역	ai	AI/LLM

New label

feature

Name

feature

Description

작업 종류 > 새로운 기능


Color

#58e68a

Cancel

Create label

결과 확인

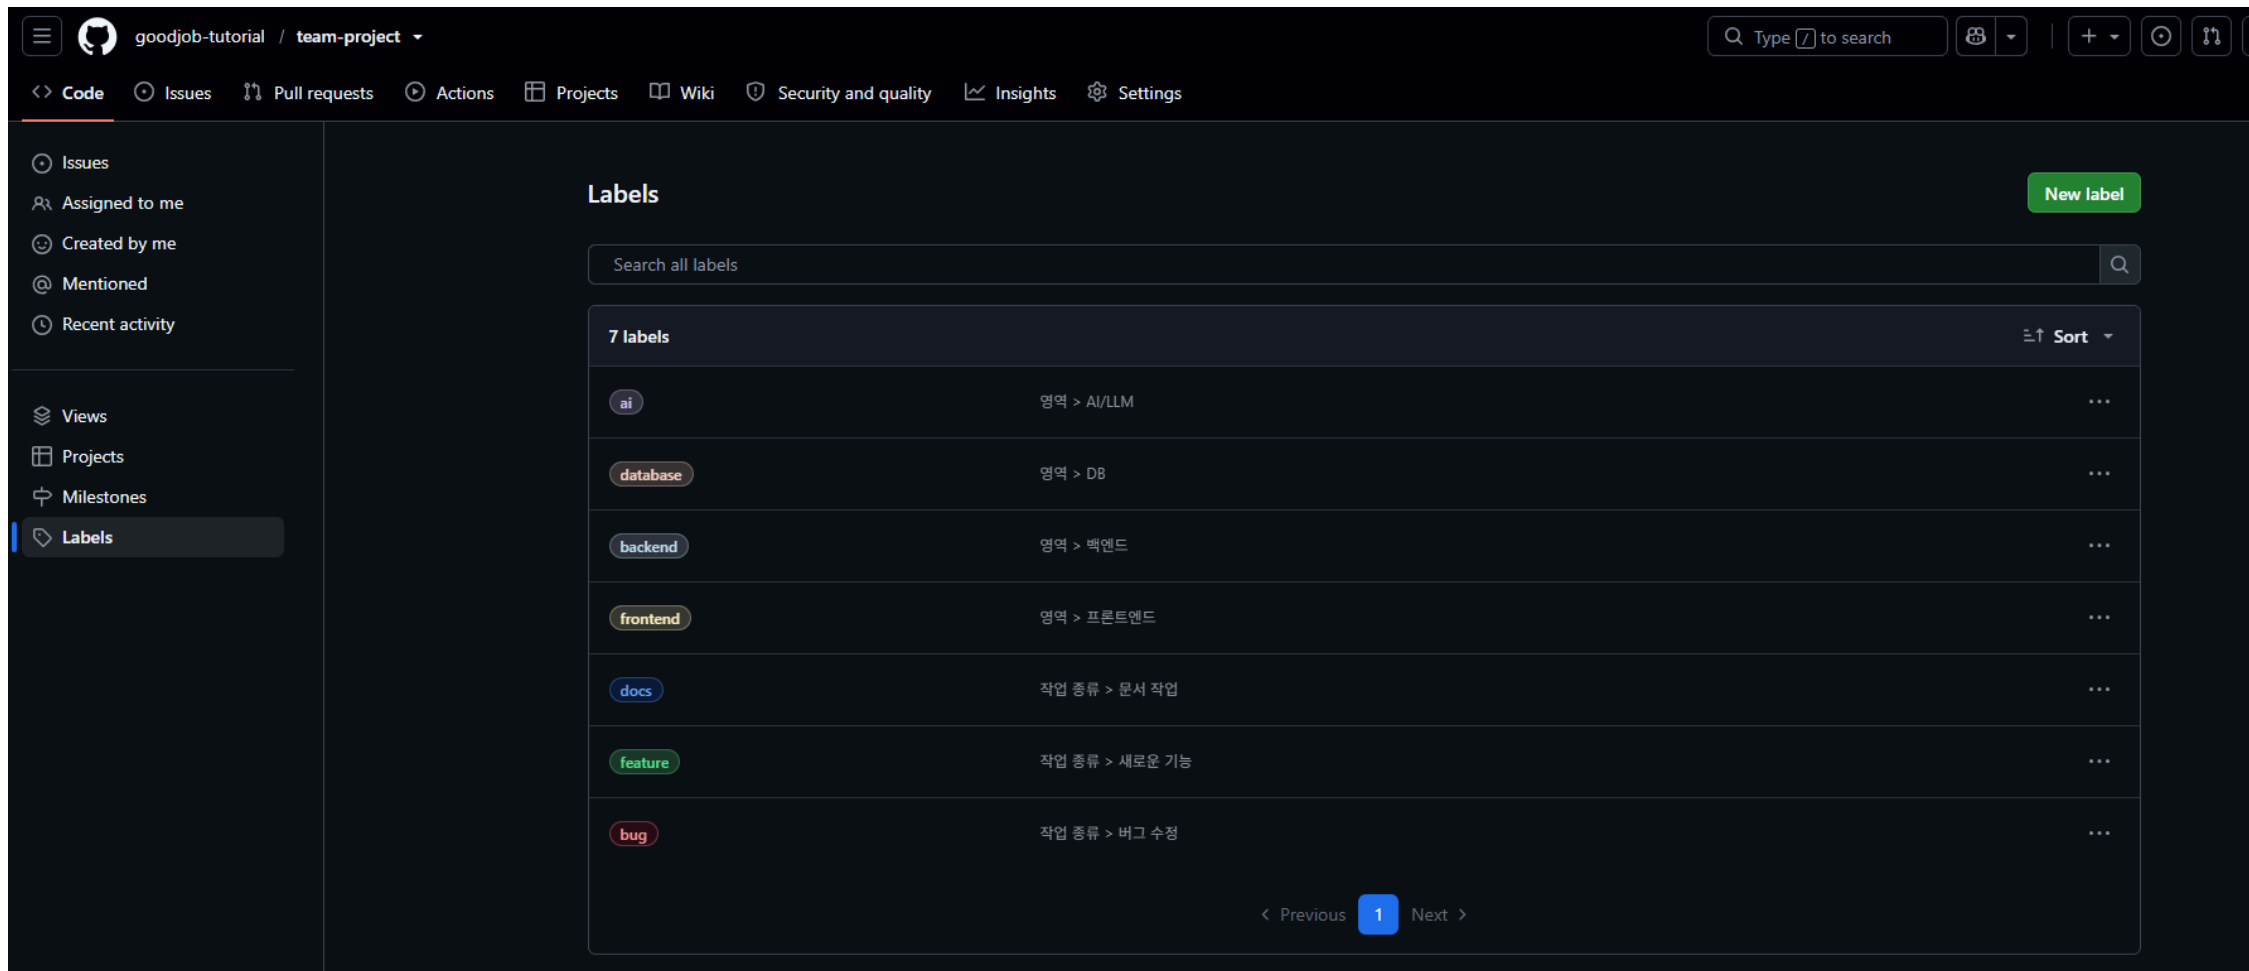

goodjob-tutorial / team-project

Code Issues Pull requests Actions Projects Wiki Security and quality Insights Settings

Issues

Assigned to me

Created by me

Mentioned

Recent activity

Views

Projects

Milestones

Labels

Labels

New label

Search all labels


7 labels

ai	영역 > AI/LLM	...
database	영역 > DB	...
backend	영역 > 백엔드	...
frontend	영역 > 프론트엔드	...
docs	작업 종류 > 문서 작업	...
feature	작업 종류 > 새로운 기능	...
bug	작업 종류 > 버그 수정	...

< Previous 1 Next >

2단계: Issue Template 설정

Repository → Settings → General → Features → Issues

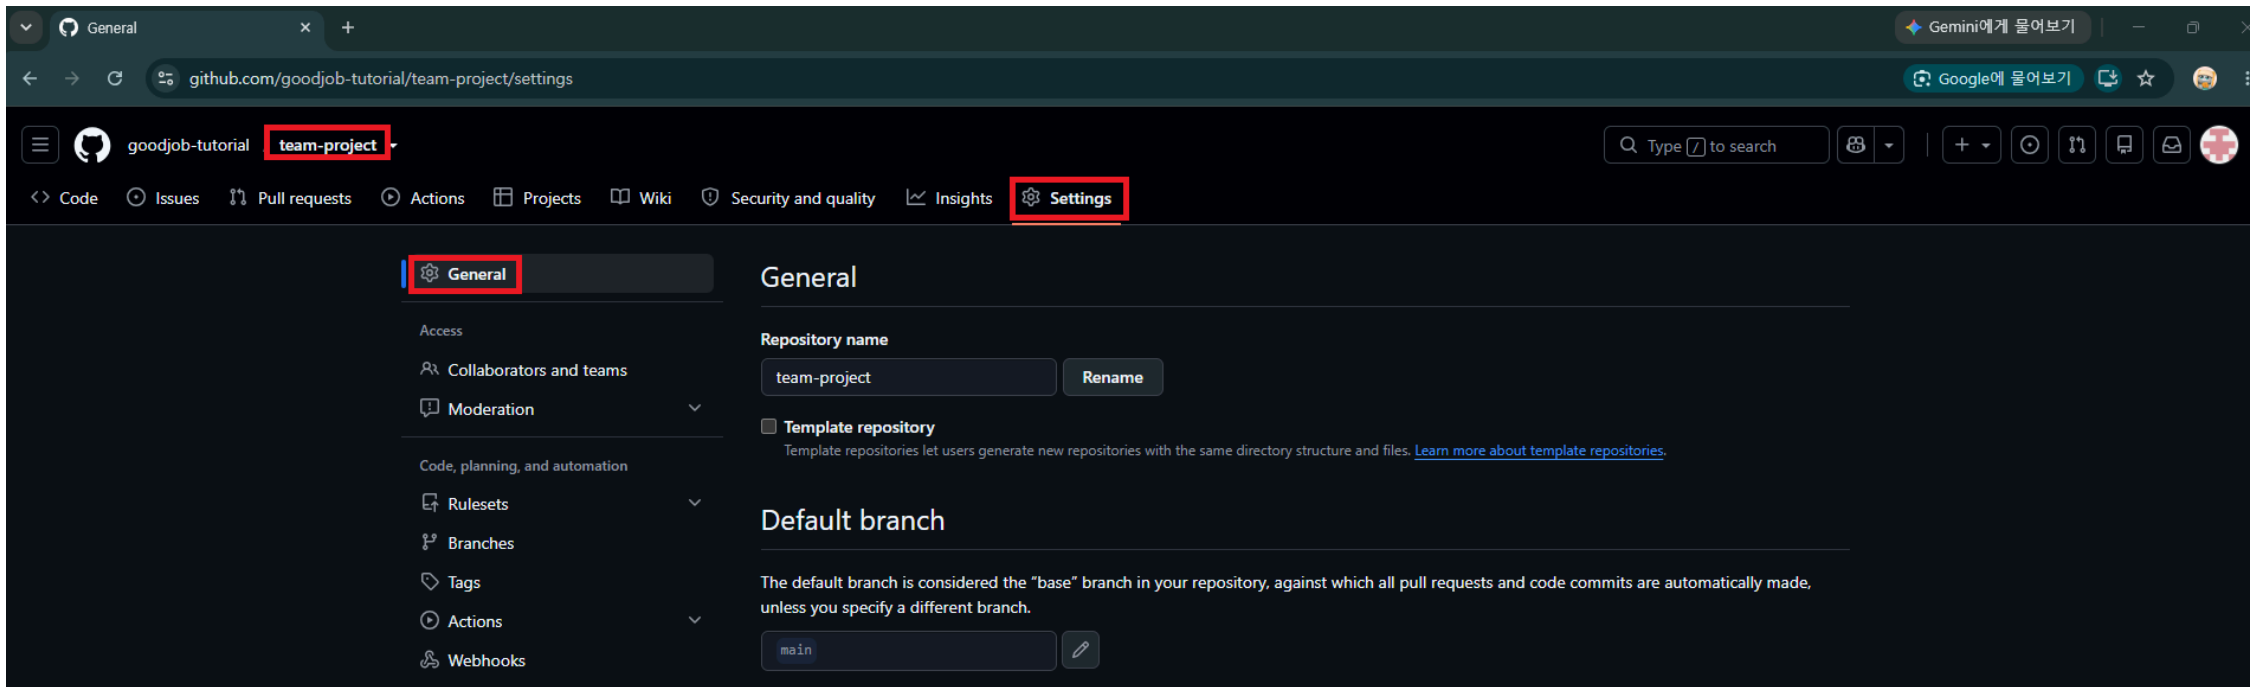

Repository → Settings →
General → Features → Issues

Features

☒ **Wikis**
Wikis host documentation for your repository.

☒ **Restrict editing to users in teams with push access only**
Public wikis will still be readable by everyone.

☒ **Issues**
Issues integrate lightweight task tracking into your repository. Keep projects on track with issue labels and milestones, and reference them in commit messages.

Issue permissions

Creation allowed by: **All users** ▾

If restricted, issues will still be readable by everyone who can see this repository.

Get organized with issue templates
Give contributors issue templates that help you cut through the noise and help them push your project forward. [Set up templates](#)


☐ **Sponsorships**
Sponsorships help your community know how to financially support this repository.

Display a "Sponsor" button
Add links to GitHub Sponsors or third-party methods your repository accepts for financial contributions to your project. [Set up sponsor button](#)

☒ **Preserve this repository**
Include this code in the [GitHub Archive Program](#).


☐ **Discussions**
Discussions is the space for your community to have conversations, ask questions and post answers without opening issues.

Template	용도	추천
Bug report	버그 신고	✓
Feature request	새로운 기능 개발	✓
Custom template	직접 정의	필요하면

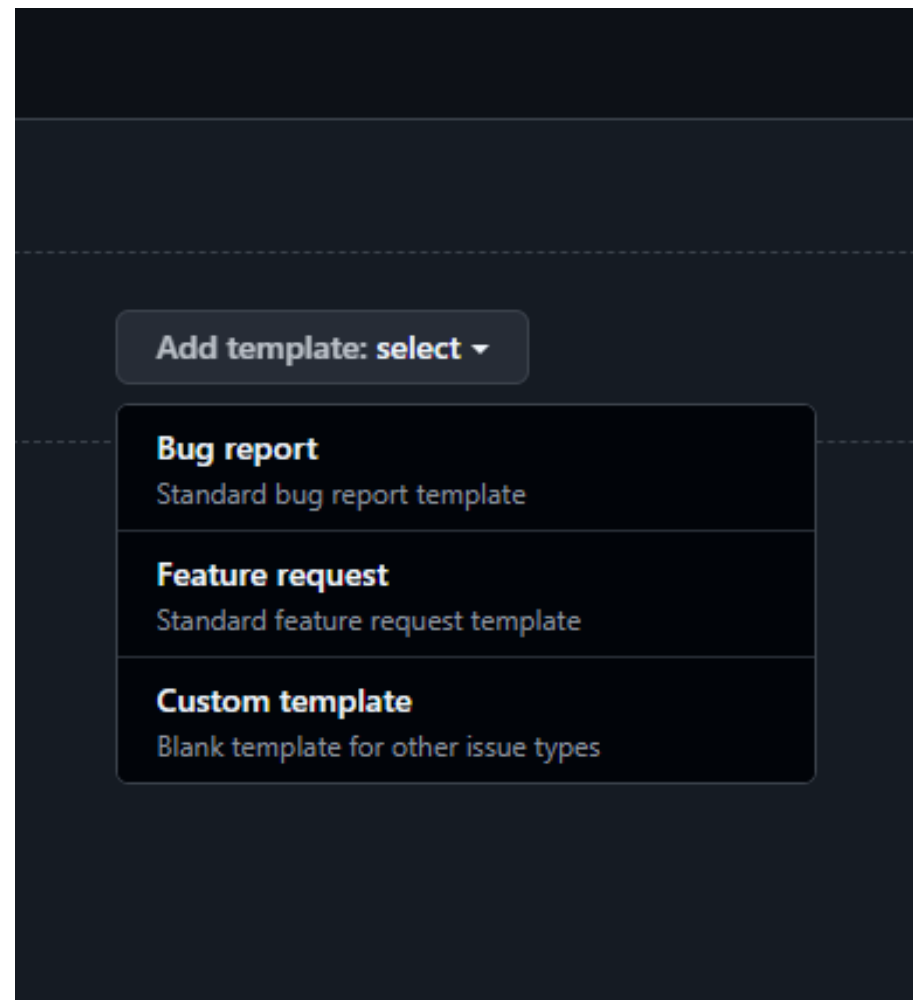

Bug report 생성

만약 생성이 안되면,
브라우저 리프레쉬!

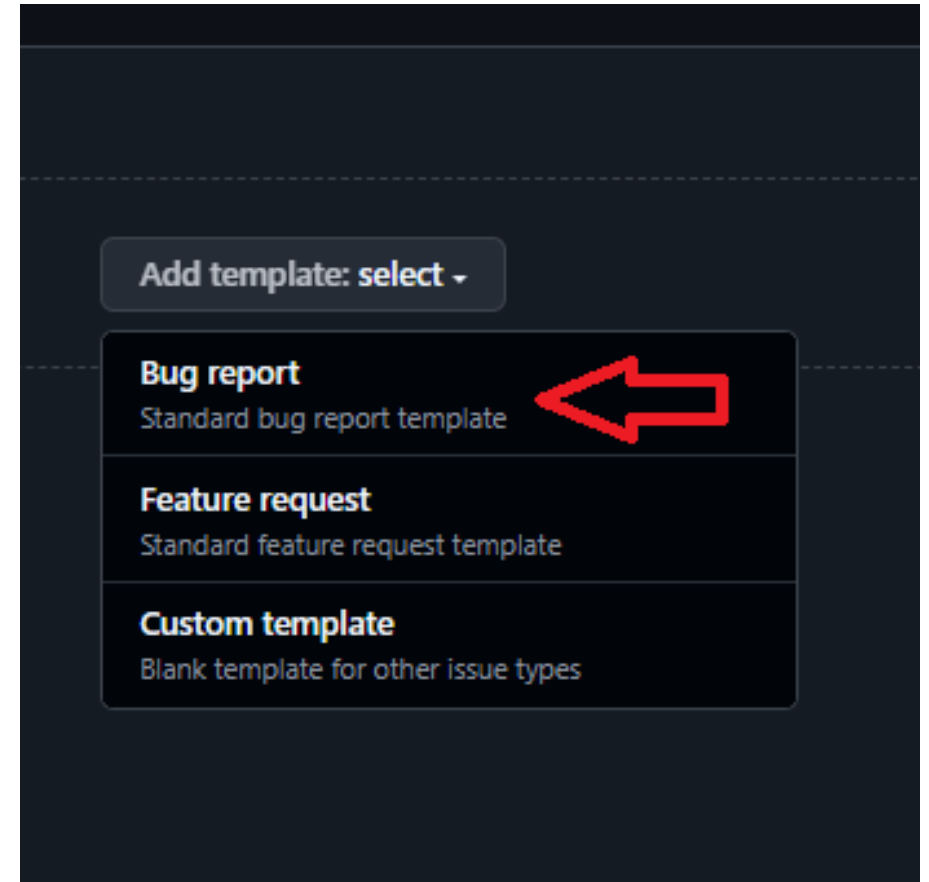

Preview and edit


[Propose changes](#)

Bug report
Create a report to help us improve

 [Preview and edit](#) 

[Add template: select ▾](#)

수정

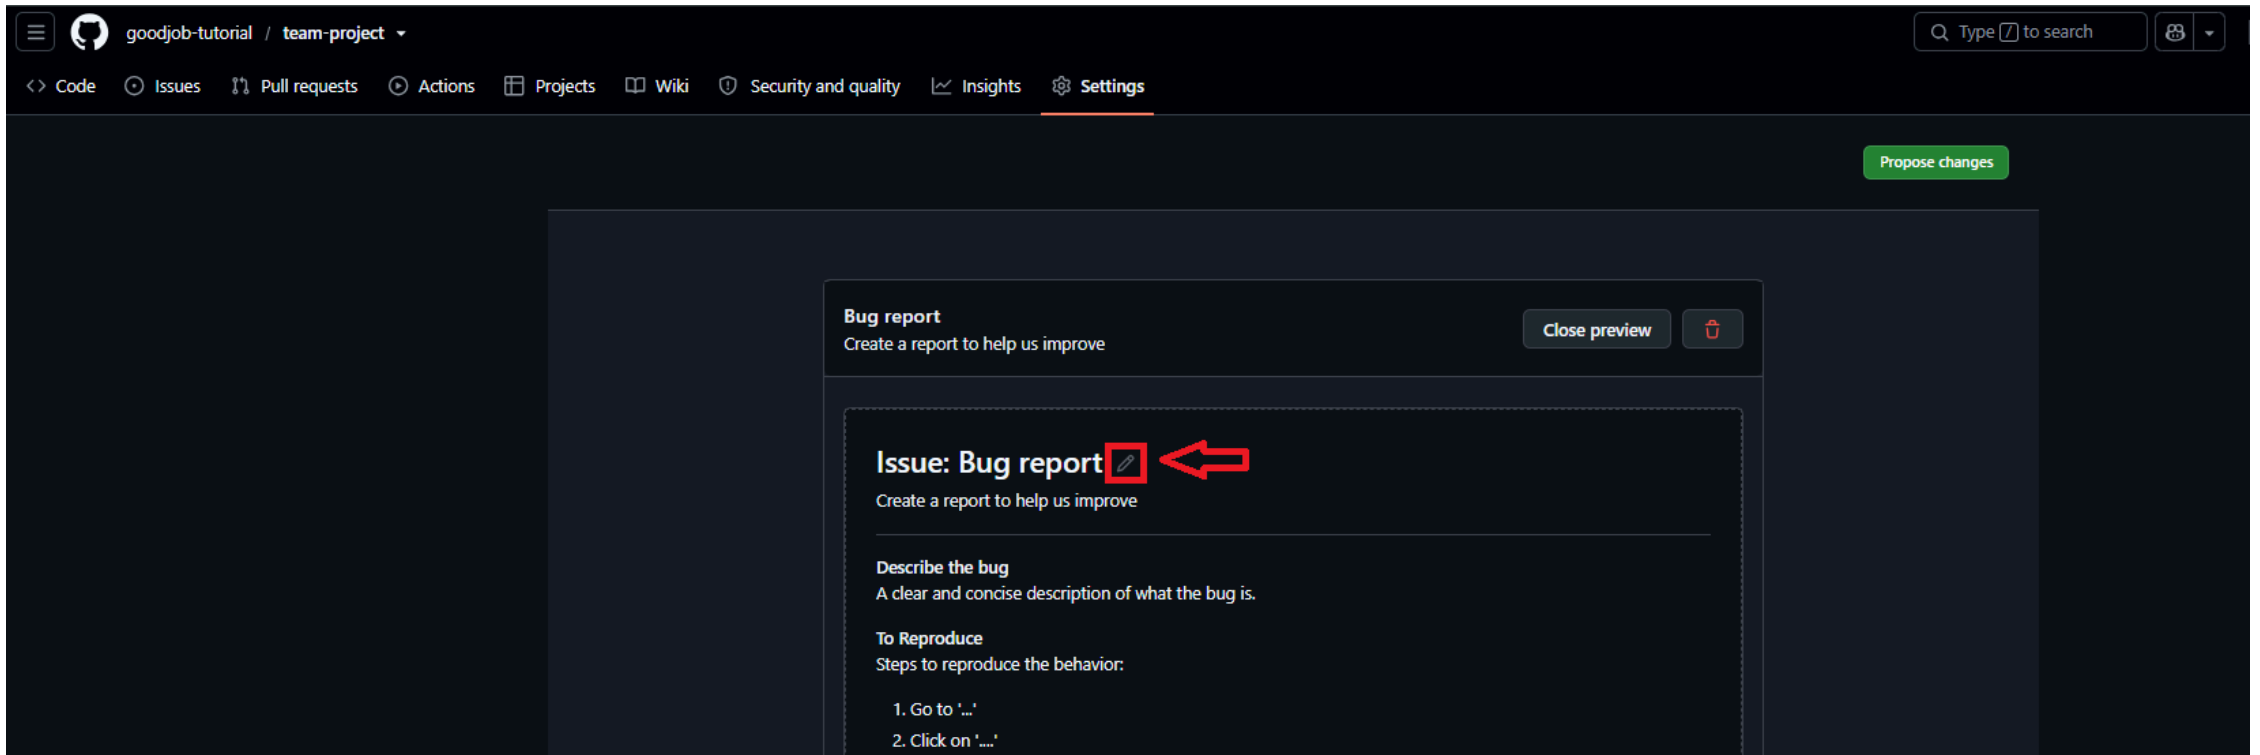

```
---
name: Bug Report
about: 버그 및 오류를 등록합니다.
title: "[Bug] "
labels: "bug"
assignees: ""
---
```

##

 버그 설명

어떤 문제가 발생했는지 작성해주세요.

##



재현 방법

- 1.
- 2.
- 3.

##



예상 동작

정상적으로 어떻게 동작해야 하는지 작성해주세요.

##



스크린샷

필요한 경우 오류 화면이나 로그를 첨부해주세요.

##



추가 정보

- OS:
- Browser:
- 기타:

작성 완료 후 Close preview

Bug report
Create a report to help us improve

[Close preview](#) 

Template name ×

Bug report

 This file lives in bug_report.md

About

Create a report to help us improve

Template content Styling with Markdown is supported

```
---
name: Bug Report
about: 버그 및 오류를 등록합니다.
title: "[Bug] "
labels: "bug"
assignees: ""
---

## 🐛 버그 설명
```

Optional additional items

Issue default title
This will be suggested as the issue title

[BUG]

Assignees 
No one—[assign yourself](#)

Labels 
bug

Type 
Bug

Bug report

Create a report to help us improve

Close preview



Issue: Bug report

Create a report to help us improve

name: Bug Report
about: 버그 및 오류를 등록합니다.
title: "[Bug] "
labels: "bug"
assignees: ""

버그 설명

어떤 문제가 발생했는지 작성해주세요.

재현 방법

- 1.
- 2.

Feature Request 생성

```
---
name: Feature Request
about: 새로운 기능 개발을 등록합니다.
title: "[Feature] "
labels: "feature"
assignees: ""
---
```

##



기능 설명

개발할 기능을 간단하게 작성해주세요.

📋 작업 내용

- [] 작업 1
- [] 작업 2
- [] 작업 3

##



완료 조건

- [] 기능 구현 완료
- [] 정상 동작 확인

##



참고사항

관련 화면, API, 문서 등이 있다면 작성해주세요.

Feature request

Suggest an idea for this project

Close preview



Issue: Feature request

Suggest an idea for this project

name: Feature Request

about: 새로운 기능 개발을 등록합니다.

title: "[Feature] "

labels: "feature"

assignees: ""


기능 설명

개발할 기능을 간단하게 작성해주세요.

작업 내용

☐ 작업 1

추가/수정된 내용 반영

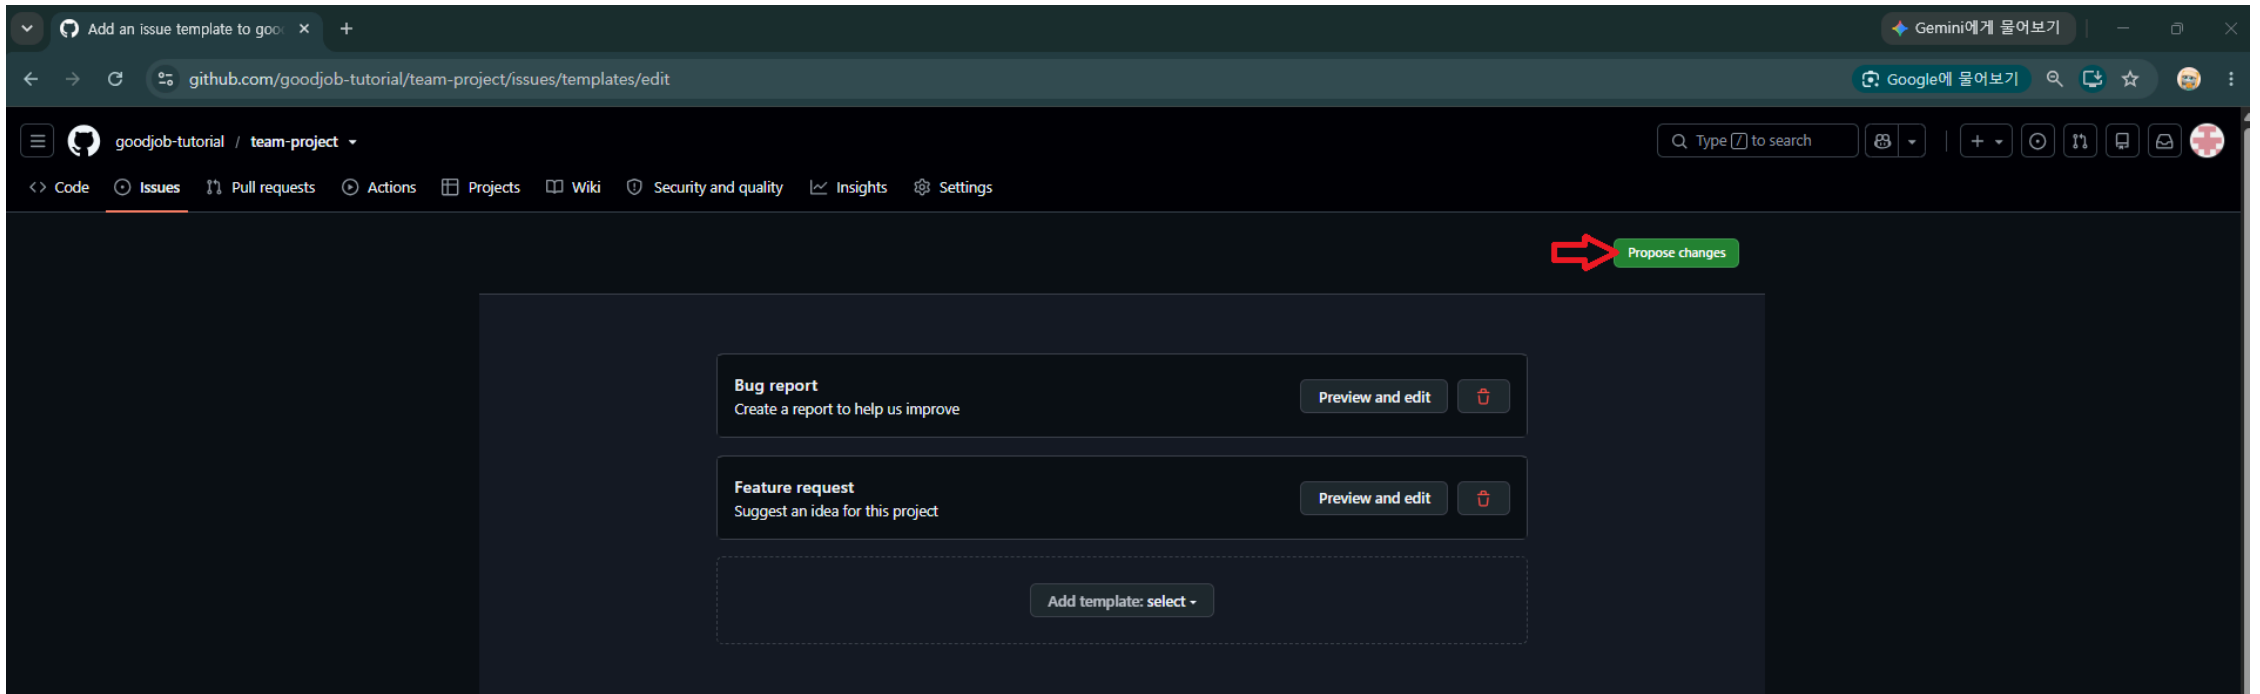

반영 이유 작성 및 Commit

Propose changes

Bug report

Create a report to help us improve

Preview and edit

Feature request

Suggest an idea for this project

Preview and edit

Add template: select ▾

Commit changes

Commit message

Update issue templates

Extended commit message

Bug report & Feature request 추가/수정

☒ Commit directly to the `main` branch.

☐ Create a new branch for this commit and start a pull request.

Commit changes

21


결과 확인

The screenshot shows a web browser window displaying the GitHub repository page for 'goodjob-tutorial/team-project'. The browser's address bar shows 'github.com/goodjob-tutorial/team-project'. The repository page header includes the repository name 'team-project' and a 'Public' label. Below the header, there are navigation tabs: 'Code', 'Issues', 'Pull requests', 'Actions', 'Projects', 'Wiki', 'Security and quality', 'Insights', and 'Settings'. A notification banner at the top states 'Updated issue templates for this repository'. The main content area features a commit history table. The table has columns for the commit author, message, commit hash, and time. The first commit is by 'mrcho593' with the message 'Update issue templates', hash '06936ab', and '2 Commits' made 'now'. This commit is highlighted with a red box. Below it is a commit by 'Initial commit' for 'README.md' made '17 hours ago'. To the right of the commit history, there is an 'About' section with a description 'No description, website, or topics provided.' and a list of repository statistics: '0 stars', '0 watching', '0 forks', and 'Audit log'. The repository name 'team-project' is also displayed at the bottom of the page.

Commit Message	Commit Hash	Time
Update issue templates	06936ab	now
Initial commit		17 hours ago

3단계: Branch protection rules 정의

Repository → Settings → Branches

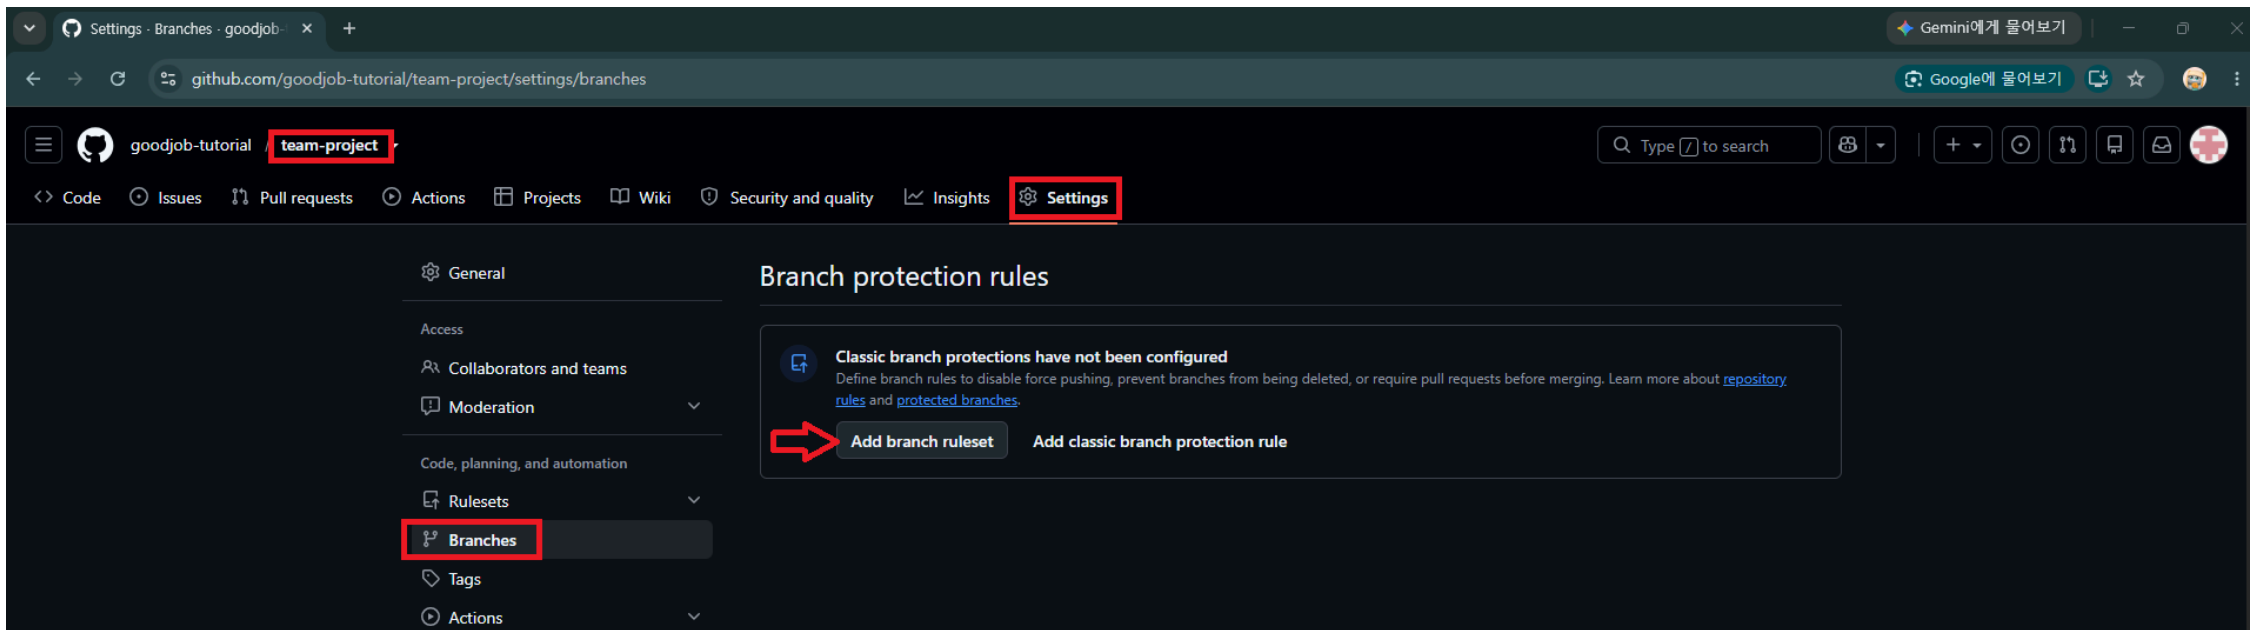

Bypass list

Bypass 권한을 가진 특정 사용자/팀이 설정되어 있다면, 그 사람은 규칙을 우회할 수 있음

Rulesets / New branch ruleset

Protect your most important branches
[Rulesets](#) define whether collaborators can delete or force push and set requirements for any pushes, such as passing status checks or a linear commit history.

Ruleset Name *
main-rule

Enforcement status
Active

Bypass list
Exempt roles, teams, agents, apps, and users from this ruleset by adding them to the bypass list.

Actors All Roles Teams Apps Users Others + Add bypass

Bypass list is empty

Target branches

규칙이 적용될 branch 정의

Environments

Pages

Custom properties

Security and quality

Advanced Security

Code quality

Deploy keys

Secrets and variables

Integrations

GitHub Apps

Email notifications

Target branches

Which branches should be matched?

Branch targeting criteria

Add target

Branch targeting has not been configured

- Include default branch
- Include all branches
- Target by inclusion or exclusion pattern
- Include by pattern
- Exclude by pattern

Rules

Which rules should be applied?

Branch rules

☐ Restrict creations

Only allow users with bypass permission to create matching refs.

The screenshot displays the GitHub Actions configuration interface. On the left is a sidebar with navigation links: Webhooks, Copilot, Planning, Environments, Pages, Custom properties, Security and quality, Advanced Security, Code quality, Deploy keys, and Secrets and variables. The main area is titled 'Actors' and includes tabs for 'All', 'Roles', 'Teams', 'Apps', 'Users', and 'Others'. A '+ Add bypass' button is in the top right. Below the tabs, a 'web-team' team is listed with an 'Always allow' status and a trash icon. The 'Target branches' section asks 'Which branches should be targeted by this ruleset?' and contains a 'Branch targeting criteria' section with an 'Add target' button. A modal dialog titled 'Include by pattern' is open, explaining that matching branches will be targeted. It features a 'Branch naming pattern' input field containing '+ main', which is highlighted with a red box. Below the input, example patterns are provided: 'main', 'releases/**/*', and 'users/**/*', with a link to 'Learn more about fnmatch'. At the bottom of the dialog are 'Cancel' and 'Add Inclusion pattern' buttons, with a red arrow pointing from the 'Cancel' button to the 'Add Inclusion pattern' button. The background shows a 'Rules' section with the question 'Which rules should be applied?' and a 'not been configured' message.

Webhooks

Copilot

Planning

Environments

Pages

Custom properties

Security and quality

Advanced Security

Code quality

Deploy keys

Secrets and variables

Actors

All Roles Teams Apps Users Others

+ Add bypass

web-team Teams

Always allow

Target branches

Which branches should be targeted by this ruleset?

Branch targeting criteria

Add target

Include by pattern

Branches that match the matching pattern will be targeted by this ruleset.

Branch naming pattern

+ main

Example patterns: "main", "releases/**/*", "users/**/*". [Learn more about fnmatch.](#)

Cancel Add Inclusion pattern

not been configured

Rules

Which rules should be applied?

Branch rules

규칙 정의

Target branches

Which branches should be matched?

Branch targeting criteria

Add target ▾

+

main

✕

Rules

Which rules should be applied?

Branch rules

☐ Restrict creations

Only allow users with bypass permission to create matching refs.

☐ Restrict updates

Only allow users with bypass permission to update matching refs.

☒ Restrict deletions

Only allow users with bypass permissions to delete matching refs.

☐ Require linear history

Prevent merge commits from being pushed to matching refs.

☐ Require merge queue

Merges must be performed via a merge queue.

☐ Require deployments to succeed

Choose which environments must be successfully deployed to before refs can be pushed into a ref that matches this rule.

규칙: Merge 전 PR 필수

☒ **Require a pull request before merging**
Require all commits be made to a non-target branch and submitted via a pull request before they can be merged.

Hide additional settings ^

Required approvals

1 ▾

The number of approving reviews that are required before a pull request can be merged.

☐ **Dismiss stale pull request approvals when new commits are pushed**
New, reviewable commits pushed will dismiss previous pull request review approvals.

☐ **Require review from specific teams**
A collection of reviewers and associated file patterns. Each reviewer has a list of file patterns which determine the files that reviewer is required to review.

☐ **Require review from Code Owners**
Require an approving review in pull requests that modify files that have a designated code owner.

☐ **Restrict who can dismiss pull request reviews**
Specify people, teams, or apps allowed to dismiss pull request reviews.

☐ **Require approval of the most recent reviewable push**
Whether the most recent reviewable push must be approved by someone other than the person who pushed it.

☒ **Require conversation resolution before merging**
All conversations on code must be resolved before a pull request can be merged.

☐ **Require an additional approval for unattributed Copilot pull requests** Preview
When Copilot opens a pull request without a human collaborator, require one more approving review if a non-zero approval count is required.

방식	작업 Commit	Merge Commit	History	난이도
Merge	유지	생성	복잡해질 수 있음	쉬움
Squash	하나로 합침	별도 Merge Commit 없음	가장 깔끔	쉬움
Rebase	유지	없음	일렬로 깔끔	어려움

Allowed merge methods

Squash ▾

When merging pull requests, you can allow any combination of merge commits, squashing, or rebasing. At least one option must be enabled.



Require status checks to pass

Choose which status checks must pass before the ref is updated. When enabled, commits must first be pushed to another ref where the checks pass.



Block force pushes

Prevent users with push access from force pushing to refs.



Require code scanning results

Choose which tools must provide code scanning results before the reference is updated. When configured, code scanning must be enabled and have results for both the commit and the reference being updated.

Create

☐ **Require code quality results**
Choose which severity levels of code quality results should block pull request merges. When configured, a code quality analysis must be done on the pull request before the changes can be merged.

☐ **Restrict code coverage**
Enforce minimum line coverage thresholds on pull requests. When configured, uploaded coverage data must meet the specified criteria before changes can be merged.

☐ **Automatically request Copilot code review**
Request Copilot code review for new pull requests automatically if the author has access to Copilot code review and their premium requests quota has not reached the limit.

Restrictions

Enterprise

☐ **Restrict commit metadata**
Restrict commit author email addresses, committer email addresses, commit message content, and other metadata

☐ **Restrict branch names**
Restrict branch names

Create

결과 확인

The screenshot shows the GitHub web interface for the 'team-project' repository. The browser address bar displays 'github.com/goodjob-tutorial/team-project/settings/rules'. The page title is 'goodjob-tutorial / team-project'. The navigation bar includes links for Code, Issues, Pull requests, Actions, Projects, Wiki, Security and quality, Insights, and Settings (which is currently selected). On the left sidebar, the 'Rulesets' option is highlighted under the 'Code, planning, and automation' section. The main content area is titled 'Rulesets' and features a 'New ruleset' button in the top right corner. Below this, there is a filter dropdown set to 'All'. A single ruleset, 'main-rule', is listed with a green play icon, indicating it is active. The ruleset details show '3 branch rules • targeting 1 branch'. A three-dot menu is visible to the right of the ruleset name.