SSH 연결


- 안전하고 안정적인 방법으로, 장시간 작업에 가장 추천

SSH 키 생성 및 등록


단계1: SSH 키 생성

> 명령어 실행 후 Enter 3번 실행!

```
ssh-keygen -t ed25519 -C "YOUR_EMAIL@DOMAIN.COM"
```

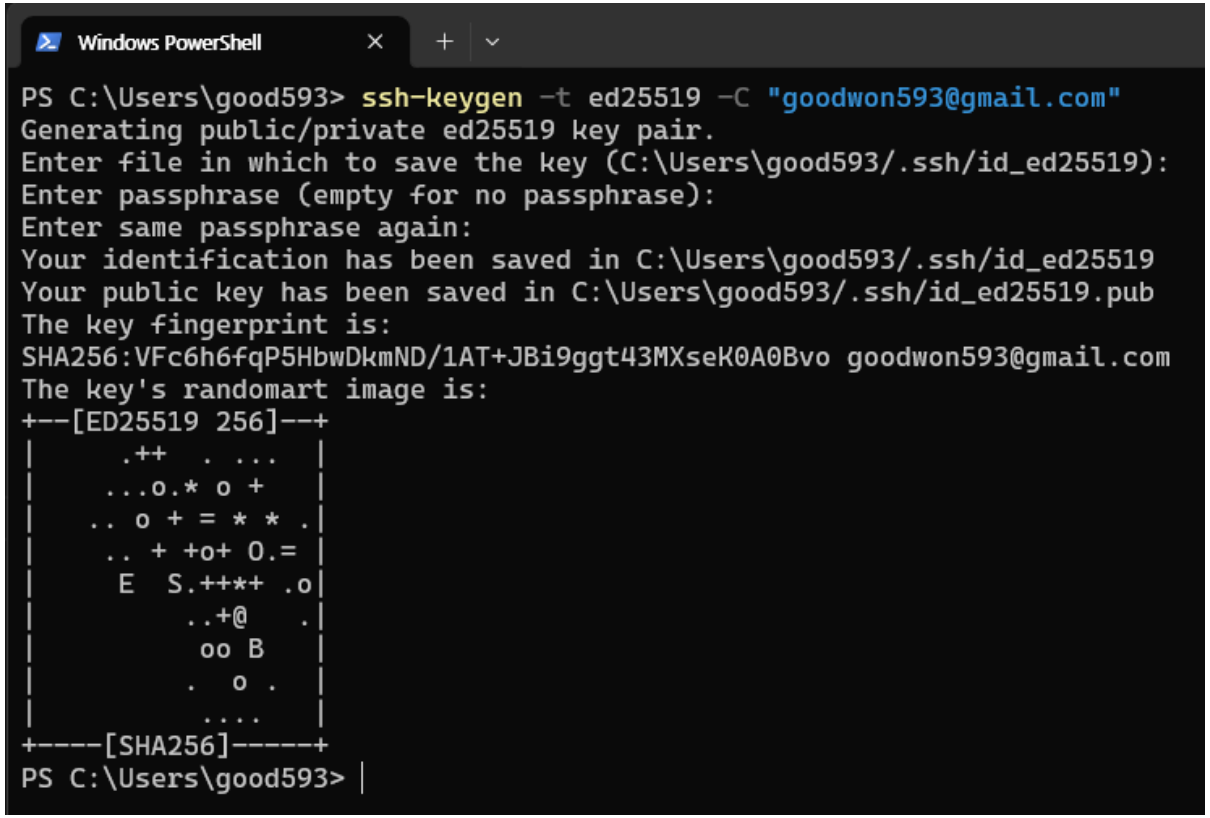

- 생성된 키 위치:
  - 공개키: **Runpod 등에 등록**
    - `~/.ssh/id_ed25519.pub`
  - 개인키: **타인에게 공개 금지**
    - `~/.ssh/id_ed25519`
- Windows(CMD) 사용 시:
  - `C:\Users\사용자명\.ssh\`

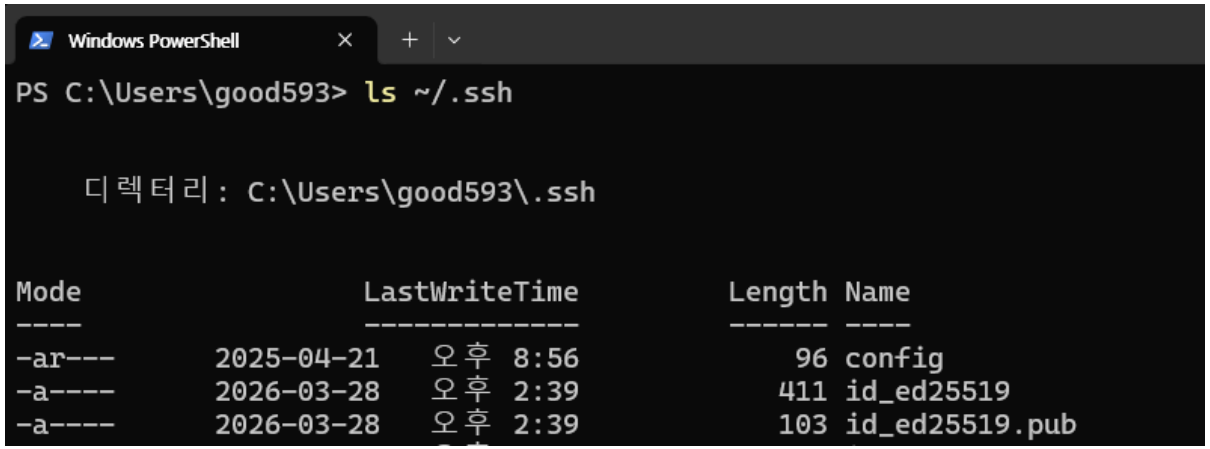

주의사항 (권한 설정)

- WSL 2나 리눅스 환경에서 config 파일이나 키 파일의 권한이 너무 개방되어 있으면 SSH 접속이 거부될 수 있습니다.
- 이 경우 아래 명령어로 권한을 조정해 주세요.


```
chmod 600 ~/.ssh/config
chmod 600 ~/.ssh/id_ed25519
```

단계2: 공개키 확인

```
cat ~/.ssh/id_ed25519.pub
```


출력 예시:

```
ssh-ed25519 AAAAC4NzaC1lZDI1JTE5AAAAIGP+L8h... YOUR_EMAIL@DOMAIN.COM
```

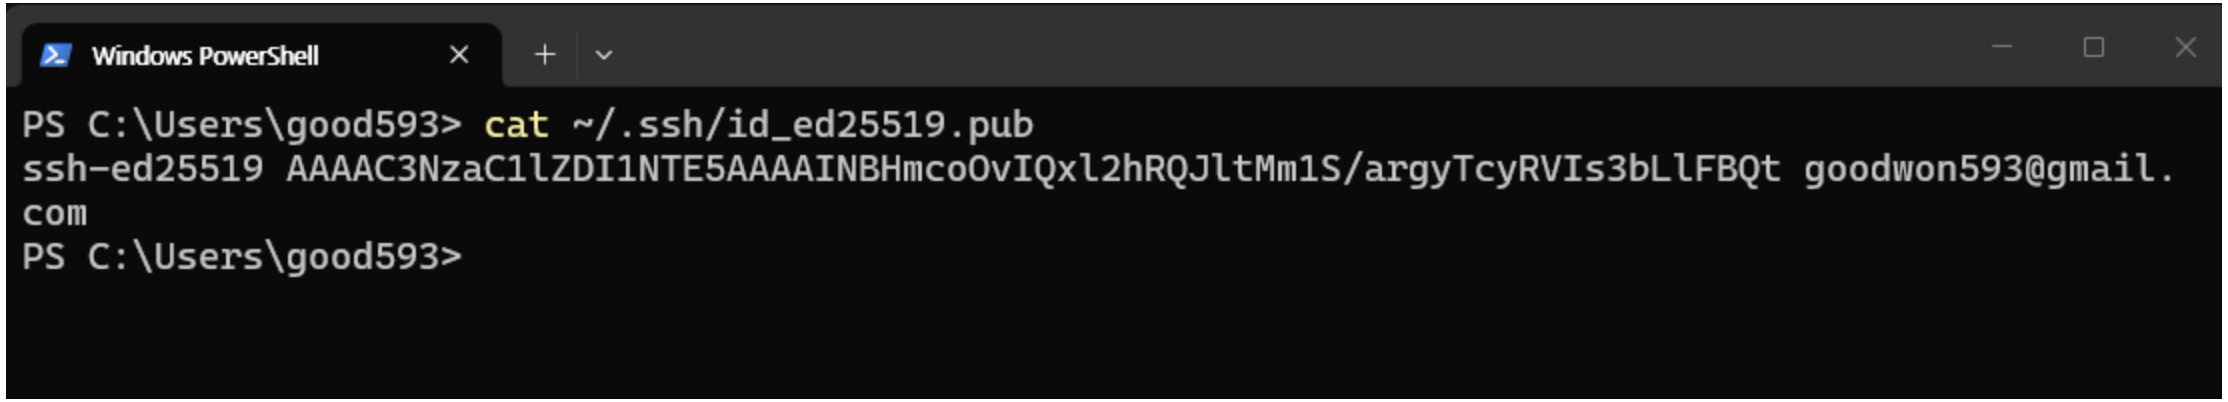

단계3: RunPod 공개키 등록

> 여러 키를 등록할 경우, 각 키를 **새 줄**로 구분

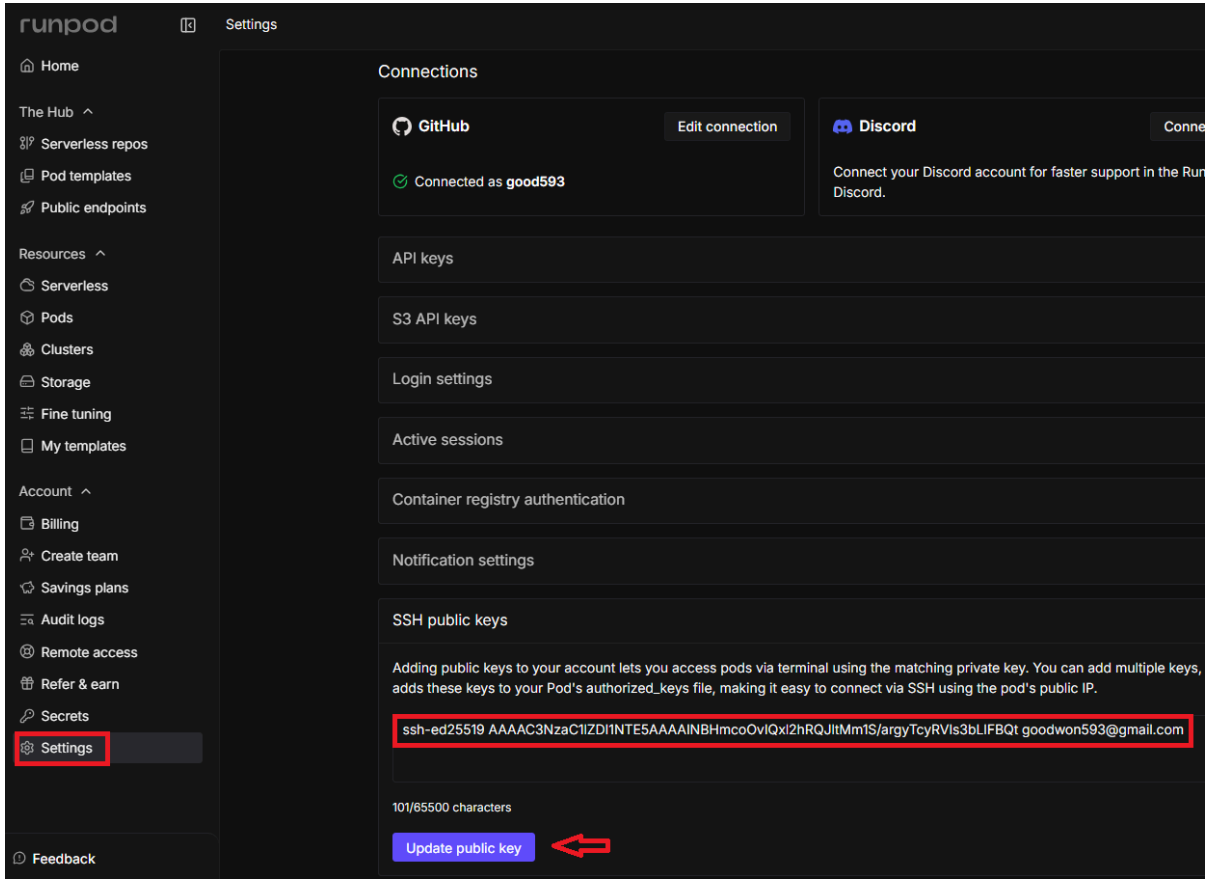



SSH 연결 방법 3가지

방법	파일 전송 지원	추천 상황
기본 SSH	❌	빠른 접속, 일반 Pod
공개 IP SSH	✅	파일 전송, 풀 SSH 기능


1. 기본 SSH 연결

단계1: Pods 페이지에서 Pod 선택

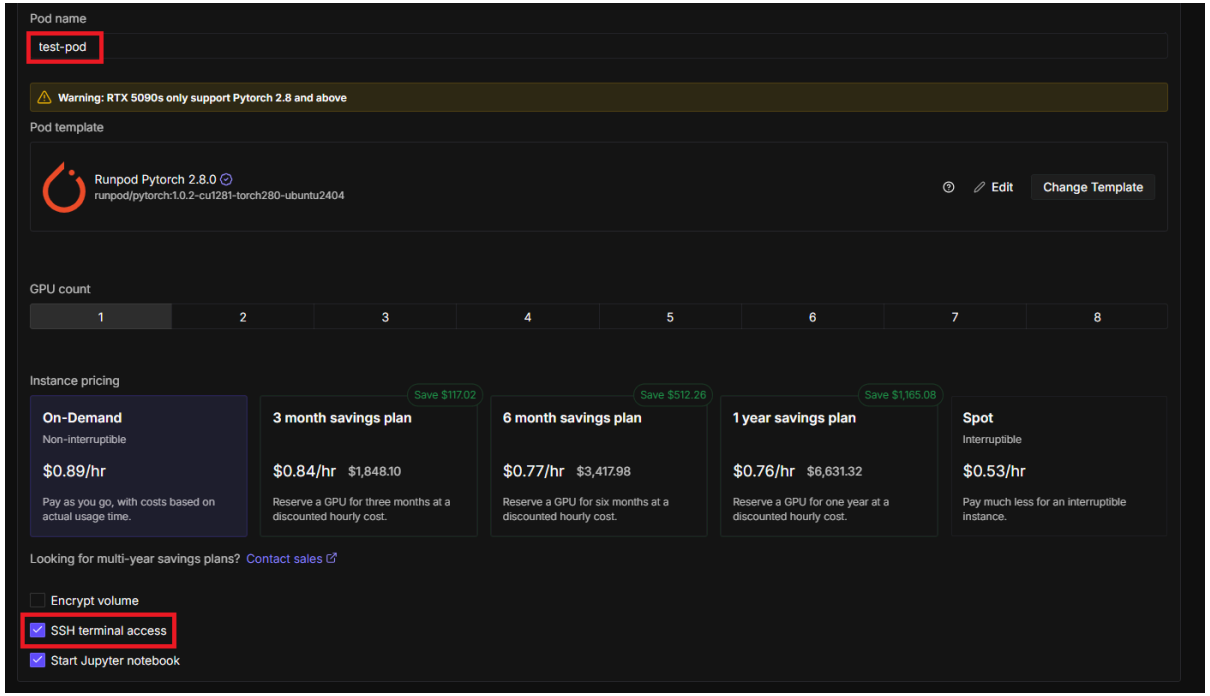


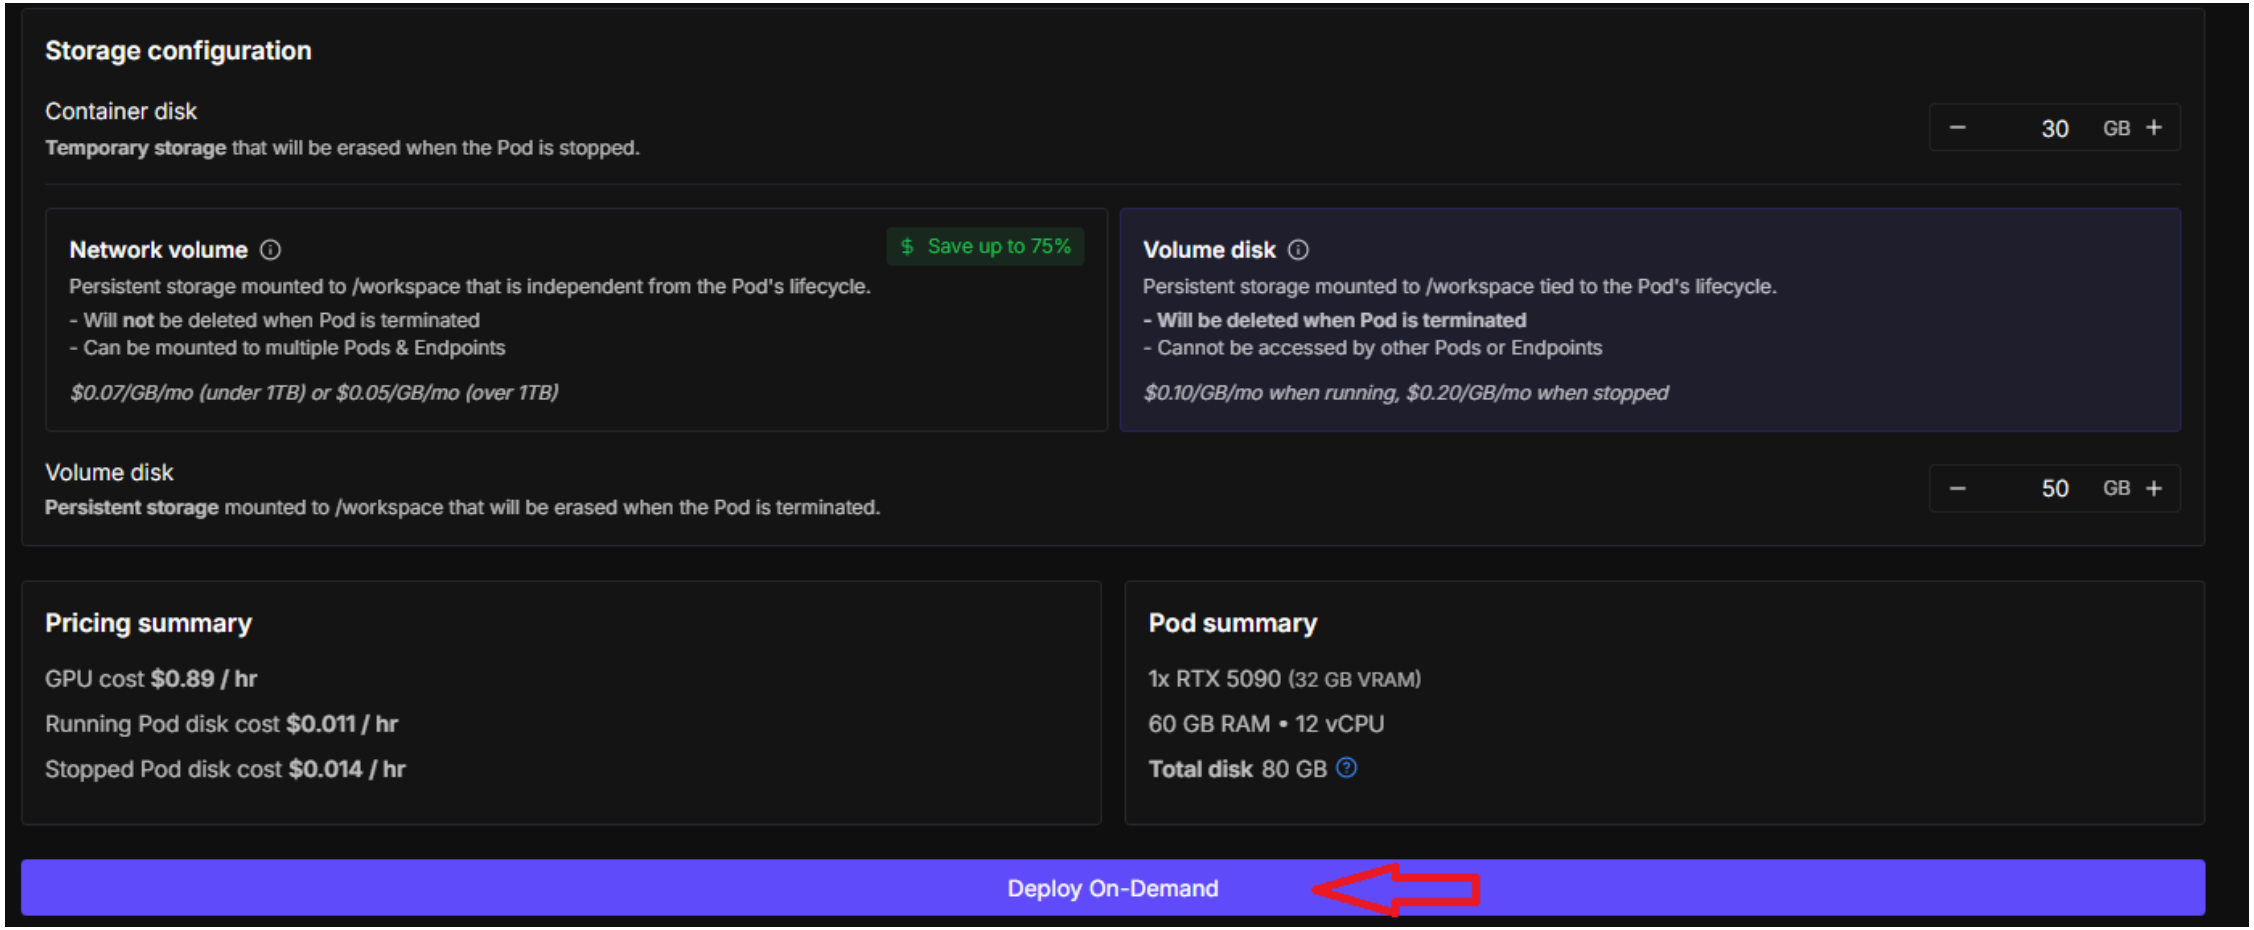
Storage configuration
Container disk
Temporary storage that will be erased when the Pod is stopped.
– 30 GB +
Network volume
$ Save up to 75%
Persistent storage mounted to /workspace that is independent from the Pod's lifecycle.
- Will not be deleted when Pod is terminated
- Can be mounted to multiple Pods & Endpoints
$0.07/GB/mo (under 1TB) or $0.05/GB/mo (over 1TB)
Volume disk
Persistent storage mounted to /workspace tied to the Pod's lifecycle.
- Will be deleted when Pod is terminated
- Cannot be accessed by other Pods or Endpoints
$0.10/GB/mo when running, $0.20/GB/mo when stopped
Volume disk
Persistent storage mounted to /workspace that will be erased when the Pod is terminated.
– 50 GB +
Pricing summary
GPU cost $0.89 / hr
Running Pod disk cost $0.011 / hr
Stopped Pod disk cost $0.014 / hr
Pod summary
1x RTX 5090 (32 GB VRAM)
60 GB RAM • 12 vCPU
Total disk 80 GB
Deploy On-Demand


단계2: SSH 항목의 명령어 복사

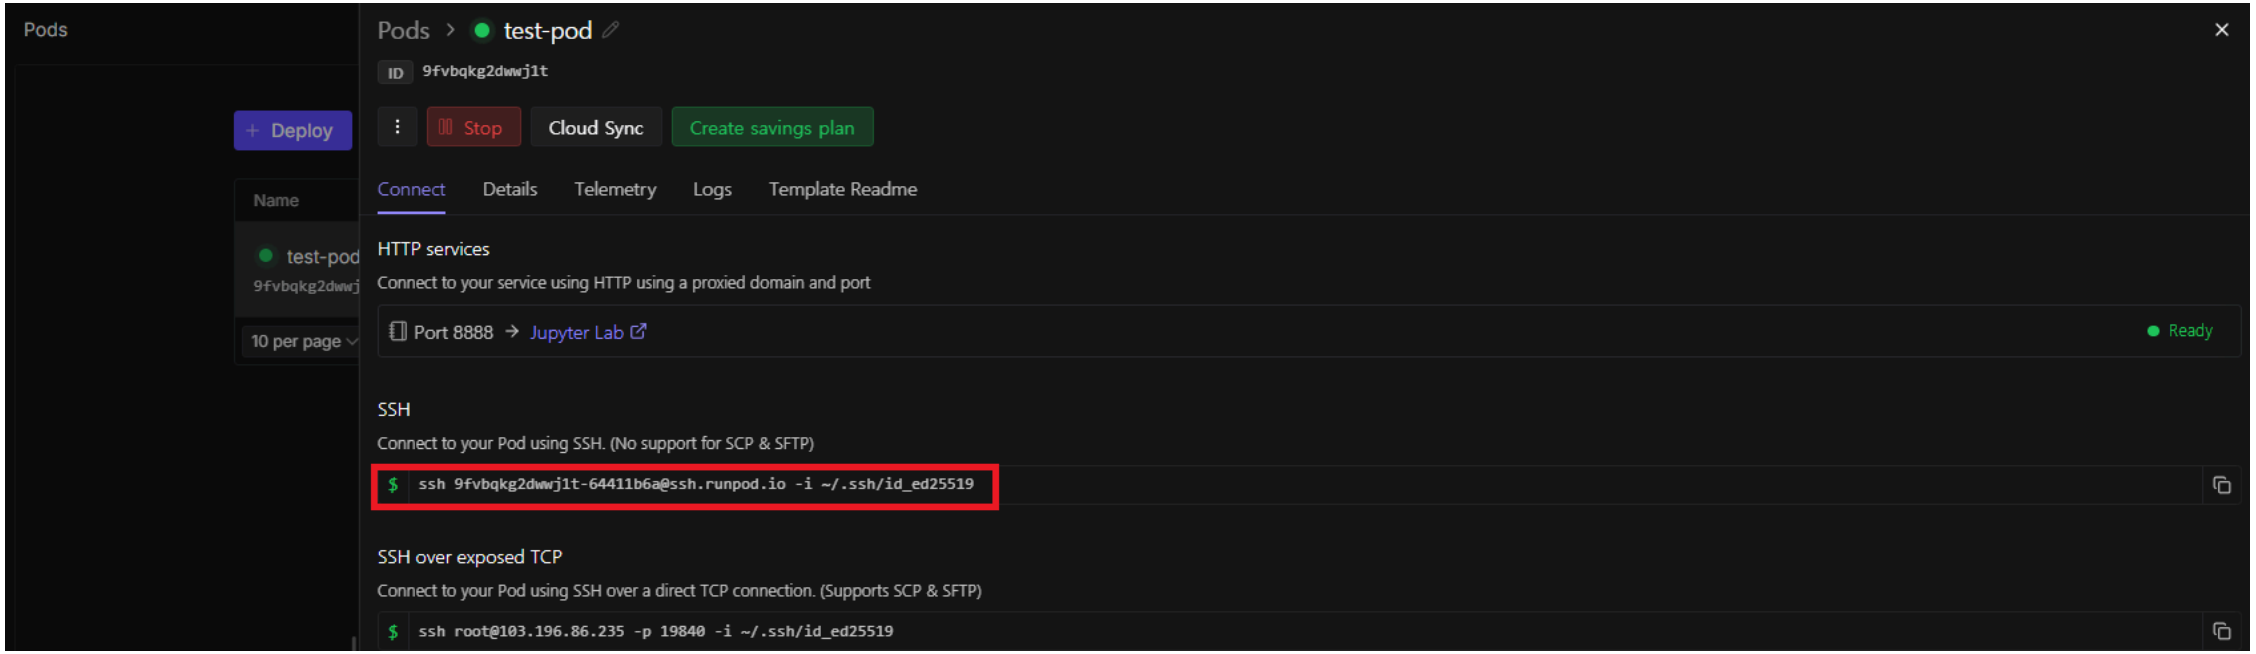

단계3: 터미널에 붙여넣고 실행 > yes

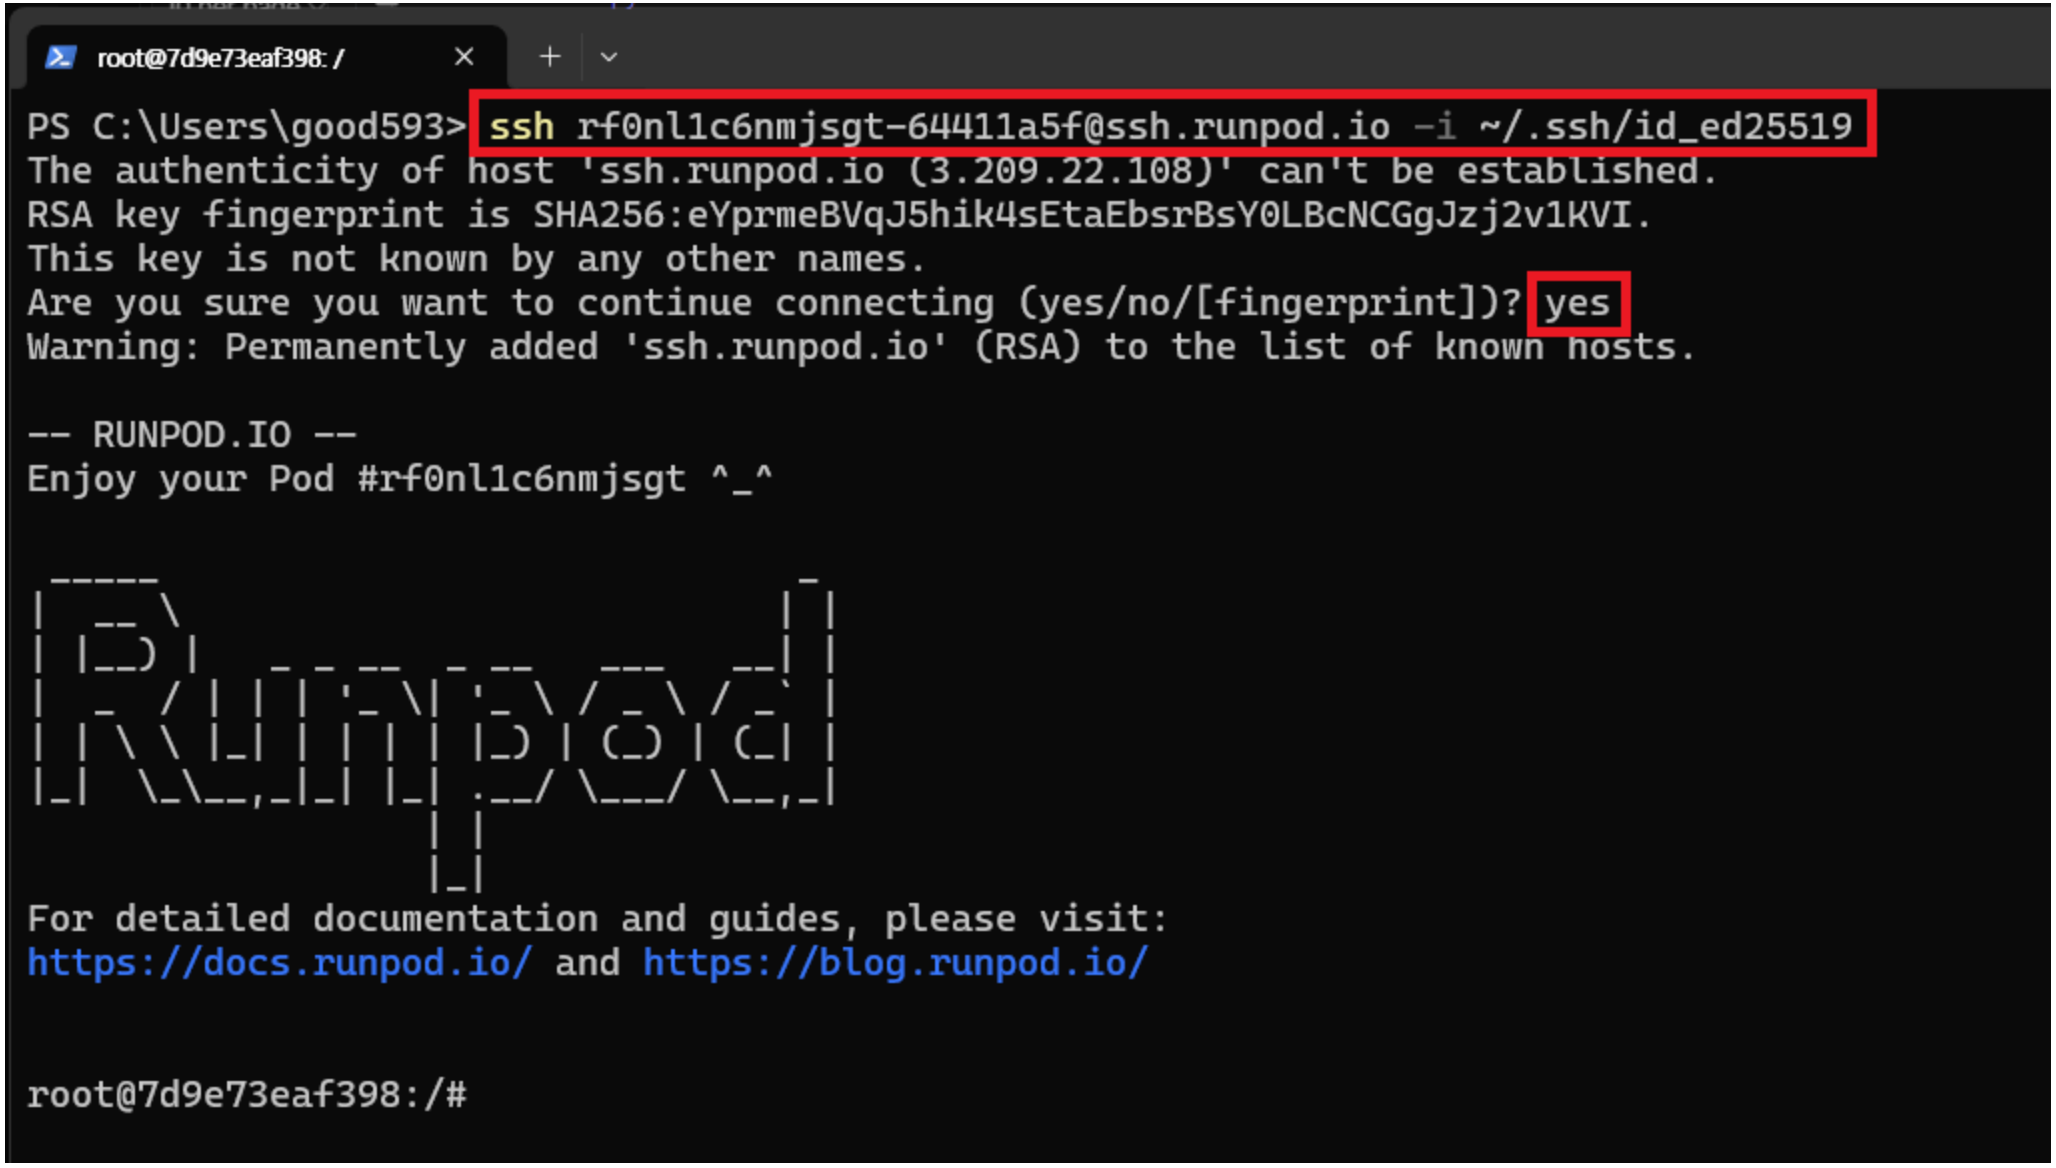

단계4: 접속 확인 및 나가기(exit)

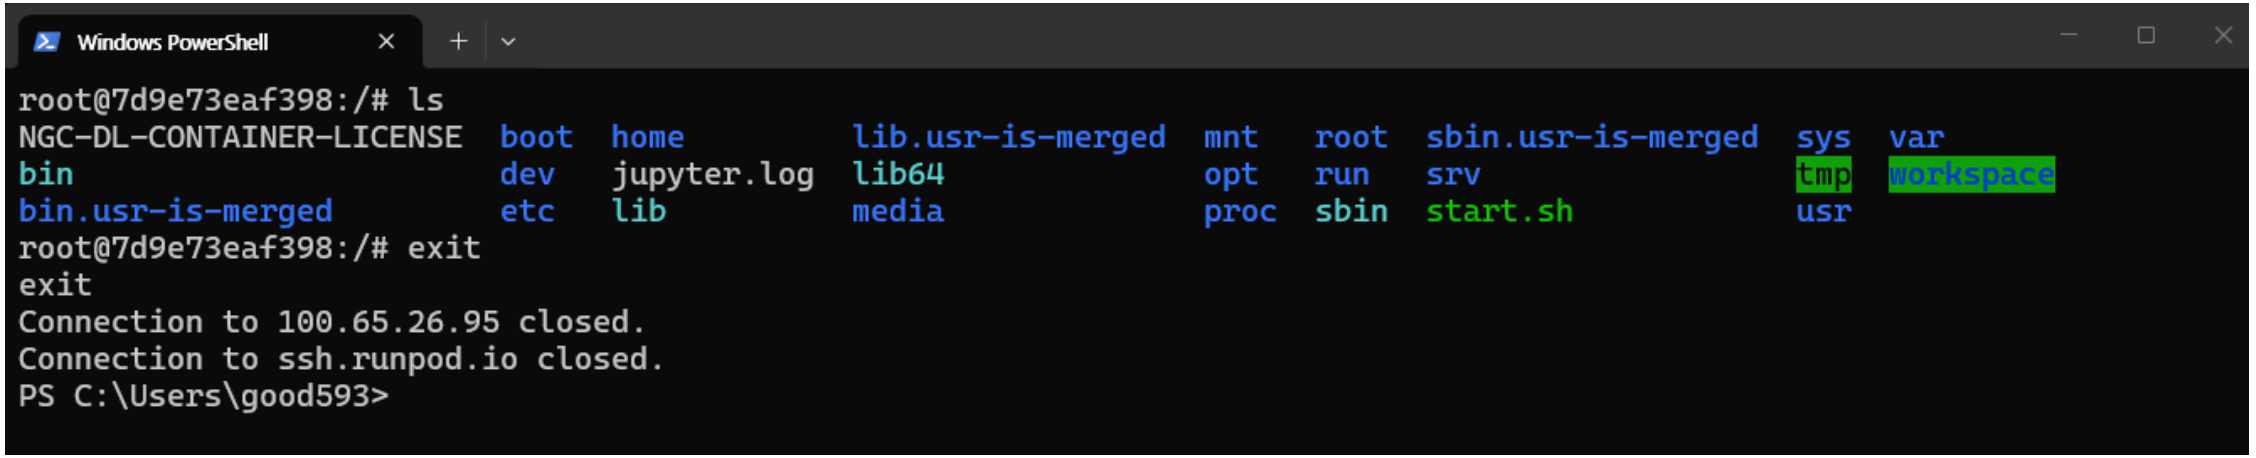


2. 공개 IP SSH 연결 (파일 전송 가능)

- SCP, SFTP 등 파일 전송이 필요할 때 사용
- 공식 RunPod 템플릿(PyTorch, Stable Diffusion)은 자동 설정됨

> 커스텀 템플릿 사용 시 아래 명령어를 Docker 시작 명령에 추가:

```
bash -c 'apt update; \
DEBIAN_FRONTEND=noninteractive apt-get install openssh-server -y; \
mkdir -p ~/.ssh; \
cd ~/.ssh; \
chmod 700 ~/.ssh; \
echo "$PUBLIC_KEY" >> authorized_keys; \
chmod 700 authorized_keys; \
service ssh start; \
sleep infinity'
```


단계1: SSH over exposed TCP 항목의 명령어 복사

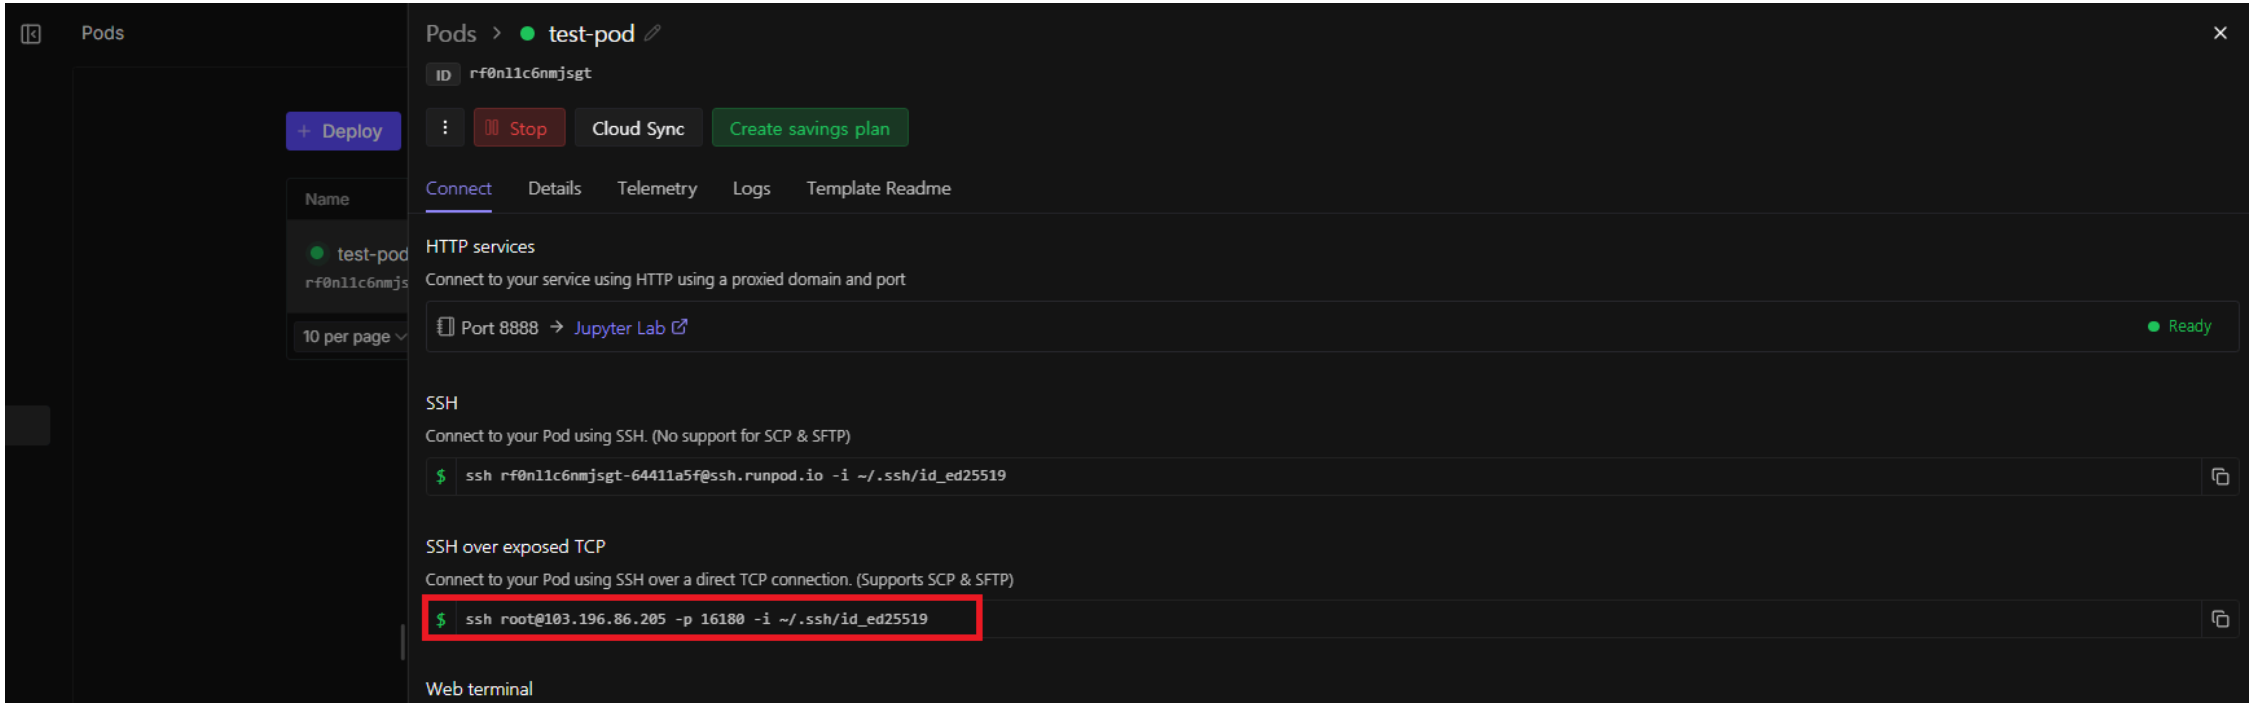

단계2: 터미널에 붙여넣고 실행

명령어 예시:
```
ssh root@213.173.108.12 -p 17445 -i ~/.ssh/id_ed25519
```

명령어 구조:
```
ssh root@[Pod IP 주소] -p [SSH 포트] -i [개인키 경로]
```

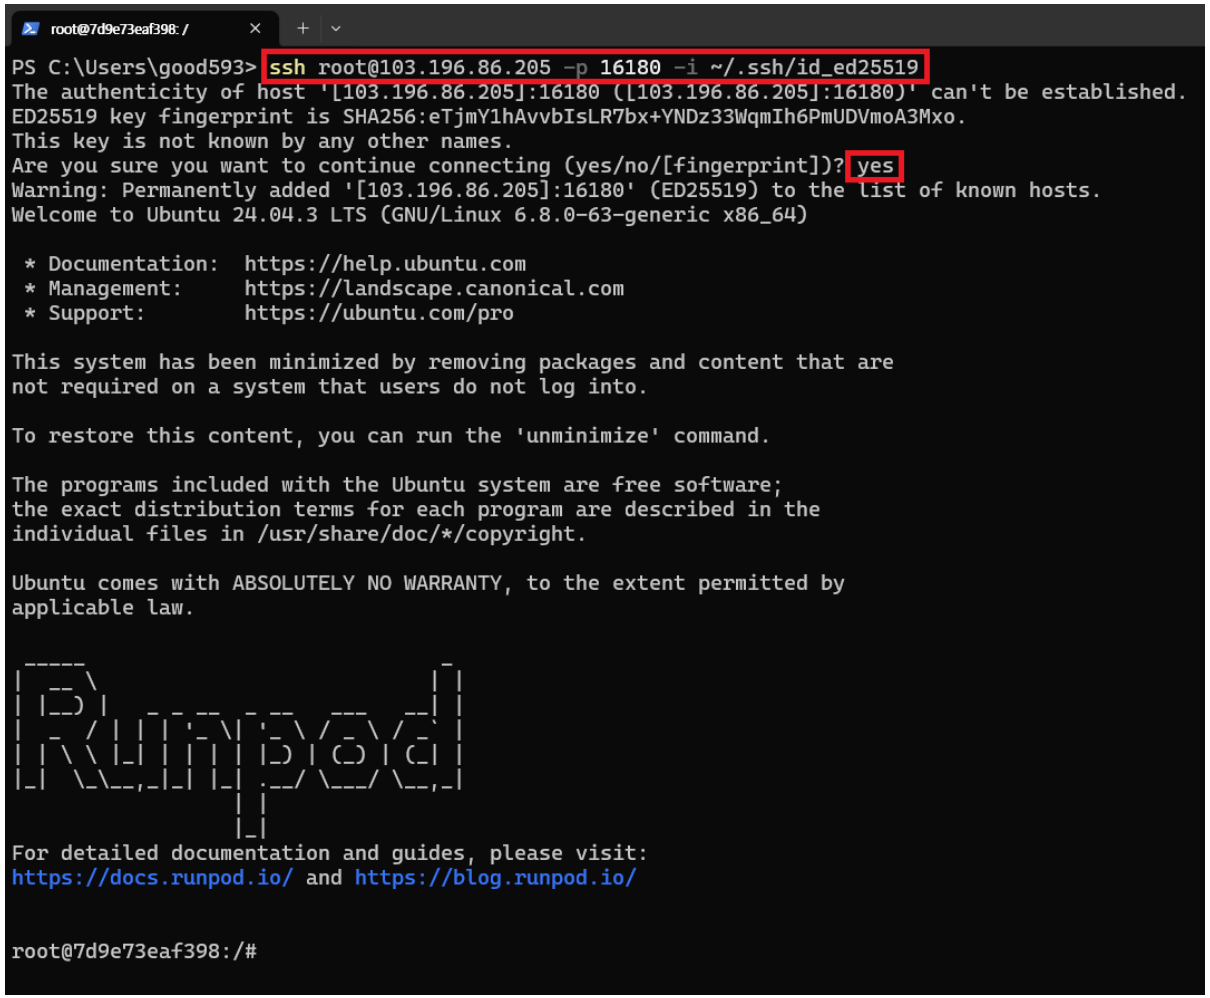


3. VS Code / Cursor 연결


- 로컬 VS Code나 Cursor에서 Pod를 원격으로 개발할 수 있음.

단계1: Install the Remote-SSH extension


> Cursor: Remote-SSH by Anysphere.

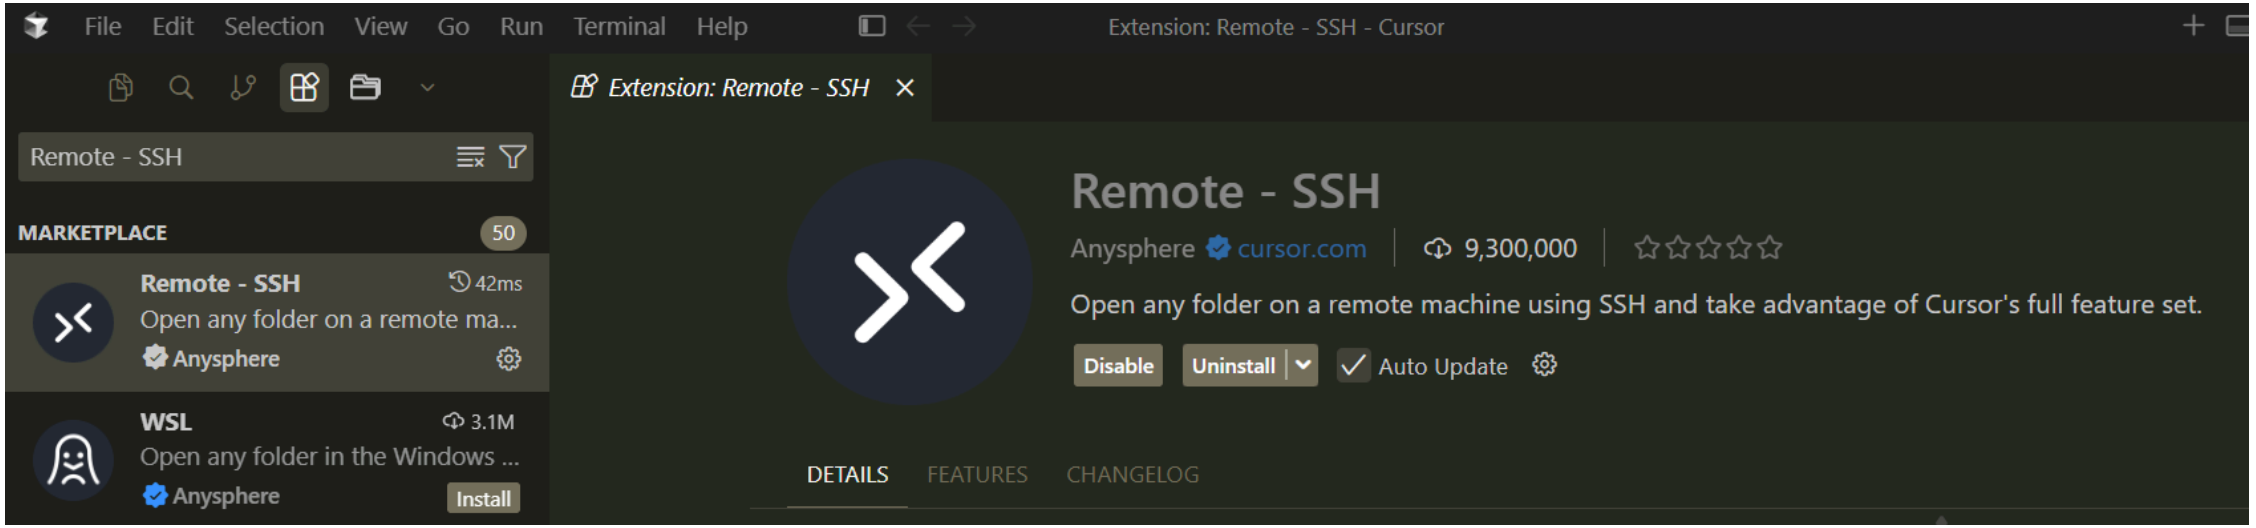


VSCode: Remote - SSH by ms-vscode-remote.

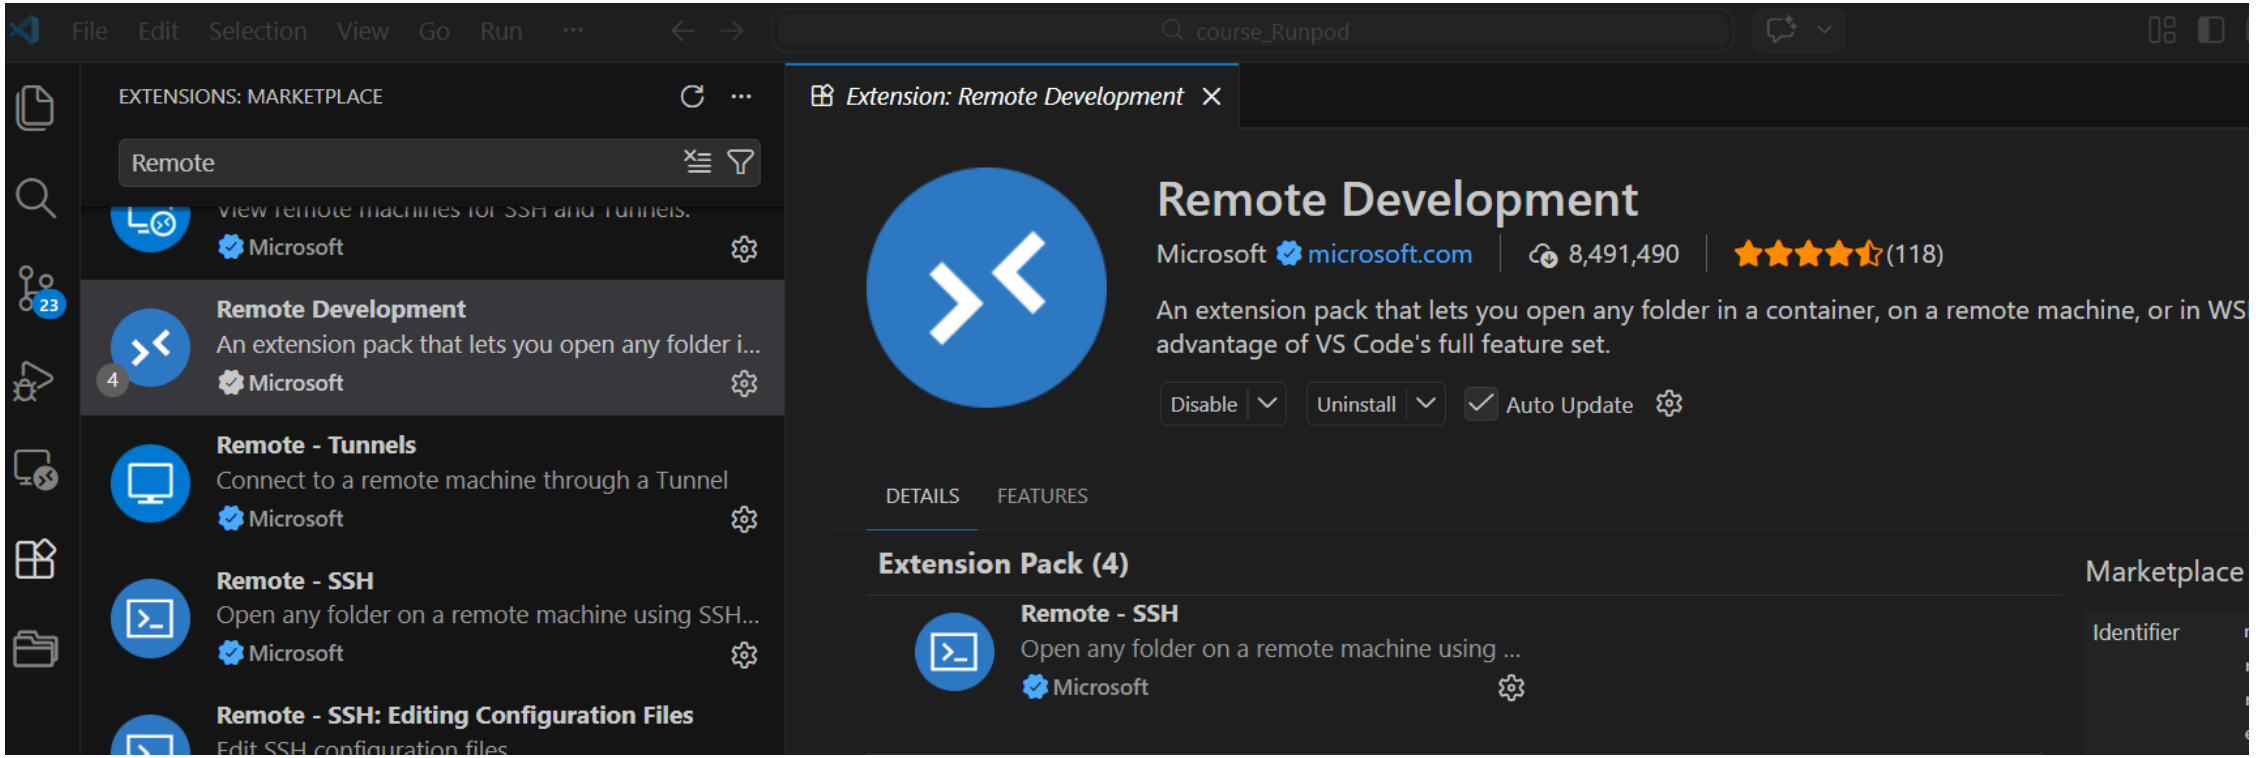


단계2: Host 등록

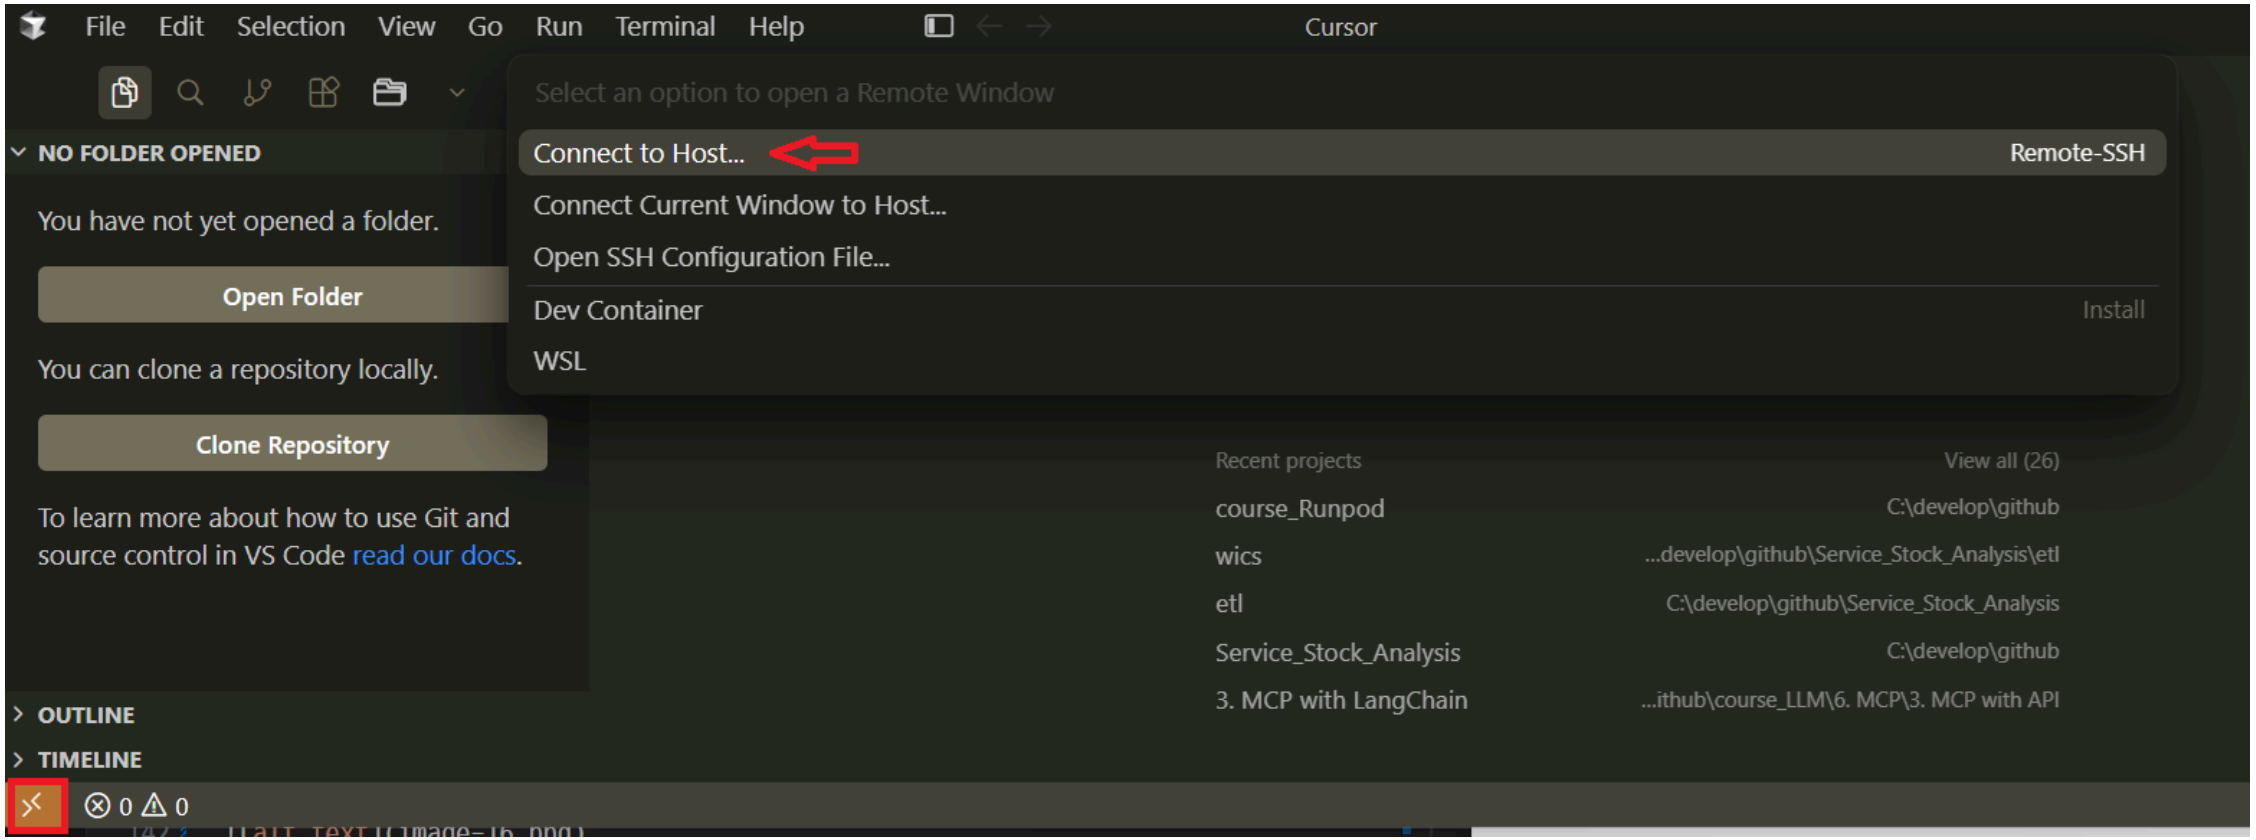
File Edit Selection View Go Run Terminal Help
Cursor
Select an option to open a Remote Window
Connect to Host... Remote-SSH
Connect Current Window to Host...
Open SSH Configuration File...
Dev Container Install
WSL
NO FOLDER OPENED
You have not yet opened a folder.
Open Folder
You can clone a repository locally.
Clone Repository
To learn more about how to use Git and source control in VS Code read our docs.
Recent projects View all (26)
course_Runpod C:\develop\github
wics ...develop\github\Service_Stock_Analysis\etl
etl C:\develop\github\Service_Stock_Analysis
Service_Stock_Analysis C:\develop\github
3. MCP with LangChain ...ithub\course_LLM\6. MCP\3. MCP with API
OUTLINE
TIMELINE
0 0

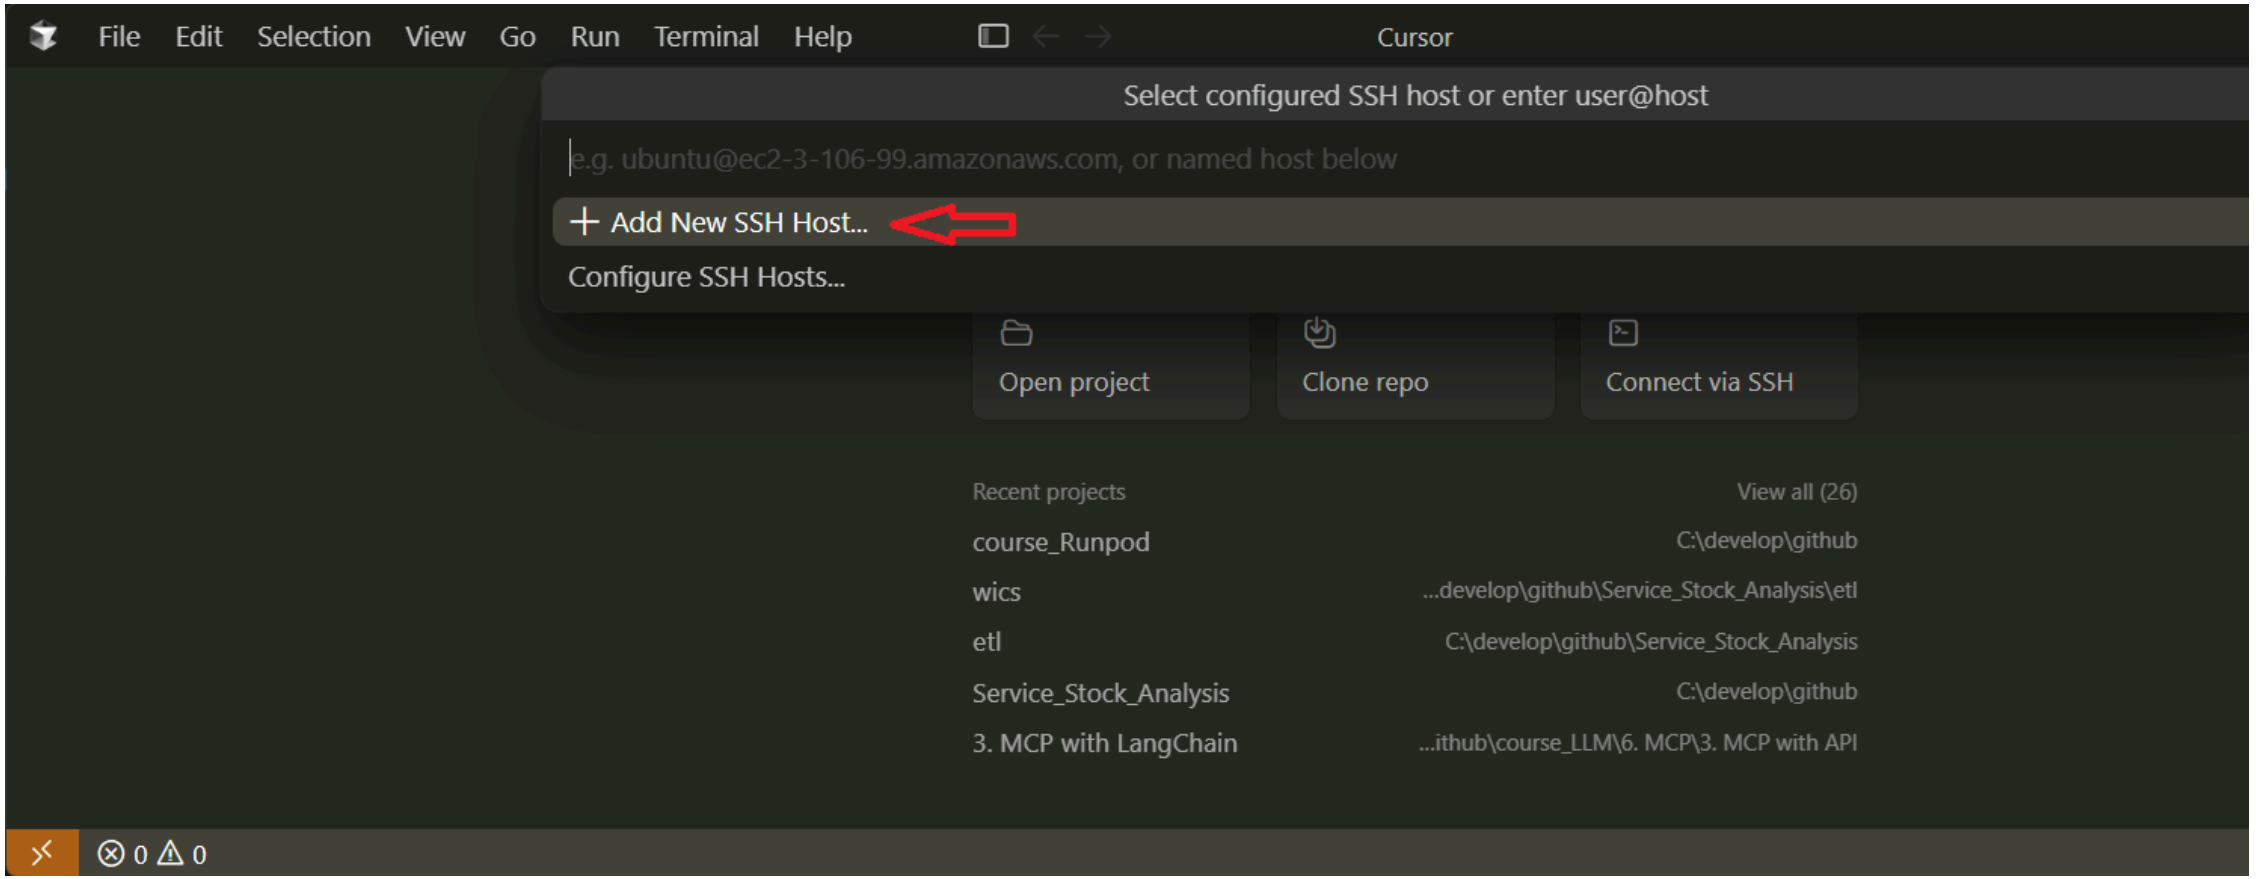
File Edit Selection View Go Run Terminal Help
Cursor
Select configured SSH host or enter user@host
e.g. ubuntu@ec2-3-106-99.amazonaws.com, or named host below
Add New SSH Host...
Configure SSH Hosts...
Open project
Clone repo
Connect via SSH
Recent projects
View all (26)
course_Runpod
C:\develop\github
wics
...develop\github\Service_Stock_Analysis\etl
etl
C:\develop\github\Service_Stock_Analysis
Service_Stock_Analysis
C:\develop\github
3. MCP with LangChain
...ithub\course_LLM\6. MCP\3. MCP with API
0 0


- SSH over exposed TCP 항목의 명령어 복사

```
# ssh root@[Pod IP 주소] -p [SSH 포트] -i [개인키 경로]
ssh root@103.196.86.205 -p 16180 -i ~/.ssh/id_ed25519
```

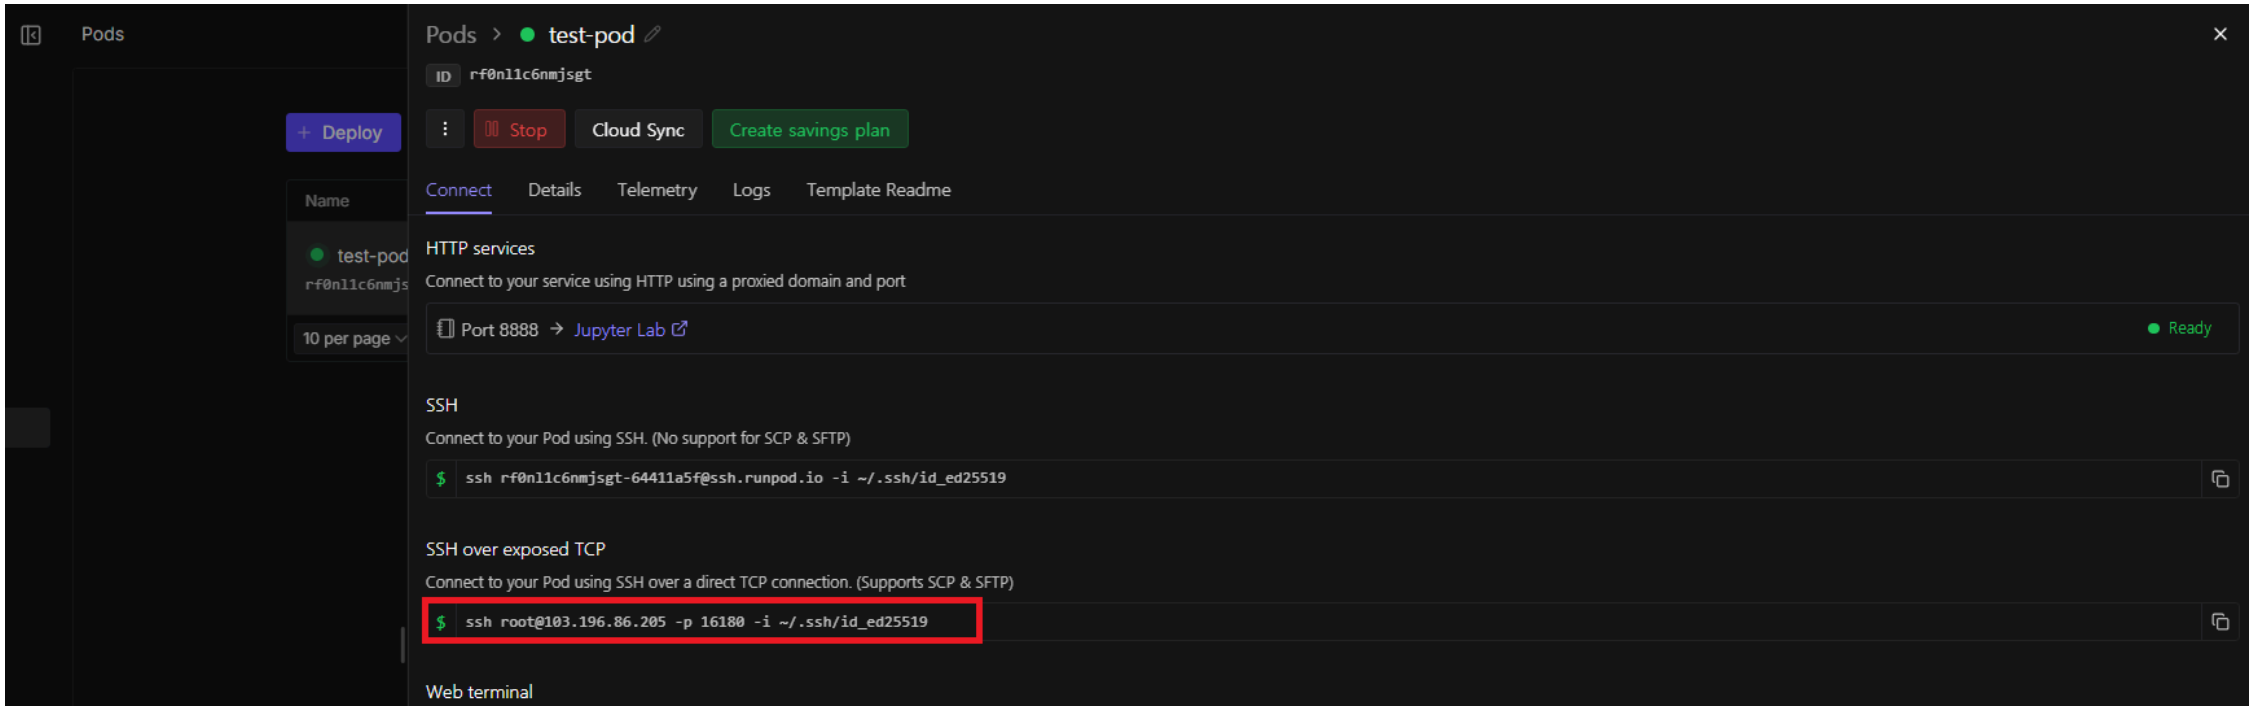



- SSH over exposed TCP 정보를 이용해서 Host 작성


```
Host my-server # 접속할 때 사용할 별명
    # Pod IP 주소
    HostName 103.196.86.205
    # 접속할 계정명(root)
    User root
    # SSH 포트
    Port 16180
    # 개인키 경로
    IdentityFile ~/.ssh/id_ed25519
```

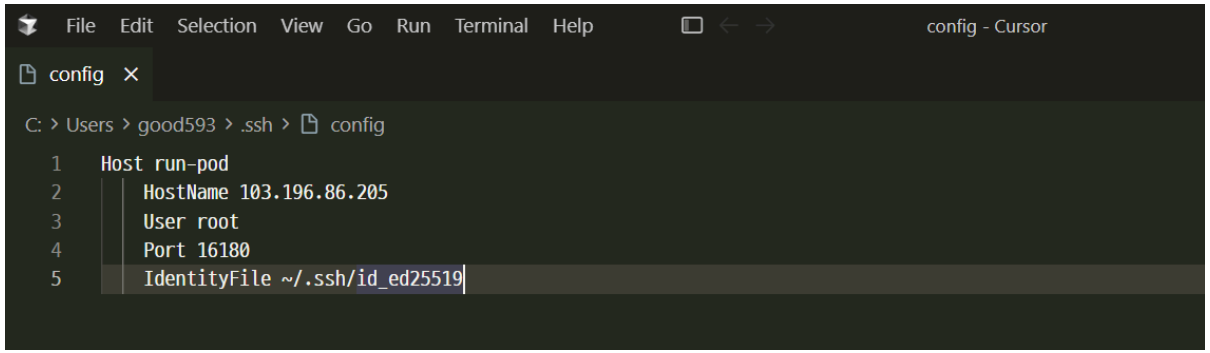

단계3: Runpod 접속

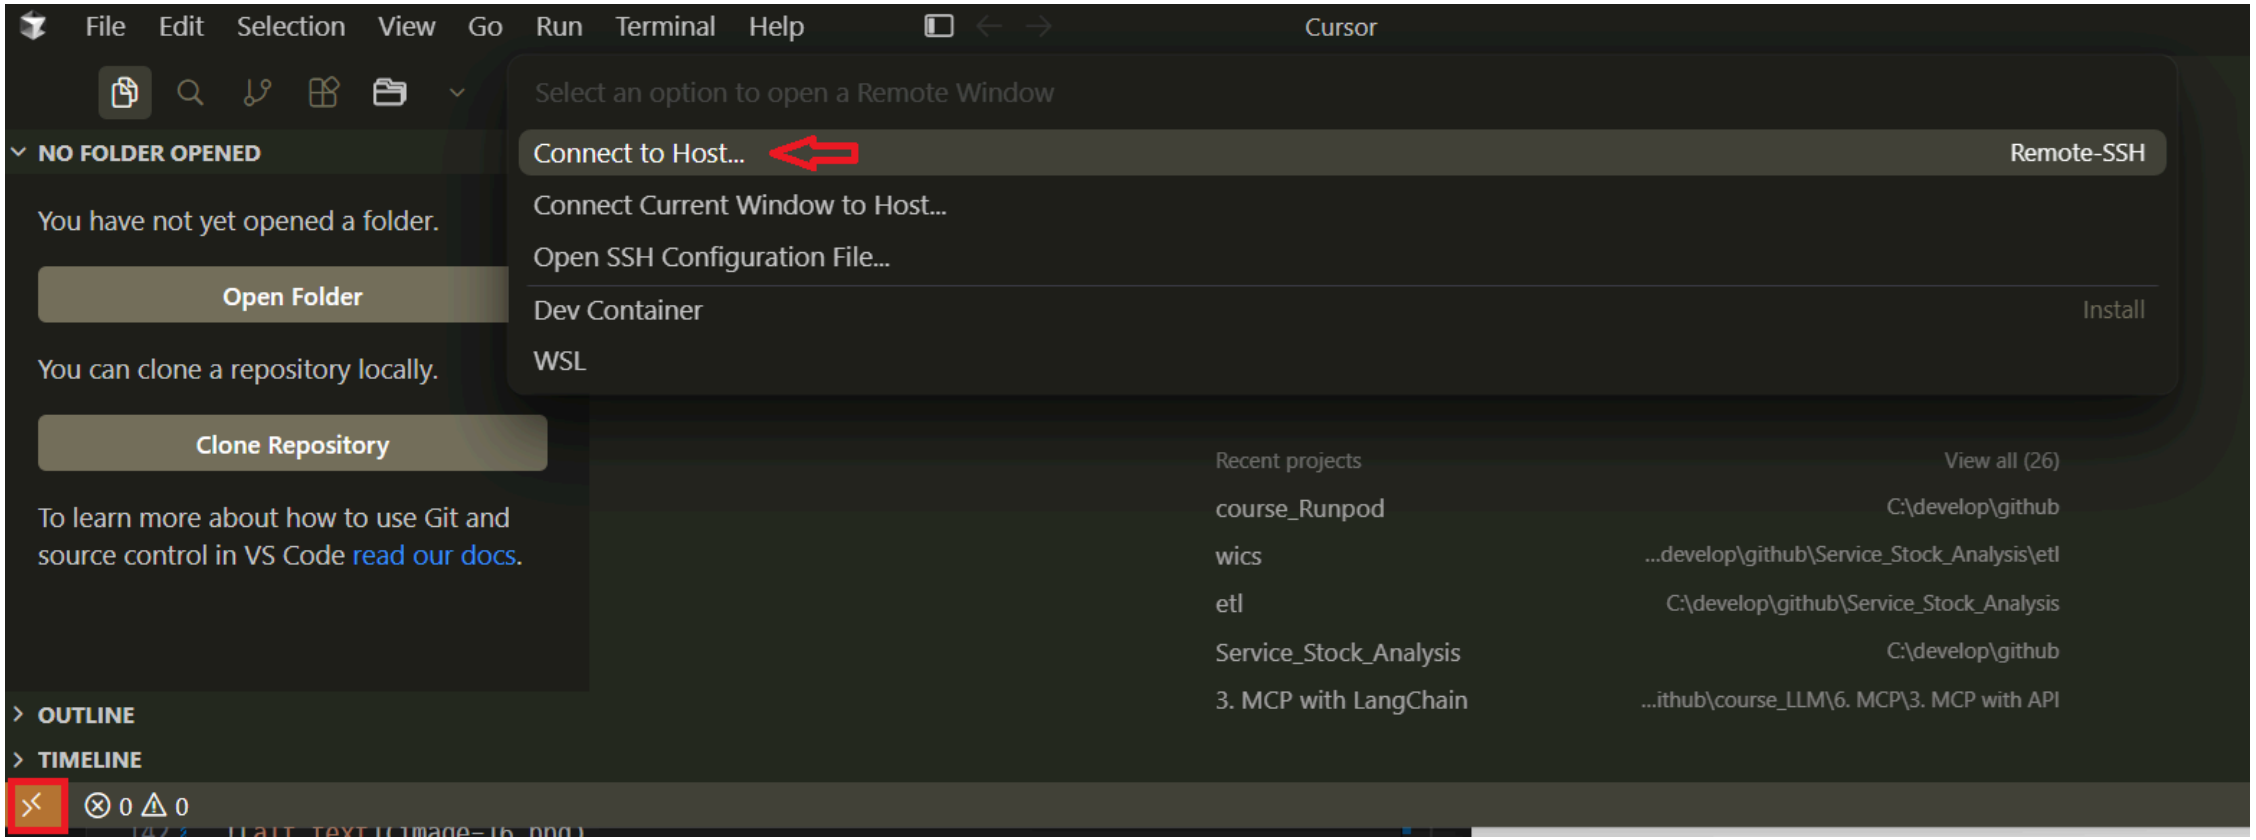

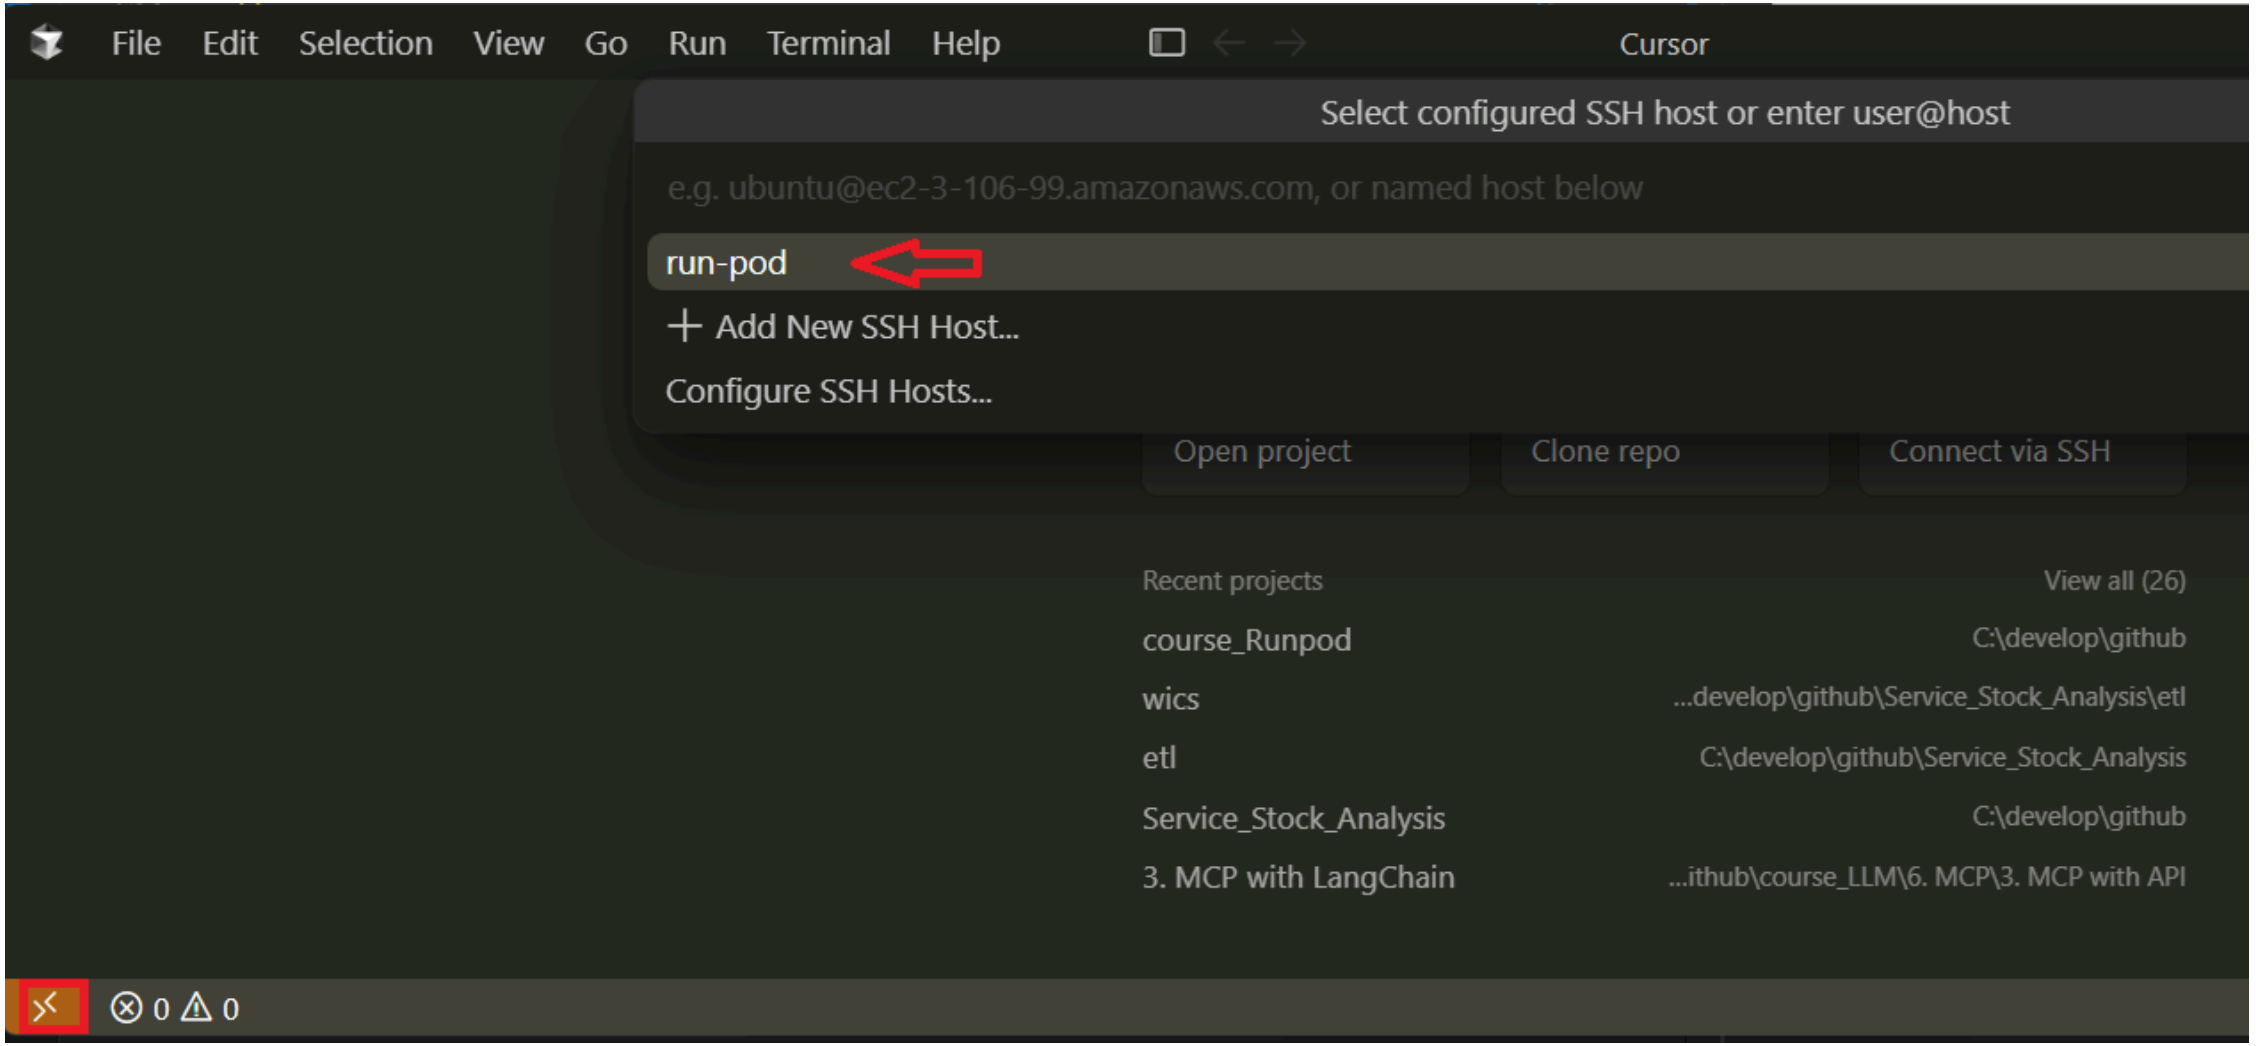
File Edit Selection View Go Run Terminal Help
Cursor
Select configured SSH host or enter user@host
e.g. ubuntu@ec2-3-106-99.amazonaws.com, or named host below
run-pod
Add New SSH Host...
Configure SSH Hosts...
Open project
Clone repo
Connect via SSH
Recent projects
View all (26)
course_Runpod C:\develop\github
wics ...develop\github\Service_Stock_Analysis\etl
etl C:\develop\github\Service_Stock_Analysis
Service_Stock_Analysis C:\develop\github
3. MCP with LangChain ...ithub\course_LLM\6. MCP\3. MCP with API
0 0

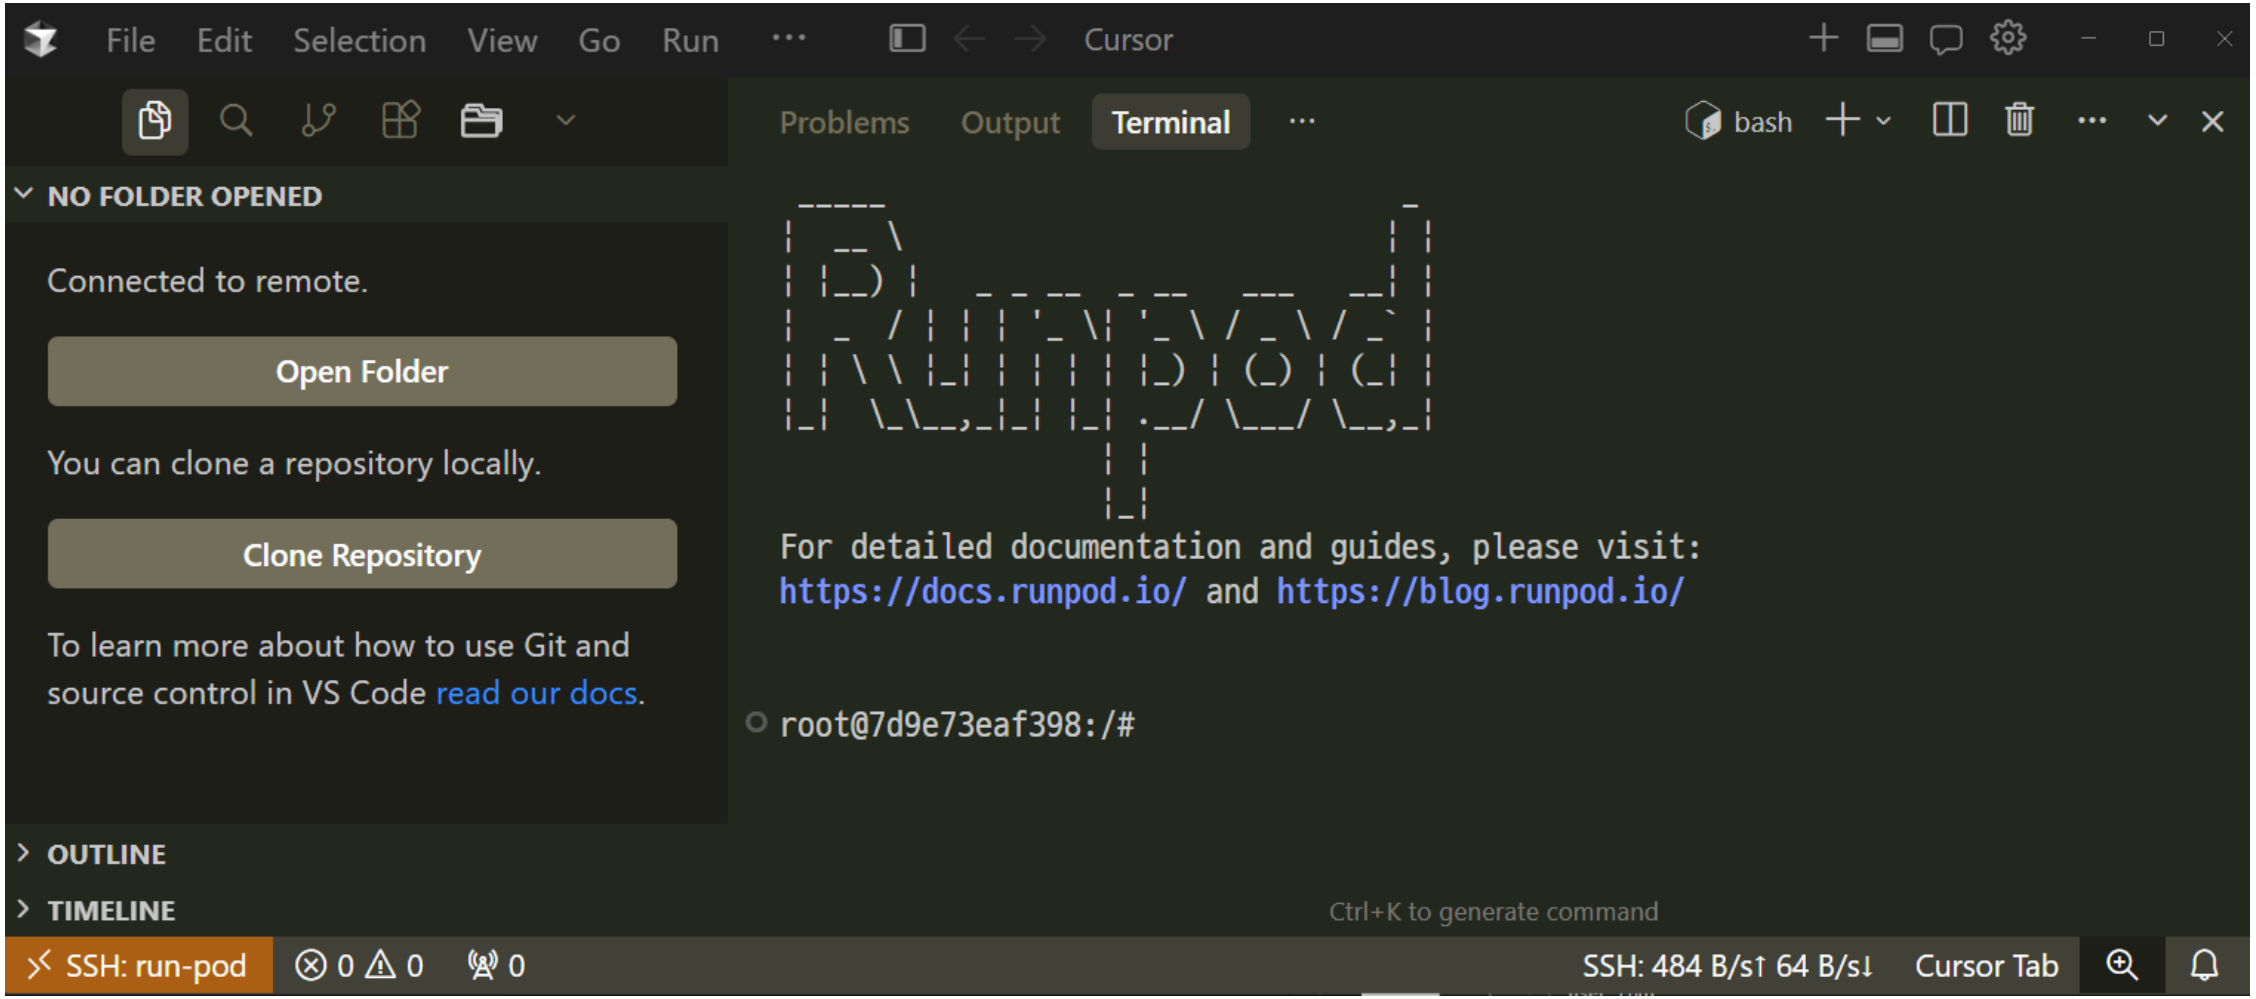
File Edit Selection View Go Run ···
Cursor
Problems Output Terminal ···
bash
NO FOLDER OPENED
Connected to remote.
Open Folder
You can clone a repository locally.
Clone Repository
To learn more about how to use Git and source control in VS Code read our docs.
For detailed documentation and guides, please visit:
https://docs.runpod.io/ and https://blog.runpod.io/
root@7d9e73eaf398:/#
OUTLINE
TIMELINE
Ctrl+K to generate command
SSH: run-pod
0 0
0
SSH: 484 B/s↑ 64 B/s↓
Cursor Tab