Storage

> Storage 종류 3가지

종류	Pod 꺼도 유지?	Pod 삭제해도 유지?	공유 가능?
Container Disk	❌	❌	❌
Volume Disk	✅	❌	❌
Network Volume	✅	✅	✅


요금


- `Container Disk (컨테이너 디스크)`는 Pod가 멈춰있을 때 두 배 요금이 부과될 수 있으니 주의하시기 바랍니다.
- `Volume Disk (볼륨 디스크)`는 Pod를 **중지(stop)만 해도 계속 청구됩니다.**
- `Network Volume (네트워크 볼륨)`은 **GB당 월 $0.05** (100GB = 월 $5)

1. Container Disk (**컨테이너 디스크**)


- **임시 저장소**입니다.
- Pod가 꺼지면 데이터가 **전부 사라집니다**.
- 운영체제 파일이나 캐시처럼 잠깐만 필요한 파일에 사용합니다.

단계1: Container Disk 수정

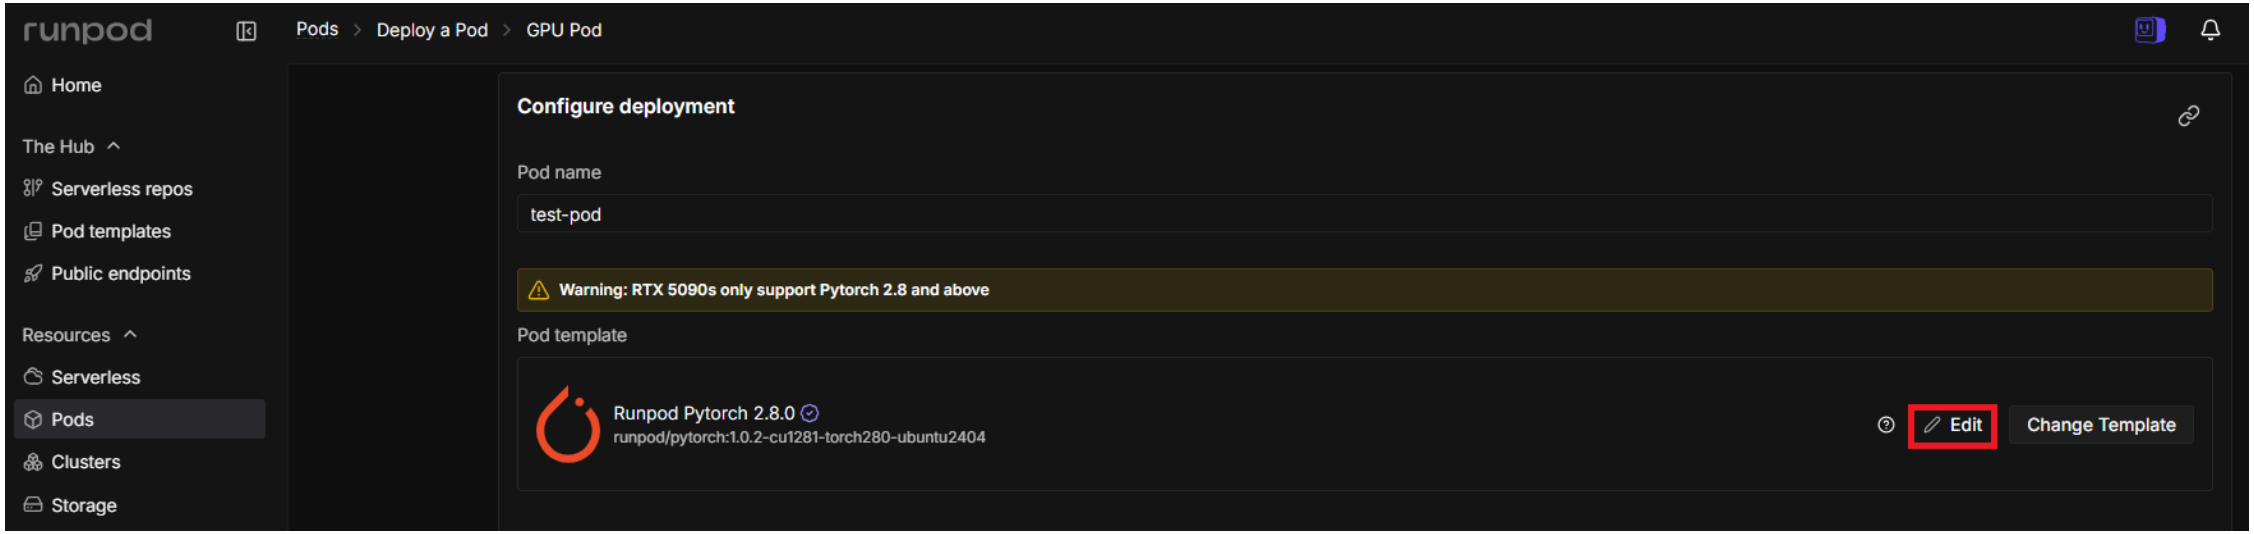


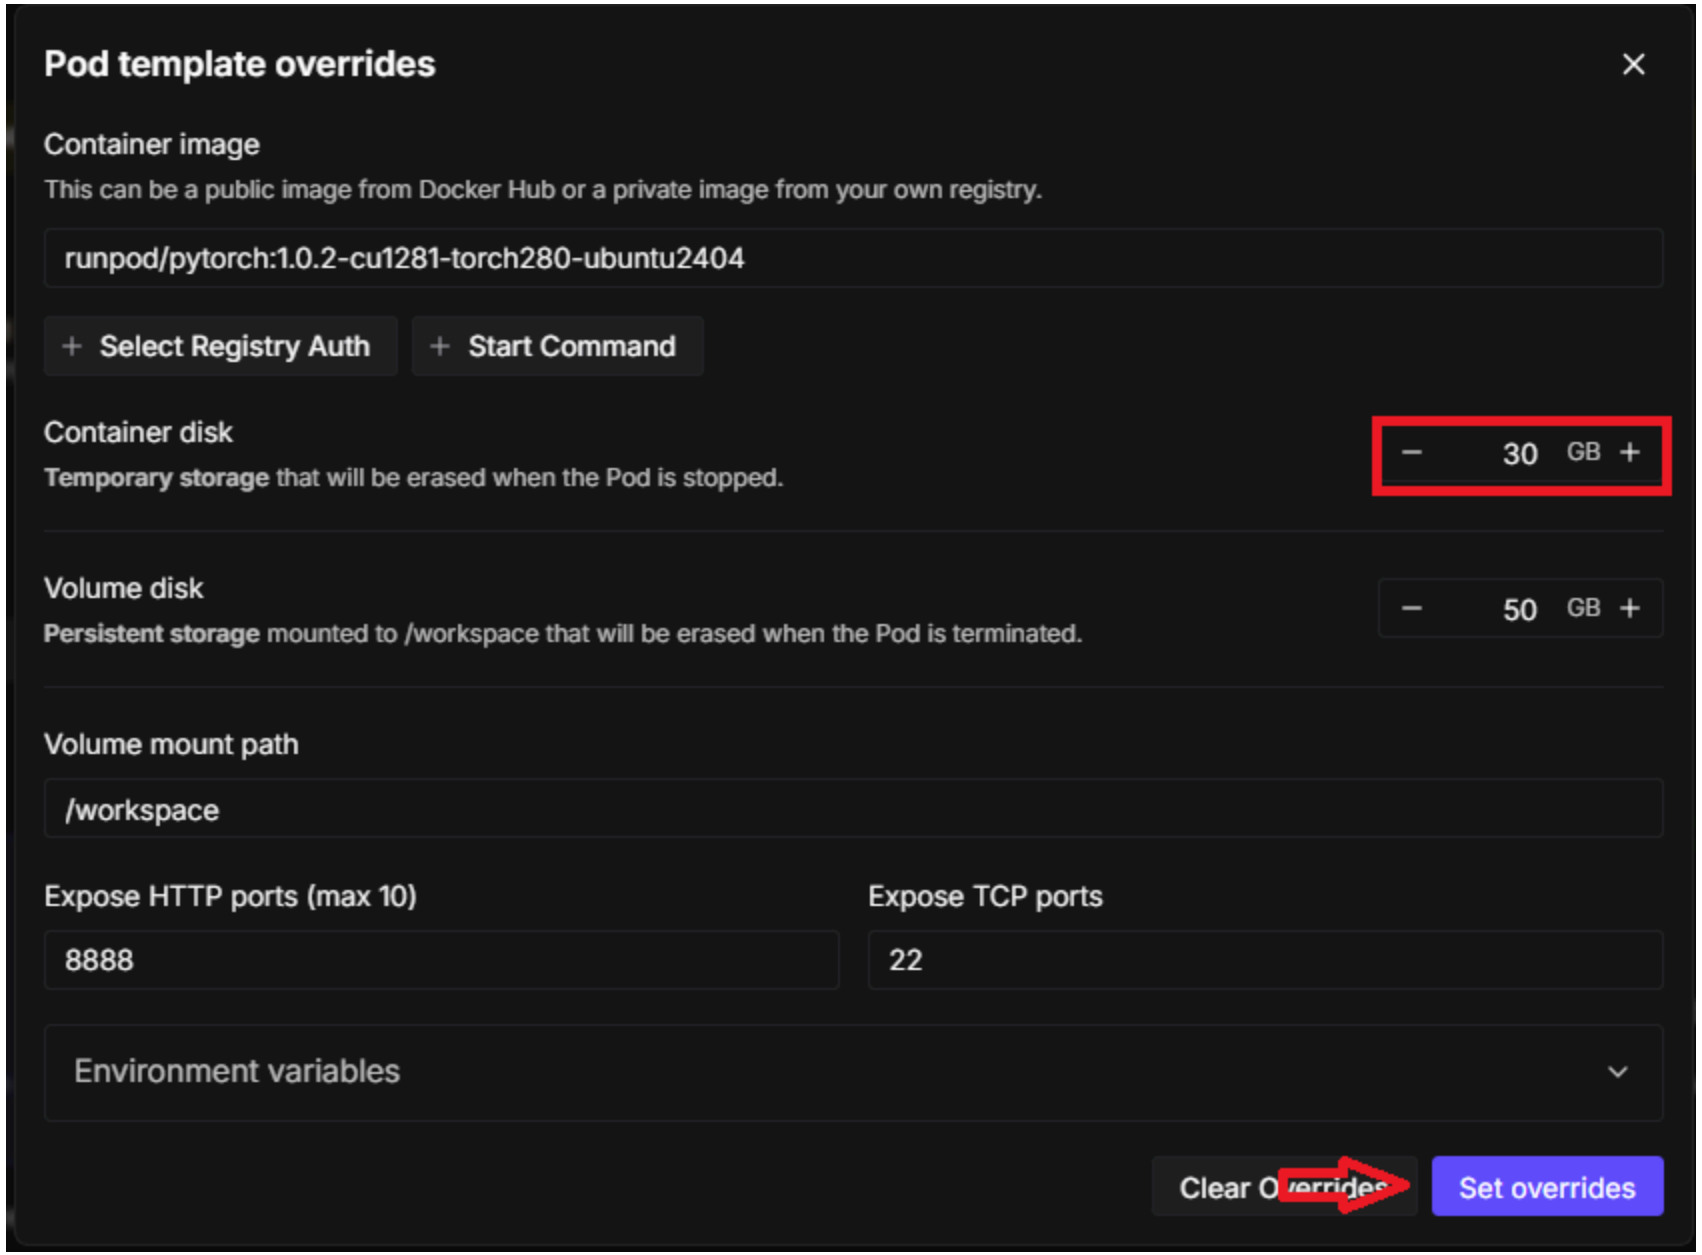
Pod template overrides
Container image
This can be a public image from Docker Hub or a private image from your own registry.
runpod/pytorch:1.0.2-cu1281-torch280-ubuntu2404
+ Select Registry Auth
+ Start Command
Container disk
Temporary storage that will be erased when the Pod is stopped.
30 GB
Volume disk
Persistent storage mounted to /workspace that will be erased when the Pod is terminated.
50 GB
Volume mount path
/workspace
Expose HTTP ports (max 10)
8888
Expose TCP ports
22
Environment variables
Clear Overrides
Set overrides

단계2: Pod 실행

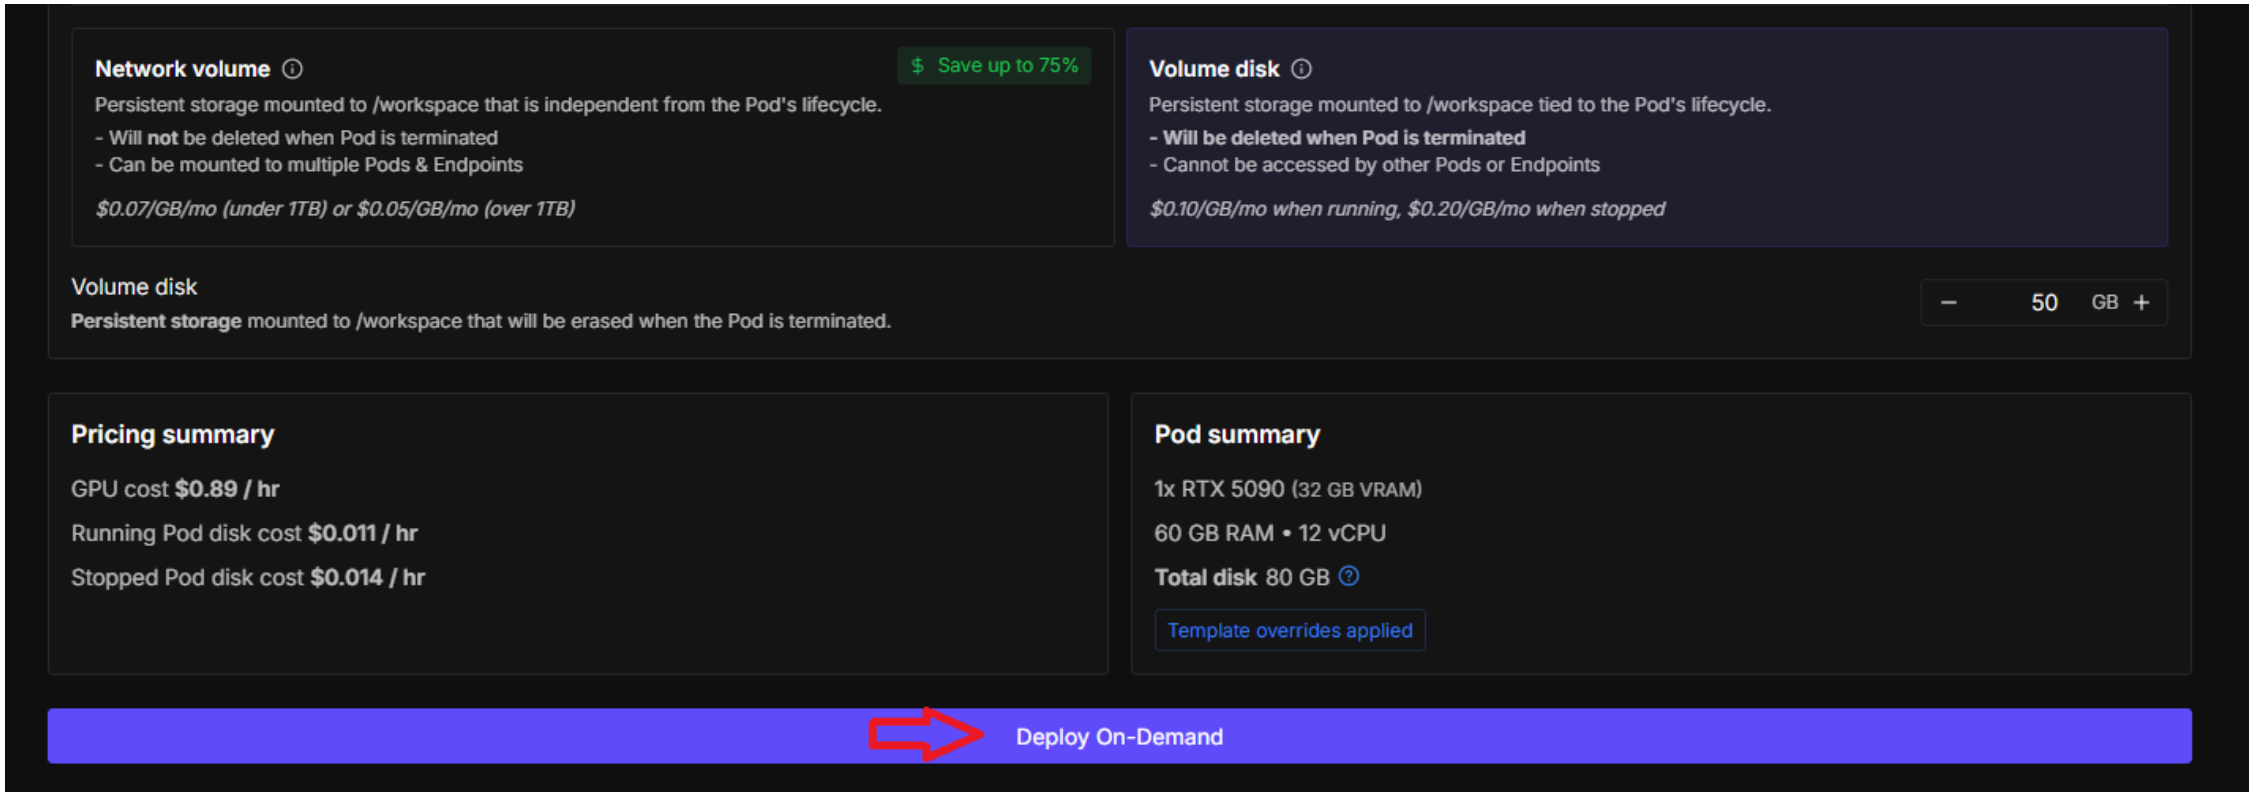

Network volume
$ Save up to 75%
Persistent storage mounted to /workspace that is independent from the Pod's lifecycle.
- Will not be deleted when Pod is terminated
- Can be mounted to multiple Pods & Endpoints
$0.07/GB/mo (under 1TB) or $0.05/GB/mo (over 1TB)
Volume disk
Persistent storage mounted to /workspace tied to the Pod's lifecycle.
- Will be deleted when Pod is terminated
- Cannot be accessed by other Pods or Endpoints
$0.10/GB/mo when running, $0.20/GB/mo when stopped
Volume disk
Persistent storage mounted to /workspace that will be erased when the Pod is terminated.
50 GB
Pricing summary
GPU cost $0.89 / hr
Running Pod disk cost $0.011 / hr
Stopped Pod disk cost $0.014 / hr
Pod summary
1x RTX 5090 (32 GB VRAM)
60 GB RAM • 12 vCPU
Total disk 80 GB
Template overrides applied
Deploy On-Demand

Pod 접속

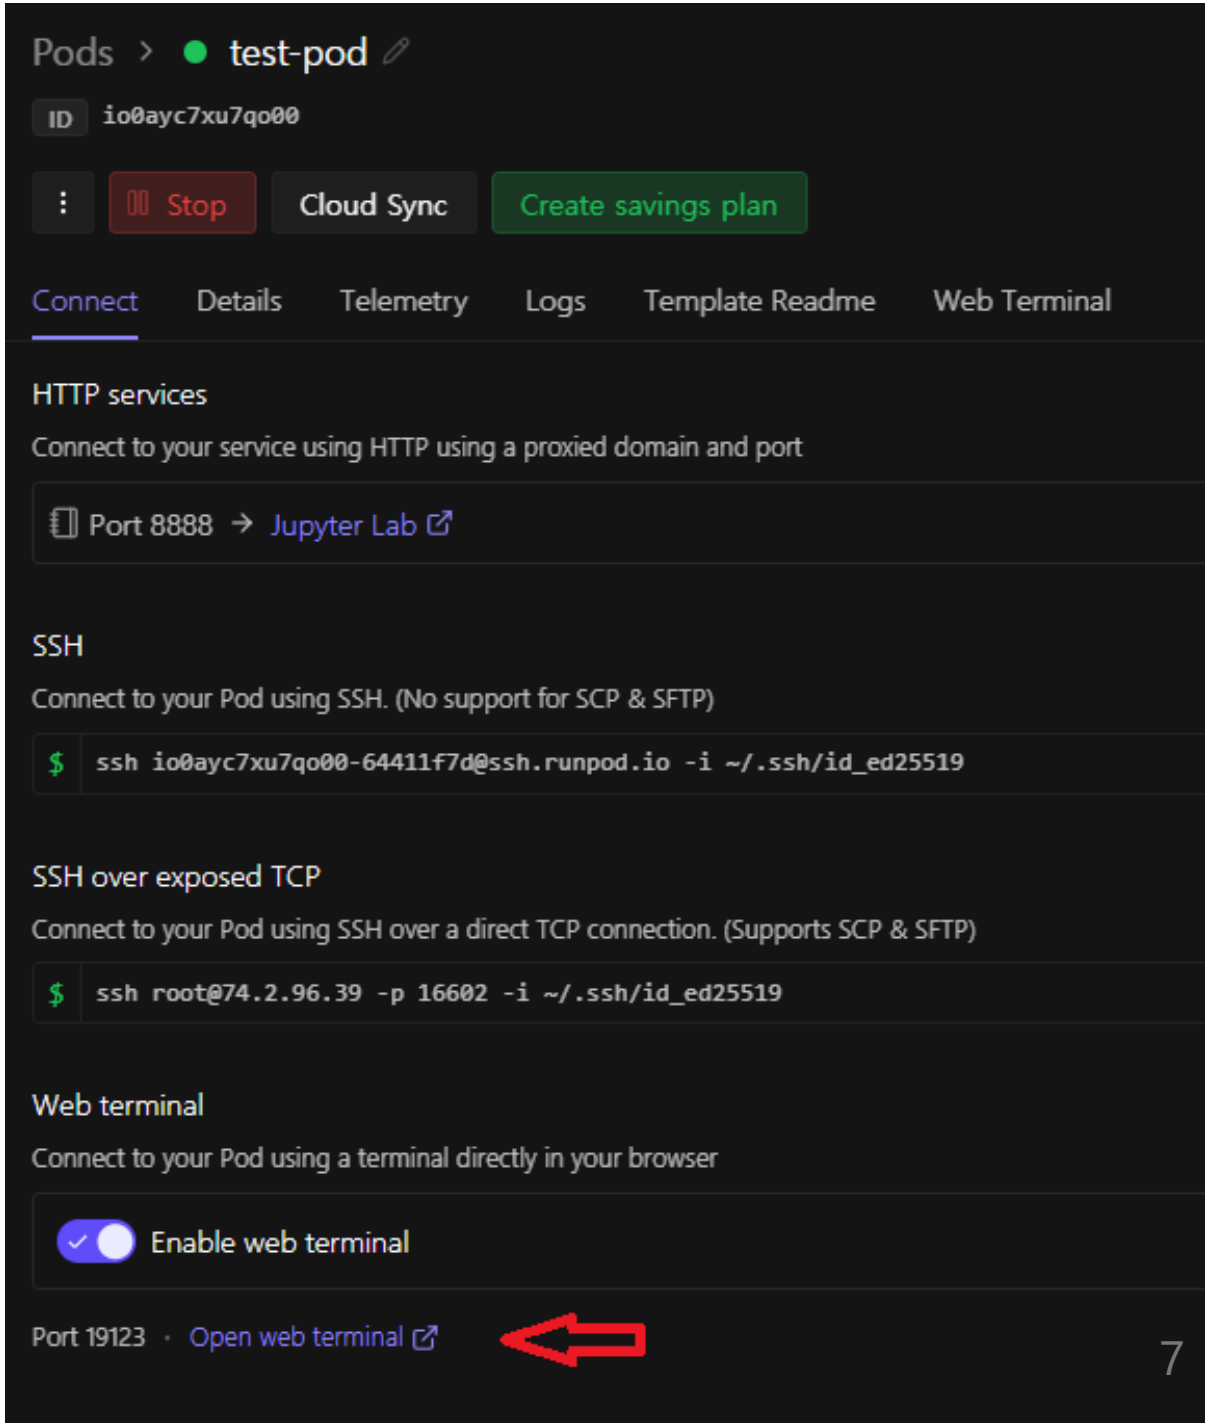

Pods
test-pod
ID
io0ayc7xu7qo00
Stop
Cloud Sync
Create savings plan
Connect
Details
Telemetry
Logs
Template Readme
Web Terminal
HTTP services
Connect to your service using HTTP using a proxied domain and port
Port 8888 → Jupyter Lab
SSH
Connect to your Pod using SSH. (No support for SCP & SFTP)
$ ssh io0ayc7xu7qo00-64411f7d@ssh.runpod.io -i ~/.ssh/id_ed25519
SSH over exposed TCP
Connect to your Pod using SSH over a direct TCP connection. (Supports SCP & SFTP)
$ ssh root@74.2.96.39 -p 16602 -i ~/.ssh/id_ed25519
Web terminal
Connect to your Pod using a terminal directly in your browser
Enable web terminal
Port 19123 · Open web terminal


단계3: 폴더(test) 및 파일 (sample.txt) 생성

```
# 폴더 생성
mkdir /test
# 파일 생성
touch /test/sample.txt
# 확인
ls /test
```

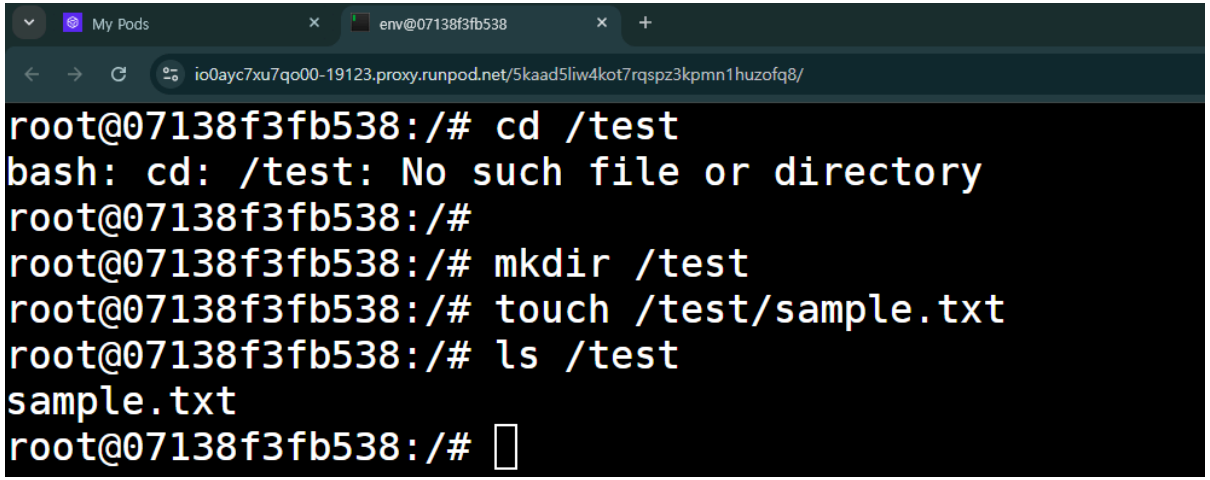


단계4: Pod 재시작

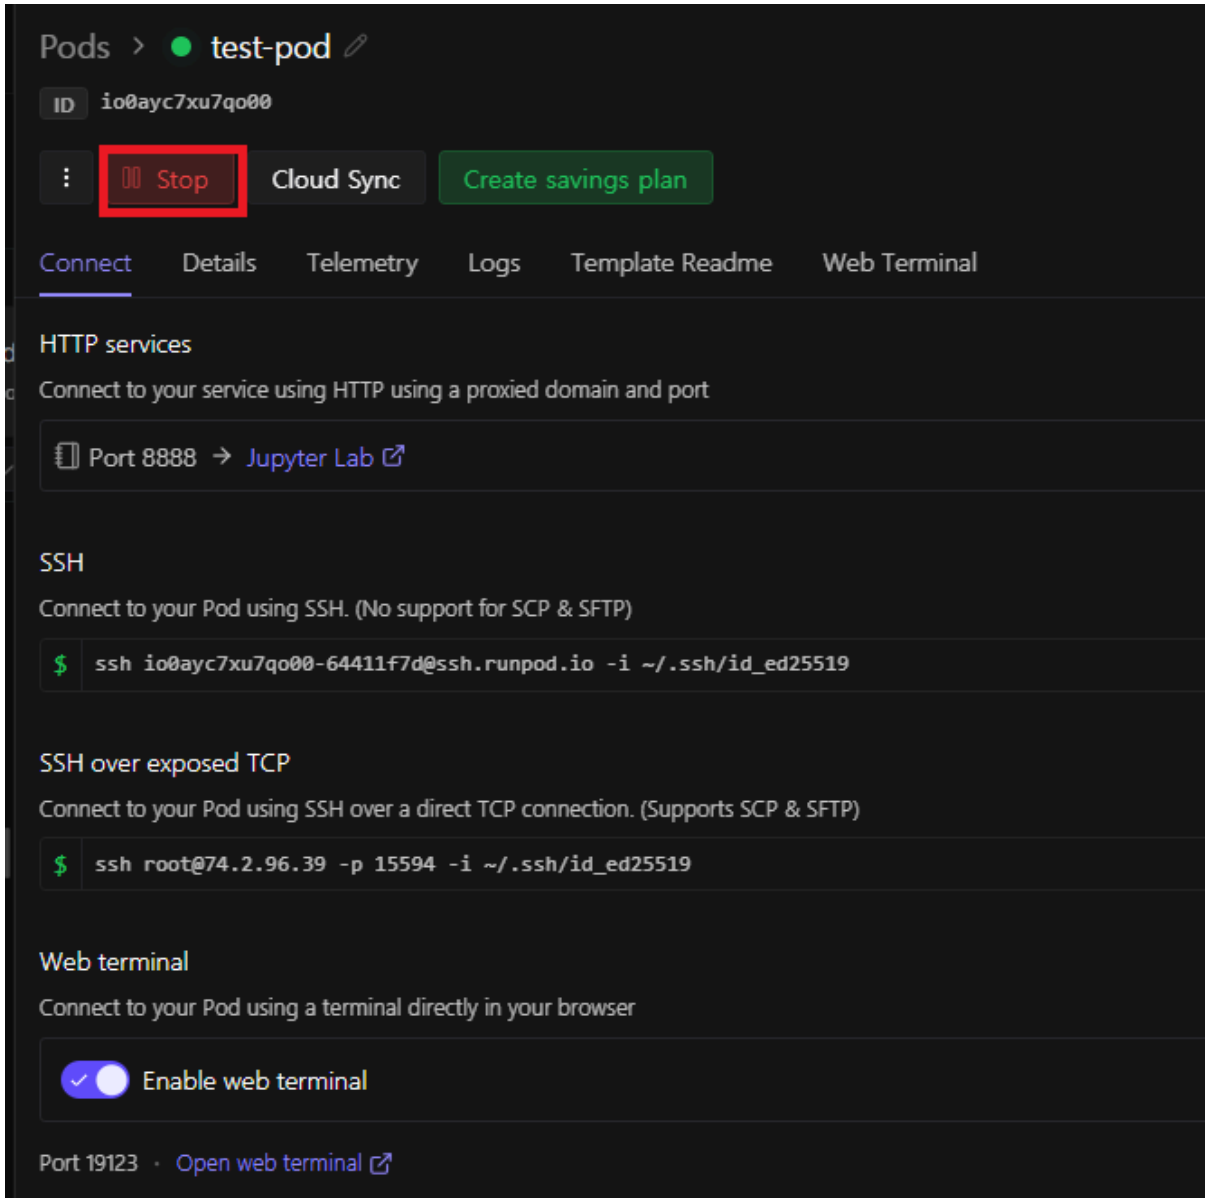
Pods
test-pod
ID
io0ayc7xu7qo00
Stop
Cloud Sync
Create savings plan
Connect
Details
Telemetry
Logs
Template Readme
Web Terminal
HTTP services
Connect to your service using HTTP using a proxied domain and port
Port 8888
Jupyter Lab
SSH
Connect to your Pod using SSH. (No support for SCP & SFTP)
$
ssh io0ayc7xu7qo00-64411f7d@ssh.runpod.io -i ~/.ssh/id_ed25519
SSH over exposed TCP
Connect to your Pod using SSH over a direct TCP connection. (Supports SCP & SFTP)
$
ssh root@74.2.96.39 -p 15594 -i ~/.ssh/id_ed25519
Web terminal
Connect to your Pod using a terminal directly in your browser
Enable web terminal
Port 19123
Open web terminal

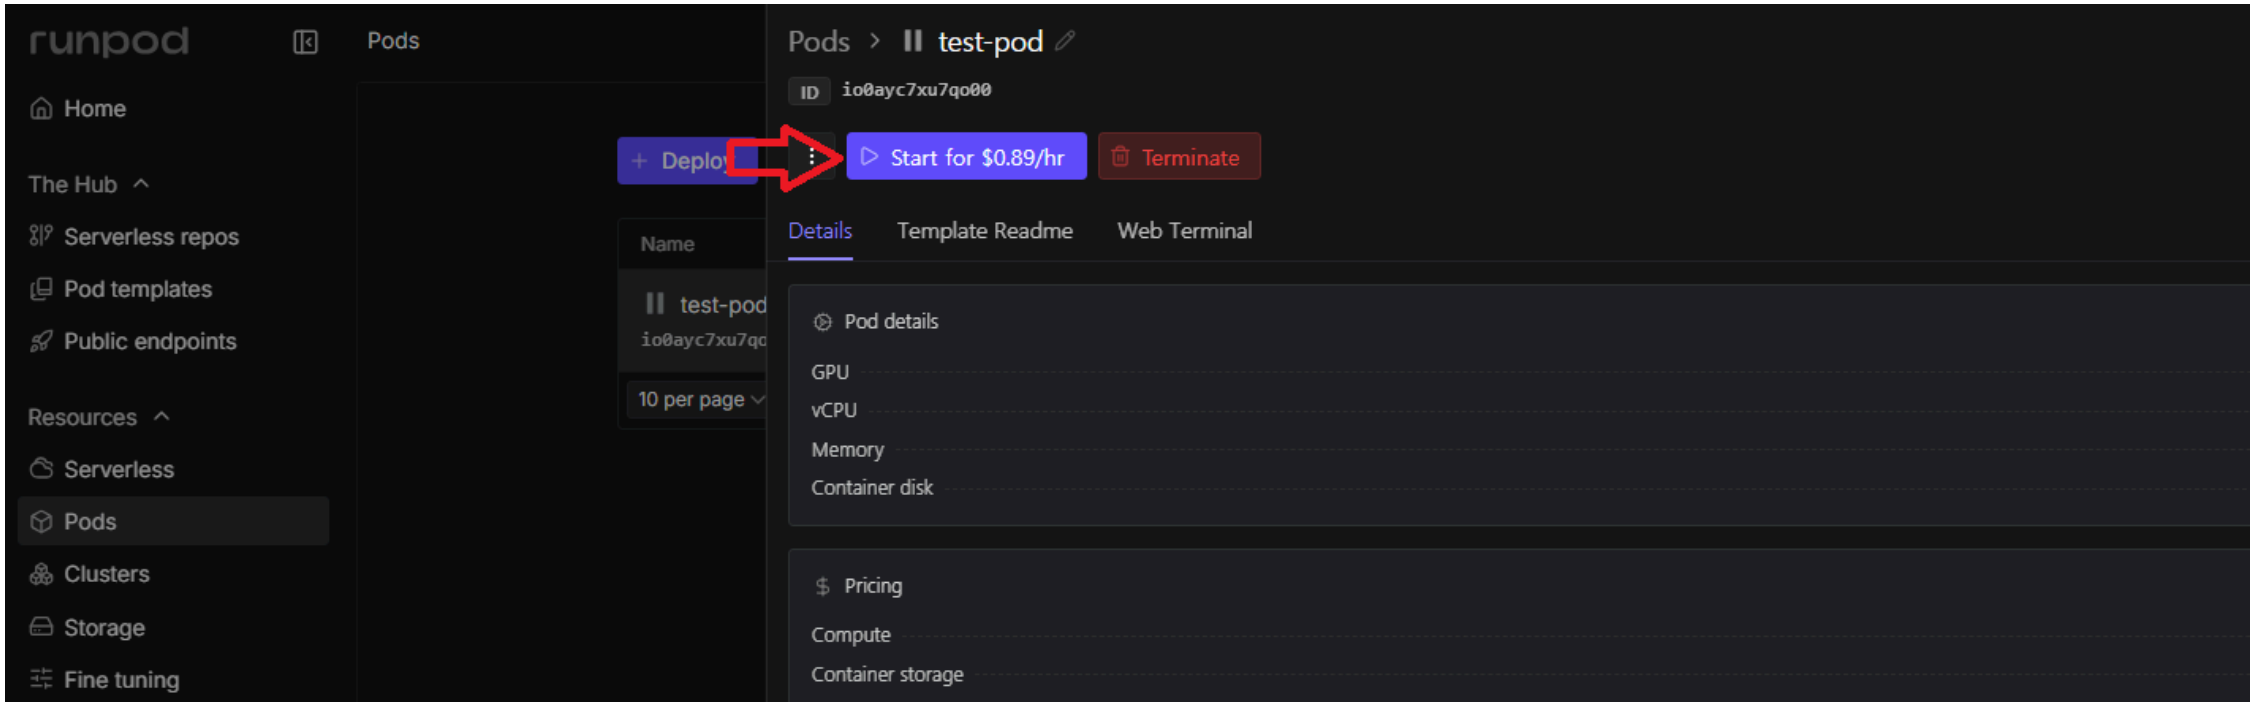
runpod
Pods
Home
The Hub
Serverless repos
Pod templates
Public endpoints
Resources
Serverless
Pods
Clusters
Storage
Fine tuning
Deploy
Name
test-pod
io0ayc7xu7qc
10 per page
Pods
test-pod
ID
io0ayc7xu7qo00
Start for $0.89/hr
Terminate
Details
Template Readme
Web Terminal
Pod details
GPU
vCPU
Memory
Container disk
Pricing
Compute
Container storage


단계5: Pod 재접속

- 폴더/파일 확인

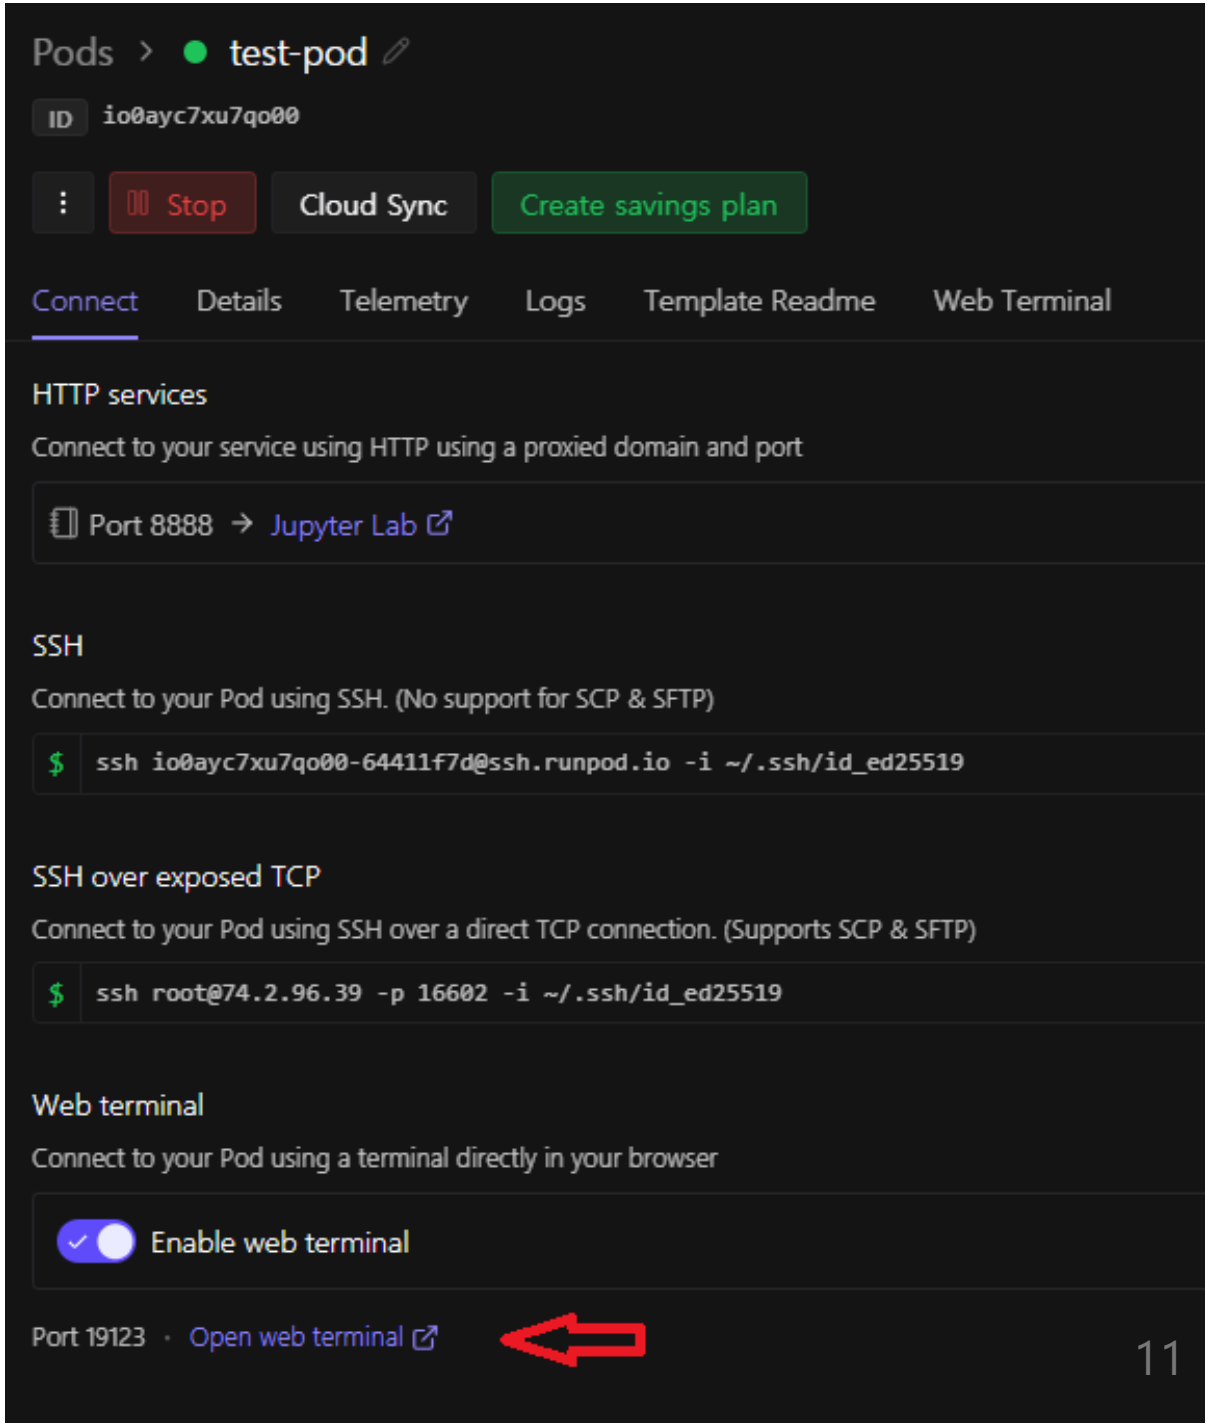

> 데이터(폴더/파일)가 **전부 사라짐**.


```
# 확인
ls /test
```

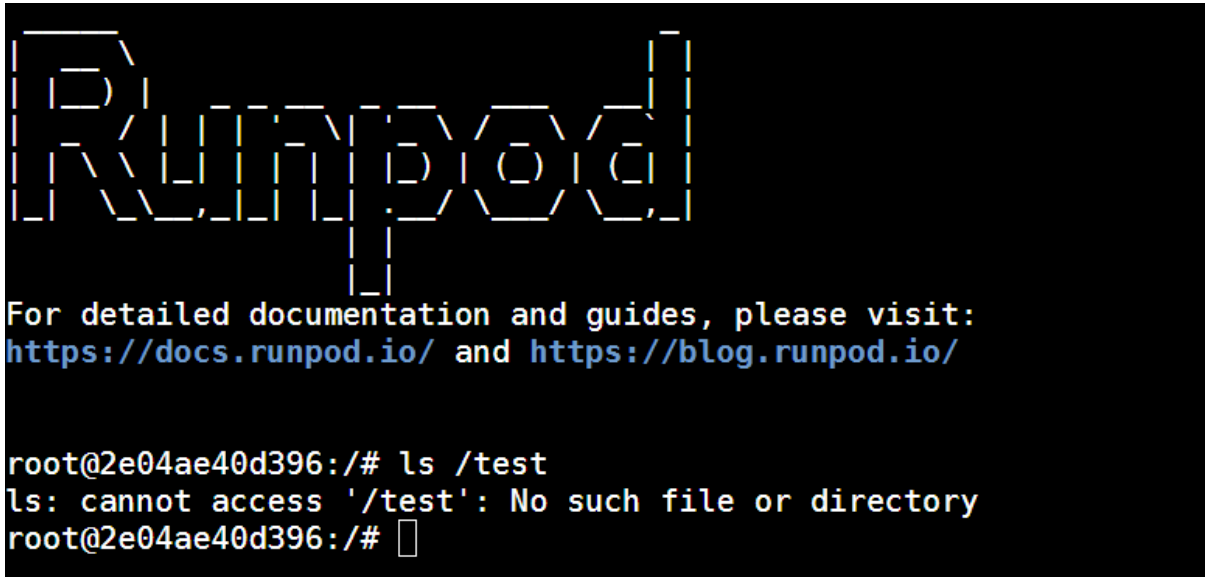


2. Volume Disk (**볼륨 디스크**)

- **반영구적 저장소**입니다.
- Pod를 껐다가 다시 켜도 `/workspace` 폴더의 데이터는 유지됩니다.
- 단, Pod 자체를 **삭제(terminate)하면 사라집니다**.
- 모델, 데이터셋, 체크포인트 저장에 적합합니다.


단계1: Volume Disk 수정

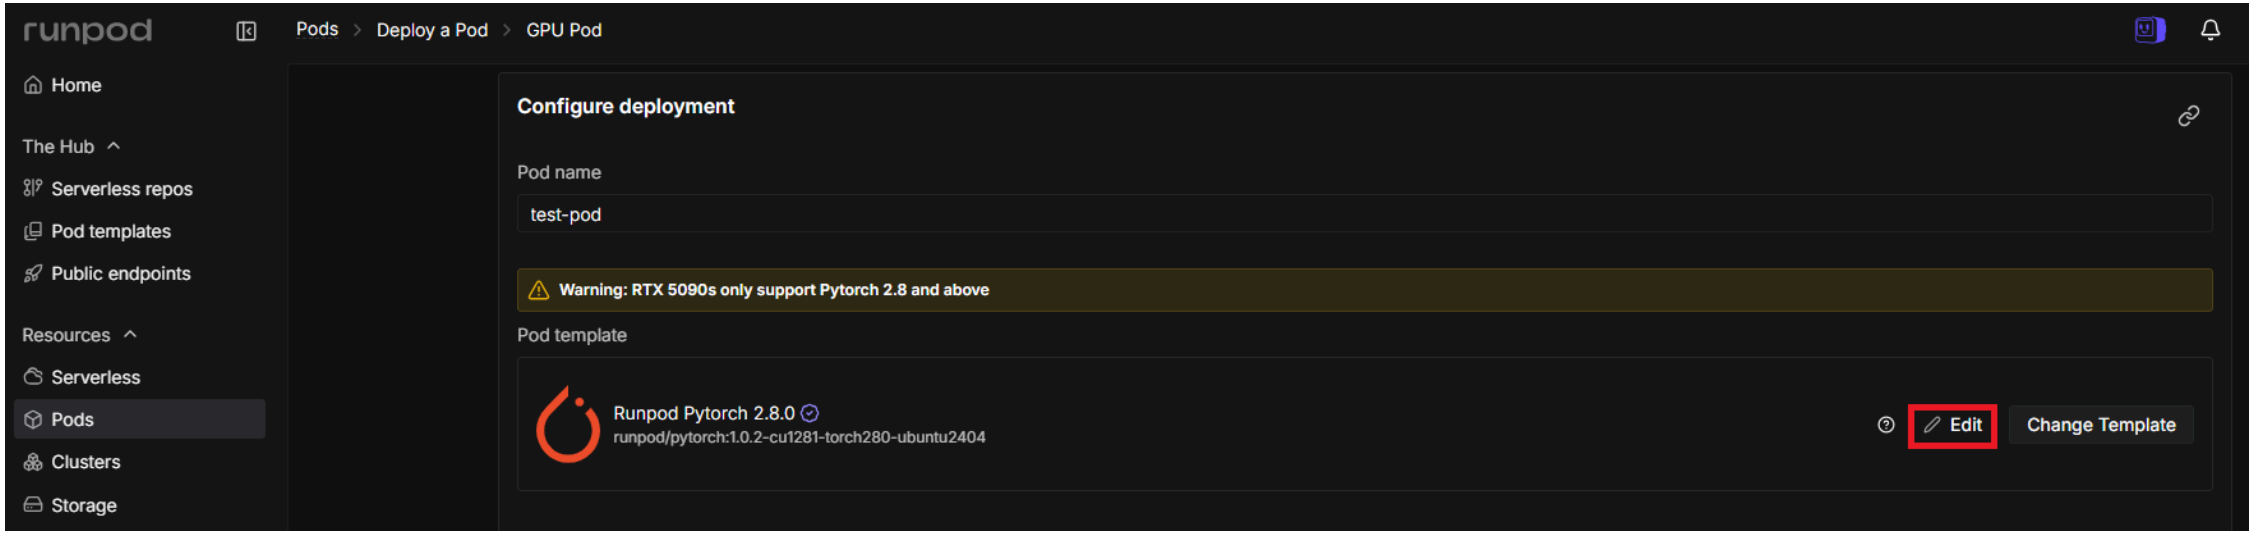


- Volume mount path
  - Volume Disk가 저장되는 위치
  - `/workspace`

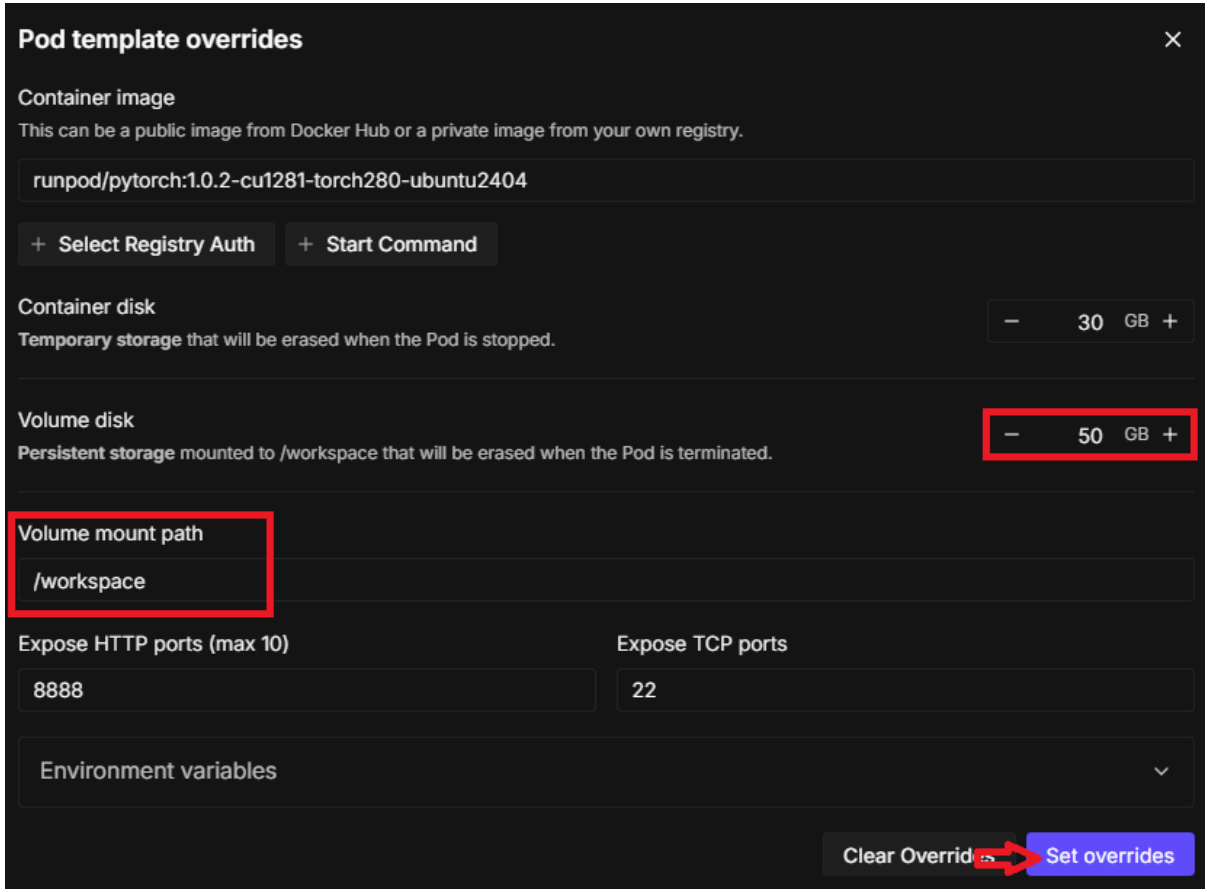

단계2: Volume Disk 선택 후 Pod 실행

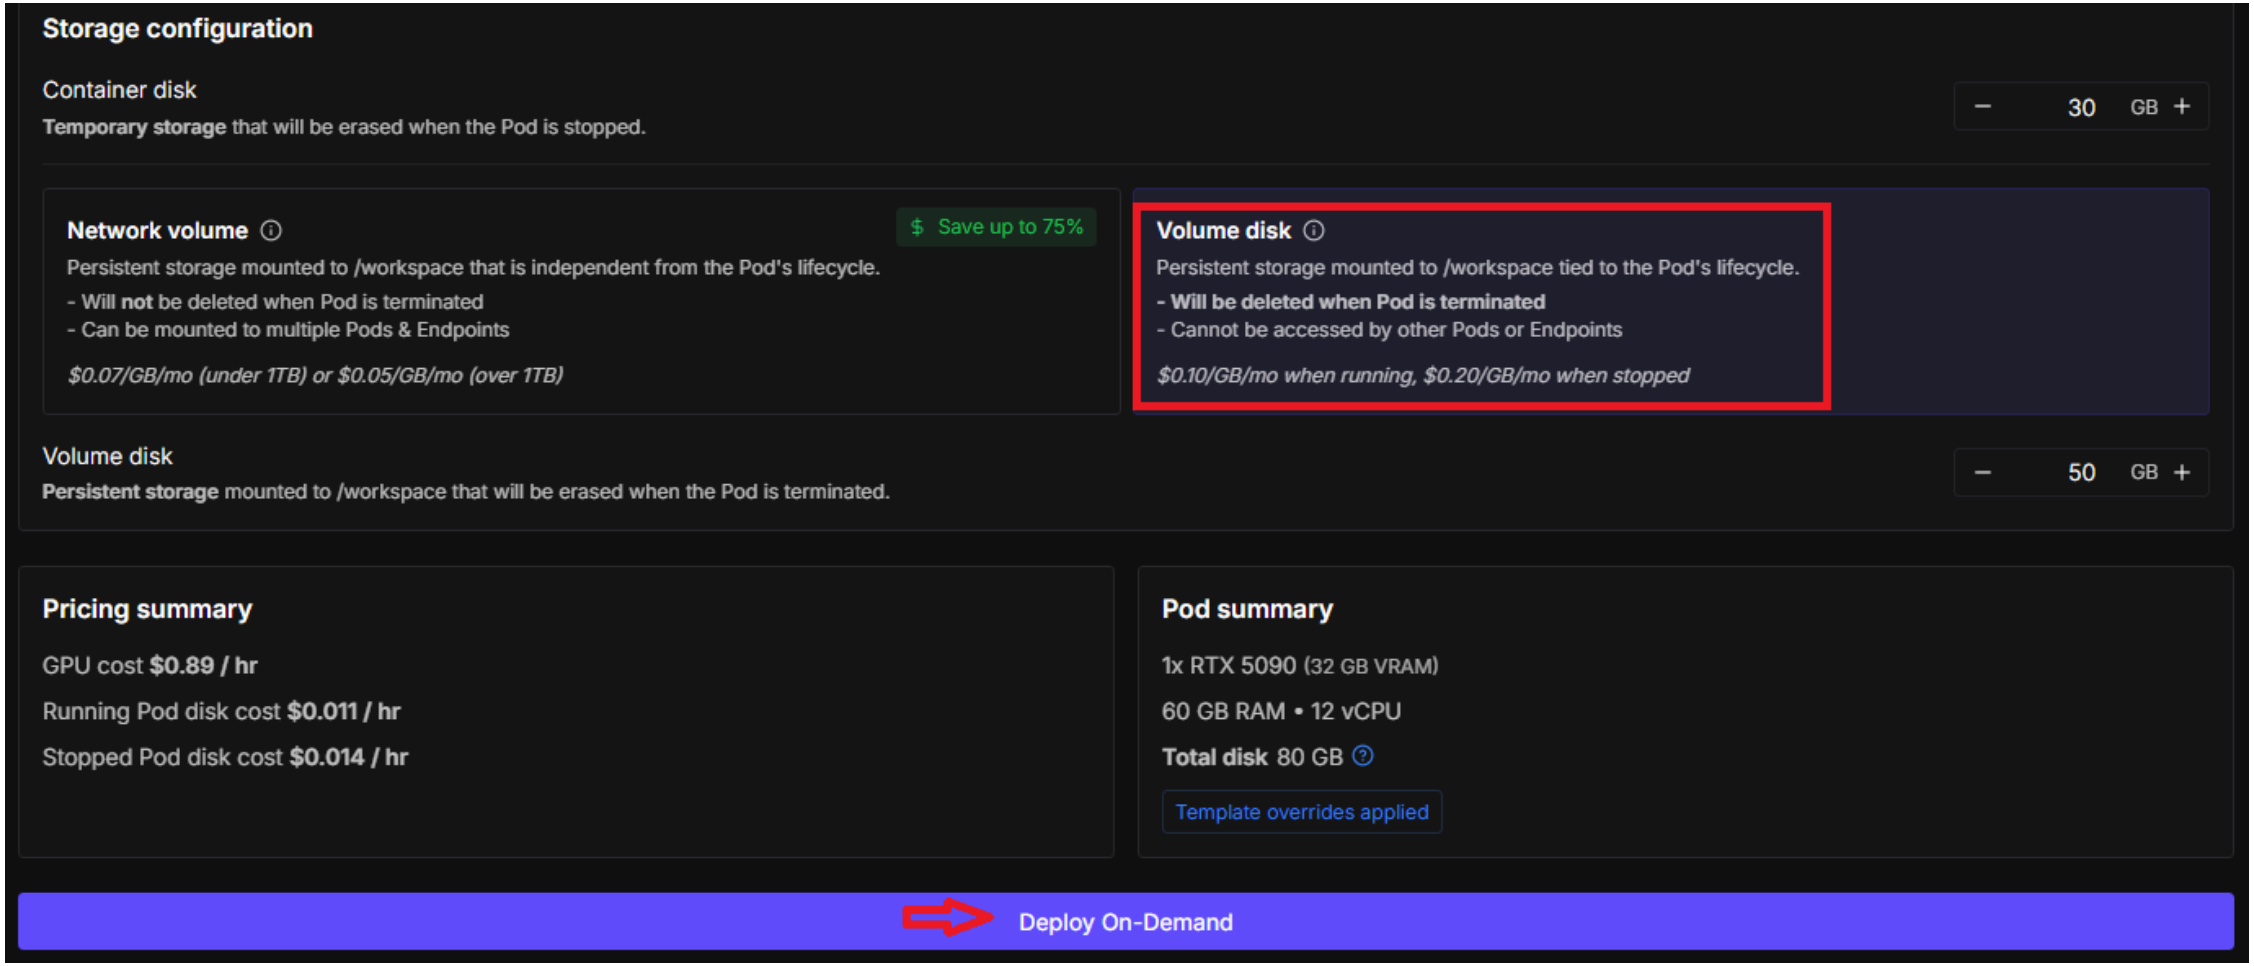


Pod 접속

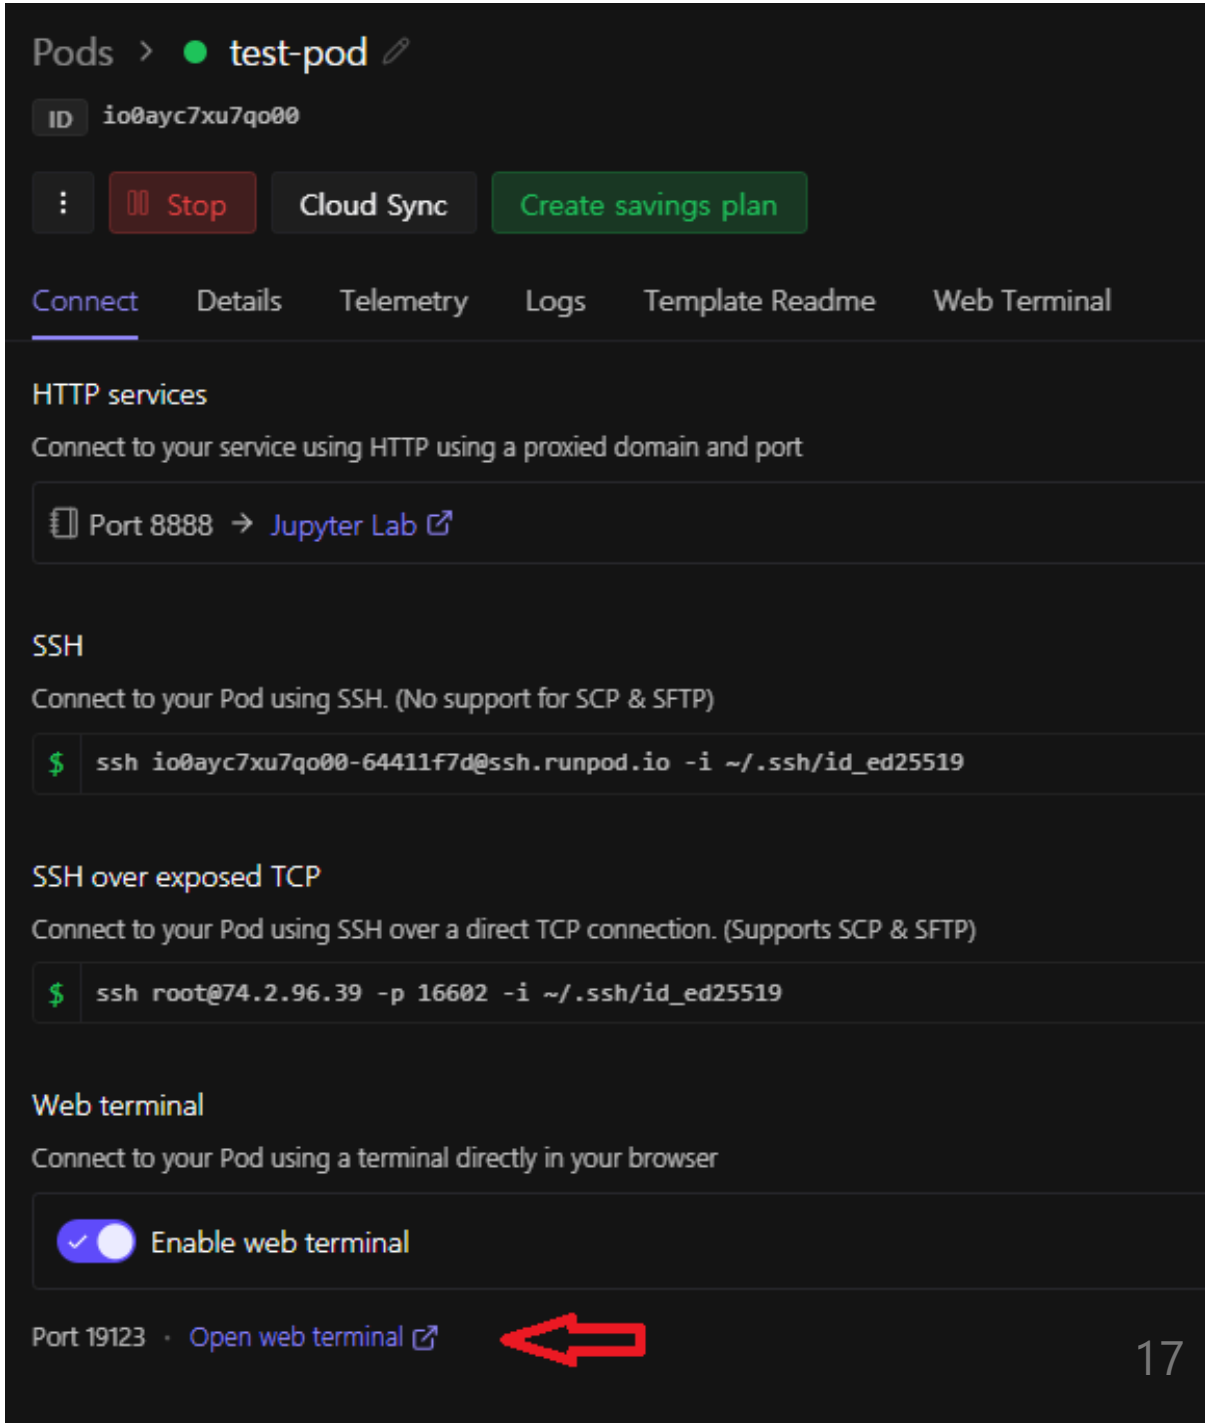
Pods
test-pod
ID
io0ayc7xu7qo00
Stop
Cloud Sync
Create savings plan
Connect
Details
Telemetry
Logs
Template Readme
Web Terminal
HTTP services
Connect to your service using HTTP using a proxied domain and port
Port 8888 → Jupyter Lab
SSH
Connect to your Pod using SSH. (No support for SCP & SFTP)
$ ssh io0ayc7xu7qo00-64411f7d@ssh.runpod.io -i ~/.ssh/id_ed25519
SSH over exposed TCP
Connect to your Pod using SSH over a direct TCP connection. (Supports SCP & SFTP)
$ ssh root@74.2.96.39 -p 16602 -i ~/.ssh/id_ed25519
Web terminal
Connect to your Pod using a terminal directly in your browser
Enable web terminal
Port 19123 · Open web terminal


단계3: 폴더(test) 및 파일 (sample.txt) 생성


- Volume mount path: `/workspace`

```
# 폴더 생성
mkdir /workspace/test
# 파일 생성
touch /workspace/test/sample.txt
# 확인
ls /workspace/test
```

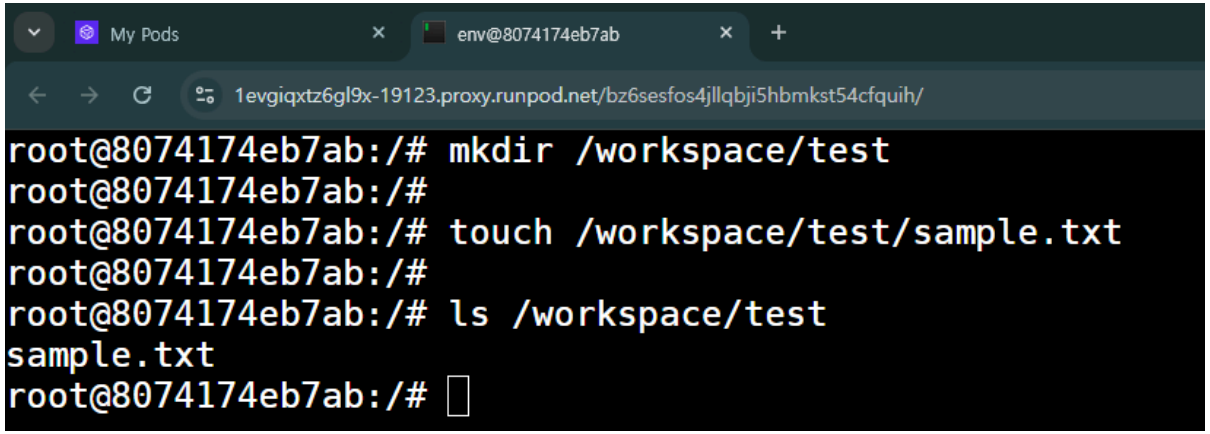


단계4: Pod 재시작

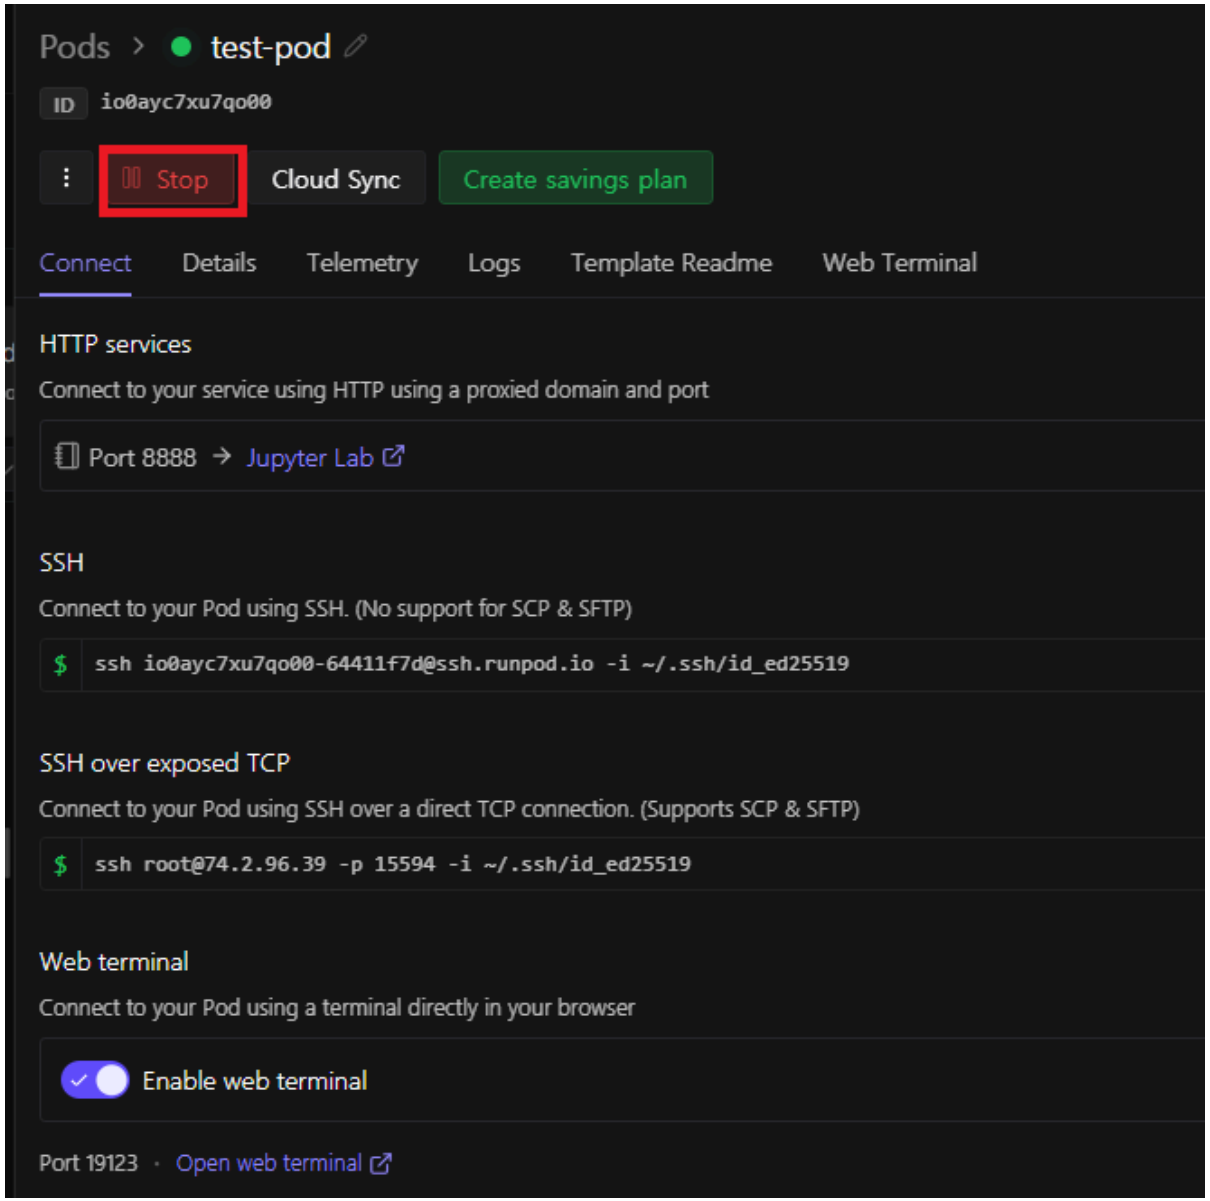
Pods
test-pod
ID
io0ayc7xu7qo00
Stop
Cloud Sync
Create savings plan
Connect
Details
Telemetry
Logs
Template Readme
Web Terminal
HTTP services
Connect to your service using HTTP using a proxied domain and port
Port 8888
Jupyter Lab
SSH
Connect to your Pod using SSH. (No support for SCP & SFTP)
$
ssh io0ayc7xu7qo00-64411f7d@ssh.runpod.io -i ~/.ssh/id_ed25519
SSH over exposed TCP
Connect to your Pod using SSH over a direct TCP connection. (Supports SCP & SFTP)
$
ssh root@74.2.96.39 -p 15594 -i ~/.ssh/id_ed25519
Web terminal
Connect to your Pod using a terminal directly in your browser
Enable web terminal
Port 19123
Open web terminal

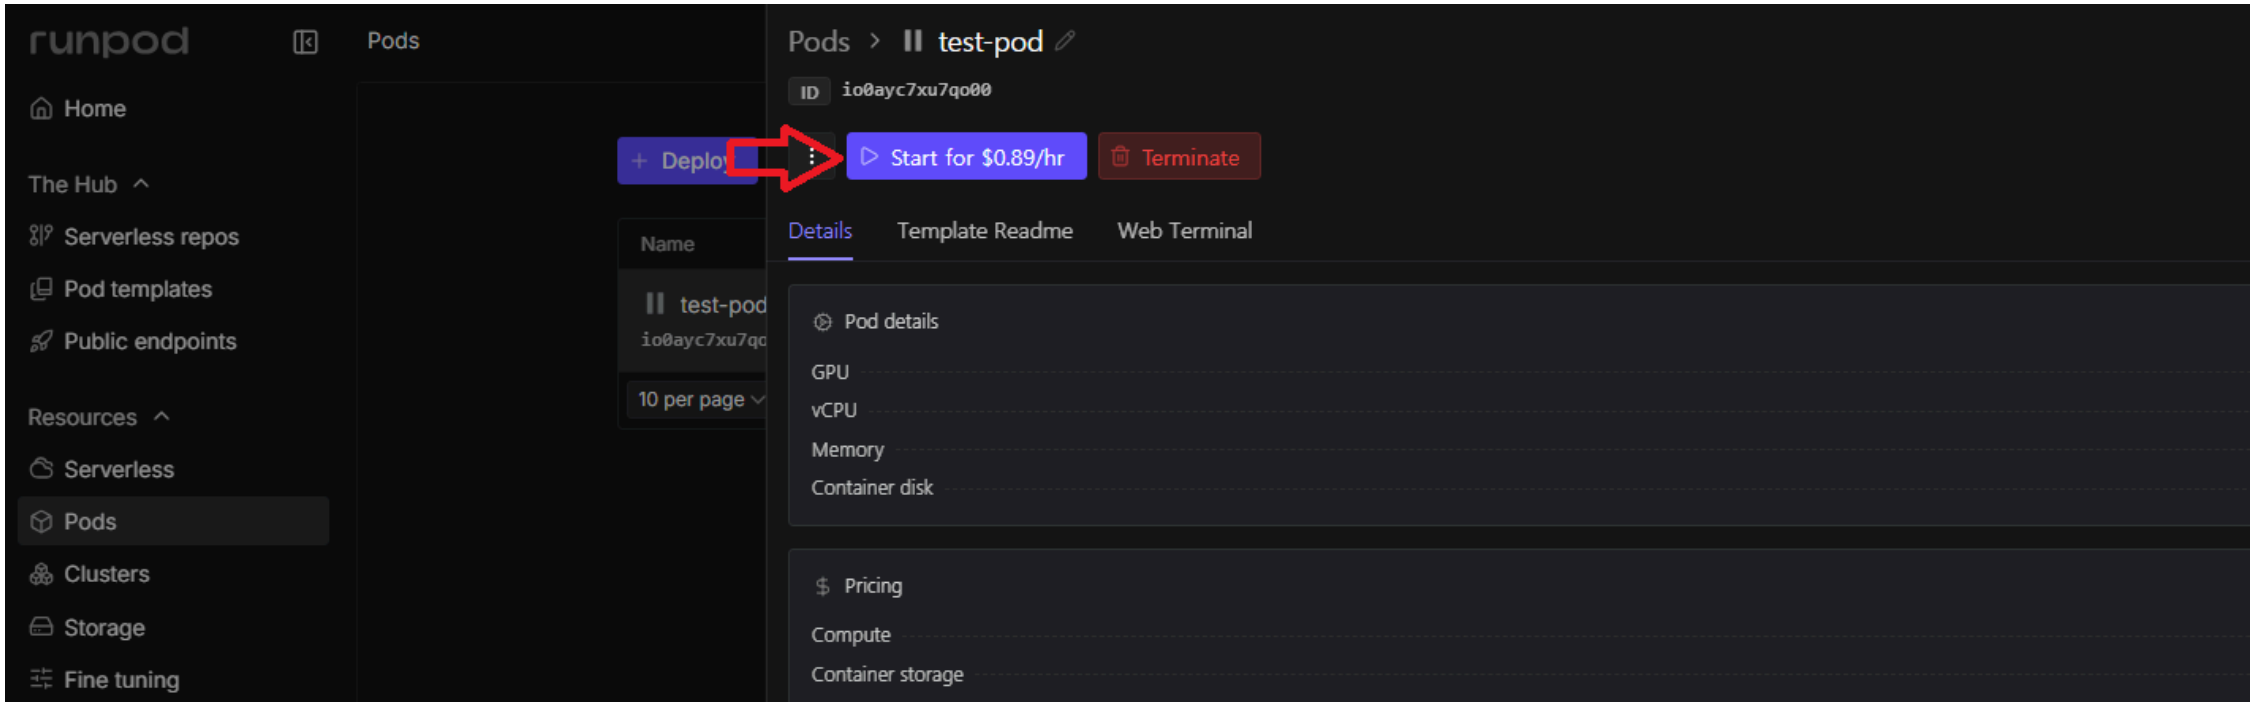
runpod
Pods
Home
The Hub
Serverless repos
Pod templates
Public endpoints
Resources
Serverless
Pods
Clusters
Storage
Fine tuning
Deploy
Name
test-pod
io0ayc7xu7qc
10 per page
Pods
test-pod
ID
io0ayc7xu7qo00
Start for $0.89/hr
Terminate
Details
Template Readme
Web Terminal
Pod details
GPU
vCPU
Memory
Container disk
Pricing
Compute
Container storage

단계5: Pod 재접속

- 폴더/파일 확인

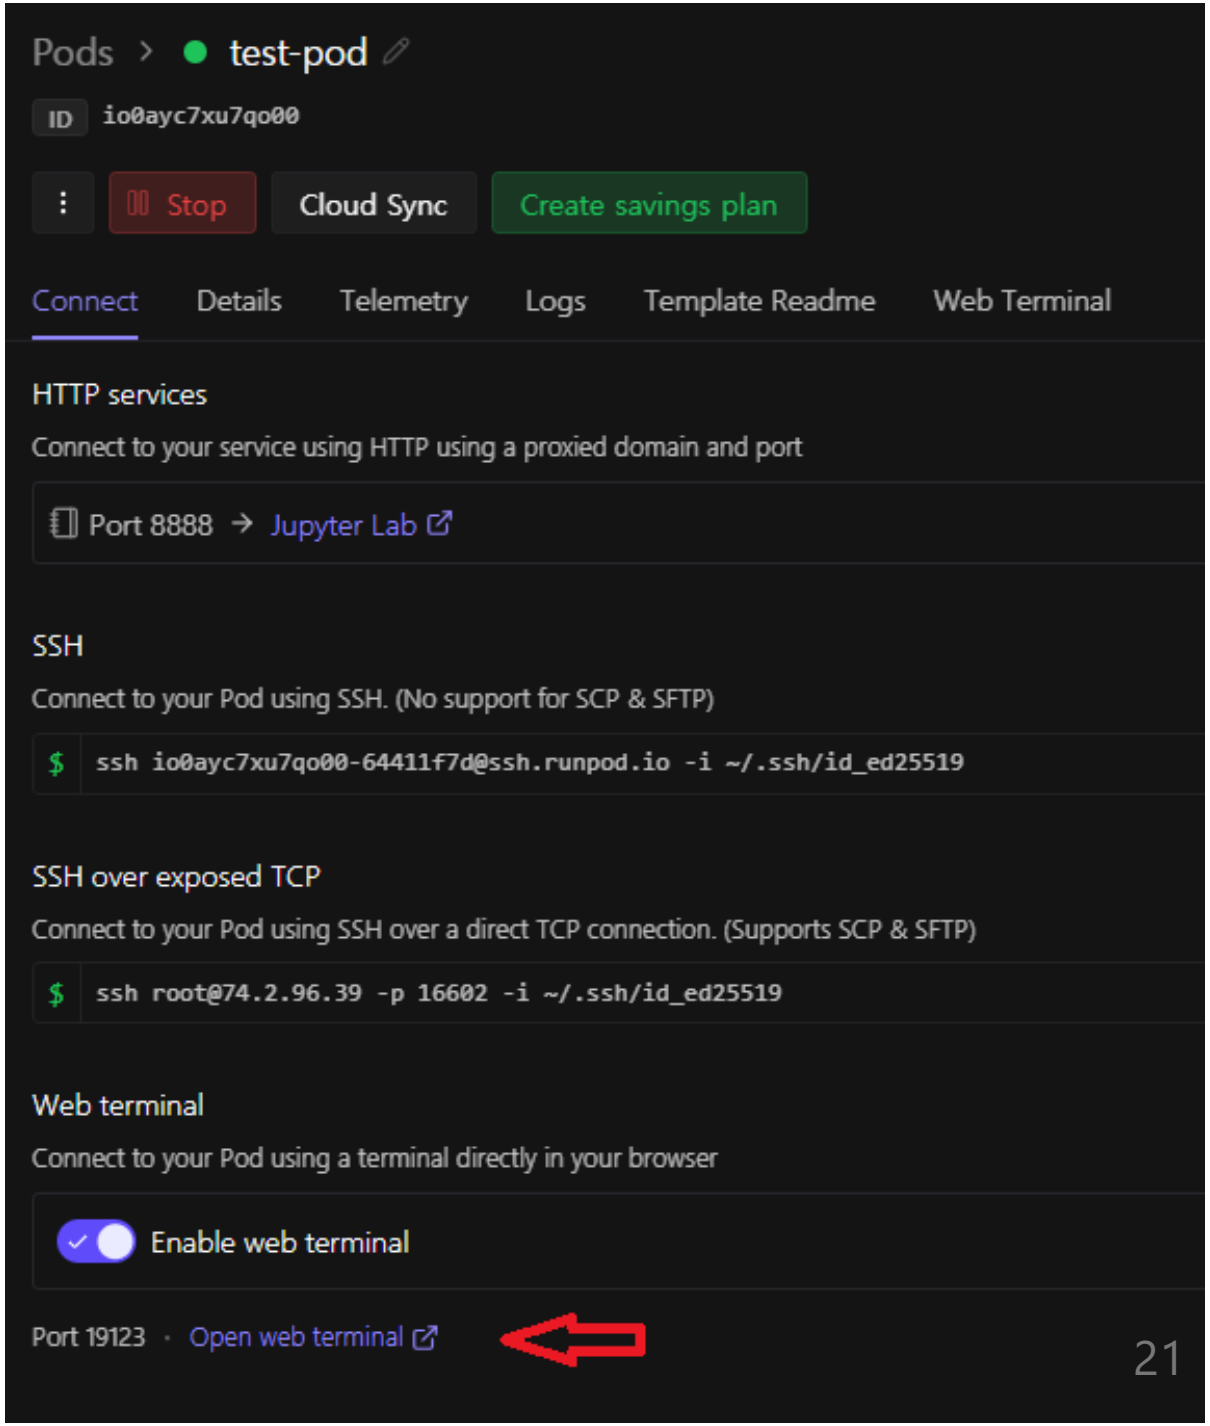

> 데이터(폴더/파일)가 **전부 존재함**.

```
# 확인
ls /workspace/test
```

