

GitHub Actions - CI

1. GitHub Actions CI 개념

- CI(Continuous Integration): 코드가 바뀔 때마다 자동으로 빌드/테스트를 실행하는 것
- `main` 브랜치에 push 하거나 PR을 올릴 때마다, 사람이 직접 테스트를 돌리지 않아도 GitHub이 대신 실행해줌
- 목표: "테스트를 깜빡하고 배포" 하는 실수를 방지

(선택) 모노레포에서 예제별로 CI 나누기

- 한 저장소에 여러 예제 폴더가 있어도, 워크플로우 파일은 항상 저장소 루트
`.github/workflows/` 에 위치
- 예제마다 `paths` 필터를 다르게 주면, 각 폴더 변경 시 해당 워크플로우만 실행됨

```
.github/workflows/  
├── django-with-aws-test.yml    (paths: "Github Actions/Django with aws/**")  
└── (다른 예제)-test.yml
```

2. 워크플로우 파일 구조

`.github/workflows/django-with-aws-test.yml`

```
on:
  push:
    branches: ["main"]
    paths: ["Github Actions/Django with aws/**"]
  pull_request:
    branches: ["main"]
    paths: ["Github Actions/Django with aws/**"]


jobs:
  test:
    runs-on: ubuntu-latest
    defaults:
      run:
        working-directory: Github Actions/Django with aws/django_server
```

각 항목 설명

- `on` : 워크플로우가 언제 실행될지 정의 (여기선 main에 push / PR)
- `paths` : 지정한 폴더가 변경됐을 때만 실행 (다른 예제 폴더 변경 시엔 실행 안 됨)
- `jobs` : 실제로 실행할 작업 목록 (여기선 `test` 하나)
- `working-directory` : 이후 `run` 스텝들이 실행될 기준 폴더 지정

3. 실행 결과 확인

- GitHub 저장소 → Actions 탭에서 워크플로우 실행 내역 확인
- 각 커밋/PR마다 성공(O) / 실패(X) 표시

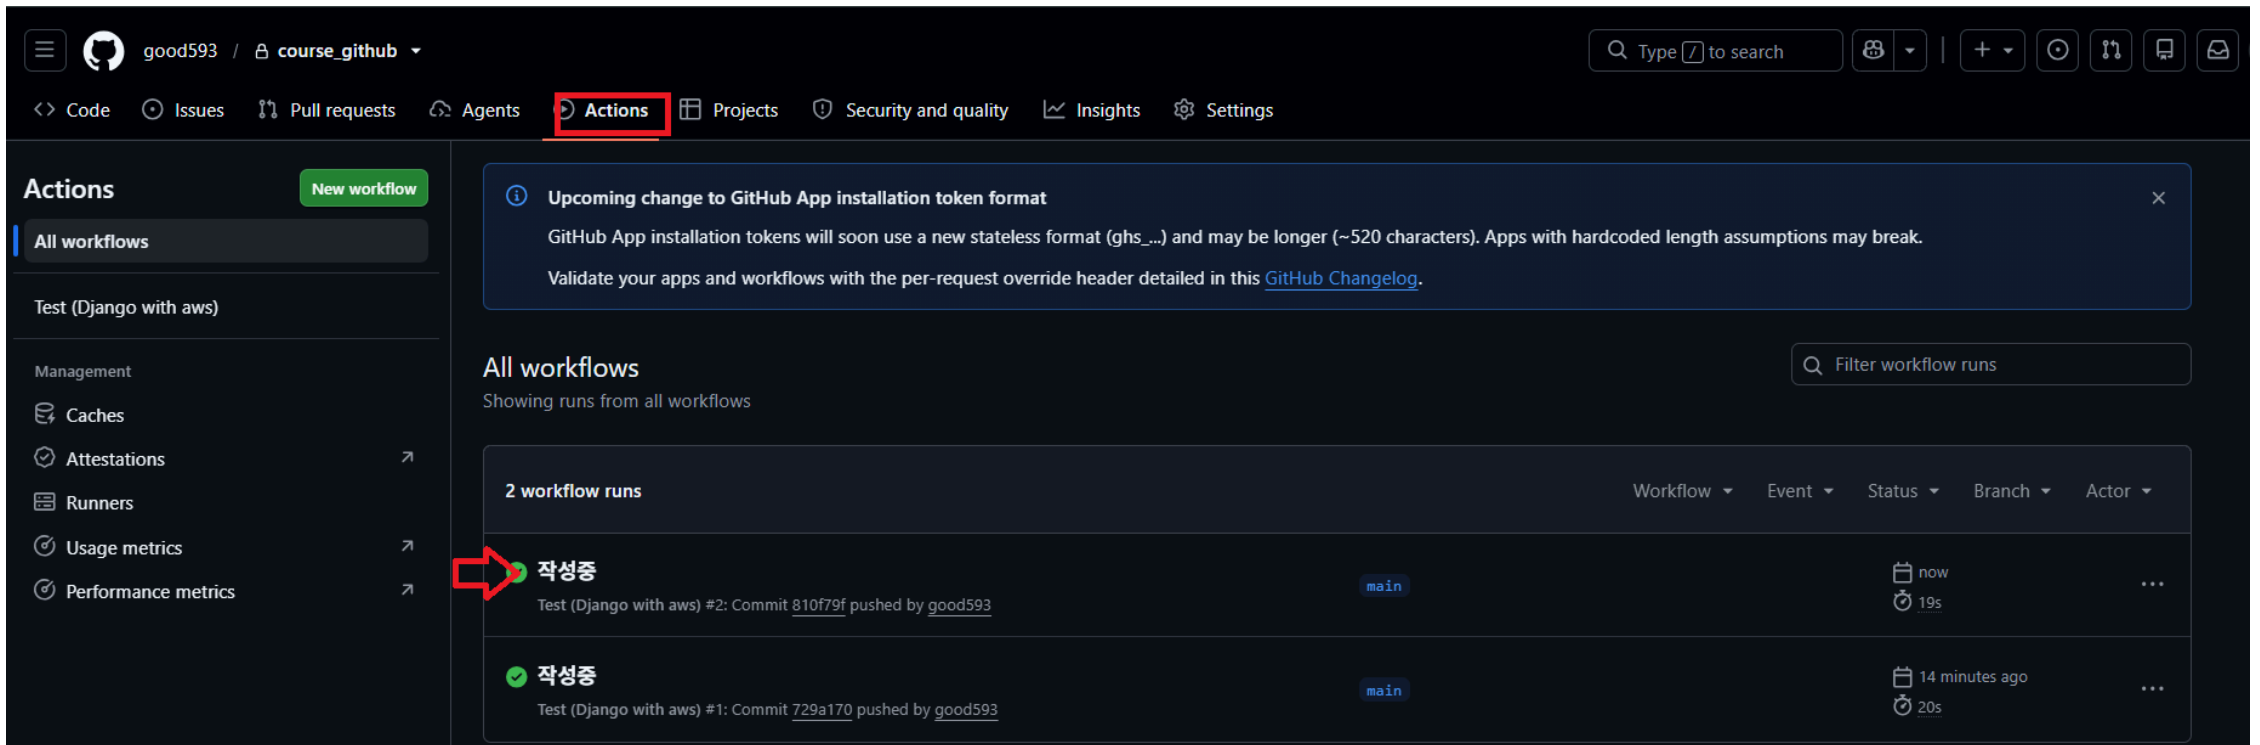

The screenshot shows the GitHub Actions interface for a repository named 'course_github' by user 'good593'. The 'Actions' tab is selected and highlighted with a red box. The left sidebar shows the 'Actions' section with a 'New workflow' button and a list of workflow runs for 'Test (Django with aws)'. The main area displays 'All workflows' with a search bar and a table of workflow runs. The table has columns for Workflow, Event, Status, Branch, and Actor. Two runs are listed: one with status '작성중' (In Progress) and another with status '완료' (Completed). A red arrow points to the '작성중' status of the first run.

Upcoming change to GitHub App installation token format

GitHub App installation tokens will soon use a new stateless format (ghs_...) and may be longer (~520 characters). Apps with hardcoded length assumptions may break. Validate your apps and workflows with the per-request override header detailed in this [GitHub Changelog](#).

All workflows

Showing runs from all workflows

2 workflow runs

Workflow	Event	Status	Branch	Actor
Test (Django with aws) #2: Commit 810f79f pushed by good593	main	작성중	now	19s
Test (Django with aws) #1: Commit 729a170 pushed by good593	main	완료	14 minutes ago	20s

good593 / course_github

Search Type / to search

<> Code

Issues

Pull requests

Agents

Actions

Projects

Security and quality

Insights

Settings

← Test (Django with aws)

✓ 작성중 #2

Summary

All jobs

test

Run details

Usage

Workflow file

Triggered via push 1 minute ago

good593 pushed · 810f79f · main

Status
Success

Total duration
19s

Artifacts
—

django-with-aws-test.yml

on: push

test 16s

good593 / course_github

Type / to search

<> Code

Issues

Pull requests

Agents

Actions

Projects

Security and quality

Insights

Settings

← Test (Django with aws)

✓

작성중 #2

Re-run all jobs

Summary

All jobs

test

Run details

Usage

Workflow file

Annotations

3 warnings

test

succeeded 2 minutes ago in 16s

Search logs

> ✓ Set up job

> ✓ 저장소 코드 체크아웃

> ✓ uv 설치

> ✓ 의존성 설치

> ✓ Django 테스트 실행

> ✓ Post uv 설치

> ✓ Post 저장소 코드 체크아웃

> ✓ Complete job