

Object Oriented Programming

Composition

Mr. Usman Wajid

usman.wajid@nu.edu.pk

March 31, 2023



National University
of Computer & Emerging Sciences

Inheritance Vs Composition

The two common ways to relate classes in a meaningful way are:

Inheritance Vs Composition

The two common ways to relate classes in a meaningful way are:

- 1 **Inheritance:** ("is a" relationship)

Inheritance Vs Composition

The two common ways to relate classes in a meaningful way are:

- ❶ **Inheritance:** ("is a" relationship)
- ❷ **Composition:** ("has-a" relationship)

Composition

Composition

When one or more member(s) of a class are objects of another class type

Composition

When one or more member(s) of a class are objects of another class type

- In composition two classes "has a" relationship between them

Composition

When one or more member(s) of a class are objects of another class type

- In composition two classes "has a" relationship between them
- Similar, to rest of all concepts of OOP, composition prevents us from re-inventing the wheel

Composition

When one or more member(s) of a class are objects of another class type

- In composition two classes "has a" relationship between them
- Similar, to rest of all concepts of OOP, composition prevents us from re-inventing the wheel
- Hence, it optimizes code reuse-ability

Composition Example 1

```
class Element {
    int val;
public:
    int getVal(){ return val; }
    void setVal(int val){ this->val = val;}
};

class Collection {
    Element e1, e2;
public:
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);
        else
            e2.setVal(val);
    }
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();
        else
            return e2.getVal();
    }
};
```

```
int main() {
    Collection c;
    for (int i = 1; i<=2; i++)
        c.setElement(i, i+1);
    for (int i=1; i<=2; i++)
        cout<<"Element # "<<i;
        cout<<" = ";
        cout<<c.getElement(i);
}
```

Composition Example 1

```
class Element {
    int val;
public:
    int getVal(){ return val; }
    void setVal(int val){ this->val = val;}
};

class Collection {
    Element e1, e2;
public:
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);
        else
            e2.setVal(val);
    }
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();
        else
            return e2.getVal();
    }
};
```

```
int main() {
    Collection c;
    for (int i = 1; i<=2; i++)
        c.setElement(i, i+1);
    for (int i=1; i<=2; i++)
        cout<<"Element # "<<i;
        cout<<" = ";
        cout<<c.getElement(i);
}
```

```
Element # 1 = 2
Element # 2 = 3
```

Composition Example 2

```
class Element {
    int val;

public:
    Element(){cout<<"Element constructed!\n";}
    int getVal(){return val;}
    void setVal(int val){this->val = val;}
};

class Collection {
    Element e1, e2;

public:
    Collection(){cout<<"collection constructed!";}
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);

        else
            e2.setVal(val);}
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();

        else
            return e2.getVal();}
};
```

```
int main() {
    Collection c;
}
```

Composition Example 2

```
class Element {
    int val;
public:
    Element(){cout<<"Element constructed!\n";}
    int getVal(){return val;}
    void setVal(int val){this->val = val;}
};

class Collection {
    Element e1, e2;
public:
    Collection(){cout<<"collection constructed!";}
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);
        else
            e2.setVal(val);}
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();
        else
            return e2.getVal();}
};
```

```
int main() {
    Collection c;
}
```

```
Element constructed!
Element constructed!
collection constructed!
```

Composition Example 3

```
class Element {
    int val;
public:
    Element(int x)
    {
        setVal(x);
        cout<<"Element("<<x<<" ) constructed!\n";}
    int getVal(){return val;}
    void setVal(int val){this->val = val;}
};

class Collection {
    Element e1, e2;
public:
    Collection(): e2(2), e1(1) {
        cout<<"collection constructed!";
    }
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);
        else
            e2.setVal(val);}
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();
        else
            return e2.getVal();}
};
```

```
int main() {
    Collection c;
}
```

Composition Example 3

```
class Element {
    int val;
public:
    Element(int x)
    {
        setVal(x);
        cout<<"Element("<<x<<" ) constructed!\n";}
    int getVal(){return val;}
    void setVal(int val){this->val = val;}
};

class Collection {
    Element e1, e2;
public:
    Collection(): e2(2), e1(1) {
        cout<<"collection constructed!";
    }
    void setElement(int eNum, int val){
        if (eNum==1)
            e1.setVal(val);
        else
            e2.setVal(val);}
    int getElement(int eNum){
        if (eNum==1)
            return e1.getVal();
        else
            return e2.getVal();}
};
```

```
int main() {
    Collection c;
}
```

```
Element(1) constructed!
Element(2) constructed!
collection constructed!
```

Composition continued ...

when the constructor is divided between the declaration and the definition, the list of alternative constructors should be associated with the definition, not the declaration

- This means that the following code snippet is correct,

```
class X {  
    public:  
    X(int x) { };  
};  
class Y {  
    X x;  
    public:  
    Y(int x);  
};  
Y::Y(int x) : x(1) { };
```

Composition continued ...

Member-objects of a class are constructed:

- In the order/sequence they are declared

Member-objects of a class are constructed:

- In the order/sequence they are declared
- Not in the order they are listed in the constructor's member initialization list

Member-objects of a class are constructed:

- In the order/sequence they are declared
- Not in the order they are listed in the constructor's member initialization list
- Before the enclosing class objects are constructed

Composition Example 4

```
class A{
    private:
        int y;
    public:
        int x;
        A (int a, int b) {x=a; y=b;}
        void print(){
            cout<<"x = "<<x<<"\ty = "<<y<<endl;
        }
};

class B{
    private:
        int z;
    public:
        A objA;
        B(int a, int b, int c): objA(a,b) {z = c;}
        void print(){
            objA.print();
            cout<<"z = "<<z<<endl;
        }
};
```

```
int main() {

    B objB(3, 4, 5);
    objB.print();
    objB.objA.print();

}
```

Composition Example 4

```
class A{
    private:
        int y;
    public:
        int x;
        A (int a, int b) {x=a; y=b;}
        void print(){
            cout<<"x = "<<x<<"\ty = "<<y<<endl;
        }
};

class B{
    private:
        int z;
    public:
        A objA;
        B(int a, int b, int c): objA(a,b) {z = c;}
        void print(){
            objA.print();
            cout<<"z = "<<z<<endl;
        }
};
```

Initialization list goes with the constructor contacting composition in order to pass parameters to the other class constructor

```
int main() {
    B objB(3, 4, 5);
    objB.print();
    objB.objA.print();
}
```

Composition Example 4

```
class A{
    private:
        int y;
    public:
        int x;
        A (int a, int b) {x=a; y=b;}
        void print(){
            cout<<"x = "<<x<<"\ty = "<<y<<endl;
        }
};


class B{
    private:
        int z;
    public:
        A objA;
        B(int a, int b, int c): objA(a,b) {z = c;}
        void print(){
            objA.print();
            cout<<"z = "<<z<<endl;
        }
};
```

Initialization list goes with the constructor contacting composition in order to pass parameters to the other class constructor

```
int main() {
    B objB(3, 4, 5);
    objB.print();
    objB.objA.print();
}
```

```
x = 3    y = 4
z = 5
x = 3    y = 4
```

Composition Practice!

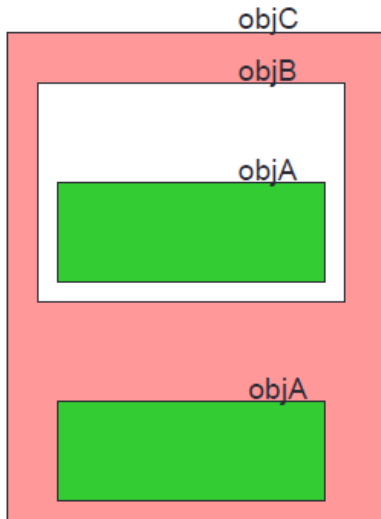

```
Constructor of A
Constructor of B
Constructor of A
Constructor of C
Destructor of C
Destructor of A
Destructor of B
Destructor of A
Press any key to continue
```

OOP Assignment # 02

Create a real world example of composition with the following constraints,

- The base class must be composed of at least 5 different class objects
- All the classes should be from real world scenario. Few examples are,
 - Colors class: such as Rainbow colors
 - Size class: small, medium and large
 - State class: solid, liquid, gas
 - Date-of-Birth class: day, month, year
 - Time class: secs, mins, hours
 - etc etc
- Plagiarism will be checked on the following basis,
 - copy from another student
 - copy from google
 - copy from text-generator model such as chat-GPT
- In all of the above mentioned modes of plagiarism, 0 marks will be assigned
- In case of any need of guidance, find me in the PHD lab on the top most floor