

01. evaluation

October 8, 2024

1 Model Evaluation

```
[2]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns

import httpimport
import joblib

from pathlib import Path
from dmbs import gainsChart

from scikitplot.metrics import plot_cumulative_gain
from sklearn.metrics import confusion_matrix, accuracy_score, roc_curve, auc
from sklearn.model_selection import train_test_split, cross_val_score
from sklearn.preprocessing import StandardScaler

%matplotlib inline
```

no display found. Using non-interactive Agg backend

```
[3]: # Import personal library
with httpimport.github_repo("junclemente", "jcds", ref="master"):
    import jcds.metrics as jm
    import jcds.charts as jc
```

```
[4]: # Import datasets
datasets = Path("../datasets")
df = pd.read_csv(datasets / "school_final_dataset.csv")
display(df.head())
```

	Undergrad_Degree	Work_Experience	Employability_Before	Status	\
0	Business	No	252.0	Placed	
1	Business	No	423.0	Not Placed	
2	Computer Science	Yes	101.0	Placed	
3	Engineering	No	288.0	Not Placed	
4	Finance	No	248.0	Not Placed	

	Status_enc
0	1
1	0
2	1
3	0
4	0

1.1 Setup Testing and Validation Dataframes

```
[5]: # Variables to use for predictive modeling
variables = ["Undergrad_Degree", "Work_Experience", "Employability_Before"]
target = "Status_enc"
```

```
[6]: # Setup train and val dataframes
X = df[variables]
y = df[target]

X_train, X_val, y_train, y_val = train_test_split(X, y, test_size=0.4,
↪random_state=42)

# # One-hot encode categorical variables
X_enc = pd.get_dummies(X, drop_first=True)
X_train = pd.get_dummies(X_train, drop_first=True)
X_val = pd.get_dummies(X_val, drop_first=True)

# # Standardize cont / Initialize scaler
scaler = StandardScaler()
std_cols = ["Employability_Before"]

Xs_enc = X_enc.copy()
Xs_enc[std_cols] = scaler.fit_transform(Xs_enc[std_cols])

Xs_train = X_train.copy()
Xs_train[std_cols] = scaler.transform(Xs_train[std_cols])

Xs_val = X_val.copy()
Xs_val[std_cols] = scaler.transform(Xs_val[std_cols])

display(X_enc.head())
display(Xs_enc.head())
```

	Employability_Before	Undergrad_Degree_Business \
0	252.0	True
1	423.0	True
2	101.0	False
3	288.0	False
4	248.0	False

	Undergrad_Degree_Computer Science	Undergrad_Degree_Engineering \
0	False	False
1	False	False
2	True	False
3	False	True
4	False	False

	Undergrad_Degree_Finance	Work_Experience_Yes
0	False	False
1	False	False
2	False	True
3	False	False
4	True	False

	Employability_Before	Undergrad_Degree_Business \
0	0.987385	True
1	5.717070	True
2	-3.189121	False
3	1.983108	False
4	0.876749	False

	Undergrad_Degree_Computer Science	Undergrad_Degree_Engineering \
0	False	False
1	False	False
2	True	False
3	False	True
4	False	False

	Undergrad_Degree_Finance	Work_Experience_Yes
0	False	False
1	False	False
2	False	True
3	False	False
4	True	False

1.2 Import Predictive Models

```
[7]: models = Path("../models")
dt_model = joblib.load(models / "decision_tree_model.pkl")
knn_model = joblib.load(models / "k_nearest_neighbor_model.pkl")
lr_model = joblib.load(models / "logistic_regression_model.pkl")
```

1.3 Classification Reports

```
[8]: dt_model.fit(X_train, y_train)
dt_model.predict(X_val)
cm = confusion_matrix(y_val, dt_model.predict(X_val))
jm.mc_confusion(cm)
```

Confusion Matrix:

```
[[186 10]
 [ 10 274]]
```

```
[8]:
```

	Class 0	Class 1
Accuracy	0.95833	0.95833
Error rate	0.04167	0.04167
Sensitivity (Recall)	0.94898	0.96479
Specificity	0.96479	0.94898
Precision	0.94898	0.96479
F1	0.94898	0.96479
F2	0.94898	0.96479
F0.5	0.94898	0.96479

```
[9]: knn_model.fit(Xs_train, y_train)
knn_pred = knn_model.predict(Xs_val)
cm = confusion_matrix(y_val, knn_pred)
jm.mc_confusion(cm)
```

Confusion Matrix:

```
[[182 14]
 [  6 278]]
```

```
[9]:
```

	Class 0	Class 1
Accuracy	0.95833	0.95833
Error rate	0.04167	0.04167
Sensitivity (Recall)	0.92857	0.97887
Specificity	0.97887	0.92857
Precision	0.96809	0.95205
F1	0.94792	0.96528
F2	0.93621	0.97339
F0.5	0.95992	0.95730

```
[10]: lr_model.fit(Xs_train, y_train)
lry_pred = lr_model.predict(Xs_val)
cm = confusion_matrix(y_val, lry_pred)
jm.mc_confusion(cm)
```

Confusion Matrix:

```
[[184 12]
 [  5 279]]
```

```
[10]:
```

	Class 0	Class 1
Accuracy	0.96458	0.96458
Error rate	0.03542	0.03542
Sensitivity (Recall)	0.93878	0.98239
Specificity	0.98239	0.93878
Precision	0.97354	0.95876
F1	0.95584	0.97043

F2	0.94553	0.97758
F0.5	0.96639	0.96340

1.3.1 Observation

Metric	Decision Tree	K-Nearest Neighbor	Logistic Regression
Accuracy	0.96	0.96	0.96
Recall	0.96	0.98	0.98
Precision	0.96	0.95	0.96
F1 Score	0.96	0.97	0.97

Based on the classification reports, all three models appear to do very well. Accuracy is consistent in all models at predicting the target class. Recall shows how many true positives were correctly identified. The Decision Tree did poorly compared to the other two models. Precision shows the percentage of predicted positives were actually correct. F1 Score is the harmonic mean of Precision and Recall.

Based on this information, the Logistic Regression model takes a slight win over the KNN model.

1.4 Accuracy through Cross Validation

```
[11]: # Visualize Accuracy using k_folds 2 - 10
n_rows = 3
n_cols = 3


fig, axes = plt.subplots(n_rows, n_cols, figsize=(10, 8))

axes = axes.flatten()

for idx, k_folds in enumerate(range(2, 11)):
    dt_accuracy = cross_val_score(dt_model, Xs_enc, y, cv=k_folds,
    ↪scoring="accuracy")
    knn_accuracy = cross_val_score(knn_model, Xs_enc, y, cv=k_folds,
    ↪scoring="accuracy")
    lr_accuracy = cross_val_score(lr_model, Xs_enc, y, cv=k_folds,
    ↪scoring="accuracy")
    models = ["Decision Tree", "KNN", "Logistic Regression"]
    scores = [dt_accuracy, knn_accuracy, lr_accuracy]

    axes[idx].boxplot(scores, labels=models)
    axes[idx].set_title(f"Accuracy: k_folds={k_folds}")

plt.tight_layout()
plt.show()
```

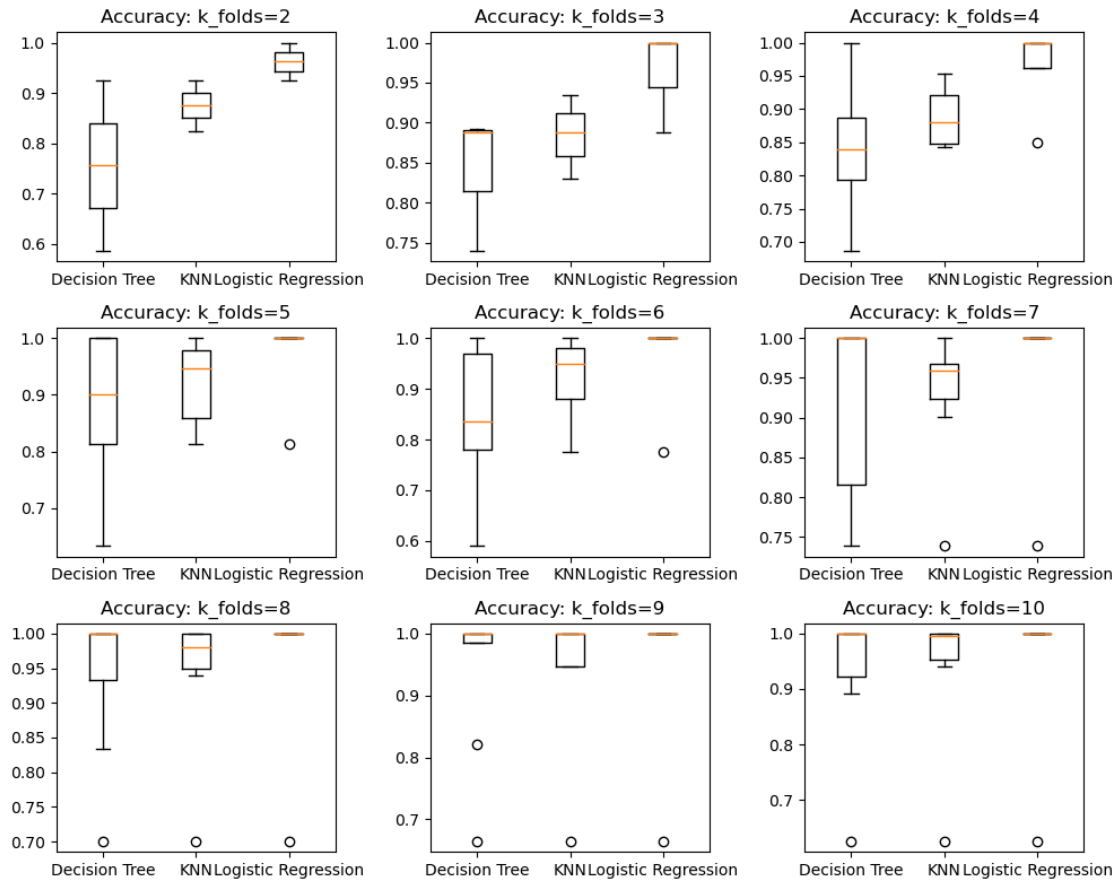


1.4.1 Observation

A comparison of all three models using cross-fold validation shows the variation of accuracy through different folds. Compared to the other two models, the logistic regression model is the most stable through the different k-fold values.

1.5 AUC-ROC Chart

```
[14]: plt.figure()
      jc.plot_roc(y_val, dty_pred, "Decision Tree")
      jc.plot_roc(y_val, knny_pred, "K-Nearest Neighbor")
      jc.plot_roc(y_val, lry_pred, "Logistic Regression")
      plt.plot([0, 1], [0, 1], color="navy", lw=2, linestyle="--")
      plt.title("AUC-ROC Curve")
      plt.xlabel = "False Positive Rate"
      plt.ylabel = "True Positive Rate"
      plt.legend(loc="lower right")
      plt.show()
```

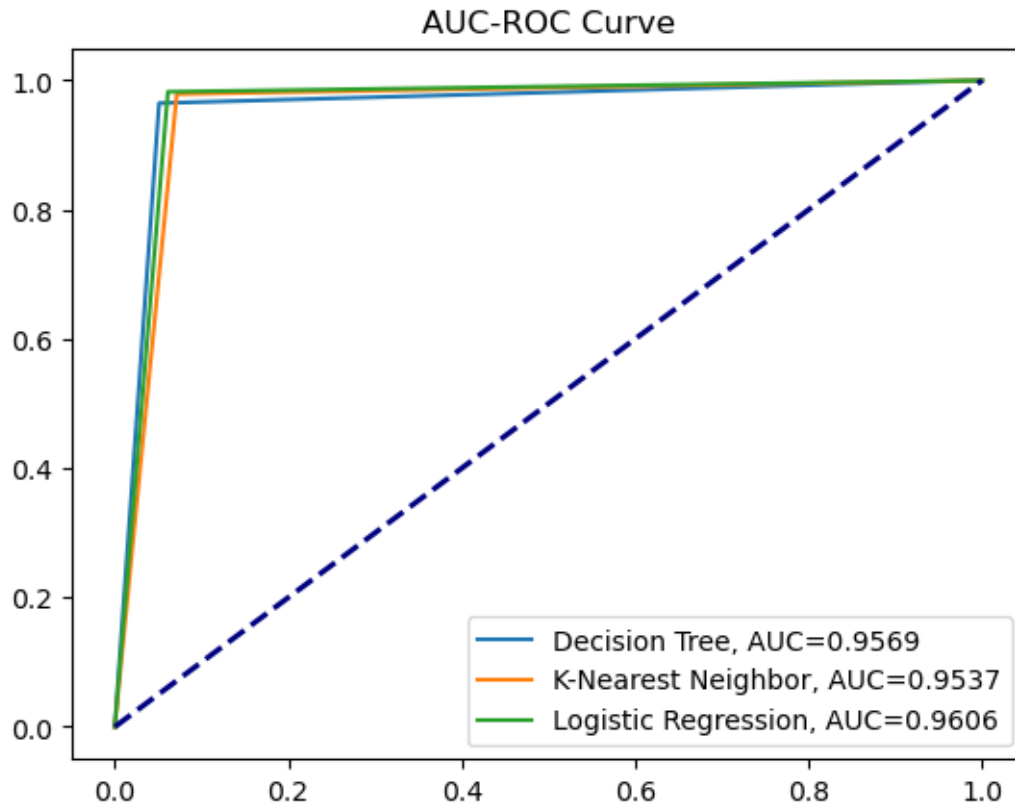

1.5.1 Observation

Based on this curve, all three models appear to do very well. The Logistic Regression model has a slightly better AUC than KNN.

2 Conclusion

Three machine learning models were developed and tested to predict placement status: - Decision Tree - K-Nearest Neighbor - Logistic Regression

After comparing their performance across different evaluation metrics, the Logistic Regression model showed the best predictive accuracy and overall performance. Therefore, this model was selected for predicting placement status.

```
[19]: intercept = np.round(lr_model.intercept_, 3)
      coef = np.round(lr_model.coef_, 3)

      print(f"Intercept (beta_0): {intercept}")
      print(f"Coefficeints (beta_1, beta_2,..., beta_n): {coef}")
```

```
Intercept (beta_0): [-0.21]
Coefficeints (beta_1, beta_2,..., beta_n): [[ 0.      1.733  1.74  -1.241  1.766
```

0.]]

2.1 Logistic Regression Equation

$$p(x) = \frac{1}{1 + e^{-(\beta_0 + \beta_1 x_1 + \beta_2 x_2 + \beta_3 x_3 + \beta_4 x_4 + \beta_5 x_5 + \beta_6 x_6)}}$$

Where: $\beta_0 = -0.210$, $\beta_1 = 0$, $\beta_2 = 1.733$, $\beta_3 = 1.740$, $\beta_4 = -1.241$, $\beta_5 = 1.766$, $\beta_6 = 0$

- x1: Employability_Before - x2: Undergrad_Degree_Business - x3: Under-
grad_Degree_ComputerScience - x4: Undergrad_Degree_Engineering - x5: Under-
grad_Degree_Finance - x6: Work_Experience_Yes