

Workbench screenshots · contact sheet

Run run-e8bc1d3725a54664991c46d39ee1aa74 · workbench 0e3e704 · every paper/ panel at 12.2 cm wide (LNCS text width), as printed. 46 panels on 33 pages; a panel taller than an appendix page (830 CSS px) is shown by its parts.

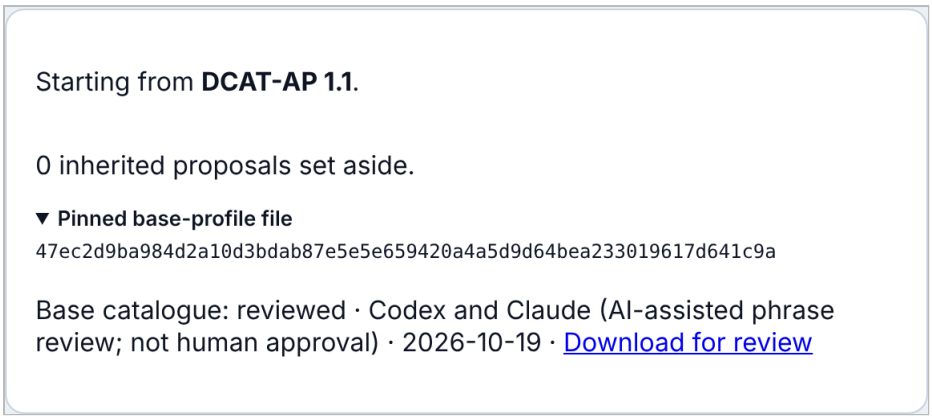

S01a-acquisition-base-profile@600.png · 576×252 CSS px · 5.4 cm high at 12.2 cm · smallest text 7.2 pt · supplement

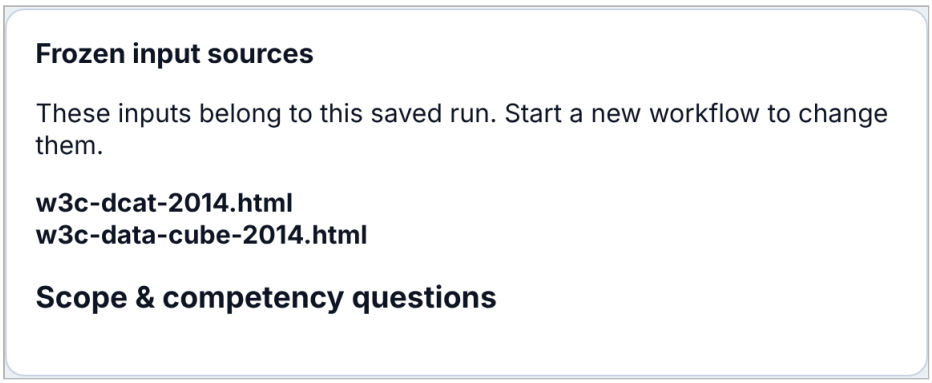

S01b-acquisition-frozen-sources@600.png · 576×230 CSS px · 4.9 cm high at 12.2 cm · smallest text 9.61 pt · supplement

3a · Stakeholders and role selection

automatic · completed · 4 perspectives

60 of 60 evidence units processed · 5 of 5 batches read.

Discovery collects candidates from the whole corpus. The registry retains every candidate; one panel selection follows. 12 registry entries · 1 panel decisions saved.

Documented and inferred labels are selection judgements. Exact quotations can be checked; they do not establish stakeholder endorsement. Every extracted requirement still needs its own evidence.

Consuming Applications documented

Place filled: documented. Sources: w3c-data-cube-2014.html

Stakeholders: consuming applications

Support applications that retrieve and process data cube observations.

- What queries do consuming applications need to perform?
- How can applications discover slice definitions efficiently?

The text notes that normalized representations help consuming applications query uniformly.

Documented stakeholder that directly consumes DCAT metadata, i.e., finds and uses the data.

S03-part1-role_selection-stakeholders@600.png · 576×628 CSS px · 13.3 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate

synthesis of appropriate URIs for observations.
By default the values of all of the components will be attached to each individual observation,
this is called the normalized representation.
This allows such observations to stand alone, so that a SPARQL query to retrieve the observation
can immediately locate the attributes which enable the observation to be interpreted. However,

Inspect stakeholder evidence


.
...
In a data set containing just observations with no intervening structure then each observation
must have a complete set of dimension values, along with all the measure values. If the
set is structured by using slices then further abbreviation is possible, as discussed
in the next section.
7.2 Slices and groups of observations

Inspect stakeholder evidence


S03-part2-role_selection-stakeholders@600.png · 576×484 CSS px · 10.3 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate




S03-part3-role_selection-stakeholders@600.png · 576×783 CSS px · 16.6 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate

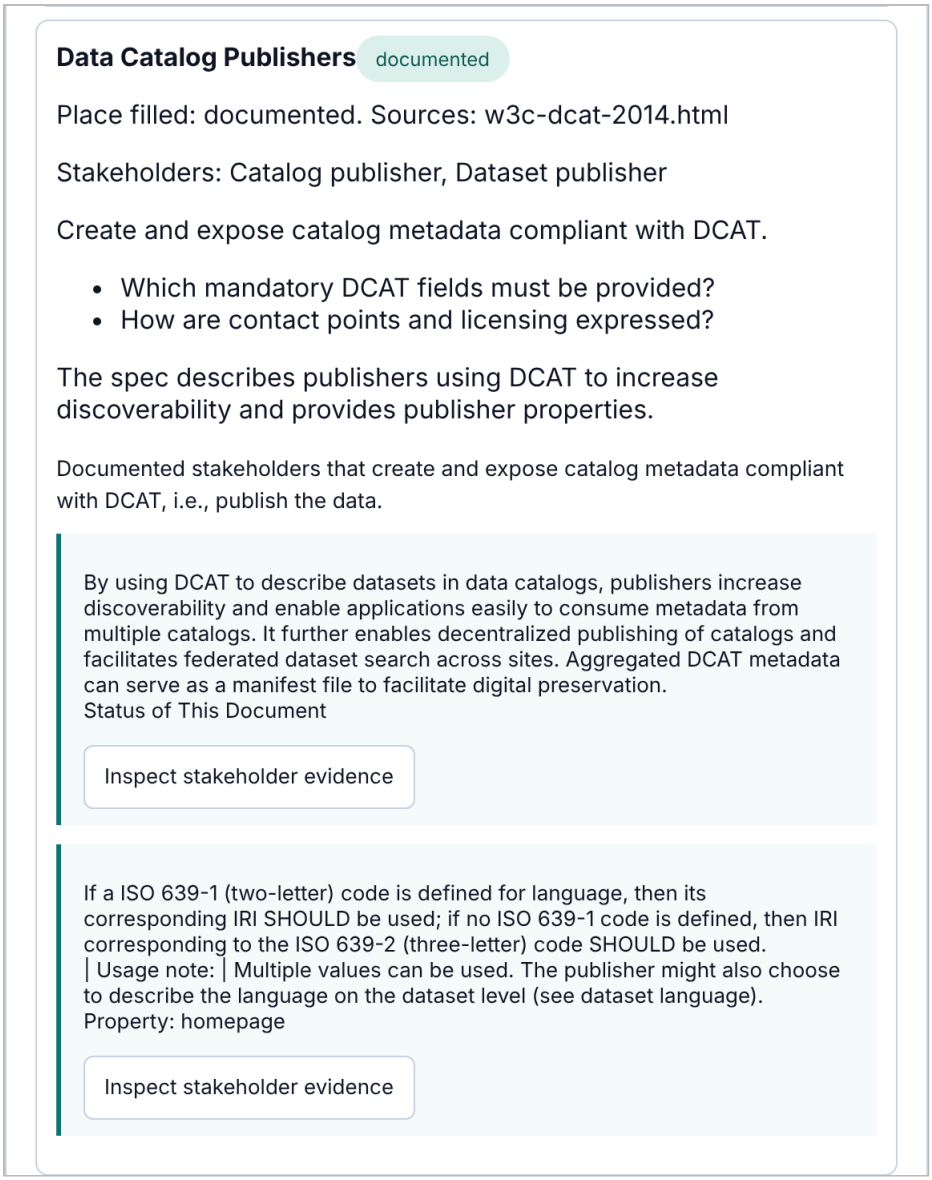

S03-part4-role_selection-stakeholders@600.png · 576×730 CSS px · 15.5 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate

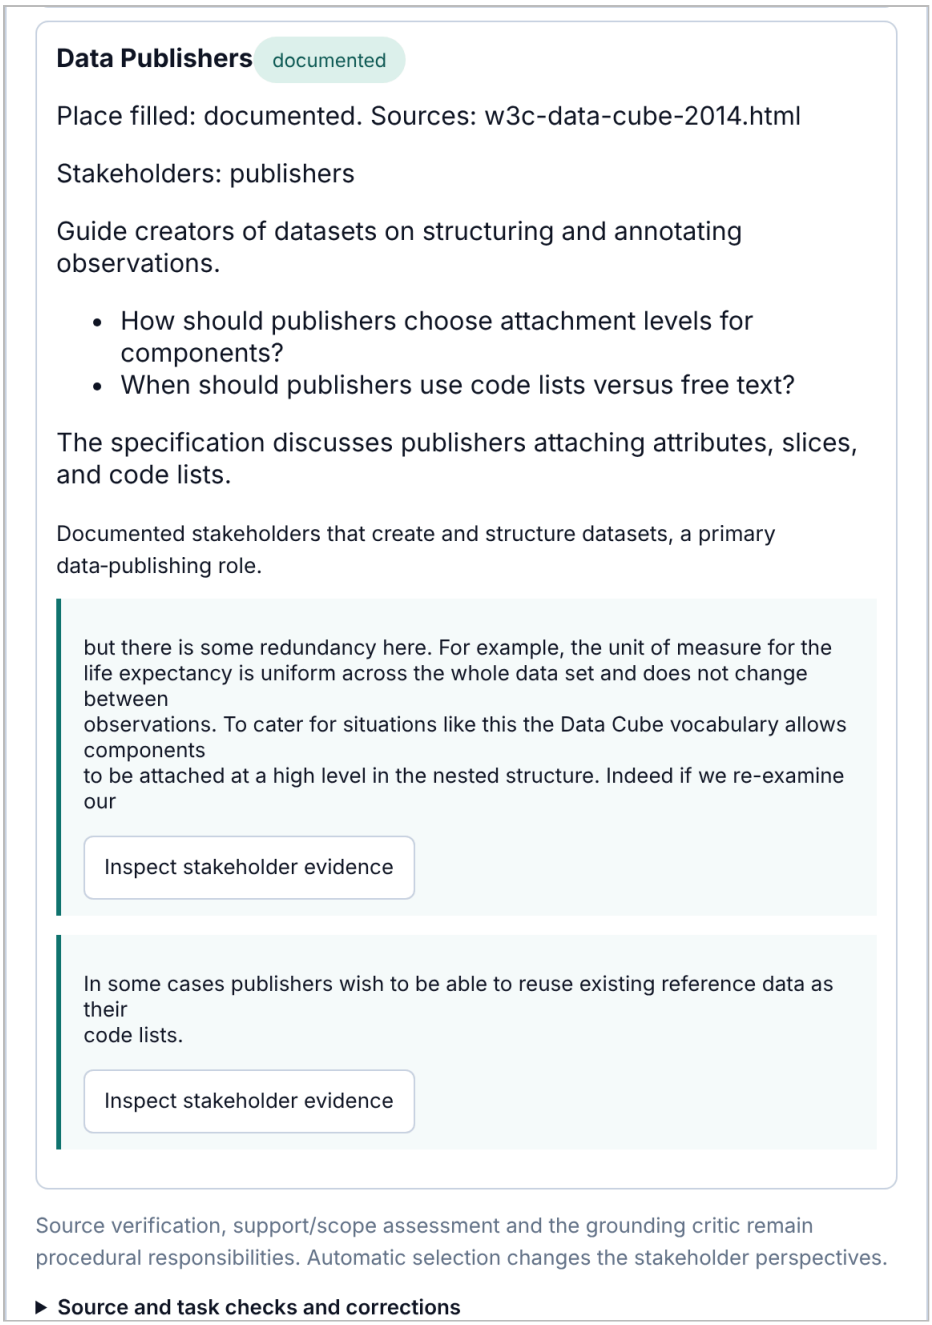


S03-part5-role_selection-stakeholders@600.png · 576×820 CSS px · 17.4 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate

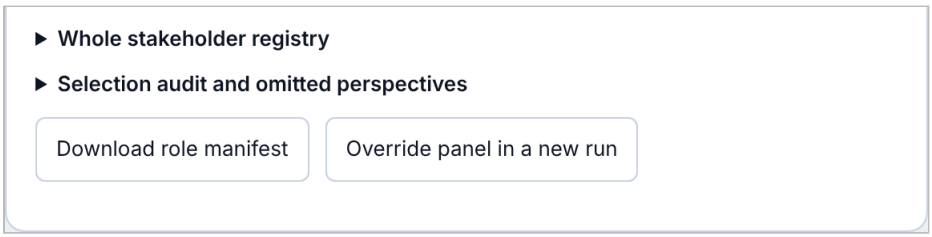


S03-part6-role_selection-stakeholders@600.png · 576×139 CSS px · 2.9 cm high at 12.2 cm · smallest text 7.2 pt · supplement, appendix candidate



S04a-part1-elicitation-extraction-routing@600.png · 576×217 CSS px · 4.6 cm high at 12.2 cm · smallest text 7.2 pt · main-text strip (a), supplement

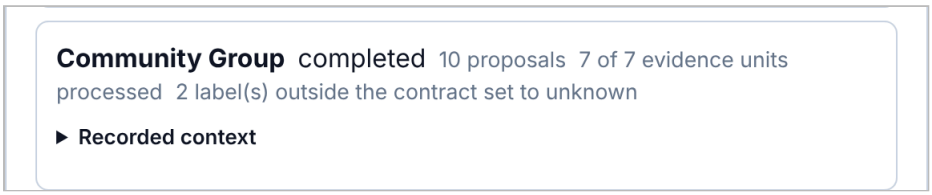


S04a-part2-elicitation-extraction-routing@600.png · 576×114 CSS px · 2.4 cm high at 12.2 cm · smallest text 7.2 pt · main-text strip (a), supplement

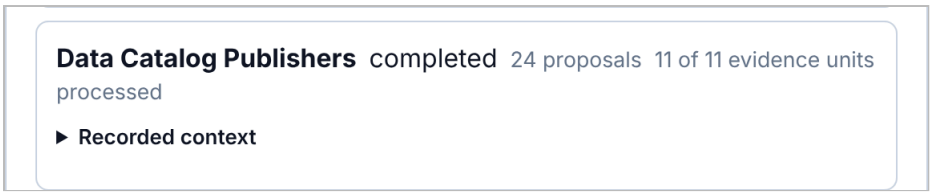


S04a-part3-elicitation-extraction-routing@600.png · 576×114 CSP px · 2.4 cm high at 12.2 cm · smallest text 7.2 pt · main-text strip (a), supplement




S04a-part4-elicitation-extraction-routing@600.png · 576×114 CSS px · 2.4 cm high at 12.2 cm · smallest text 7.2 pt · main-text strip (a), supplement

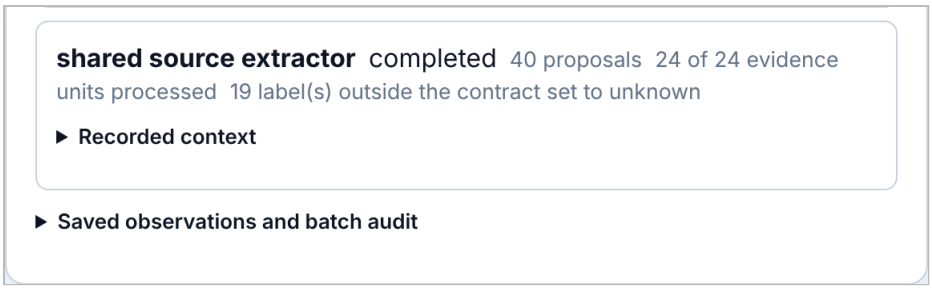


S04a-part5-elicitation-extraction-routing@600.png · 576×173 CSS px · 3.7 cm high at 12.2 cm · smallest text 7.2 pt · main-text strip (a), supplement

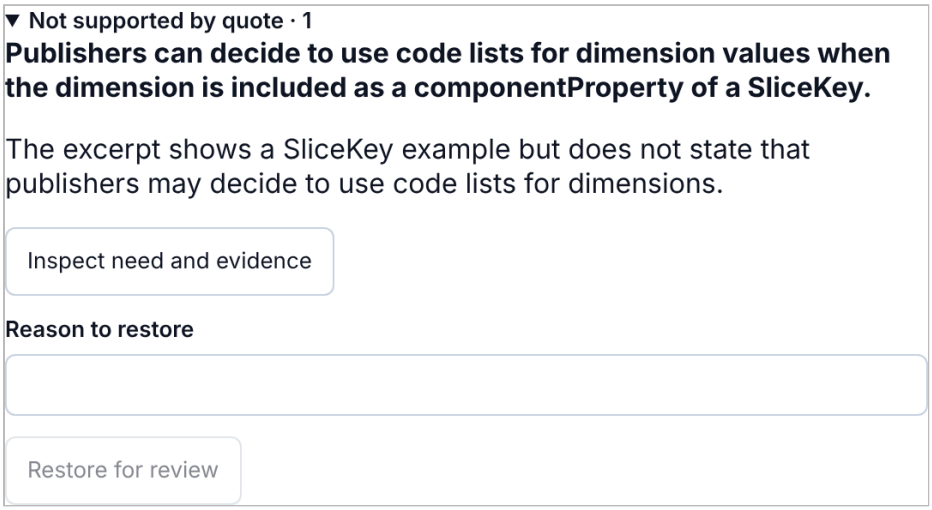


S04c-consolidation-proposal-set-aside@600.png · 538×290 CSS px · 6.6 cm high at 12.2 cm · smallest text 8.36 pt · main-text strip (a), supplement

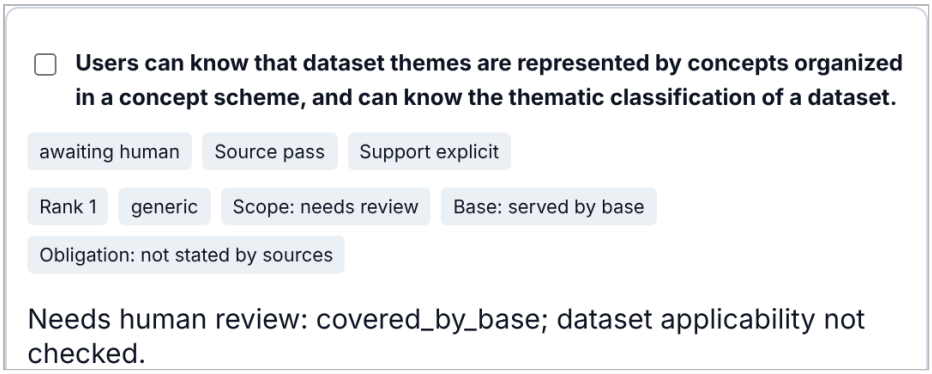


S06-part1-consolidation-grouped-need@600.png · 538×211 CSS px · 4.8 cm high at 12.2 cm · smallest text 7.07 pt · main-text strip (b), supplement

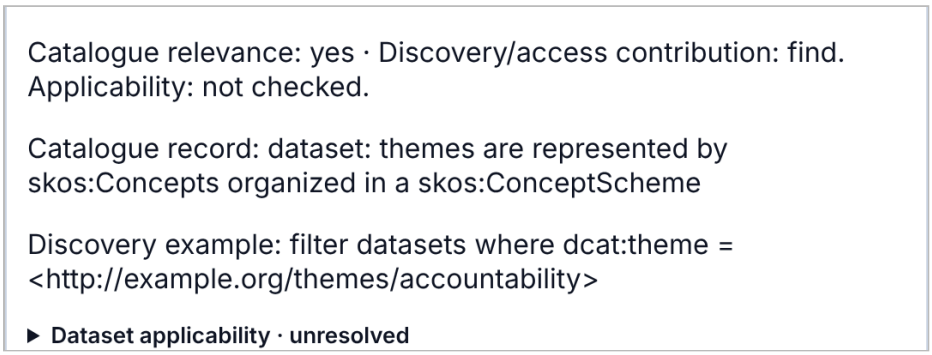


S06-part2-consolidation-grouped-need@600.png · 538×200 CSS px · 4.5 cm high at 12.2 cm · smallest text 7.07 pt · main-text strip (b), supplement

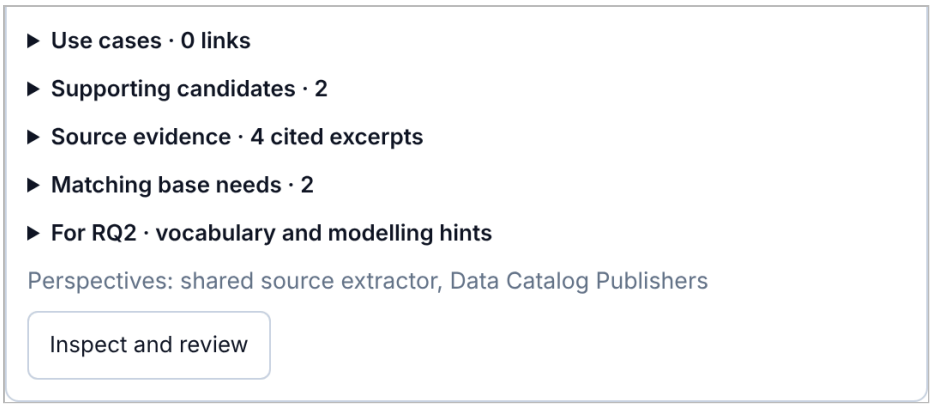


S06-part3-consolidation-grouped-need@600.png · 538×230 CSS px · 5.2 cm high at 12.2 cm · smallest text 7.07 pt · main-text strip (b), supplement

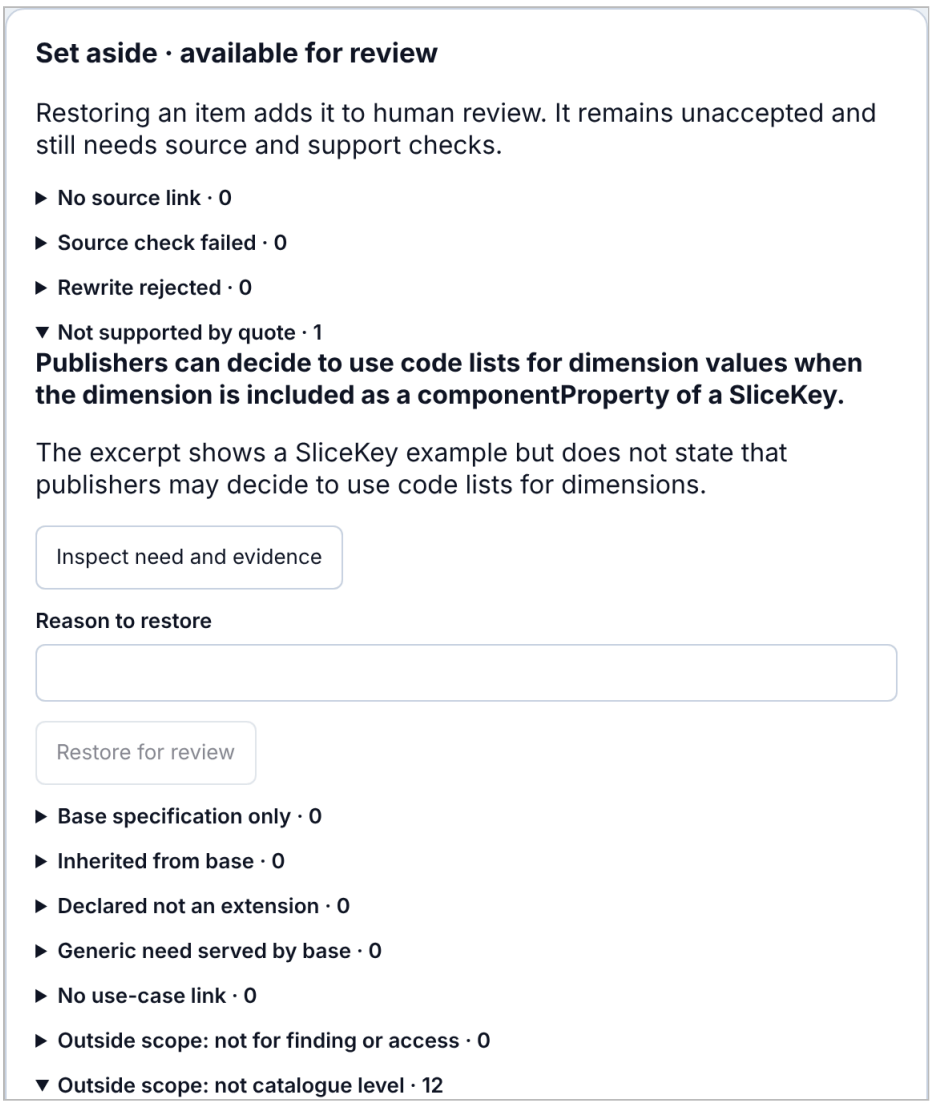


S07-part1-consolidation-set-aside-needs@600.png · 576×681 CSS px · 14.4 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

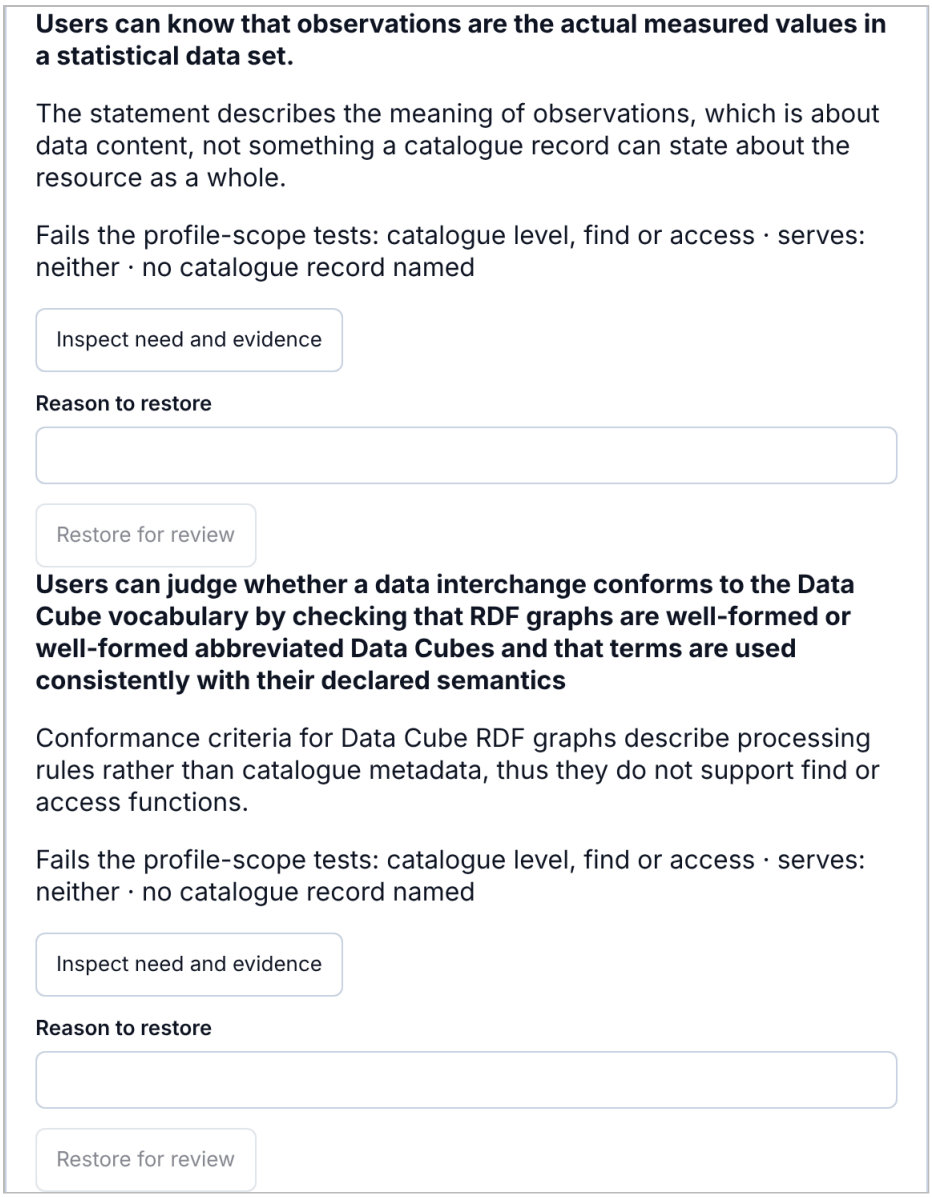

S07-part2-consolidation-set-aside-needs@600.png · 576×740 CSS px · 15.7 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

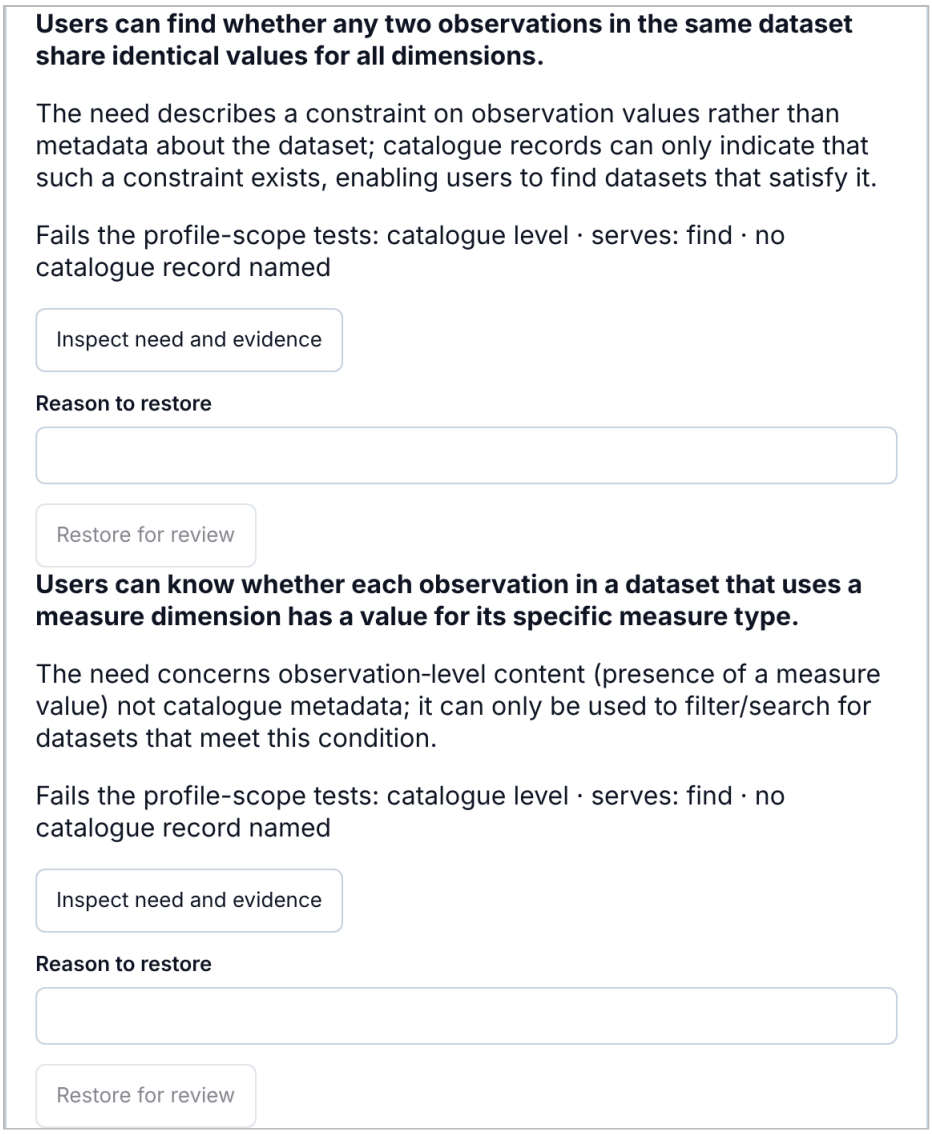

S07-part3-consolidation-set-aside-needs@600.png · 576×700 CSS px · 14.8 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

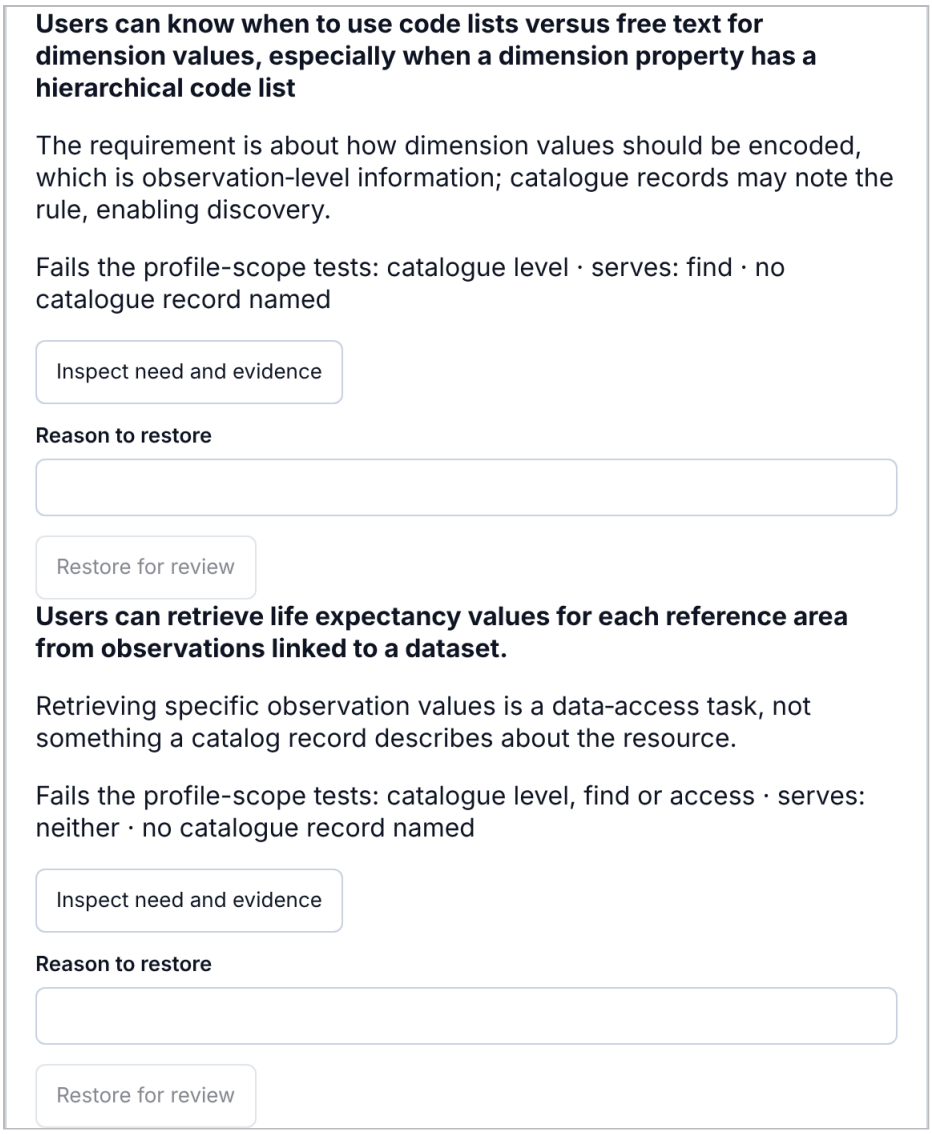

S07-part4-consolidation-set-aside-needs@600.png · 576×700 CSS px · 14.8 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

Publishers can know when to use a qb:HierarchicalCodeList instead of a SKOS ConceptScheme for representing hierarchical code lists.

The statement gives publishing guidance about when to use a qb:HierarchicalCodeList, which is not information that a catalog record would state about a resource.

Fails the profile-scope tests: catalogue level, find or access · serves: neither · no catalogue record named

Inspect need and evidence

Reason to restore

Restore for review

Users can know that each observation must have a complete set of dimension values and all measure values.

It specifies a completeness rule for observations (all dimensions and measures present), which is a data-quality constraint rather than catalogue metadata.


Fails the profile-scope tests: catalogue level, find or access · serves: neither · no catalogue record named

Inspect need and evidence

Reason to restore

Restore for review

S07-part5-consolidation-set-aside-needs@600.png · 576×700 CSS px · 14.8 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

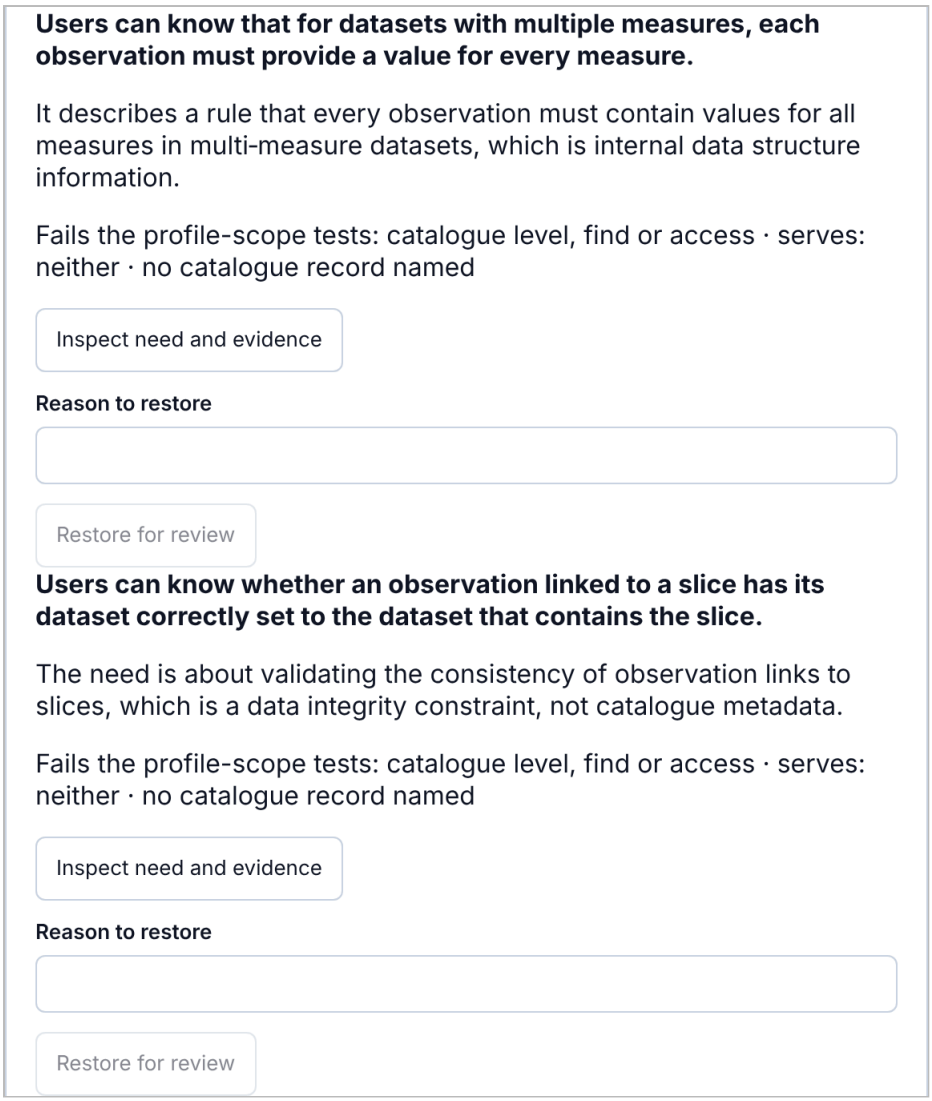

S07-part6-consolidation-set-aside-needs@600.png · 576×680 CSS px · 14.4 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

Publishers can know that when a code list is already available as a SKOS ConceptScheme or can reasonably be made so, they should use SKOS rather than qb:HierarchicalCodeList.

The recommendation about using SKOS instead of qb:HierarchicalCodeList concerns publishing practice, not a metadata statement about a specific catalogue resource.

Fails the profile-scope tests: catalogue level, find or access · serves: neither · no catalogue record named

Inspect need and evidence

Reason to restore

Restore for review

Users can find the code list associated with a dimension property and verify that each observation's value for that dimension is included in the code list.

Optional annotation of components with qb:codeList is a modeling choice, not a catalogue-level statement about a resource.

Fails the profile-scope tests: catalogue level, find or access, operational data-processing instruction · serves: neither · no catalogue record named

Inspect need and evidence

Reason to restore

Restore for review

▶ **Outside scope: data-processing instruction, not catalogue metadata · 0**

▶ **Outside scope: not commonly agreed (D5 v1 runs) · 0**

S07-part7-consolidation-set-aside-needs@600.png · 576×827 CSS px · 17.5 cm high at 12.2 cm · smallest text 7.8 pt · supplement, appendix candidate

Dataset kinds and compact requirements

These are source-linked machine proposals. Category labels describe the supplied sources; they do not establish community agreement or an exhaustive taxonomy.

60 units attempted · 54 of 60 evidence units fully checked · 48 dataset kinds. The scan is incomplete; uncertain needs stay in the list. Equivalence can still be checked for needs with verified applicability.

12 rejected category mentions are recorded in the scan audit; valid mentions from partially checked units remain available.

▶ **Dataset kinds and their sources**

▼ **Stage counts and unresolved checks**

91 proposals entered semantic grouping; 70 groups were produced. 89 rewritten needs entered base comparison.

Base comparison: 89 retained from 89 rewritten needs. 60 no-match decisions followed complete catalogue searches; a positive full match can stop early. Dispositions: no base match 60 · not checked 1 · refines base 3 · served by base 25.

Catalogue scope: 76 retained and 13 set aside from 89 judged. Reasons: fa scope set aside 1 · not catalogue level 12.

Applicability: 62 checked of 76; 14 unresolved. Families: 69 from 76 eligible needs; 0 family-grouping chunks used exact-singleton fallback. Compact representatives: 76 of 76 atomic needs.

76 compact representatives from 76 atomic needs. Needs with incomplete support or applicability remain separate for human review; selected counts are not an accuracy or minimality claim. The complete atomic review list remains available.


Equivalence comparisons covered 75 needs. The selected cover is smallest for the safe equivalence links recorded. Unexamined comparisons and machine errors can change the result.

▶ **1 possible equivalent pairs need review; no coverage was substituted**

S09-part1-consolidation-coverage@600.png · 576×795 CSS px · 16.8 cm high at 12.2 cm · smallest text 7.8 pt · supplement

Dataset kinds with no retained linked need: collection of data, SDMX-ML, multi-dimensional data, Turtle, multiple measures, RSS feed, qb:HierarchicalCodeList, Health, qb:Slice, spreadsheets, RDF, abbreviated format, XML, skos:ConceptScheme, dataset, qb:MeasureProperty, qb:DataStructureDefinition, CSV, qb:ObservationGroup, normalized representation, regional and small area statistics, API, normalized, SDMX-EDI, API, qb:measureType, HierarchicalCodeList, Observation, skos:Collection, multi-dimensional, Data Sets, qb:SliceKey, cube, Attribute, qb:Observation, abbreviated structure. This is a coverage gap to review, not a reason to invent a requirement.

S09-part2-consolidation-coverage@600.png · 576×271 CSS px · 5.7 cm high at 12.2 cm · smallest text 7.8 pt · supplement

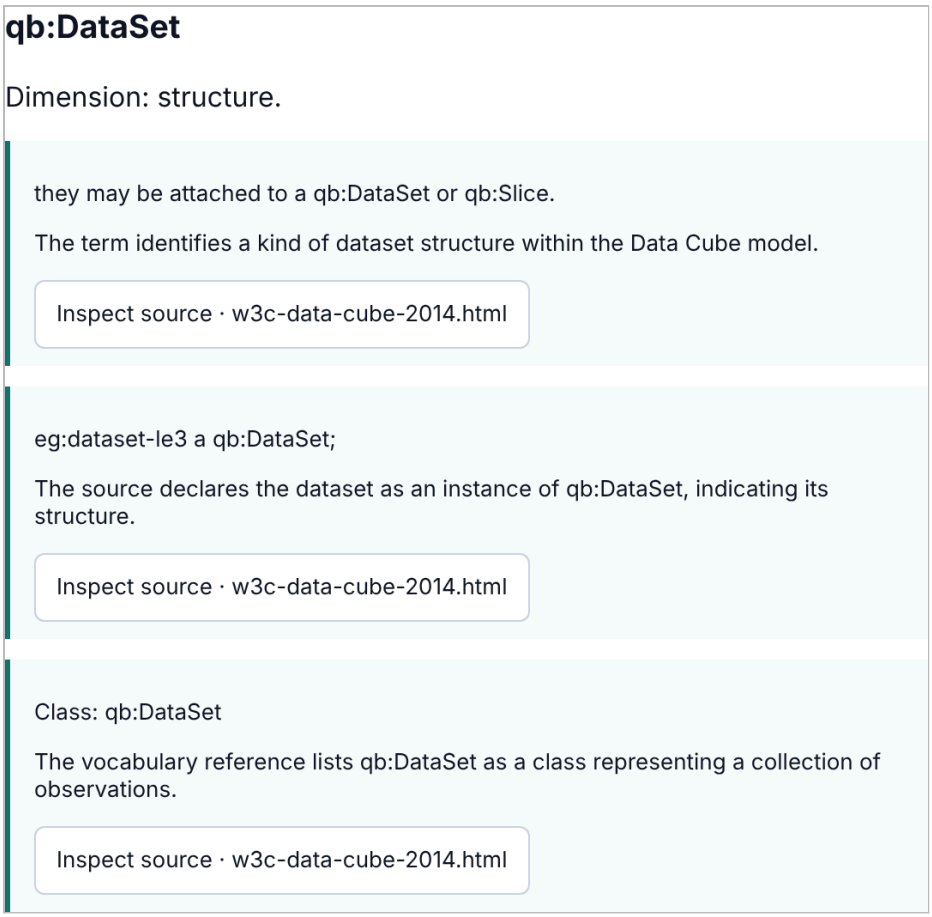

S09b-consolidation-dataset-kind@600.png · 538×527 CSS px · 12.0 cm high at 12.2 cm · smallest text 8.36 pt · supplement

fa task review

mediated · Consuming Applications, Community Group, Data Catalog Publishers, Data Publishers · bounded to 2 rounds / 16 calls

Saved dialogue steps

Independent positions → issue list → mediator draft → targeted responses → final mediation → independent checks. Stakeholder roles and model choices are recorded separately.

- ▸ **task**
- ▸ **mediator routing**
- ▸ **packet**
- ▸ **initial positions**
- ▸ **issues**
- ▸ **experience claims**
- ▸ **draft**
- ▸ **targeted roles**
- ▸ **final**
- ▸ **checks**
- ▸ **question groups**
- ▸ **retrieval**
- ▸ **before revision ids**
- ▸ **after revision ids**
- ▸ **working before revision ids**
- ▸ **working after revision ids**
- ▸ **salvage**
- ▸ **phases**

Mediator outcome · provisional

S10-appendix-part1-deliberation-discussion-case-audit@600.png · 538×775 CSS px · 17.6 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

The need that observations are the actual measured values is a content-definition statement that does not support catalogue-level find or access tasks. It is set aside with reason not_find_or_access, accompanied by a review question (Q1). Experience claims X1 and X2 are excluded; X3 and X4 are admitted as they identify missing metadata needs for observation exposure that support find/access.

set_aside · already_set_aside

Users can know that observations are the actual measured values in a statistical data set.

Set-aside reason: not find or access

The need describes data content definition rather than catalogue-level metadata that supports finding or accessing resources, so it does not serve find or access tasks.

> Human review: Q1

> **Human review question · Q1**
>
> Should the set-aside of need N1 for not_find_or_access be reviewed, and if so, what additional evidence might change its classification?
>
> A reversible set-aside requires a visible review question to allow future reassessment.
>
> Needs: rev-5b8775c062e360c748a49447 · Concerns: concern-47f8a946ea2c5682be2e515f, concern-0e321c2a68998df6137a513e, concern-369d4dc10edb955df4fbc6b9, concern-d70087ca51952c310da8289c, concern-9f23587f371ee8c29666b8d8
>
> Alternative: Retain the set-aside
>
> Alternative: Reclassify as a find/access need

S10-appendix-part2-deliberation-discussion-case-audit@600.png · 538×821 CSS px · 18.6 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

▼ **Concern dispositions and complete mediation audit**


```
{
  "completed_at": "2026-10-31T00:33:38.955787+00:00",
  "concern_dispositions": [
    {
      "action_ids": [
        "A1"
      ],
      "concern_id": "concern-47f8a946ea2c5682be2e515f",
      "question_ids": [
        "Q1"
      ],
      "rationale": "The concern that the need does not serve catalogue-
level find or access functions is resolved by setting the need aside
for not_find_or_access.",
      "status": "addressed"
    },
    {
      "action_ids": [
        "A1"
      ],
      "concern_id": "concern-0e321c2a68998df6137a513e",
```


Consuming Applications · round 1

The need that users can know observations are the actual measured values is justified by source excerpt but does not serve catalogue-level find or access tasks and lacks evidence for supporting consuming applications in discovery or querying of slices.

Experience · split: When I design data discovery interfaces, I separate content understanding needs from operational metadata needs that enable efficient querying. The original need should be split into (a) a content definition need (observations are measured values) and (b) a metadata need describing how observations are exposed for query (e.g., slice definitions, query endpoints). · Mediator excluded it: The claim proposes splitting the need, but the original need does not serve find or access tasks; splitting would not create a find/access metadata requirement.

Inspect cited evidence

S10-appendix-part3-deliberation-discussion-case-audit@600.png · 538×779 CSS px · 17.7 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

Community Group · round 1

The need "Users can know that observations are the actual measured values in a statistical data set" is about data content definition rather than metadata that supports finding or accessing datasets. The source excerpt confirms the meaning of observations but does not provide a catalogue-level metadata requirement. Consequently, the need does not serve find or access tasks and is out of scope for catalogue-level information requirements.

Inspect cited evidence

Data Catalog Publishers · round 1

The need that users can know observations are the actual measured values is outside catalogue-level metadata and does not aid finding or accessing resources, so it should be excluded as out of scope.

Inspect cited evidence

Data Publishers · round 1

The need that users can know observations are the actual measured values describes dataset content rather than find or access metadata; it is out of scope for catalogue-level information and does not aid discovery or access.

Experience · drop: When I advise publishers on structuring statistical data, I focus on metadata that enable discovery and access, such as identifiers, summaries, and access conditions, rather than definitions of data content. The need should be dropped because it does not support the publisher's task of providing find-access metadata. · Mediator excluded it: The claim recommends dropping the need, which aligns with the set-aside decision; however, the decision is already captured by the set-aside, so the claim is excluded.

Inspect cited evidence

Consuming Applications · round 2

All existing concerns for need N1 are addressed by the set-aside decision, confirming it does not serve catalogue-level find or access tasks. No additional issues identified.

S10-appendix-part4-deliberation-discussion-case-audit@600.png · 538×781 CSS px · 17.7 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

Community Group · round 2

All existing concerns about need N1 have been addressed by the set-aside decision, confirming it does not serve catalogue-level find or access tasks. No further evidence or scope issues remain.

Experience · missing need: When I coordinate community vocabularies, I ensure that metadata needs for exposing observations (e.g., slice definitions, query endpoints) are captured so that applications can discover and retrieve specific data slices. A need describing how observations are exposed for query (e.g., slice metadata, access endpoints) should be added to support find/access tasks. Proposed: Users can discover how observations are exposed for query, including slice definitions and access endpoints, to enable data cube slice discovery and retrieval. · Mediator admitted it: Stakeholder experience identifies a missing metadata need for exposing observations (slice definitions, access endpoints) that directly supports find and access tasks.

Data Catalog Publishers · round 2

All scope and evidence concerns for need N1 have been addressed by the set-aside decision, confirming it does not serve catalogue-level find or access tasks. A stakeholder experience proposes adding a missing need for metadata that describes how observations are exposed for query (slice definitions and access endpoints) to support discovery and retrieval of data cube slices.

Experience · missing need: When I coordinate community vocabularies, I ensure that metadata needs for exposing observations (e.g., slice definitions, query endpoints) are captured so that applications can discover and retrieve specific data slices. A need describing how observations are exposed for query (e.g., slice metadata, access endpoints) should be added to support find/access tasks. Proposed: Users can discover how observations are exposed for query, including slice definitions and access endpoints, to enable data cube slice discovery and retrieval. · Mediator admitted it: Stakeholder experience reiterates the need for metadata about how observations are exposed for query, confirming its relevance to catalogue-level find/access requirements.

Data Publishers · round 2

All identified concerns for need N1 have been addressed by the set-aside decision, confirming it does not serve catalogue-level find or access tasks. No additional issues are detected.

Stopped: bounded fa dialogue complete

S10-appendix-part5-deliberation-discussion-case-audit@600.png · 538×780 CSS px · 17.7 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

Mediation can save source-checked provisional revisions. Questions and unresolved conflicts remain for human review; no machine outcome is human approval.

Human contribution or closure rationale

Add to saved thread

Close for human adjudication

S10-appendix-part6-deliberation-discussion-case-audit@600.png · 538×249 CSS px · 5.6 cm high at 12.2 cm · smallest text 7.71 pt · appendix, supplement

Mediator outcome · provisional

The need that observations are the actual measured values is a content-definition statement that does not support catalogue-level find or access tasks. It is set aside with reason not_find_or_access, accompanied by a review question (Q1). Experience claims X1 and X2 are excluded; X3 and X4 are admitted as they identify missing metadata needs for observation exposure that support find/access.

set_aside · already_set_aside

Users can know that observations are the actual measured values in a statistical data set.

Set-aside reason: not find or access

The need describes data content definition rather than catalogue-level metadata that supports finding or accessing resources, so it does not serve find or access tasks.

> Human review: Q1

> **Human review question · Q1**
>
> Should the set-aside of need N1 for not_find_or_access be reviewed, and if so, what additional evidence might change its classification?
>
> A reversible set-aside requires a visible review question to allow future reassessment.
>
> Needs: rev-5b8775c062e360c748a49447 · Concerns: concern-47f8a946ea2c5682be2e515f, concern-0e321c2a68998df6137a513e, concern-369d4dc10edb955df4fbc6b9, concern-d70087ca51952c310da8289c, concern-9f23587f371ee8c29666b8d8
>
> Alternative: Retain the set-aside
>
> Alternative: Reclassify as a find/access need

▶ **Concern dispositions and complete mediation audit**

S10-strip1-deliberation-discussion-case@600.png · 538×869 CSS px · 19.7 cm high at 12.2 cm · smallest text 7.71 pt · main-text strip (c), supplement

Consuming Applications · round 1

The need that users can know observations are the actual measured values is justified by source excerpt but does not serve catalogue-level find or access tasks and lacks evidence for supporting consuming applications in discovery or querying of slices.

Experience · split: When I design data discovery interfaces, I separate content understanding needs from operational metadata needs that enable efficient querying. The original need should be split into (a) a content definition need (observations are measured values) and (b) a metadata need describing how observations are exposed for query (e.g., slice definitions, query endpoints). · Mediator excluded it: The claim proposes splitting the need, but the original need does not serve find or access tasks; splitting would not create a find/access metadata requirement.

Inspect cited evidence

S10-strip2-deliberation-discussion-case@600.png · 538×307 CSS px · 7.0 cm high at 12.2 cm · smallest text 8.36 pt · main-text strip (c), supplement

Community Group · round 2

All existing concerns about need N1 have been addressed by the set-aside decision, confirming it does not serve catalogue-level find or access tasks. No further evidence or scope issues remain.

Experience · missing need: When I coordinate community vocabularies, I ensure that metadata needs for exposing observations (e.g., slice definitions, query endpoints) are captured so that applications can discover and retrieve specific data slices. A need describing how observations are exposed for query (e.g., slice metadata, access endpoints) should be added to support find/access tasks. Proposed: Users can discover how observations are exposed for query, including slice definitions and access endpoints, to enable data cube slice discovery and retrieval. · Mediator admitted it: Stakeholder experience identifies a missing metadata need for exposing observations (slice definitions, access endpoints) that directly supports find and access tasks.

S10-strip3-deliberation-discussion-case@600.png · 538×283 CSS px · 6.4 cm high at 12.2 cm · smallest text 8.36 pt · main-text strip (c), supplement

set_aside · already_set_aside

Users can know that observations are the actual measured values in a statistical data set.

Set-aside reason: not find or access

The need describes data content definition rather than catalogue-level metadata that supports finding or accessing resources, so it does not serve find or access tasks.

> Human review: Q1

S10-strip4-deliberation-discussion-case@600.png · 538×248 CSS px · 5.6 cm high at 12.2 cm · smallest text 10.28 pt · main-text strip (c), supplement

8 · Inspect and adjudicate

Users can know that a downloadable distribution can be linked without defining a separate distribution instance.

Source pass | Support explicit | awaiting human

Where this need comes from — chain complete

Source	w3c-dcat-2014.html: "...dcat:downloadURL with the downloadable distribution and that the other distribution through the landing page does not have to be defined as a separate dcat:Distribution instance...."
Extracted by	Shared source extractor
Checks	the quote supports it; it helps users find data; record test passed; not in the base profile; a first judgement was overruled at the find/access test
Discussion	defer (human_review): The need is supported by source evidence but the fa_scope entry marks the outcome as disputed, leaving the actor (users) and condition (linking without a separate distribution) insufficiently validated. Deferral allows c...
For you	Q1 / Does the information requirement apply specifically to data users seeking to discover downloadable distributions, and under what conditions is the statement con...

Each link opens the saved result of the step that made it, at the highlighted row.

▼ **Full chain · 1 quotations · 1 extracted proposals · 13 decisions · 1 discussions**

1. **Need** Users can know that a downloadable distribution can be linked without defining a separate distribution instance. rev-93437ef84fc283334ed629cc · active
   Step 8 · Human review: the need record
2. **Quotation** w3c-dcat-2014.html: "Notice that we used dcat:downloadURL with the downloadable distribution and that the other distribution through the landing page does not have to be defined as a separate dcat:Distribution instance. 5. Vocabulary specifi..." Source: w3c-dcat-2014.html
3. **Extracted** Shared source extractor: Users can know that a downloadable distribution can be linked via dcat:downloadURL without defining a separate dcat:Distribution instance · rq1-fa-elicitation-v1 · inferenz-gpt-oss-120b
   Step 3b · Candidate extraction: extracted observation
   Step 3b · Candidate extraction: the agent's role run
   Model call 2072282f (extraction, inferenz-gpt-oss-120b)
4. **source check** pass: Every cited quotation was found in its source. rev-b7aa661d2c56fa393f9fcf82
   Step 5 · Original-source checks: source check on the record

S11-part1-adjudication-human-review@600.png · 576×814 CSS px · 17.2 cm high at 12.2 cm · smallest text 6.5 pt · appendix, supplement

5. **proposal support** supported: The excerpt notes a downloadable distribution can be linked via dcat:downloadURL without a separate instance. rev-b7aa661d2c56fa393f9fcf82 · model call recorded
   Step 6 · Grouped needs & scope: proposal_support row
   Model call 0e98a6bc (proposal_support, inferenz-gpt-oss-120b)
6. **writer split** written apart from rev-2c378d6fb388f725372c44db: Writer output unavailable: Repeated row ID.; Repeated row ID. rev-b7aa661d2c56fa393f9fcf82 · model call recorded
   Step 6 · Grouped needs & scope: need writing event
   Model call 6e37f86f (writer, inferenz-gpt-oss-120b)
7. **source check** pass: Every cited quotation was found in its source. rev-93437ef84fc283334ed629cc
   Step 6 · Grouped needs & scope: source check on the record
8. **need statement** merge_need of 1 member(s): The need mirrors the member statement exactly, adding no extra elements. The ability for Users to know a downloadable distribution can be linked via dcat:downloadURL without a separate Distribution instance is fully preserved. rev-93437ef84fc283334ed629cc · model call recorded
   Step 6 · Grouped needs & scope: need writing event
   Model call e315776d (writer, inferenz-gpt-oss-120b)
9. **classification** domain_use_of_base: The need refines the base need of finding a download URL by specifying that the downloadable distribution can be linked without creating a separate distribution instance. rev-93437ef84fc283334ed629cc · model call recorded
   Step 6 · Grouped needs & scope: classification row
   Model call 3a2d00f9 (classification, inferenz-gpt-oss-120b)
10. **fa test** find: The source explicitly states that using dcat:downloadURL with the downloadable distribution is sufficient and that a separate distribution instance is not required, which informs users how to discover/download datasets. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6 · Grouped needs & scope: profile_scope row
    Model call e8f51332 (profile_scope, inferenz-gpt-oss-120b)
11. **record test** passed: The catalogue record can state that a download URL directly links to a distribution, enabling users to discover downloadable data without an intermediate distribution record. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6 · Grouped needs & scope: profile_scope row
    Model call 53555b61 (profile_scope, inferenz-gpt-oss-120b)
12. **dataset applicability** 1 categories: The excerpt mentions a "downloadable distribution" and "downloadable file", directly matching the format category for downloadable files. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6 · Grouped needs & scope: dataset_applicability row
    Model call 07d87a9d (profile_scope, inferenz-gpt-oss-120b)


S11-part2-adjudication-human-review@600.png · 576×750 CSS px · 15.9 cm high at 12.2 cm · smallest text 6.5 pt · appendix, supplement

13. **fa test confirmation** disputed: The excerpt explicitly states this modelling option; it is not an operational obligation for users, but a piece of information relevant to how catalogs may be authored. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6 · Grouped needs & scope: fa test confirmation on the record
    Model call 6461455f (profile_scope, inferenz-gpt-oss-120b)
14. **assessment** explicit: The evidence directly states that a downloadable distribution can be linked via dcat:downloadURL without defining a separate dcat:Distribution instance, which matches the requirement's need statement. No contradictions or missing premises are detected. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6 · Grouped needs & scope: assessment
    Model call 24ec882e (assessment, inferenz-gpt-oss-120b)
15. **base review** domain_use_of_base (agree): The need restates the base entry B67 (download URL) but adds the meaning that a downloadable distribution can be linked via dcat:downloadURL without defining a separate dcat:Distribution instance. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6a · Base review: base review on the record
    Model call 67f45447 (base_review, inferenz-gpt-oss-120b)
16. **base review check** supported: B67 covers dcat:downloadURL; the excerpt adds that a downloadable distribution can be linked without a separate dcat:Distribution, which is a valid domain use of the base entry. rev-93437ef84fc283334ed629cc · model call recorded
    Step 6a · Base review: base review check on the record
    Model call 1060ac84 (base_review_check, inferenz-gpt-oss-120b)
17. **Discussion** case-705bb404c208a0f00b179759 · stopped: bounded fa dialogue complete Step 7 · Discussion: case case-705bb404c208a0f00b179759


    ▶ **12 model calls of this discussion**

    - defer (human_review): The need is supported by source evidence but the fa_scope entry marks the outcome as disputed, leaving the actor (users) and condition (linking without a separate distribution) insufficiently validated. Deferral allows clarification before confirming the need. · asks: Q1 Step 7 · Discussion: outcome A1
    - Concern of Consuming Applications (round 1): The requirement's scope is unspecified, which may limit its applicability for applications needing precise discovery criteria.
    - Concern of Community Group (round 1): The fa_scope entry reports a disputed outcome for the user actor, suggesting the applicability of the information requirement is not fully confirmed.
    - Concern of Data Catalog Publishers (round 1): The need is classified as serving "find" while the fa_scope confirmation marks it as serving "neither", indicating a conflict about its intended use.
    - Concern of Data Publishers (round 1): The confirmation in fa_scope is disputed, so the actor (users) and the condition (understanding linking without a separate distribution) lack clear validation.


S11-part3-adjudication-human-review@600.png · 576×782 CSS px · 16.6 cm high at 12.2 cm · smallest text 6.5 pt · appendix, supplement

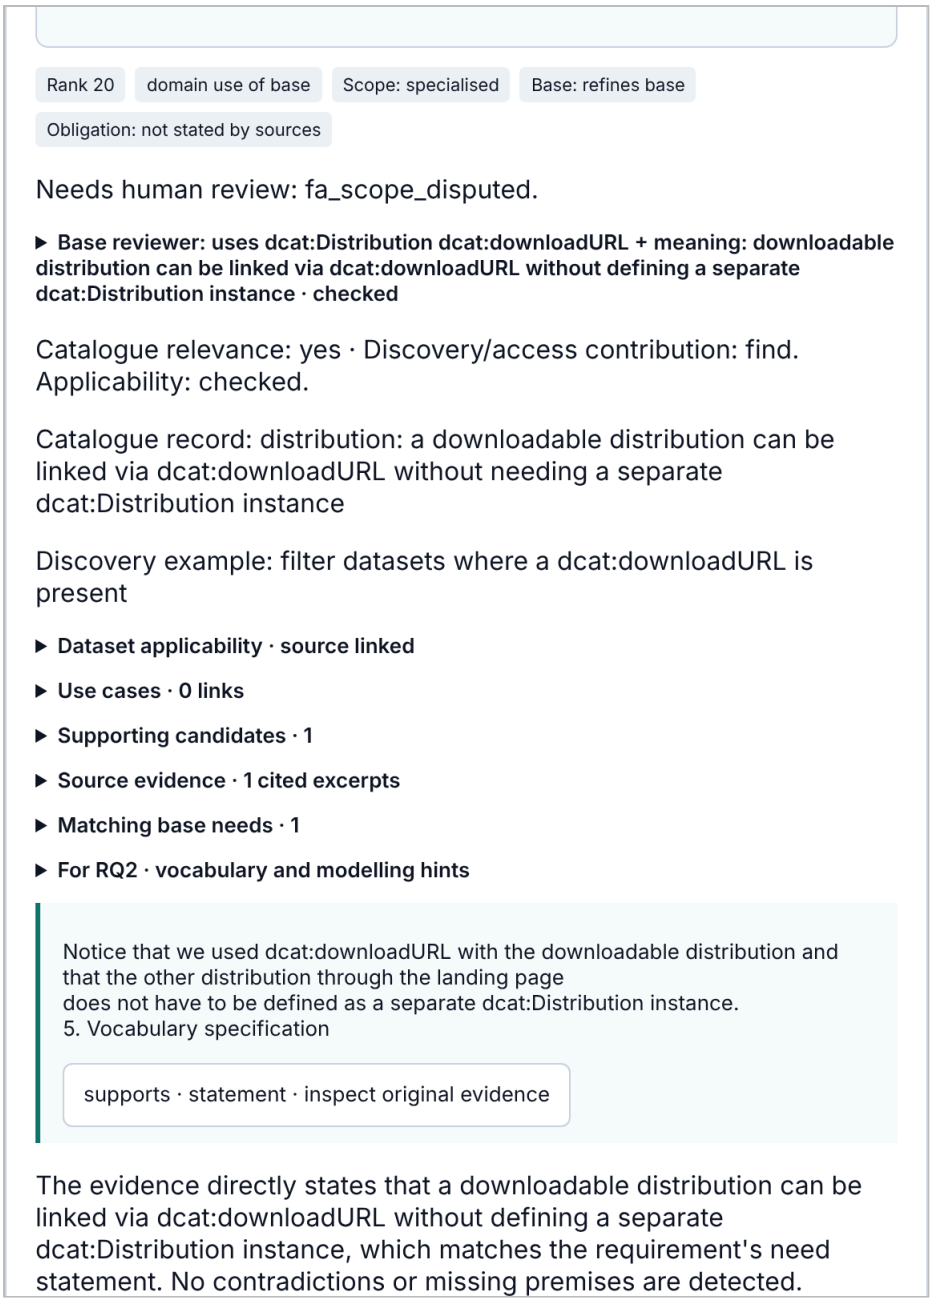


S11-part4-adjudication-human-review@600.png · 576×805 CSS px · 17.1 cm high at 12.2 cm · smallest text 6.5 pt · appendix, supplement

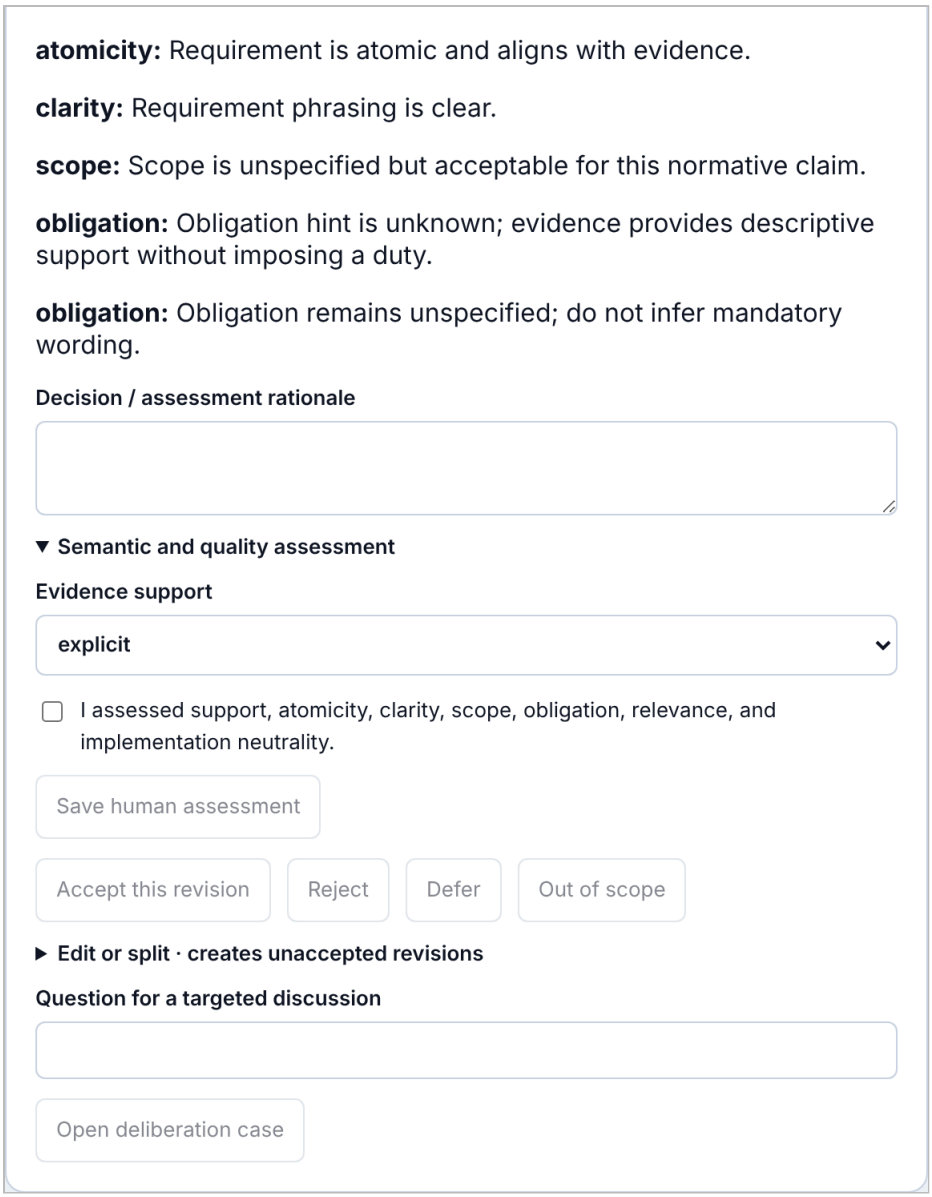


S11-part5-adjudication-human-review@600.png · 576×740 CSS px · 15.7 cm high at 12.2 cm · smallest text 6.5 pt · appendix, supplement

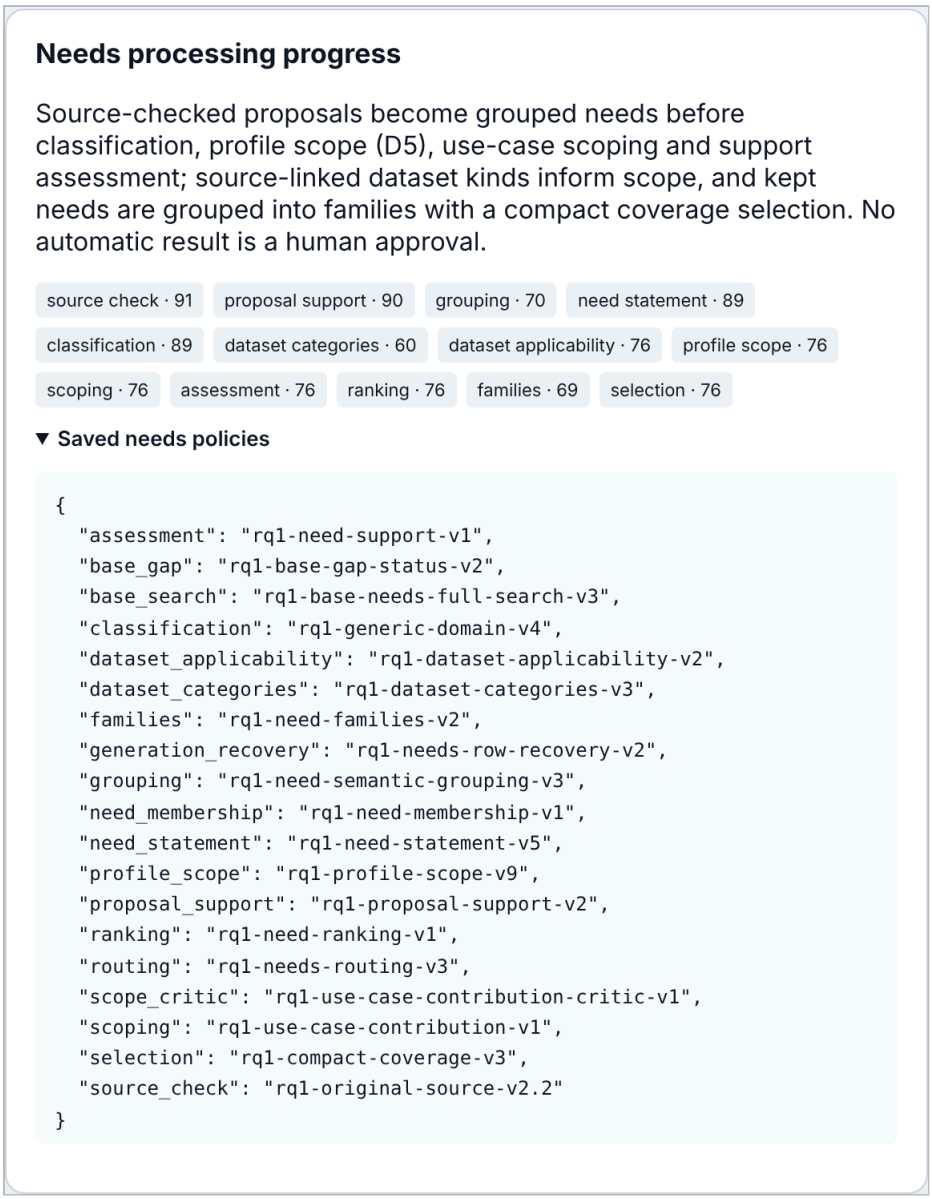

S12a-deliberation-needs-steps-policies@600.png · 576×740 CSS px · 15.7 cm high at 12.2 cm · smallest text 6.6 pt · supplement

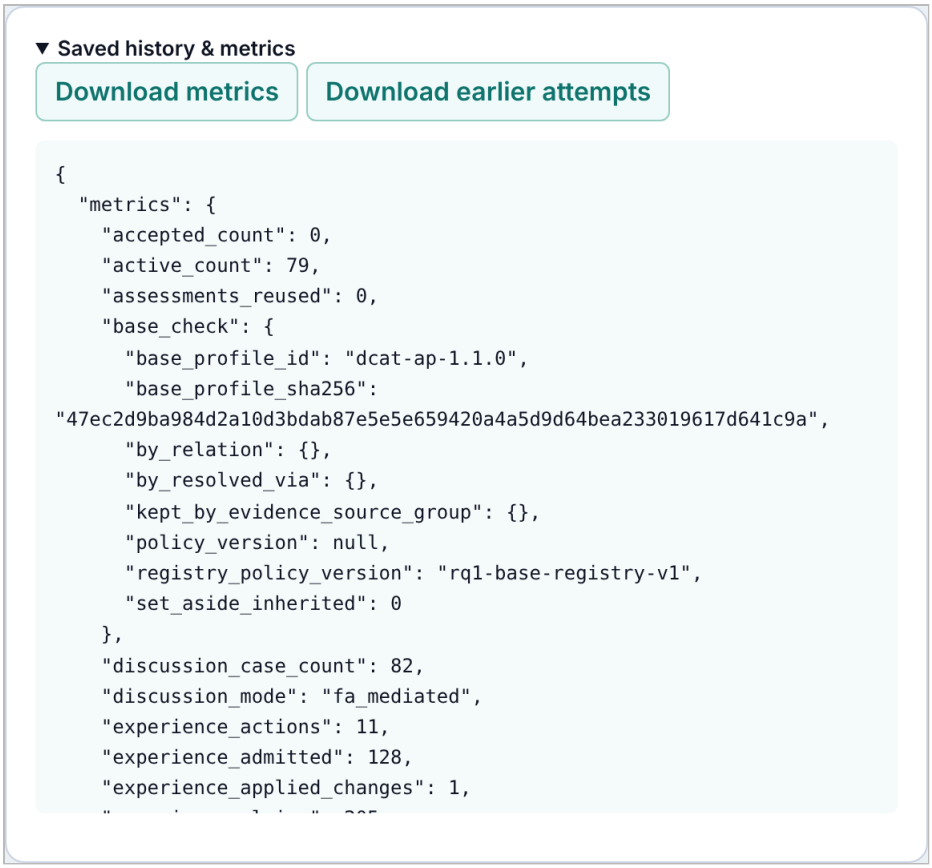

S12b-deliberation-history-metrics@600.png · 576×534 CSS px · 11.3 cm high at 12.2 cm · smallest text 7.2 pt · supplement

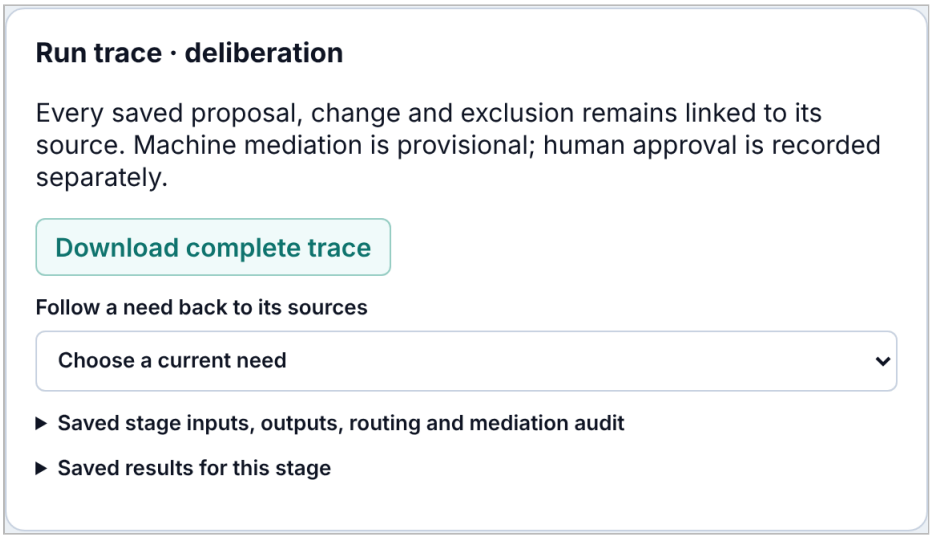

S12c-deliberation-run-trace@600.png · 576×326 CSS px · 6.9 cm high at 12.2 cm · smallest text 7.2 pt · supplement



S13-baseline-validated-baseline@600.png · 576×170 CSS px · 3.6 cm high at 12.2 cm · smallest text 7.8 pt · supplement