



# Deep Neural Networks


# What is a deep neural network?

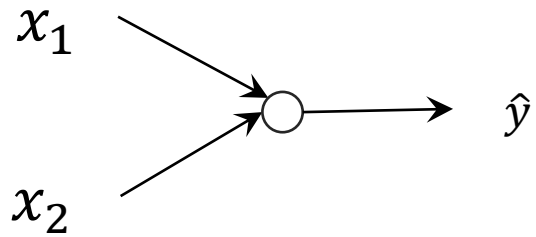


Logistic regression

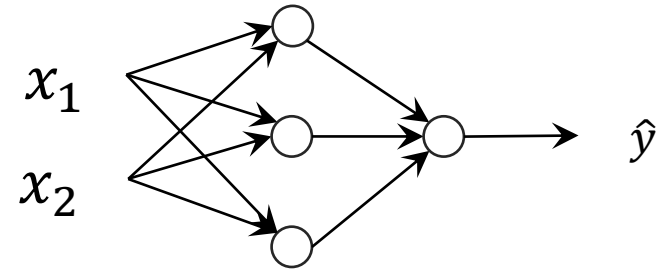

1 hidden layer

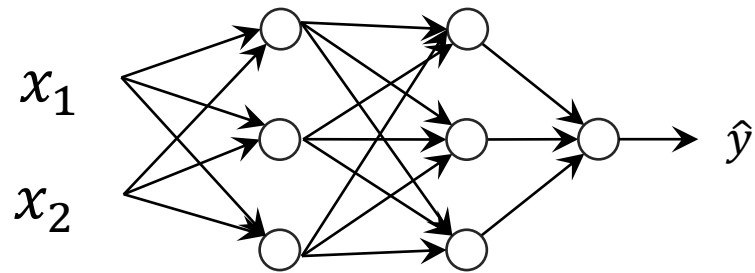


2 hidden layers

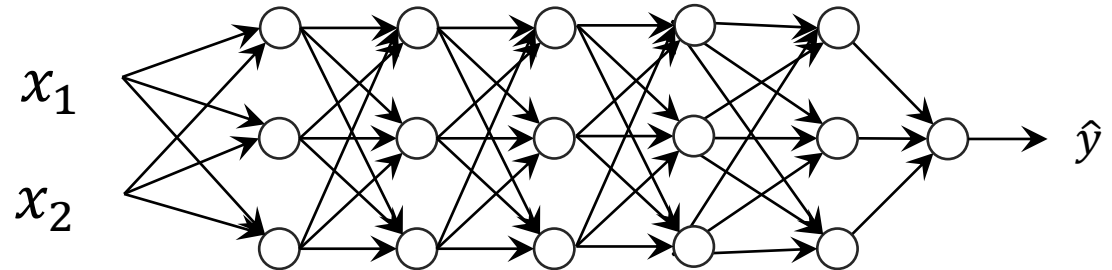

5 hidden layers

# Deep neural network

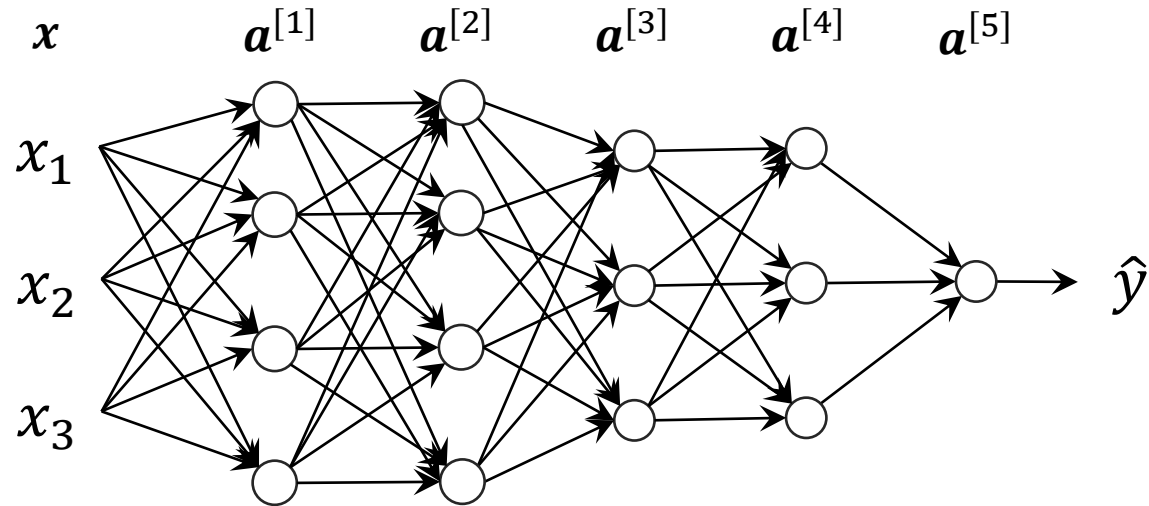

$f$ : activation function (e.g., ReLU)

$$\mathbf{a}^{[1]} = f(\mathbf{W}^{[1]}\mathbf{x} + \mathbf{b}^{[1]})$$

$$\mathbf{a}^{[i]} = f(\mathbf{W}^{[i]}\mathbf{a}^{[i-1]} + \mathbf{b}^{[i]})$$

$$\hat{y} = \mathbf{a}^{[5]} = \sigma(\mathbf{W}^{[5]}\mathbf{a}^{[4]} + \mathbf{b}^{[5]})$$


For  $i = 2, 3, 4$

# Output types


Output Type	Output Distribution	Output Layer	Cost Function
Binary	Bernoulli	Sigmoid	Binary cross-entropy
Discrete	Multinoulli	Softmax	Discrete cross-entropy
Continuous	Gaussian	Linear	Gaussian cross-entropy (MSE)
Continuous	Mixture of Gaussian	Mixture Density	Cross-entropy
Continuous	Arbitrary	See part III: GAN, VAE, FVBN	Various

# Output types

Binary classification:

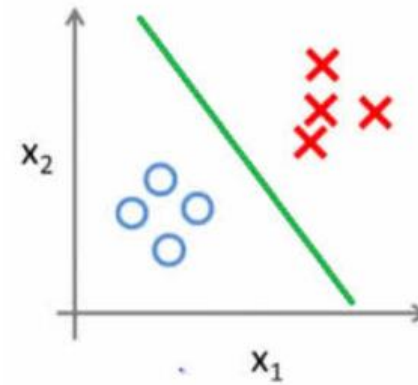

Multi-class classification:

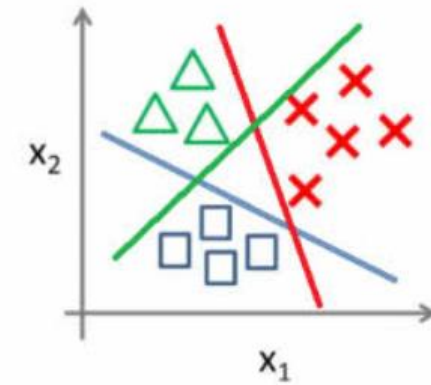

Amey band (2020)

Binary classification

(n-ary) Classification

Output classes

0/1

1/2/3/./n

Output activation  
function

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

$$\text{softmax}(\mathbf{x})_i = \frac{e^{x_i}}{\sum_{i'=1}^n e^{x_{i'}}}$$

Loss function

$$-y \log \hat{y} - (1 - y) \log(1 - \hat{y})$$

$$-\sum_{i=1}^n \hat{y}_i \log y_i$$

Binary cross entropy


Cross entropy

# Softmax outputs a categorical (multinoulli) distribution

$$\text{softmax}(\mathbf{x})_i = \frac{e^{x_i}}{\sum_{i'=1}^n e^{x_{i'}}}$$

- $\text{softmax}(\mathbf{x})_i \geq 0$
- $\sum_{i=1}^n \text{softmax}(\mathbf{x})_i = 1$

# Deep neural network

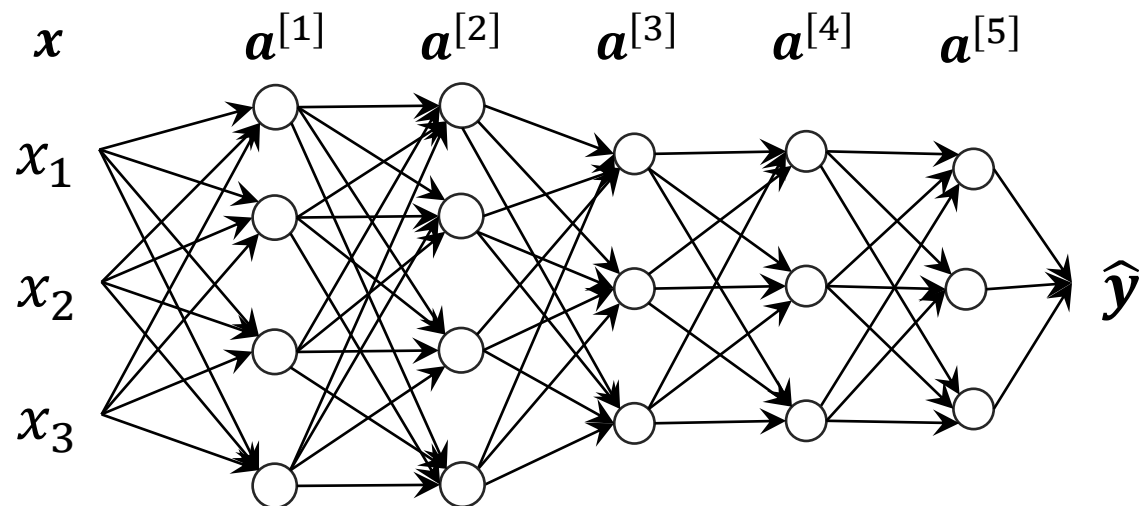

$f$ : activation function (e.g., ReLU)

$$a^{[1]} = f(W^{[1]}x + b^{[1]})$$

$$a^{[i]} = f(W^{[i]}a^{[i-1]} + b^{[i]})$$

$$\hat{y} = a^{[5]} = \text{softmax}(W^{[5]}a^{[4]} + b^{[5]})$$

# Parameters vs Hyper parameters

- (Model) parameters
  - A model parameter is a configuration variable that is internal to the model and whose value can be estimated from data
  - Examples)  $\mathbf{W}^{[1]}, \mathbf{W}^{[2]}, \dots, \mathbf{b}^{[1]}, \mathbf{b}^{[2]}, \dots,$
- Hyper parameters
  - A model hyperparameter is a configuration that is external to the model and whose value cannot be estimated from data
  - Examples
    - Learning rate
    - Number of layers
    - Number of hidden units for each layer



Stochastic Gradient Descent  
Mini-Batch Gradient Descent

# Stochastic gradient descent

- A **stochastic** approximation of gradient descent optimization

Approximate  $\nabla J(\mathbf{w})$  by  $\nabla J_i(\mathbf{w}) = \nabla_{\mathbf{w}} L(y_i, \hat{y})$

# Stochastic approximation

X	P(X)
1	0.2
2	0.5
10	0.2
20	0.1

Expectation

$$E[X] = 1 * 0.2 + 2 * 0.5 + 10 * 0.2 + 20 * 0.1 = 5.2$$

Stochastic approximation of the expectation (Sample mean)

Step 1) Draw k sample values according to P

e.g.) 10, 2, 2, 1

Step 2) Take the average of the values

e.g.)  $15/4 = 3.75$

Let Y be the sample mean

$E[X] = E[Y]$       Y is an *unbiased* estimator of  $E[X]$  regardless of k

# Stochastic gradient descent (SGD)

$$J(\theta) = \sum_{q=1}^m L(\hat{y}^{(q)}, y^{(q)})$$
$$\nabla J(\theta) = \sum_{q=1}^m \nabla L(\hat{y}^{(q)}, y^{(q)})$$

- A **stochastic** approximation of gradient descent optimization

Approximate  $\nabla J(\mathbf{w})$  by  $\nabla J_i(\mathbf{w}) = \nabla_{\mathbf{w}} L(\hat{y}^{(i)}, y^{(i)})$

## Gradient descent

1. Initialize parameters  $\mathbf{w}$
2. For each epoch:
3.      $d\mathbf{w} = 0$
4.     For  $i = 1$  to  $n$ :
5.          $d\mathbf{w} := d\mathbf{w} + \nabla J_i(\mathbf{w})$
6.      $\nabla J(\mathbf{w}) = \frac{d\mathbf{w}}{n}$
7.      $\mathbf{w} := \mathbf{w} - \eta \nabla J(\mathbf{w})$

Batch size:  $n$

Easy to parallelize

Inefficient

Stable

## Stochastic gradient descent

1. Initialize parameters  $\mathbf{w}$
2. For each epoch:
3.     **Randomly shuffle** training examples
4.     For  $i = 1$  to  $n$ :
5.          $\mathbf{w} := \mathbf{w} - \eta \nabla J_i(\mathbf{w})$

Batch size: 1

Hard to parallelize

Fast update

Unstable

Stochastic gradient descent

(Batchsize) = 1

Mini-batch gradient descent

$1 < (\text{Batchsize}) < n$


Gradient descent

(Batchsize) =  $n$

- Mini-batch gradient


1. Initialize parameters  $\mathbf{w}$
2. For each epoch:
3.     Randomly shuffle training examples
4.     For  $b = 1$  to  $\frac{n}{\text{batchsize}}$ :
5.          $\mathbf{w} := \mathbf{w} - \eta \nabla J^b(\mathbf{w})$

$$J^b(\mathbf{w}) = \sum_{(x_i, y_i) \in \text{batch}} L(y_i, \hat{y})$$

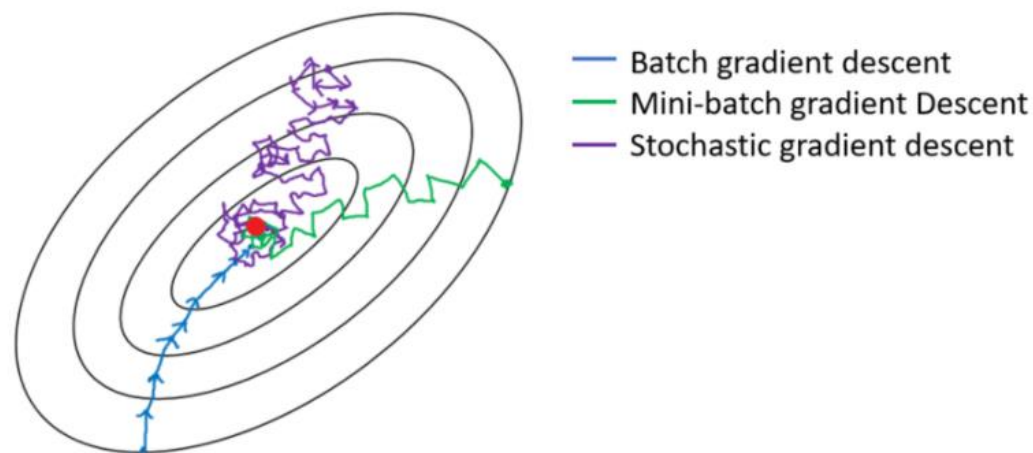

# Implementing a DNN with PyTorch

# MNIST

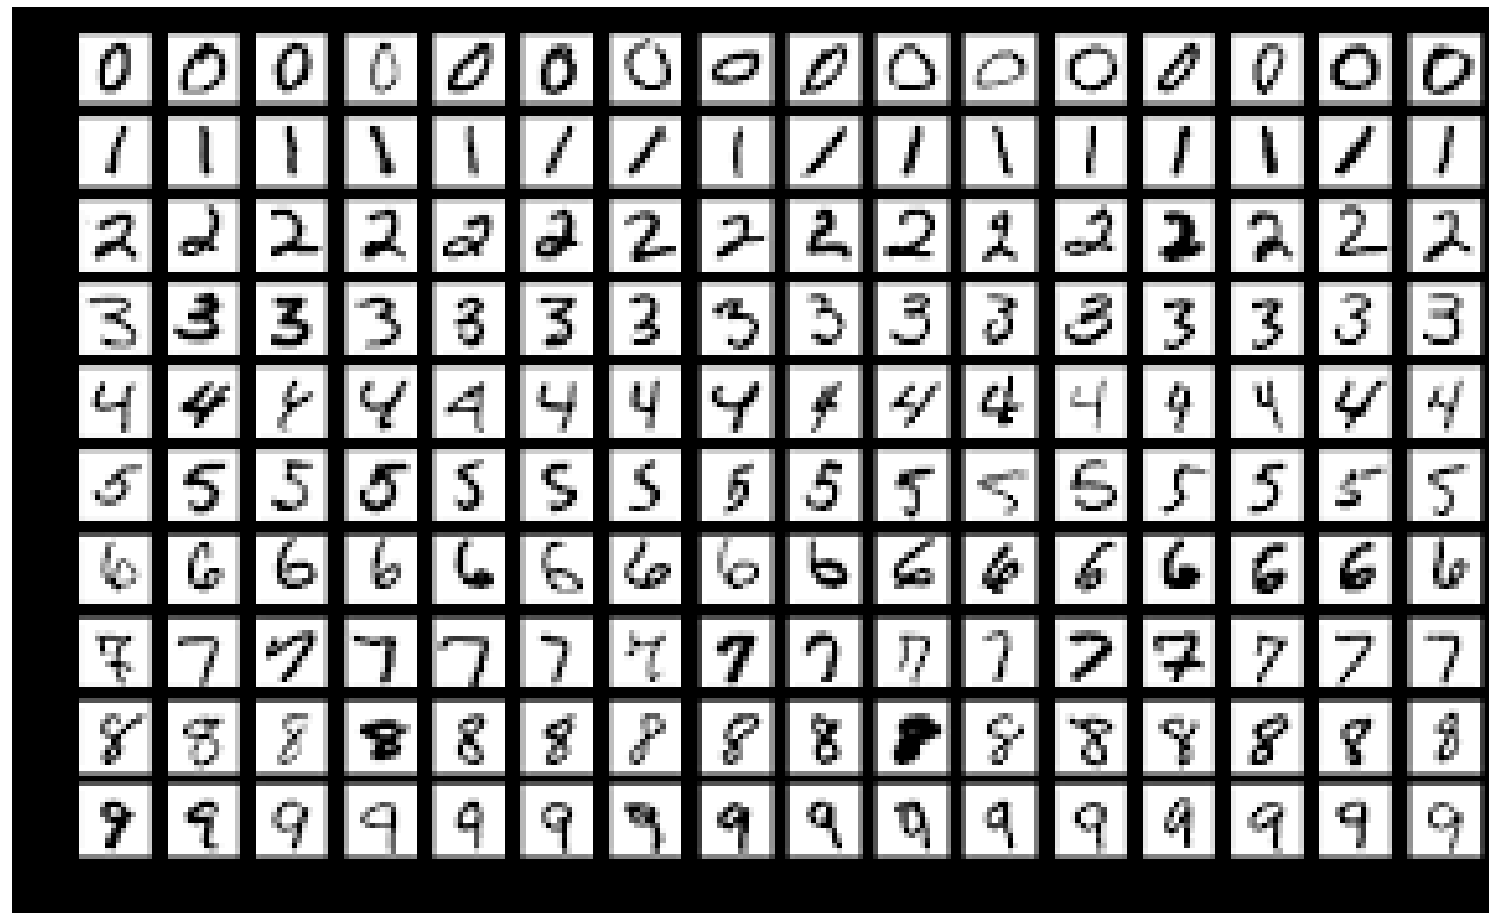

# Data loading

- Import torchvision
- From torchvision import datasets

```
batch_size = 12

train_data = datasets.MNIST('D:\#datasets', train=True, download=True, transform=transforms.ToTensor())
test_data = datasets.MNIST('D:\#datasets', train=False, download=True, transform=transforms.ToTensor())

train_loader = torch.utils.data.DataLoader(train_data, batch_size = batch_size, shuffle=True)
test_loader = torch.utils.data.DataLoader(test_data, batch_size = batch_size)
```



# Model

```
class MLP(nn.Module):
    def __init__(self):
        super().__init__()

        self.in_dim = 28*28 # MNIST
        self.out_dim = 10

        self.fc1 = nn.Linear(self.in_dim, 512)
        self.fc2 = nn.Linear(512, 256)
        self.fc3 = nn.Linear(256, 128)
        self.fc4 = nn.Linear(128, 64)
        self.fc5 = nn.Linear(64, self.out_dim)

        self.relu = nn.ReLU()
        self.log_softmax = nn.LogSoftmax()

    def forward(self, x):
        a1 = self.relu(self.fc1(x.view(-1, self.in_dim)))
        a2 = self.relu(self.fc2(a1))
        a3 = self.relu(self.fc3(a2))
        a4 = self.relu(self.fc4(a3))
        logit = self.fc5(a4)
        return logit
```

# Train

```
model = MLP()
criterion = nn.CrossEntropyLoss()
optimizer = optim.SGD(model.parameters(), lr = 0.01)

for epoch in range(10): # loop over the dataset multiple times
    running_loss = 0.0
    for i, data in enumerate(train_loader, 0):
        # get the inputs; data is a list of [inputs, labels]
        inputs, labels = data

        # zero the parameter gradients
        optimizer.zero_grad()

        # forward + backward + optimize
        outputs = model(inputs)
        loss = criterion(outputs, labels)
        loss.backward()
        optimizer.step()

        # print statistics
        running_loss += loss.item()
        if (i+1) % 2000 == 0: # print every 2000 mini-batches
            print('[%d, %5d] loss: %.3f' %
                  (epoch + 1, i + 1, running_loss / 2000))
            running_loss = 0.0

print('Finished Training')
```

---

[1,	2000]	loss: 2.209
[1,	4000]	loss: 0.739
[2,	2000]	loss: 0.316
[2,	4000]	loss: 0.230
[3,	2000]	loss: 0.154
[3,	4000]	loss: 0.144
[4,	2000]	loss: 0.112
[4,	4000]	loss: 0.101
[5,	2000]	loss: 0.075
[5,	4000]	loss: 0.082
[6,	2000]	loss: 0.061
[6,	4000]	loss: 0.063
[7,	2000]	loss: 0.046
[7,	4000]	loss: 0.054
[8,	2000]	loss: 0.033
[8,	4000]	loss: 0.041
[9,	2000]	loss: 0.029
[9,	4000]	loss: 0.033
[10,	2000]	loss: 0.021
[10,	4000]	loss: 0.025

Finished Training

# Test


```
import matplotlib.pyplot as plt
import numpy as np
```

```
def imshow(img):
    npimg = img.numpy()
    plt.imshow(np.transpose(npimg, (1, 2, 0)))
    plt.show()
```

```
dataiter = iter(test_loader)
images, labels = dataiter.next()

imshow(torchvision.utils.make_grid(images, nrow = batch_size))
print('GroundTruth')
print("    '+' '.join('%3s' % label.item() for label in labels))

outputs = model(images)
_, predicted = torch.max(outputs, 1)
print("Prediction")
print("    '+' '.join('%3s' % label.item() for label in predicted))
```

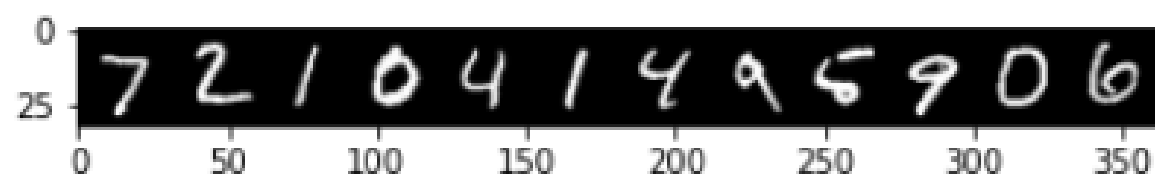

GroundTruth

7 2 1 0 4 1 4 9 5 9 0 6

Prediction

7 2 1 0 4 1 4 9 6 9 0 6

# Test

```
n_predict = 0
n_correct = 0

for data in test_loader:
    inputs, labels = data
    outputs = model(inputs)
    _, predicted = torch.max(outputs, 1)

    n_predict += len(predicted)
    n_correct += (labels == predicted).sum()

print(f"{n_correct}/{n_predict}")
print(f"Accuracy: {n_correct/n_predict:.3f}")
```

9761/10000  
Accuracy: 0.976

# A DNN with hyper parameters

## MLP with hyper parameters

```
class MLP_h(nn.Module):
    def __init__(self, hidden_units = [512, 256, 128]):
        super().__init__()

        self.in_dim = 28*28 # MNIST
        self.out_dim = 10

        self.l_layers = []
        self.l_layers.append(nn.Linear(self.in_dim, hidden_units[0]))
        for i in range(len(hidden_units)-1):
            self.l_layers.append(nn.Linear(hidden_units[i], hidden_units[i+1]))
        self.l_layers.append(nn.Linear(hidden_units[-1], self.out_dim))

        self.relu = nn.ReLU()
        self.log_softmax = nn.LogSoftmax()

    def forward(self, x):
        a = x.view(-1, self.in_dim)
        for l in range(len(self.l_layers)):
            z = self.l_layers[l](a)
            if l == len(self.l_layers) - 1:
                logit = z
            else:
                a = self.relu(z)

        return logit
```

```
model = MLP_h([2, 3])
criterion = nn.CrossEntropyLoss()
optimizer = optim.SGD(model.parameters(), lr = 0.01)
```

```
-----
ValueError                                Traceback (most recent call last)
<ipython-input-21-e9ee64f89c5c> in <module>
      1 model = MLP_h([2, 3])
      2 criterion = nn.CrossEntropyLoss()
----> 3 optimizer = optim.SGD(model.parameters(), lr = 0.01)

~\anaconda3\lib\site-packages\torch\optim\sgd.py in __init__(self, params, defaults)
     67         if nesterov and (momentum <= 0 or dampening > 0):
     68             raise ValueError("Nesterov momentum requires momentum > 0 and dampening < 0")
----> 69         super(SGD, self).__init__(params, defaults)
     70
     71     def __setstate__(self, state):

~\anaconda3\lib\site-packages\torch\optim\optimizer.py in __init__(self, params, defaults)
     48         param_groups = list(params)
     49         if len(param_groups) == 0:
----> 50             raise ValueError("optimizer got an empty parameter list")
     51         if not isinstance(param_groups[0], dict):
     52             param_groups = [{'params': param_groups}]
```

**ValueError:** optimizer got an empty parameter list

# nn.CrossEntropyLoss

- Softmax를 포함하고 있으므로 모델에서는 logit을 return

```
def forward(self, x):  
    a1 = self.relu(self.fc1(x.view(-1, self.in_dim)))  
    a2 = self.relu(self.fc2(a1))  
    a3 = self.relu(self.fc3(a2))  
    a4 = self.relu(self.fc4(a3))  
    logit = self.fc5(a4)  
    return logit
```

# Sequential

- Modules will be added to it in the order they are passed in the constructor

```
# Example of using Sequential  
model = nn.Sequential(  
    nn.Conv2d(1, 20, 5),  
    nn.ReLU(),  
    nn.Conv2d(20, 64, 5),  
    nn.ReLU()  
)
```

```
# Example of using Sequential with OrderedDict  
model = nn.Sequential(OrderedDict([  
    ('conv1', nn.Conv2d(1, 20, 5)),  
    ('relu1', nn.ReLU()),  
    ('conv2', nn.Conv2d(20, 64, 5)),  
    ('relu2', nn.ReLU())  
]))
```

# ModuleList

- Holds submodules in a list
- Can be indexed like a regular Python list
- Modules it contains are properly registered, and will be visible by all Module methods

```
class MyModule(nn.Module):
    def __init__(self):
        super(MyModule, self).__init__()
        self.linears = nn.ModuleList([nn.Linear(10, 10) for i in range(10)])

    def forward(self, x):
        # ModuleList can act as an iterable, or be indexed using ints
        for i, l in enumerate(self.linears):
            x = self.linears[i // 2](x) + l(x)
        return x
```




# Programming Assignment 3: DNN


- Dataset: MNIST
- Requirement
  - Plot accuracy varying the number of layers (2,3,4,5 layers)
  - Nothing more, but, using ModuleList may save your time
  - Hint:
- Due: 2022/10/20 PM 11:59
- Submission
  - Report (pdf or docx)
    - A figure: accuracy vs # layers
    - Source code
  - Source file (.py or .ipynb)

Train, Validation, Test  
datasets

# Applied ML is a highly iterative process

- Hyper parameters
  - # layers
  - # hidden units
  - Learning rates
  - Activation functions
  - ...

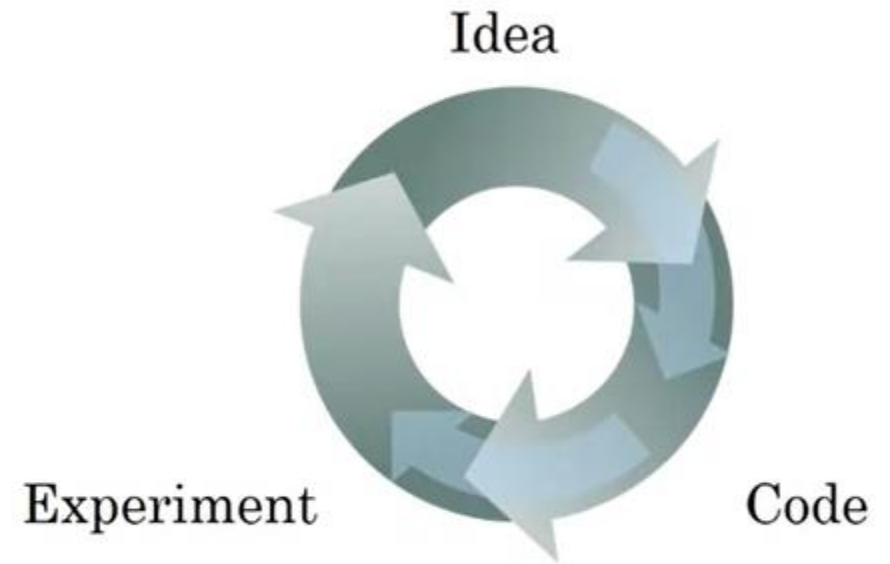


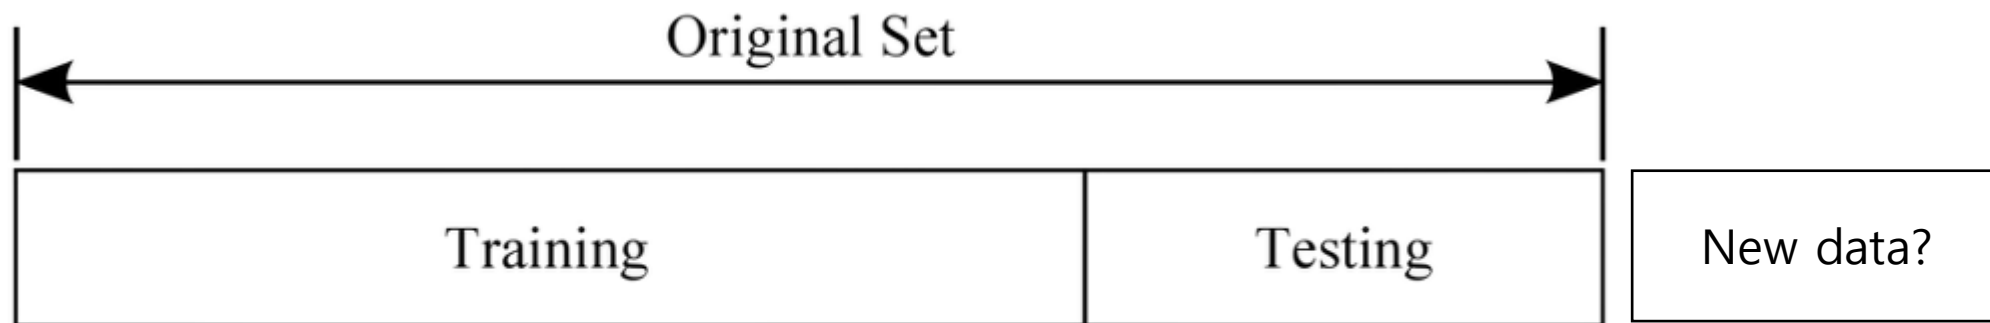

Learn parameters

Tune hyperparameters

Final evaluation

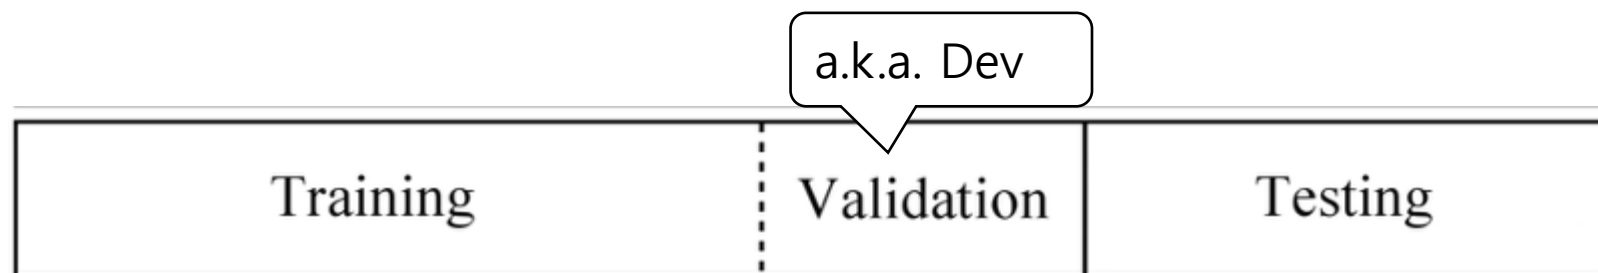

Learn parameters

Tune hyperparameters

Final evaluation

# Mismatched train/test distribution

Training set:  
Cat pictures from  
webpages

Dev/test sets:  
Cat pictures from users  
using your app

Test

Dev

Test