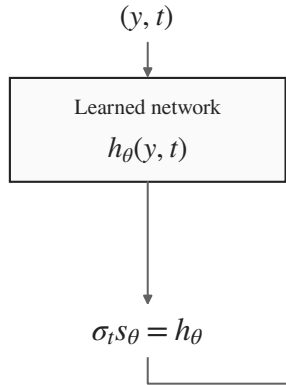
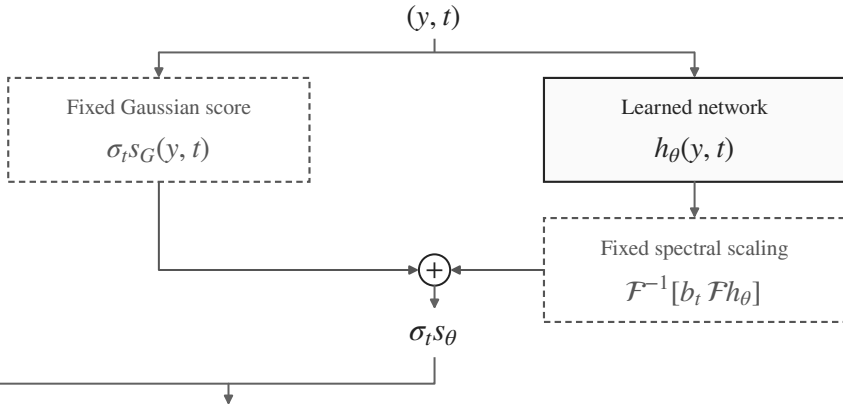


(a) Direct score (Score-SDE)**(b) Fourier Gaussian**

$$\mathcal{L}_{\text{DSM}} = \mathbb{E}_{x, t, \varepsilon} \|\sigma_t s_\theta(y, t) + \varepsilon\|^2$$

Shared DSM objective · matched backbone architecture

(c) Fixed spectral adapter

$$\sigma_t \hat{s}_{G,k} = -\frac{\sigma_t (\hat{y}_k - \hat{\mu}_k)}{P_k + \sigma_t^2}$$

$$b_{t,k} = \sqrt{\frac{P_k}{P_k + \sigma_t^2}}$$

Training-only moments: μ, P_k (held fixed).

Residual-coordinate DSM weights: $b_{t,k}^2$.

