How-To Library

Informatica

AWS PrivateLink Onboarding Guide for Informatica Intelligent Data Management Cloud

© Copyright Informatica LLC 2022, 2026. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

If you use an Amazon Virtual Private Cloud (VPC), you can configure a private connection between your VPC and Informatica® Intelligent Data Management Cloud™ (IDMC) using Amazon Web Services (AWS) PrivateLink.

You can use AWS PrivateLink with the following services:

- API Center
- API Manager
- Application Integration
- Cloud Data Integration for PowerCenter (CDI-PC)
- B2B Gateway
- Data Governance and Catalog
- Data Integration
- Data Marketplace
- Data Profiling
- Data Quality
- Integration Hub
- Data Ingestion and Replication
- MDM SaaS services (Customer 360 SaaS, Multidomain MDM SaaS, Product 360 SaaS, Reference 360 Saas, and Supplier 360 SaaS)
- Metadata Command Center

Note: This article doesn't apply to organizations that are subject to FedRAMP. For instructions on configuring an AWS PrivateLink connection for organizations subject to FedRAMP, see the AWS PrivateLink Onboarding Guide for Organizations subject to FedRAMP.

Supported Versions

- Intelligent Data Management Cloud July 2026

Table of Contents

Overview. . . . 3
Before you begin. . . . 5
Step 1. Open a support case with Informatica Global Customer Support. . . . 5
Step 2. Create a VPC endpoint in your Amazon account. . . . 6
Step 3. Configure networking rules and private hosted zone on AWS. . . . 7
Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service. . . . 9
Step 5. Set up a VPC endpoint for disaster recovery (optional). . . . 10
Step 6. Verify the IP address. . . . 10
Step 7. Provision an interface endpoint for Data Quality and Data Profiling. . . . 10
Step 8. Configure AWS PrivateLink for Advanced Data Integration. . . . 14
Create EC2, S3, Autoscaling, Elastic Load Balancing, and STS endpoints. . . . 14
Create ECR API and DKR endpoints for AWS EKS. . . . 15

Add the artifact hub to the Informatica Cloud hosted zone. . . . 16
Configure the NAT gateway for AWS IAM and the AWS CLI. . . . 16
Enable AWS PrivateLink in the advanced cluster. . . . 17
Using Application Integration with AWS PrivateLink. . . . 17
Appendix A: DNS names for IDMC services. . . . 17
Appendix B: Trusted IP ranges for PrivateLink. . . . 29
Appendix C: Worksheet for setting up AWS PrivateLink. . . . 30
Appendix D: Disaster recovery. . . . 30
Architecture overview. . . . 31
Scenario 1: IDMC outage. . . . 32
Scenario 2: Customer environment outage. . . . 34
Scenario 3: Cloud provider outage. . . . 36
Disaster recovery readiness checklist. . . . 37

Overview

If you use an Amazon Virtual Private Cloud (VPC), you can configure a private connection between your VPC and IDMC using Amazon Web Services (AWS) PrivateLink.

Note: This article doesn't apply to organizations that are subject to FedRAMP. For instructions on configuring an AWS PrivateLink connection for organizations subject to FedRAMP, see the AWS PrivateLink Onboarding Guide for Organizations subject to FedRAMP.

Access to the IDMC UI is not supported through AWS PrivateLink. PrivateLink connectivity is intended for data plane/API traffic only and the UI can be accessed via standard public endpoint.

To use AWS PrivateLink, you must purchase the appropriate SKU through Informatica. AWS PrivateLink communication works with Intelligent Data Management Cloud instances that are deployed on AWS infrastructure.


You can use AWS PrivateLink with the following services:

- API Center
- API Manager
- Application Integration
- Cloud Data Integration for PowerCenter (CDI-PC)
- B2B Gateway
- Data Governance and Catalog
- Data Integration
- Data Marketplace
- Data Profiling
- Data Quality
- Integration Hub
- Data Ingestion and Replication
- MDM SaaS services (Customer 360 SaaS, Multidomain MDM SaaS, Product 360 SaaS, Reference 360 Saas, and Supplier 360 SaaS)
- Metadata Command Center

Note: For Advanced Data Integration, you can use AWS PrivateLink only on a private cluster on AWS. You can't use AWS PrivateLink on a local or self-service cluster, or on an advanced cluster in a serverless runtime environment.

When you use AWS PrivateLink, the Secure Agent in your VPC communicates with IDMC securely through AWS PrivateLink instead of going over the public internet.

The following image shows an overview of the communication between your AWS account and IDMC when you use AWS PrivateLink:

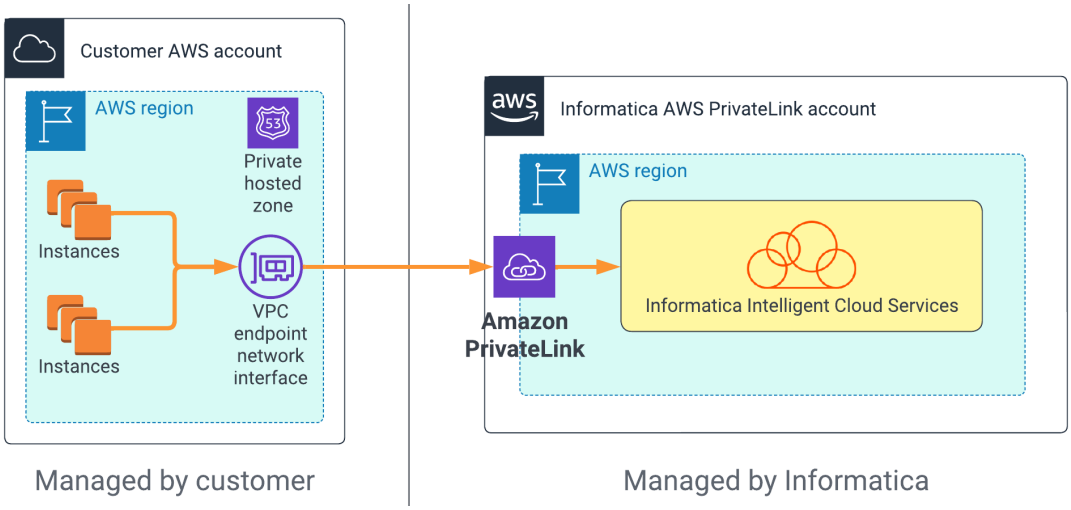

For all services except Application Integration, communication between IDMC and the Secure Agent in your VPC is two-way. For Application Integration, communication is from Application Integration to the Secure Agent only. For more information about using Application Integration with AWS PrivateLink, see "Using Application Integration with AWS PrivateLink" on page 17.

To configure IDMC to work with AWS PrivateLink, complete the following steps:

1. Open a support case with Informatica Global Customer Support to request access to IDMC using AWS PrivateLink.
2. Create a VPC endpoint in your Amazon account.
3. Configure the networking rules on AWS.
4. Open the hosted zone and create a record for each IDMC service that you use.
5. Optionally, set up a VPC endpoint for disaster recovery.
6. Verify the IP address to ensure that you're connecting to IDMC using AWS PrivateLink.
7. If you use Data Quality or Data Profiling, provision an interface endpoint to enable private communication between the Secure Agent and the Data Quality/Data Profiling S3 storage bucket.
8. If you use Advanced Data Integration, perform additional configuration steps to use AWS PrivateLink.
9. If you use Cloud Data Integration for PowerCenter (CDI-PC), provision an interface endpoint to enable private communication between the Secure Agent and the S3 storage bucket. Contact Informatica Global Customer Support for any support regarding S3 bucket.

   Important: The Secure Agent, the CDI-PC domain, and all corresponding nodes must be on the same VPC.

The following sections in this guide provide details about each of these steps.

Before you begin

Before you begin, note the IP address that you use to connect to IDMC over the public internet. When you finish configuring an AWS PrivateLink connection to IDMC, you'll need to verify that this IP address differs from the one you use to connect to IDMC using AWS PrivateLink.

To verify the IP address, open a terminal on AWS and use the ping command to ping IDMC from a server in your AWS account.

For example, if your IDMC login URL is `https://dm-us.informaticacloud.com/identity-service/home`, use the following command to ping IDMC:

```
ping dm-us.informaticacloud.com
```

The command returns output like the following example:

```
PING iics-gaprod-ids-elb-123456789.us-west-2.elb.amazonaws.com (128.01.23.456): 56 data bytes
```

The IP address is the value within the parentheses. You can record this value in "Appendix C: Worksheet for setting up AWS PrivateLink" on page 30.

Step 1. Open a support case with Informatica Global Customer Support

To start, you'll need to open a support case with Informatica Global Customer Support requesting access to IDMC through AWS PrivateLink. Informatica Global Customer Support will add your AWS account ID to the allowlist and provide you with the Amazon Resource Name (ARN) for your POD and region.

If you need help creating a support case, contact your client services manager.

1. Open a support case with Global Customer Support and request access to IDMC using AWS PrivateLink. Provide the following information in your support case:
   - Your IDMC organization ID.
   - Your IDMC primary POD ecosystem region.

     For more information about finding your POD ecosystem region, see the POD Networking and Availability page.
   - Your AWS region and backup region.

     For more information about finding your AWS region, see Regions, Availability Zones, and Local Zones in the AWS documentation.

     Note: If your VPC endpoint region differs from your IDMC region, let Global Customer Support know that you need cross-region support, and provide both your VPC endpoint region and your IDMC region.
   - Your AWS account ID and backup account ID.

     The account ID will be in the following format: `arn:aws:iam::<account ID>:<user>`. For more information about finding your AWS account ID, see Your AWS account identifiers in the AWS documentation.

   You can record these values in "Appendix C: Worksheet for setting up AWS PrivateLink" on page 30.
2. Wait for Informatica to respond to your request and provide you with the ARN.

   You should receive a response within two business days.


When Informatica responds to your request, we'll add your AWS account ID to the allowlist so that you can request an AWS PrivateLink connection to IDMC. We'll also provide you with the ARN for your POD and region and enable the appropriate license for your organization.

Step 2. Create a VPC endpoint in your Amazon account

After Informatica Global Customer Support accepts your request, create a VPC endpoint (VPCE) in your Amazon account.

1. In the AWS Management Console, under **Services**, select **VPC**.
2. Under **Virtual private cloud**, click **Endpoints**.
3. On the **Endpoints** page, click **Create endpoint**.

   The **Create Endpoint** page appears:

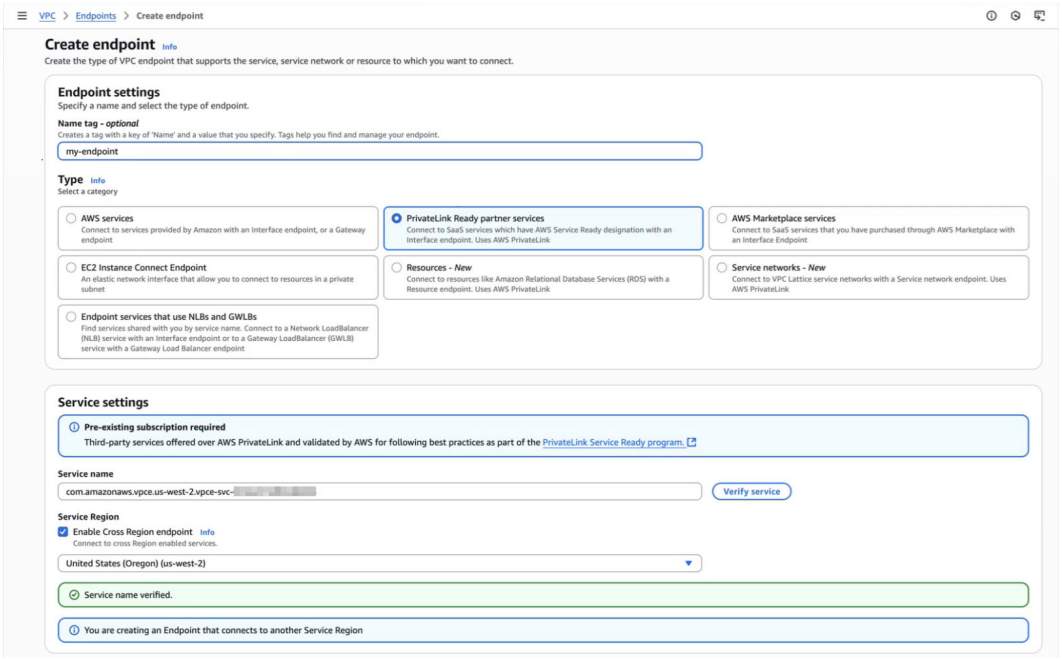

4. Under **Endpoint settings**, enter a name tag and select the service category **PrivateLink Ready partner services**.
5. Under **Service settings**, enter the ARN name provided by Informatica.
6. If your VPC endpoint region differs from your IDMC region, select **Enable Cross Region endpoint** and select your IDMC region.
7. Click **Verify service**.

   You should see a message saying that the service name was verified.

   If service verification fails, contact Informatica Global Customer Support to ensure that the region you selected is supported for your VPC endpoint.
8. Under **VPC**, select the VPC that you want to use to connect to IDMC.

   This is the VPC where your Secure Agents are or will be installed.
9. Under **Subnets**, select the availability zones and subnet IDs that you want to communicate over AWS PrivateLink.

   You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.
10. For the **IP address type**, select **IPv4**.
11. Under **Security groups**, select the security groups that define the subnet access.

Create or select a security group with an inbound rule that allows the following access:

Property	Value
IP version	IP
Protocol	TCP
Port range	443
Source	The IP address of your subnets

12. Click **Create endpoint**.
13. Update your support case with Informatica Global Customer Support to let Informatica know that you've completed the endpoint request. Include the VPC endpoint ID in the support the case.

    Informatica Global Customer support will notify you when your request has been accepted. Normally, notification takes two business days or less.


Step 3. Configure networking rules and private hosted zone on AWS

When your request has been accepted, configure the networking rules on AWS.

Note: Use caution when changing DNS records, and consult with your network team. If you require public IICS access, a split-horizon DNS is recommended. For help setting up AWS Route 53, contact AWS customer support.

1. In the AWS Management Console, under **Services**, select **Route 53**.

2. In the Route 53 Dashboard, under **DNS management**, click **Create hosted zone**.

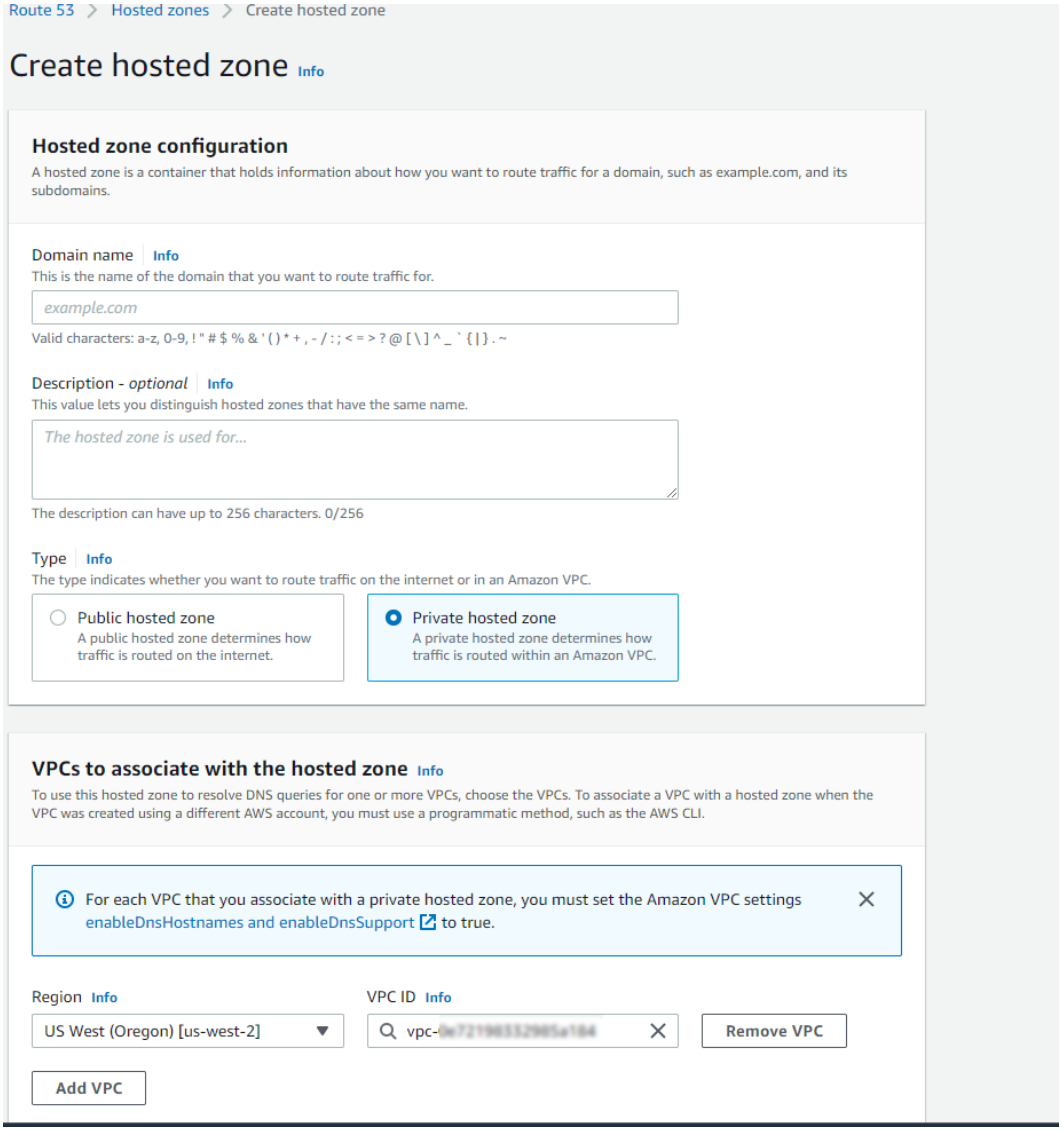

3. Under **Domain name**, enter `informaticacloud.com`.
4. Optionally, enter a description.
5. Under **Type**, select **Private hosted zone**.
6. Under **VPCs to associate with the hosted zone**, select the region and the VPC and subnets that you configured when you created the VPC endpoint.
7. Optionally, under **Tags**, create and apply tags to identify the hosted zone.
8. Click **Create hosted zone**.


   You should see a message saying that the domain "informaticacloud.com" was successfully created.

Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service

Open the hosted zone and create a record for each IDMC service that you use.

Note: To use a private hosted zone, the VPC must have DNS host names enabled.


1. In the AWS Management Console, under **Services**, select **VPC**.
2. Under **Virtual private cloud**, click **Endpoints**.
3. On the **Endpoints** page, copy the DNS name for the VPC endpoint:

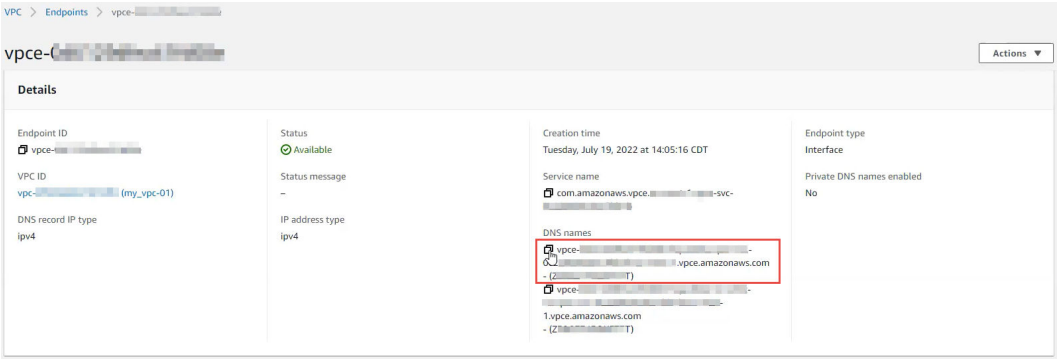

You can record this value in "Appendix C: Worksheet for setting up AWS PrivateLink" on page 30.

4. Close the **Endpoints** page.
5. In the AWS Management Console, under **Services**, select **Route 53**.
6. Select **Hosted zones**.
7. Under **Hosted Zones**, click the **informaticacloud.com** domain.
8. Under **Records**, click **Create record**.

   The **Quick create record** page appears:

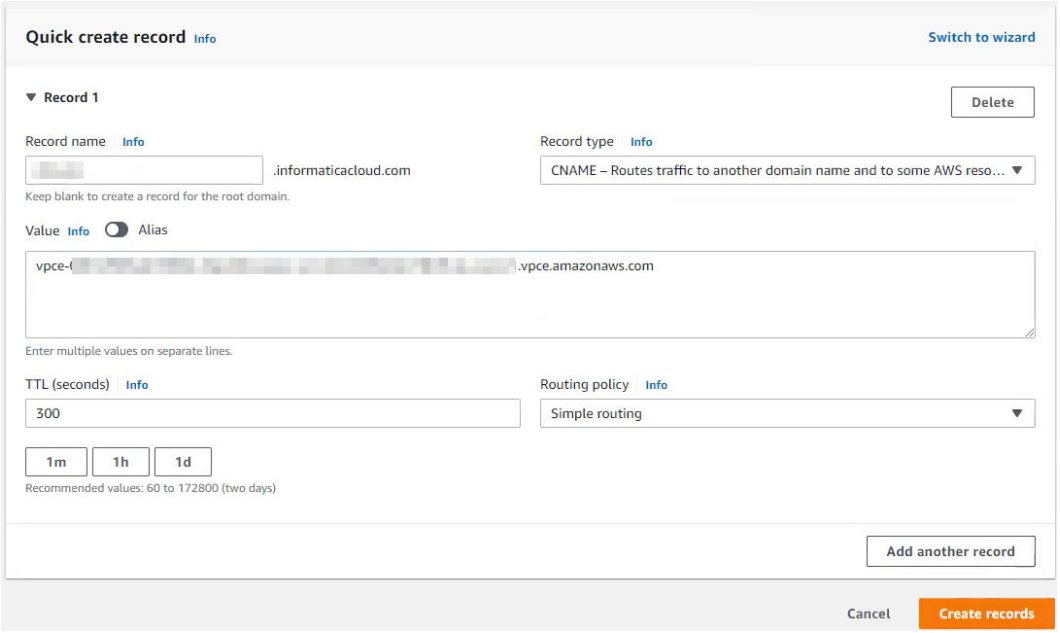

9. Under **Record name**, enter the DNS name you use to access the service over the public internet.

For information on how to obtain the DNS name for each service, see "Appendix A: DNS names for IDMC services" on page 17. You can record the DNS names you need in "Appendix C: Worksheet for setting up AWS PrivateLink" on page 30.

10. Under **Record type**, select **CNAME**.
11. Under **Value**, enter the VPC endpoint to which you want to route traffic to, for example, `vpce-svs-abcdefg012345.us-west-2.vpce.amazonaws.com`.

    This is the DNS name that you copied from the endpoint in step 3 above.
12. If you use more than one IDMC service, click **Add another record** and repeat steps 9-12 for each of the other services.
13. Click **Create records**.

Step 5. Set up a VPC endpoint for disaster recovery (optional)

Optionally, set up a VPC endpoint for disaster recovery. In the event of a faillover, you can move your DNS to the backup location.

To set up a VPC endpoint for disaster recovery, repeat the steps in "Step 2. Create a VPC endpoint in your Amazon account" on page 6 for the VPC endpoint that you want to use for disaster recovery.

Step 6. Verify the IP address

To verify that you are using AWS PrivateLink to connect to IDMC, verify the hosted zone and verify the IP address. The IP address you use should differ from the one you noted in the "Before you begin" step.

First, verify that the VPC is attached to the private hosted zone informaticacloud.com. For more information, see "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9.

Next, open a terminal in your AWS VPC and use the ping command to verify that the IP address now differs from the one returned in "Before you begin" on page 5.

For example, if your IDMC login URL is `https://dm-us.informaticacloud.com/identity-service/home`, use the following command to ping IDMC:

```
ping dm-us.informaticacloud.com
```

The command now returns output like the following example:

```
PING iics-gaprod-ids-elb-123456789.us-west-2.elb.amazonaws.com (10.98.76.543): 56 data bytes
```

The new IP address should start with the same numbers as the IP address for your VPC.

Step 7. Provision an interface endpoint for Data Quality and Data Profiling

If you use Data Quality or Data Profiling, you can configure a private connection between the Secure Agent and the Data Quality/Data Profiling S3 storage bucket.


Note: If you don't use Data Quality or Data Profiling, skip this step.

To configure a private connection, provision an interface endpoint for Data Quality and Data Profiling in your VPC and enable private DNS names for your VPC endpoint. An interface VPC endpoint creates an elastic network interface (ENI) with private IP addresses in your VPC subnets.


Note that interface VPC endpoints incur hourly and per-GB data processing charges. For more information, see AWS PrivateLink Pricing in the AWS documentation.

For more information about configuring interface endpoints, see Configure an interface endpoint in the AWS documentation.

1. In the AWS Management Console, under **Services**, select **VPC**.
2. Under **Virtual private cloud**, select **Endpoints**.
3. On the **Endpoints** page, click **Create endpoint**:

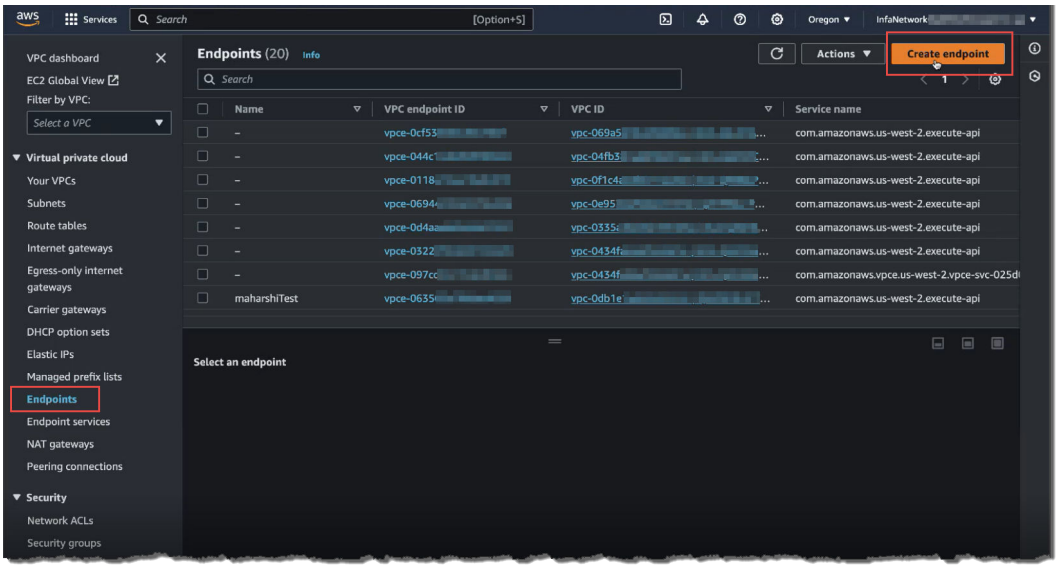

The **Create endpoint** page appears:

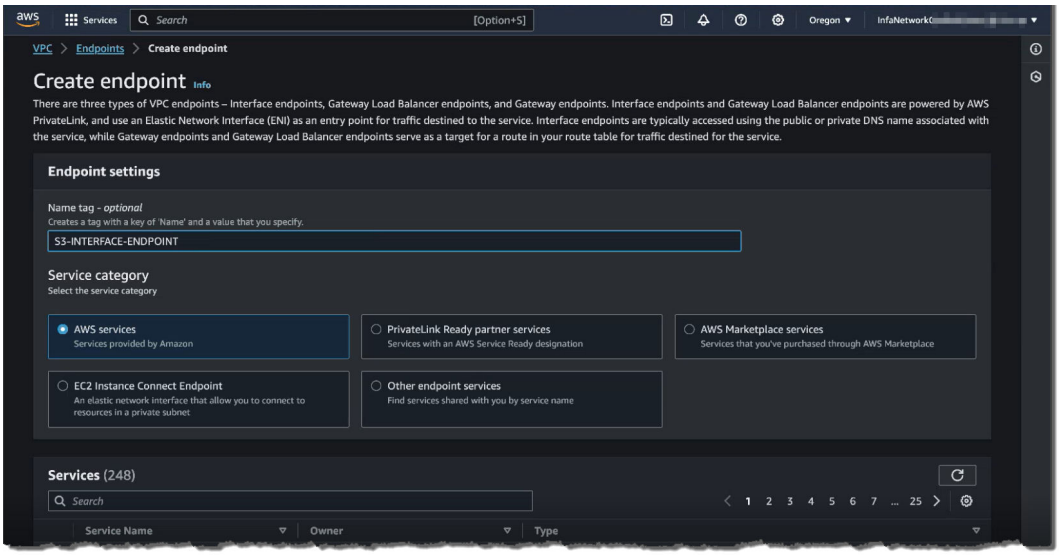

4. Under **Endpoint settings**, enter a name tag and select the service category **AWS services**.


   If you're using any other DNS provider and can't use the AWS private hosted zone, contact Informatica Global Customer Support.

5. Under **Services**, search for `S3` and select the endpoint for your region, for example, `com.amazonaws.us-west-2.s3`. Be sure that the **Type** is **Interface**.
6. Under **VPC**, select the VPC in which to create your endpoint.
7. Under **Subnets**, select the availability zones and subnet IDs associated with your endpoint. Be sure to choose subnets that aren't public.


8. Under **Security groups**, select the security groups that define the subnet access or create a new security group and select it.

   To create a new security group:

   a. In the AWS Management Console, under **Security**, select **Security groups** and click **Create security group**:

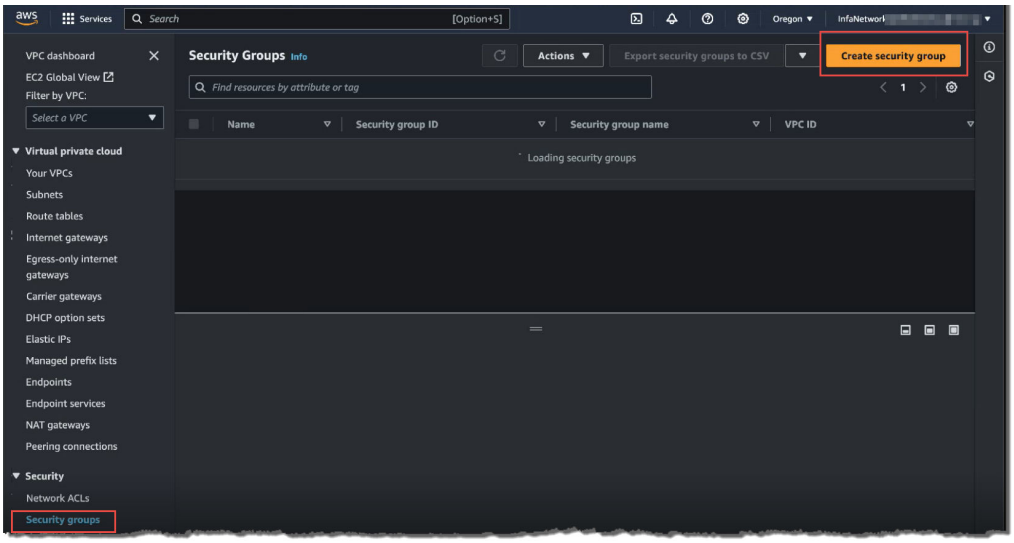

   The **Create security group** page appears:

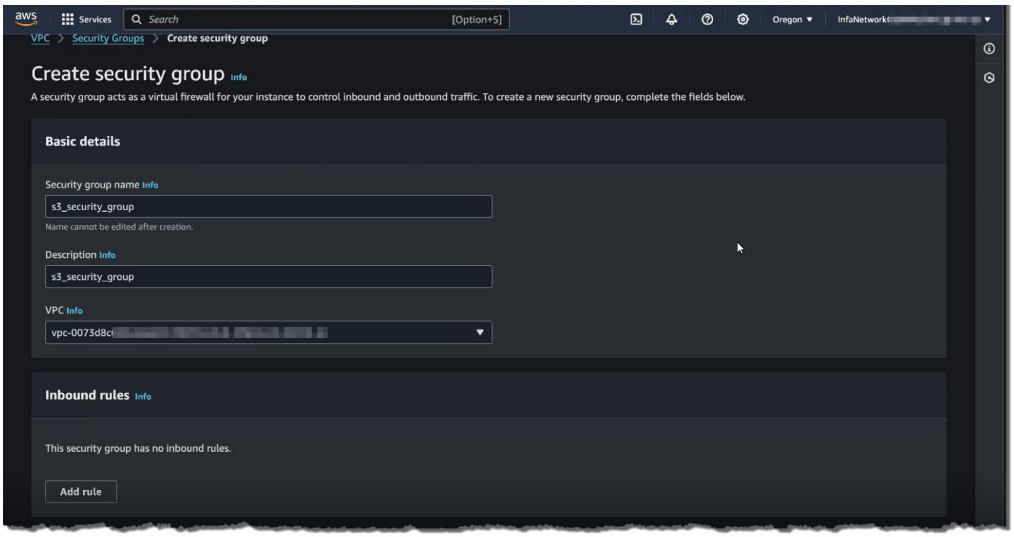

   b. Enter a name for the security group.

   c. Optionally, enter a description for the security group.

   d. Select your VPC.

   e. Under **Inbound rules**, create a rule of type **HTTPS** and choose the appropriate number of CIDR blocks.

      The number of CIDR blocks should match the IP address range for the VPC.


   f. Click **Create security group** and note the security group ID.

      You'll need the security group ID when you select the security group for the endpoint.


g. In the AWS Management Console, switch back to the **Create endpoint** page, and under **Security groups**, select the security group you created.

9. On the **Create endpoint** page, under **Policy**, select **Full access**, or select **Custom** and enter a custom policy for the VPC endpoint to control access to the service.
10. Optionally, add tags for the endpoint.
11. Click **Create endpoint**.

    It takes several minutes for the endpoint to become available. When the endpoint is available, its state changes to "Available" on the **Endpoints** page.
12. When the endpoint is available, on the **Endpoints** page, select the endpoint and choose **Actions** > **Modify private DNS name**:

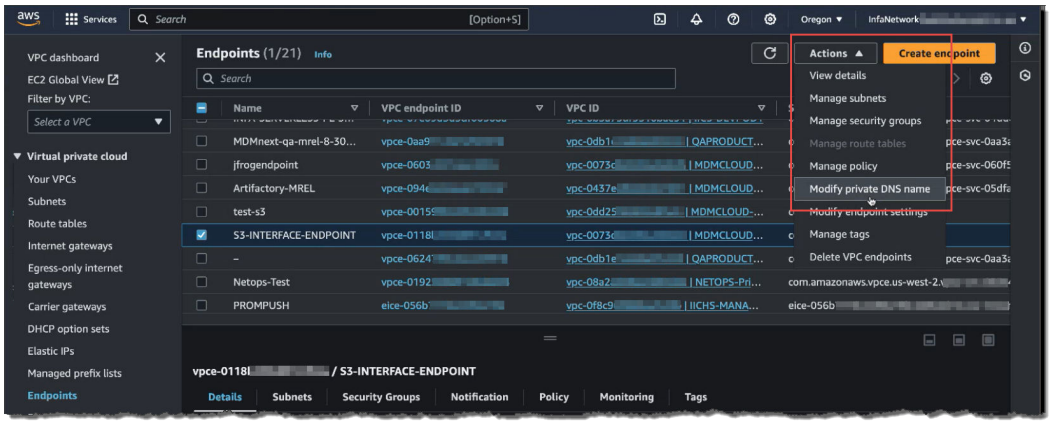

13. On the **Modify private DNS name** page, under **Modify private DNS name settings**, check **Enable for this endpoint**, uncheck **Enable private DNS only for inbound endpoint**, and then click **Save changes**:

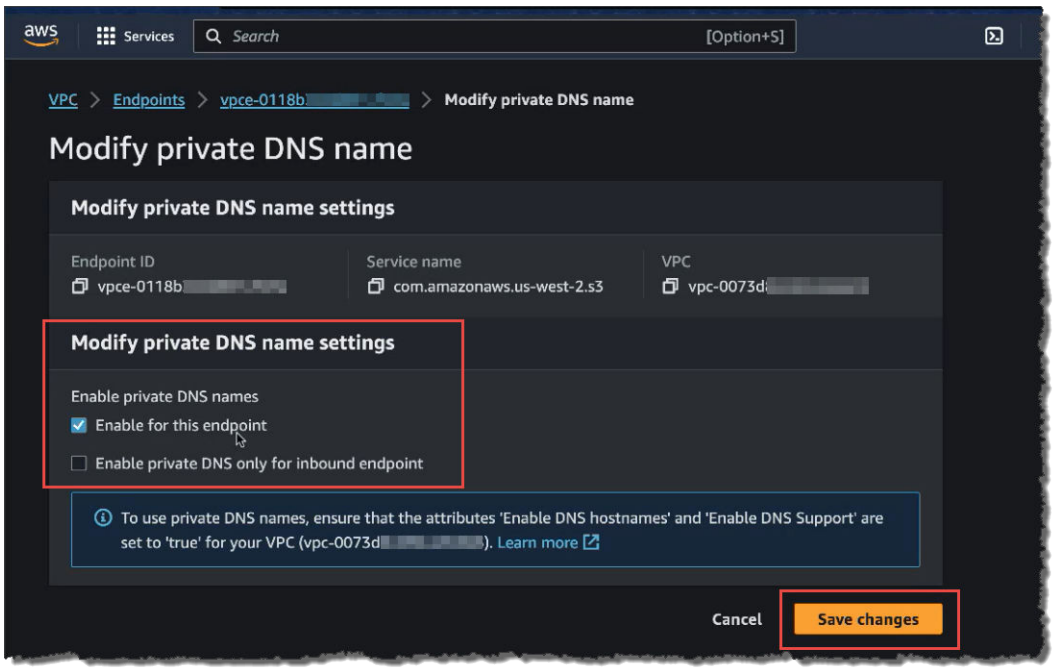

After you provision the endpoint, you can use the Linux dig command to verify that communication between the Secure Agent and S3 bucket goes through the VPC. To do this, enter the following command and verify that the IP addresses returned are part of the subnet where you created your interface endpoint:

```
dig s3.<region>.amazonaws.com +short
```

Step 8. Configure AWS PrivateLink for Advanced Data Integration

If you use Advanced Data Integration, perform additional configuration steps to use AWS PrivateLink between your VPC and IDMC.

Complete the following tasks:

- Create EC2, S3, Autoscaling, Elastic Load Balancing, and STS endpoints.
- Add the artifact hub to the Informatica Cloud hosted zone.
- Configure the NAT gateway for AWS IAM and the AWS CLI.
- Enable AWS PrivateLink in the advanced cluster.

Create EC2, S3, Autoscaling, Elastic Load Balancing, and STS endpoints

Create endpoints for EC2, S3, Autoscaling, Elastic Load Balancing, and STS in your AWS account.

1. In the AWS Management Console, under **Services**, select **VPC**.
2. Under **Virtual private cloud**, click **Endpoints**.
3. On the **Endpoints** page, click **Create endpoint** to create an EC2 endpoint.
    a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
    b. Under **Services**, search for **EC2** service and select the EC2 service such as `com.amazonaws.eu-west-1.ec2`.
    c. Under **VPC**, select the VPC that you want to use to connect to IDMC.
    d. Under **Subnets**, select the availability zones and subnet IDs that you want to communicate over AWS PrivateLink.

    You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.
    e. Under **Security groups**, select the security groups that define subnet access through port 443.
4. Click **Create endpoint** to create an S3 endpoint
    a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
    b. Under **Services**, search for **S3** and select the S3 service with type `Gateway` such as `com.amazonaws.eu-west-1.s3`.
    c. Under **VPC**, select the VPC that you want to use to connect to IDMC.
    d. Under **Route Tables**, select the route table associated with the private subnet.
5. If you're creating a managed cluster, click **Create endpoint** to create an Autoscaling endpoint. If you're creating a self-service cluster, you can skip this step.
    a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
    b. Under **Services**, search for **autoscaling** and select the Autoscaling service such as `com.amazonaws.eu-west-1.autoscaling`.
    c. Under **VPC**, select the VPC that you want to use to connect to IDMC.

d. Under **Subnets**, select the availability zones and subnet IDs that you want to communicate over AWS PrivateLink.

   You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.

e. Under **Security groups**, select the security groups that define subnet access through port 443.

6. If you're creating a managed cluster, click **Create endpoint** to create an Elastic Load Balancing endpoint. If you're creating a self-service cluster, you can skip this step.
   a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
   b. Under **Services**, search for **elasticloadbalancing** and select the Elastic Load Balancing service such as `com.amazonaws.eu-west-1.elasticloadbalancing`.
   c. Under **VPC**, select the VPC that you want to use to connect to IDMC.
   d. Under **Subnets**, select the availability zones and subnet IDs that you want to communicate over AWS PrivateLink.

      You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.

   e. Under **Security groups**, select the security groups that define subnet access through port 443.
7. Click **Create endpoint** to create an STS endpoint.
   a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
   b. Under **Services**, search for **STS** and select the STS service such as `com.amazonaws.eu-west-1.sts`.
   c. Under **VPC**, select the VPC that you want to use to connect to IDMC.
   d. Under **Subnets**, select the availability zones and subnet IDs that you want to communicate over AWS PrivateLink.

      You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.

   e. Under **Security groups**, select the security groups that define subnet access through port 443.

Create ECR API and DKR endpoints for AWS EKS

If you're using self-service clusters running in Amazon Elastic Kubernetes Service (EKS), you need to define the ECR API and DKR endpoints. These endpoints allow worker nodes to authenticate and pull container images privately. These endpoints aren't required for any other type of clusters.

1. In the AWS Management Console, under **Services**, select **VPC**.
2. Under **Virtual private cloud**, click **Endpoints**.
3. On the **Endpoints** page, click **Create endpoint** to create an ECR API endpoint.
   a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
   b. Under **Services**, select the ECR API service such as `com.amazonaws.us-west-2.ecr.api`.
   c. Under **VPC**, select the EKS VPC that you want to use to connect to IDMC.
   d. Under **Subnets**, select the availability zones and private subnet IDs that you want to communicate over AWS PrivateLink.

      You can select multiple subnets in different availability zones to ensure that your interface endpoint is resilient to availability zone failures.

   e. Under **Security groups**, select the security group used by your worker nodes.

f. Under **Policy**, select **Full access** if you don't want to restrict access, otherwise select **Custom** and use the policy generation tool to generate a custom policy. Be sure to provide your node group role ARN, as shown in the following sample custom policy:

```
{
"Statement": [{
"Sid": "AllowPull",
"Principal": {
"arn:aws:iam::543463116864:role/gani-eks-nodegroup-role"
},
"Action": [
"ecr:BatchGetImage",
"ecr:GetDownloadUrlForLayer",
         "ecr:GetAuthorizationToken"
],
"Effect": "Allow",
"Resource": "*"
}]
}
```

4. Click **Create endpoint** to create an ECR DKR endpoint.
   a. Under **Endpoint settings**, enter a name tag and select the service category **AWS Services**.
   b. Under **Services**, select the ECR DKR service such as `com.amazonaws.us-west-2.ecr.dkr`.
   c. Under **Network settings**, select the same VPC and private subnets as the ECR API endpoint.
   d. Under **Security groups**, select the appropriate security group.
   e. Under **Policy**, select **Full access** or **Custom** based on your requirements. If custom, use the policy generation tool to generate a custom policy. Refer to the ECR API steps in step 3 above for further details.

Add the artifact hub to the Informatica Cloud hosted zone

In the Informatica Cloud hosted zone, create a record for the artifact hub.

1. In the AWS Management Console, under **Services**, select **Route 53**.
2. Select **Hosted zones**.
3. Under **Hosted Zones**, click the **informaticacloud.com** domain.
4. Under **Records**, click **Create record**.
5. Under **Record name**, enter `artifacthub.informaticacloud.com`.
6. Under **Record type**, select **CNAME**.
7. Under **Value**, enter the VPC endpoint to which you want to route traffic to, for example, `vpce-svs-abcdefg012345.us-west-2.vpce.amazonaws.com`.
8. Click **Create records**.

Configure the NAT gateway for AWS IAM and the AWS CLI

Configure the NAT gateway to enable AWS IAM and the AWS CLI.

1. On an EC2 instance in your VPC, run the following commands to get the IP addresses of the AWS IAM and AWS CLI services:
   - `nslookup iam.amazonaws.com` to get the IP address of the AWS IAM service
   - `nslookup awscli.amazonaws.com` to get the IP address of the AWS CLI service
2. In the AWS Management Console, under **Services**, select **VPC**, and select your VPC.
3. Under **Resource map**, select the route table associated with the private subnet.

4. Click **Edit Routes**.
5. Click **Add route** to add a route to enable AWS IAM.

   In the route entry, add the IP address of the AWS IAM service as the destination and select NAT Gateway as the target. You can also use a dynamic IP address like 44.216.0.0/16 as the destination since the IP address can change at any time.
6. Click **Add route** to add a route to enable the AWS CLI.

   In the route entry, add the IP address of the AWS CLI service as the destination and select NAT Gateway as the target.
7. Click **Save changes.**

Enable AWS PrivateLink in the advanced cluster

Edit the advanced configuration for the advanced cluster to enable AWS PrivateLink.

1. In Administrator, navigate to the **Advanced Clusters** page.
2. Edit the advanced configuration for the advanced cluster.
3. Under **Runtime Configuration**, add a runtime property.
4. Enter the runtime property name css.aws.enable.service.endpoint.config and set it to true.

Using Application Integration with AWS PrivateLink

Application Integration supports only one-way communication through AWS PrivateLink, that is, from Application Integration to the Secure Agent.

You can invoke processes that are published on a Secure Agent through any REST client such as Postman or cURL only if the ports are allowed in the AWS security group. However, you cannot access Amazon resources using an Application Integration service connector or connection.

After you enable a Secure Agent that is installed in an AWS VPC, the agent connects directly to the connection endpoints through AWS PrivateLink. You can perform all the Application Integration operations that the Secure Agent supports. However, if the process runs on a Secure Agent that is installed on an AWS VPC, you cannot invoke the process using the endpoint URL in a browser. Instead, you can invoke the process endpoint URL using the cURL command from a machine where the Secure Agent is installed.

To invoke a process using the cURL command, use the following syntax:

```
curl -X PUT -k https://<host_name>:<port_number>/process-engine/public/rt/<process_name>
```

You can also invoke scheduled processes.

For more information about Application Integration, see the Application Integration help.

Appendix A: DNS names for IDMC services

When you create records in the hosted zone for the informaticacloud.com domain, you need to allow the DNS names for each IDMC service that you use. DNS names vary based on your POD.

When you enter DNS names to allow, enter the global service DNS names and the Data Integration DNS name for your POD. If you use any service other than Data Integration, you also need to enter the DNS names for the service.

For example, if you're on the APSE1 POD and you use the Application Integration (CAI) and API Manager services, you would allow the following DNS names:

```
dm-ap.informaticacloud.com
content.dm-ap.informaticacloud.com
```

```
apse1.dm-ap.informaticacloud.com
global-package.dm.informaticacloud.com
apse1-cai.dm-ap.informaticacloud.com
apse1-apim.dm-ap.informaticacloud.com
apse1-apigw.dm-ap.informaticacloud.com
```

If you are unsure of your POD or your organization uses a custom URL to log in to IDMC, contact your Informatica representative to find the DNS names.

IICS Pre-release

If you use the Pre-release POD, allow the following DNS names:

Service	DNS names
Global Identity Service	dmr-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	usw1.dmr-us.informaticacloud.com

If you use Cloud Data Integration for PowerCenter (CDI-PC), allow its DNS name as well:

Service	DNS names
Cloud Data Integration for PowerCenter (CDI-PC)	usw1-idms.dmr-us.informaticacloud.com

NA West 1 AWS (USW1)

If your POD is NA West 1 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	na1.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	apim-pod1.dm-us.informaticacloud.com apigw-pod1.dm-us.informaticacloud.com
Application Integration (CAI)	na1.ai.dm-us.informaticacloud.com
Application Integration (Salesforce)	na1.sfdc-ai.dm-us.informaticacloud.com
B2B Gateway	usw1-b2bgw.dm-us.informaticacloud.com

Service	DNS names
Cloud Data Integration for PowerCenter (CDI-PC)	na1-idms.dm-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com ccma.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	na1-ing.dm-us.informaticacloud.com
Data Profiling (CDP)	na1-dqprofile.dm-us.informaticacloud.com
Data Quality (CDQ)	na1-dqcloud.dm-us.informaticacloud.com
Integration Hub (CIH)	cih-pod1.dm-us.informaticacloud.com
MDM SaaS	na1-mdm.dm-us.informaticacloud.com

NA East 2 AWS (USE2)

If your POD is NA East 2 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	na2.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	apim-pod2.dm-us.informaticacloud.com apigw-pod2.dm-us.informaticacloud.com
Application Integration (CAI)	na2.ai.dm-us.informaticacloud.com
Application Integration (Salesforce)	na2.sfdc-ai.dm-us.informaticacloud.com
B2B Gateway	use2-b2bgw.dm-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	na2-idms.dm-us.informaticacloud.com

Service	DNS names
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	na2-ing.dm-us.informaticacloud.com
Data Profiling (CDP)	na2-dqprofile.dm-us.informaticacloud.com
Data Quality (CDQ)	na2-dqcloud.dm-us.informaticacloud.com
Integration Hub (CIH)	cih-pod2.dm-us.informaticacloud.com
MDM SaaS	na2-mdm.dm-us.informaticacloud.com

US West 3 AWS (USW3)

If your POD is US West 3 AWS AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	usw3.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	usw3-cai.dm-us.informaticacloud.com
Application Integration (Salesforce)	usw3-sfdc-cai.dm-us.informaticacloud.com
B2B Gateway	usw3-b2bgw.dm-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	usw3-idms.dm-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com ccma.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	usw3-ing.dm-us.informaticacloud.com

Service	DNS names
Data Profiling (CDP)	usw3-dqprofile.dm-us.informaticacloud.com
Data Quality (CDQ)	usw3-dqcloud.dm-us.informaticacloud.com
Integration Hub (CIH)	usw3-cih.dm-us.informaticacloud.com
MDM SaaS	usw3-mdm.dm-us.informaticacloud.com

US East 4 AWS (USE4)

If your POD is US East 4 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	use4.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	use4-apim.dm-us.informaticacloud.com use4-apigw.dm-us.informaticacloud.com
Application Integration (CAI)	use4-cai.dm-us.informaticacloud.com
Application Integration (Salesforce)	use4-sfdc-cai.dm-us.informaticacloud.com
B2B Gateway	use4-b2bgw.dm-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	use4-idms.dm-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com ccma.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	use4-ing.dm-us.informaticacloud.com
Data Profiling (CDP)	use4-dqcloud.dm-us.informaticacloud.com
Data Quality (CDQ)	use4-dqprofile.dm-us.informaticacloud.com

Service	DNS names
Integration Hub (CIH)	use4-cih.dm-us.informaticacloud.com
MDM SaaS	use4-mdm.dm-us.informaticacloud.com

US West 5 AWS (USW5)

If your POD is US West 5 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	usw5.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	usw5-apim.dm-us.informaticacloud.com usw5-apigw.dm-us.informaticacloud.com
Application Integration (CAI)	usw5-cai.dm-us.informaticacloud.com
Application Integration (Salesforce)	usw5-sfdc-cai.dm-us.informaticacloud.com
B2B Gateway	usw5-b2bgw.dm-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	usw5-idms.dm-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	usw5-ing.dm-us.informaticacloud.com
Data Profiling (CDP)	usw5-dqprofile.dm-us.informaticacloud.com
Data Quality (CDQ)	usw5-dqcloud.dm-us.informaticacloud.com
Integration Hub (CIH)	usw5-cih.dm-us.informaticacloud.com
MDM SaaS	usw5-mdm.dm-us.informaticacloud.com

US East 6 AWS (USE6)

If your POD is US East 6 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-us.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	use6.dm-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	use6-apim.dm-us.informaticacloud.com use6-apigw.dm-us.informaticacloud.com
Application Integration (CAI)	use6-cai.dm-us.informaticacloud.com
Application Integration (Salesforce)	use6-sfdc-cai.dm-us.informaticacloud.com
B2B Gateway	use6-b2bgw.dm-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	use6-idms.dm-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-us.informaticacloud.com cdmp-app.dm-us.informaticacloud.com mcc.dm-us.informaticacloud.com icd-app.dm-us.informaticacloud.com cdgc-api.dm-us.informaticacloud.com idmc-api.dm-us.informaticacloud.com
Data Ingestion and Replication	use6-ing.dm-us.informaticacloud.com
Data Profiling (CDP)	use6-dqprofile.dm-us.informaticacloud.com
Data Quality (CDQ)	use6-dqcloud.dm-us.informaticacloud.com
Integration Hub (CIH)	use6-cih.dm-us.informaticacloud.com
MDM SaaS	use6-mdm.dm-us.informaticacloud.com

Canada Central 1 AWS (CAC1)

If your POD is Canada Central 1 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-na.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	nac1.dm-na.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	nac1-cai.dm-na.informaticacloud.com
Application Integration (Salesforce)	nac1-sfdc-cai.dm-na.informaticacloud.com
B2B Gateway	nac1-b2bgw.dm-na.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	nac1-idms.dm-na.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-na.informaticacloud.com mcc.dm-na.informaticacloud.com cdgc-api.dm-na.informaticacloud.com cdmp-app.dm-na.informaticacloud.com idmc-api.dm-na.informaticacloud.com cdgc-argo.dm-na.informaticacloud.com idmcp-api.dm-na.informaticacloud.com idmcp-mgmt.dm-na.informaticacloud.com
Data Ingestion and Replication	nac1-ing.dm-na.informaticacloud.com
Data Profiling (CDP)	nac1-dqprofile.dm-na.informaticacloud.com
Data Quality (CDQ)	nac1-dqcloud.dm-na.informaticacloud.com
Integration Hub (CIH)	nac1-cih.dm-na.informaticacloud.com
MDM SaaS	nac1-mdm.dm-na.informaticacloud.com

EM West 1 AWS (EMW1)

If your POD is EM West 1 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-em.informaticacloud.com content.dm-em.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	emw1.dm-em.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Center	emw1-gw.dm-em.informaticacloud.com
API Manager	emw1-apim.dm-em.informaticacloud.com emw1-apigw.dm-em.informaticacloud.com
Application Integration (CAI)	emw1-cai.dm-em.informaticacloud.com
Application Integration (Salesforce)	emw1-sfdc-cai.dm-em.informaticacloud.com
B2B Gateway	emw1-b2bgw.dm-em.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-em.informaticacloud.com mcc.dm-em.informaticacloud.com cdmp-app.dm-em.informaticacloud.com cdgc-api.dm-em.informaticacloud.com idmcp-api.dm-em.informaticacloud.com idmc-api.dm-em.informaticacloud.com
Data Ingestion and Replication	emw1-ing.dm-em.informaticacloud.com
Data Profiling (CDP)	emw1-dqprofile.dm-em.informaticacloud.com
Data Quality (CDQ)	emw1-dqcloud.dm-em.informaticacloud.com
Integration Hub (CIH)	emw1-cih.dm-em.informaticacloud.com
MDM SaaS	emw1-mdm.dm-em.informaticacloud.com

EM Central 2 Azure (EMC2)

If your POD is EM Central 2 Azure, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-emce.informaticacloud.com content.dm1-emce.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	emc2.dm1-emce.informaticacloud.

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	emc2-cai.dm1-emce.informaticacloud.com
B2B Gateway	emc2-b2bgw.dm1-emce.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	emc2-idms.dm1-emce.informaticacloud.com
Data Ingestion and Replication	emc2-ing.dm1-emce.informaticacloud.com
Data Profiling (CDP)	emc2-dqprofile.dm1-emce.informaticacloud.com
Data Quality (CDQ)	emc2-dqcloud.dm1-emce.informaticacloud.com
MDM SaaS	emc2-mdm.dm1-emce.informaticacloud.com

UK AWS (UK1)

If your POD is UK AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-uk.informaticacloud.com content.dm-uk.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	uk1.dm-uk.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	uk1-apim.dm-uk.informaticacloud.com uk1-apigw.dm-uk.informaticacloud.com
Application Integration (CAI)	uk1-cai.dm-uk.informaticacloud.com
Application Integration (Salesforce)	uk1-sfdc-cai.dm-uk.informaticacloud.com
B2B Gateway	uk1-b2bgw.dm-uk.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-uk.informaticacloud.com mcc.dm-uk.informaticacloud.com cdmp-app.dm-uk.informaticacloud.com cdgc-api.dm-uk.informaticacloud.com idmcp-api.dm-uk.informaticacloud.com idmc-api.dm-uk.informaticacloud.com
Data Ingestion and Replication	uk1-ing.dm-uk.informaticacloud.com
Data Profiling (CDP)	uk1-dqprofile.dm-uk.informaticacloud.com
Data Quality (CDQ)	uk1-dqcloud.dm-uk.informaticacloud.com
Integration Hub (CIH)	uk1-cih.dm-uk.informaticacloud.com
MDM SaaS	uk1-mdm.dm-uk.informaticacloud.com

AP SouthEast 1 AWS (APSE1)

If your POD is AP SouthEast 1 AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-ap.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	apse1.dm-ap.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	apse1-apim.dm-ap.informaticacloud.com apse1-apigw.dm-ap.informaticacloud.com
Application Integration (CAI)	apse1-cai.dm-ap.informaticacloud.com

Service	DNS names
Application Integration (Salesforce)	apse1-sfdc-cai.dm-ap.informaticacloud.com
B2B Gateway	apse1-b2bgw.dm-ap.informaticacloud.com
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc.dm-ap.informaticacloud.com mcc.dm-ap.informaticacloud.com cdmp-app.dm-ap.informaticacloud.com idmc-api.dm-ap.informaticacloud.com cdgc-api.dm-ap.informaticacloud.com idmcp-api.dm-ap.informaticacloud.com
Data Ingestion and Replication	apse1-ing.dm-ap.informaticacloud.com
Data Profiling (CDP)	apse1-dqprofile.dm-ap.informaticacloud.com
Data Quality (CDQ)	apse1-dqcloud.dm-ap.informaticacloud.com
Integration Hub (CIH)	apse1-cih.dm-ap.informaticacloud.com
MDM SaaS	apse1-mdm.dm-ap.informaticacloud.com

AP Northeast 2 AWS (APNE2)

If your POD is AP Northeast 2 AWS AWS, allow the following DNS names:

Service	DNS names
Global Identity Service	dm-apne.informaticacloud.com content.dm-apne.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	apne2.dm-apne.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	apne2-apim.dm-apne.informaticacloud.com apne2-apigw.dm-apne.informaticacloud.com
Application Integration (CAI)	apne2-cai.dm-apne.informaticacloud.com
Application Integration (Salesforce)	apne2-sfdc-cai.dm-apne.informaticacloud.com

Service	DNS names
Data Governance and Catalog, Data Marketplace and Metadata Command Center	cdgc-api.dm-apne.informaticacloud.com cdgc.dm-apne.informaticacloud.com cdmp-app.dm-apne.informaticacloud.com idmcp-api.dm-apne.informaticacloud.com idmcp-mgmt.dm-apne.informaticacloud.com mcc.dm-apne.informaticacloud.com idmc-api.dm-apne.informaticacloud.com
Data Ingestion and Replication	apne2-ing.dm-apne.informaticacloud.com
Data Profiling (CDP)	apne2-dqprofile.dm-apne.informaticacloud.com
Data Quality (CDQ)	apne2-dqcloud.dm-apne.informaticacloud.com
Integration Hub (CIH)	apne2-cih.dm-apne.informaticacloud.com
MDM SaaS	apne2-mdm.dm-apne.informaticacloud.com

Appendix B: Trusted IP ranges for PrivateLink

If your organization uses IP address filtering, add the appropriate IP range for your POD to your trusted IP range. If you don't use IP address filtering, you can ignore the IP addresses shown here.

For more information about configuring trusted IP addresses, see Authentication properties in the Informatica Documentation portal.

POD	Primary IP range	DR IP range
NA West 1 AWS (USW1)	10.202.0.0 to 10.202.3.255	10.193.52.0 to 10.193.55.255
NA East 2 AWS (USE2)	10.26.72.0 to 10.26.75.255	10.26.76.0 to 10.26.79.255
US West 3 AWS (USW3)	10.112.28.0 to 10.112.31.255	10.113.248.0 to 10.113.251.255
US East 4 AWS (USE4)	10.205.0.0 to 10.205.3.255	10.180.20.0 to 10.180.23.255
US West 5 AWS (USW5)	10.27.100.0 to 10.27.103.255	10.27.104.0 to 10.27.107.255
US East 6 AWS (USE6)	10.27.108.0 to 10.27.111.255	10.27.112.0 to 10.27.115.255
Canada Central 1 AWS (CAC1)	10.112.24.0 to 10.112.27.255	n/a
EM West 1 AWS (EMW1)	10.27.72.0 to 10.27.75.255	10.27.84.0 to 10.27.87.255
UK AWS (UK1)	10.27.68.0 to 10.27.71.255	10.27.80.0 to 10.27.83.255
AP SouthEast 1 AWS (APSE1)	10.27.76.0 to 10.27.79.255	10.27.88.0 to 10.27.91.255
AP Northeast 2 AWS (APNE2)	10.26.200.0 to 10.26.203.255	10.26.204.0 to 10.26.207.255

Appendix C: Worksheet for setting up AWS PrivateLink

Use the following worksheet to record the information that you need to configure IDMC to work with AWS PrivateLink.

The following table lists the information you'll need and the reason you need it:

Information needed	Reason	My value
Original IDMC IP address	Used to verify your AWS PrivateLink connection.	
IDMC organization ID	Needed by Informatica Global Customer support.	
IDMC primary POD ecosystem region	Needed by Informatica Global Customer support.	
AWS region	Needed by Informatica Global Customer support.	
AWS backup region	Needed by Informatica Global Customer support.	
AWS account ID	Needed by Informatica Global Customer support.	
ARN for your POD and region	Needed to create your VPC endpoint.	
VPC endpoint ID	Needed by Informatica Global Customer support.	
DNS name for the VPC endpoint	Needed to create records in the hosted zone for your IDMC services.	
DNS names for the IDMC services for which you want to create an AWS PrivateLink connection	Needed to create records in the hosted zone for your IDMC services. To find the DNS names, see "Appendix A: DNS names for IDMC services" on page 17.	
New IDMC IP address	Used to verify your AWS PrivateLink connection. If successful, this address will differ from the original IP address.	

Appendix D: Disaster recovery

AWS PrivateLink connectivity with IDMC is robust, but outages are possible. Learn how to respond to different scenarios of outages.

This appendix provides the following information:

- Overview of the architecture and its normal running state
- How to handle an IDMC outage (Scenario 1)

- How to handle a customer environment outage (Scenario 2)
- How to handle a cloud provider outage (Scenario 3)


The following table summarizes each scenario:

Scenario	Who is affected	Endpoint status	Recovery path
Ideal state	No one	✅ Primary active ✅ DR standby	None, but continue to monitor.
Scenario 1. IDMC outage	Informatica Control Plan	✅ Customer healthy ❌ IDMC down	Update the DNS to the DR endpoint. No new allowlisting should be needed if DR is pre-provisioned.
Scenario 2. Customer outage	Customer VPC or Secure Agent	❌ Customer down ✅ IDMC up	Repair the primary or fail over to the DR endpoints and restart Secure Agents.
Scenario 3. Full regional failure	Both customer and IDMC	❌ Both down	Activate the pre-provisioned DR endpoint. Redirect DNS to these endpoints. Start the Secure Agents in the DR region.

Architecture overview

AWS PrivateLink provides a private, secure connection between your Amazon VPC and IDMC, without exposing traffic to the public internet.

The following image shows the normal working state of the connection:

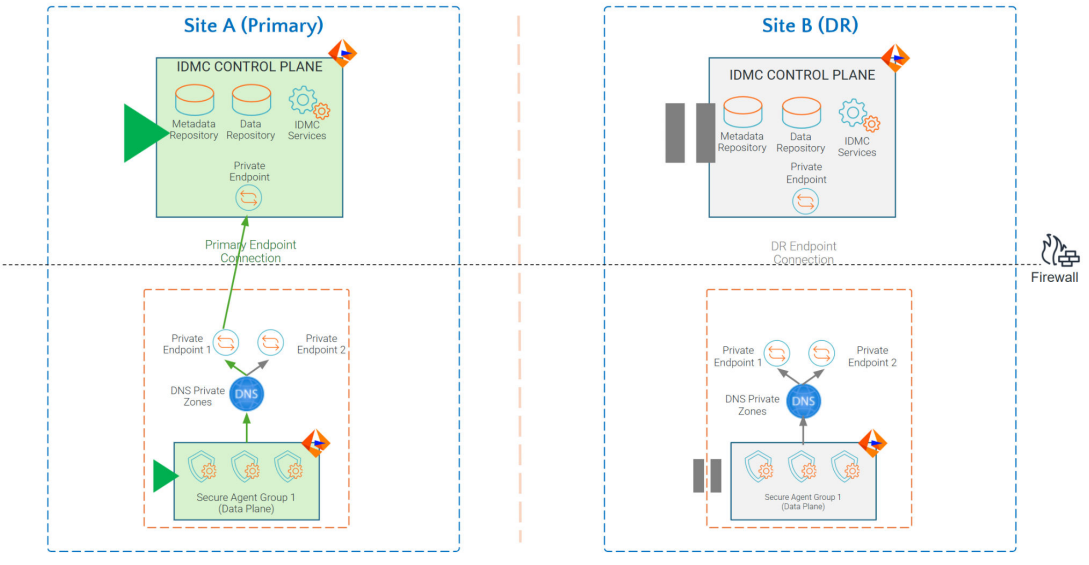

The following table describes the components within the image:

Component	Description
IDMC Control Plane	Informatica-managed plane hosting Metadata Repository, Data Repository, and IDMC Services.
VPC Endpoint (Primary)	Interface endpoint in your AWS account connecting your VPC to the IDMC service endpoint.
VPC Endpoint (DR)	Optional secondary endpoint in a different AWS region or Availability Zone. Used for failover purposes.
DNS Private Hosted Zone	Route 53 private hosted zone with CNAME/A records for each IDMC service pointing to the VPC endpoint.
Secure Agent Group	Customer-managed data plane (EC2 instances) running in your VPC.

The following points provide additional information about the architecture:

- The Secure Agent communicates with IDMC exclusively through the primary VPC endpoint (Site A - Primary in the image).
- DNS resolves all IDMC service hostnames to the private IP of the primary VPC endpoint through the Route 53 private hosted zone.
- All traffic stays within the AWS network. Nothing goes through the public internet.
- A secondary (DR) VPC endpoint is provisioned in Site B (DR) in standby, ready to take over if the primary endpoint fails.


Scenario 1: IDMC outage

In this scenario, the IDMC infrastructure in the primary region is unavailable and the cloud provider's availability is affected. Informatica manages and maintains endpoints in the primary region.

The following table summarizes this scenario:

Status	🔴 IDMC is down
Customer VPC	✅ Healthy
IDMC endpoint	❌ Unavailable
DR endpoint	✅ Available, if pre-provisioned

The following image illustrates this scenario:

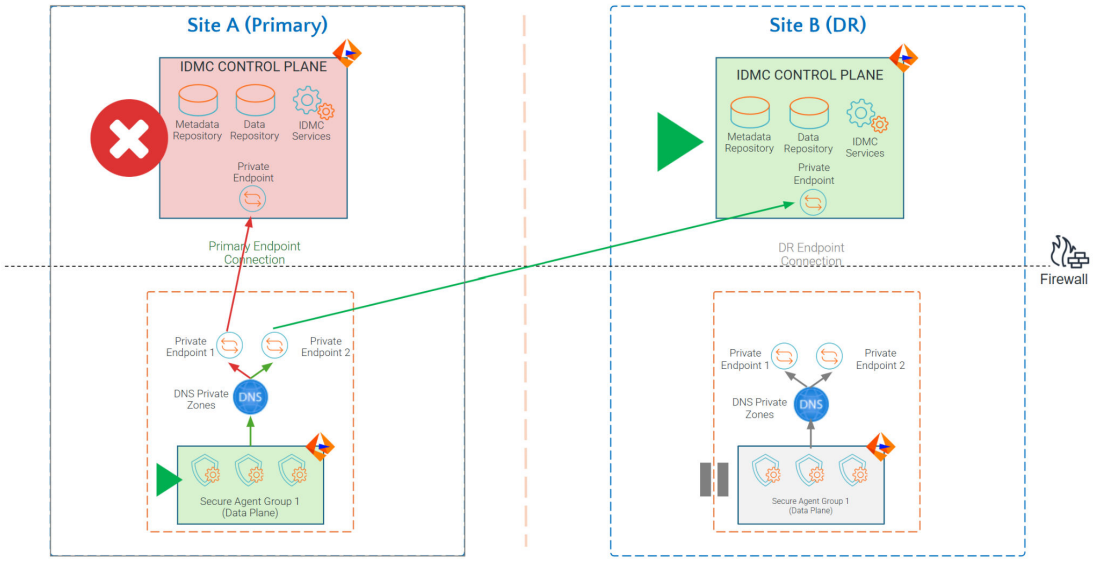

When an IDMC outage occurs, note the following points:

- The VPC endpoint on your side remains active and healthy. Your endpoint hasn't failed.
- DNS resolution continues to function normally.
- Connections through the endpoint fail because the Informatica service-side endpoint is unavailable.
- Informatica manages failover of the control plane to its DR region. The service endpoint ARN may change after failover.

How to prepare for and handle scenario 1

You can handle this scenario by preparing ahead of time and then performing certain steps during the disaster recovery (DR) event.

Complete the following steps during initial setup, before any incident has occurred:

1. Create a new private endpoint connection to Informatica's DR POD.
2. Send a connection request to Informatica's DR POD and obtain approval from Informatica Global Customer Support.

   For more information, see"Step 1. Open a support case with Informatica Global Customer Support" on page 5 .
3. Set up a VPC endpoint for disaster recovery.

   For more information, see "Step 5. Set up a VPC endpoint for disaster recovery (optional)" on page 10.

If an outage occurs, perform the following task:

- Update the DNS resolution to point to the DR endpoint. Also update Route 53 private hosted zone records to resolve IDMC service hostnames to the DR VPC endpoint's private IP.
  For more information, see "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9.

  Note: The customer account was already allow-listed for the DR endpoint during the initial setup, so no additional allow-listing is required during the DR event.

The disaster recovery should produce the following results:

- The Secure Agent connects to IDMC through the DR endpoint.
- IP address verification confirms that a private IP is in use.
- IDMC jobs and integrations resume normal operation.


Scenario 2: Customer environment outage

In this scenario the customer's primary AWS VPC, Secure Agent instances, or supporting infrastructure (Route 53, security groups, NAT gateway) becomes unavailable. IDMC continues to operate normally.

The following table summarizes this scenario:

Status	Customer Primary Environment is down
Customer VPC	Degraded or unavailable
IDMC endpoint	Fully operational
DR endpoint	Available, if pre-provisioned

The following image illustrates this scenario:

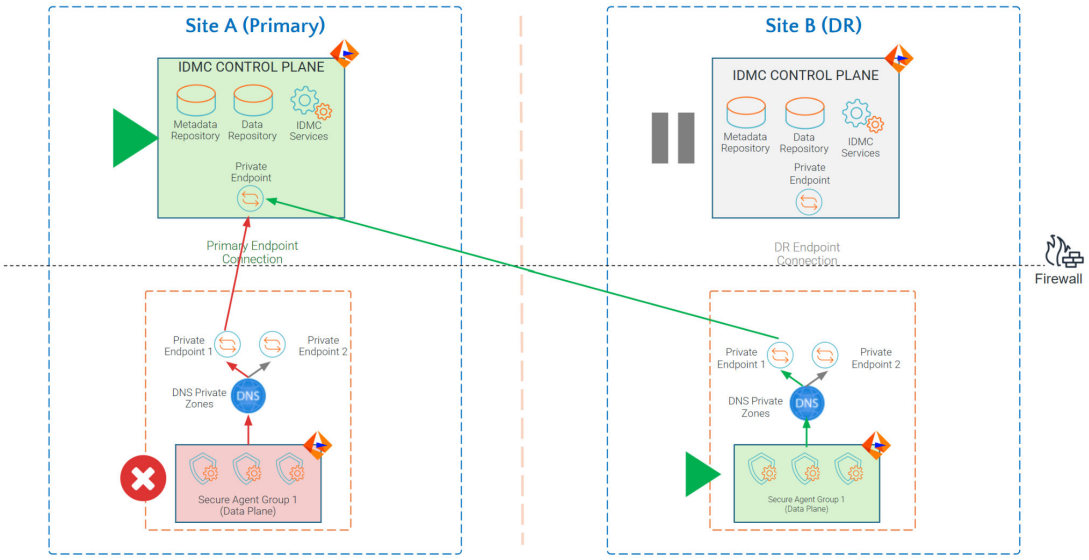

When a customer environment outage occurs, note the following points:

- The Informatica service endpoint remains fully operational.
- The VPC endpoint in the affected region may become unreachable if its VPC or networking components are down.
- DNS resolution might fail if the Route 53 private hosted zone is affected.
- The Secure Agent goes offline and IDMC reports agent connectivity loss.

How to prepare for and handle scenario 2

You can handle this scenario by preparing ahead of time and then performing certain steps during the disaster recovery (DR) event.

Complete the following steps during initial setup, before any incident has occurred:

1. Create a DR VPC endpoint in a secondary AWS region or Availability Zone.

   For more information, see"Step 5. Set up a VPC endpoint for disaster recovery (optional)" on page 10.
2. Configure networking rules.

   For more information, see "Step 3. Configure networking rules and private hosted zone on AWS" on page 7.
3. Configure Route 53 private hosted zone DNS records for the DR endpoint.

   For more information, see "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9.
4. Prepare Secure Agent launch templates for the DR region.

If an outage occurs, assess the scope of the outage by checking the VPC endpoint status, Secure Agent EC2 health, and Route 53 DNS records.
If recovering in the primary region, perform the following steps:

1. Recreate the VPC endpoint.
   For more information, see "Step 2. Create a VPC endpoint in your Amazon account" on page 6.
2. Repair the network rules.
   For more information, see"Step 3. Configure networking rules and private hosted zone on AWS" on page 7.
3. Validate the DNS records.
   For more information, see "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9.
4. Restart the Secure Agent instances.

If failing over to the DR region, perform the following steps:

1. Update the DNS records to resolve IDMC hostnames to the DR endpoint's private IP.
2. Start the Secure Agent instances in the DR region.
3. Verify connectivity.
   For more information, see "Step 6. Verify the IP address" on page 10.

The disaster recovery should produce the following results:

- The VPC endpoint shows as healthy ("Available") in the AWS Management Console.
- DNS resolves IDMC service hostnames to the correct private address.
- The status of the Secure Agent shows as "Running" in Administrator.
- Pipelines and integrations resume normal operation.


Scenario 3: Cloud provider outage

In this scenario, a complete AWS regional failure affects both the customer's VPC and the Informatica IDMC infrastructure in the same region. Neither the customer's endpoints nor Informatica's primary endpoints are accessible.

The following table summarizes this scenario:

Status	Complete regional failure
Customer VPC	Unavailable (regional failure)
IDMC endpoint	Unavailable (regional failure)
DR endpoint	Available, if pre-provisioned

The following image illustrates this scenario:

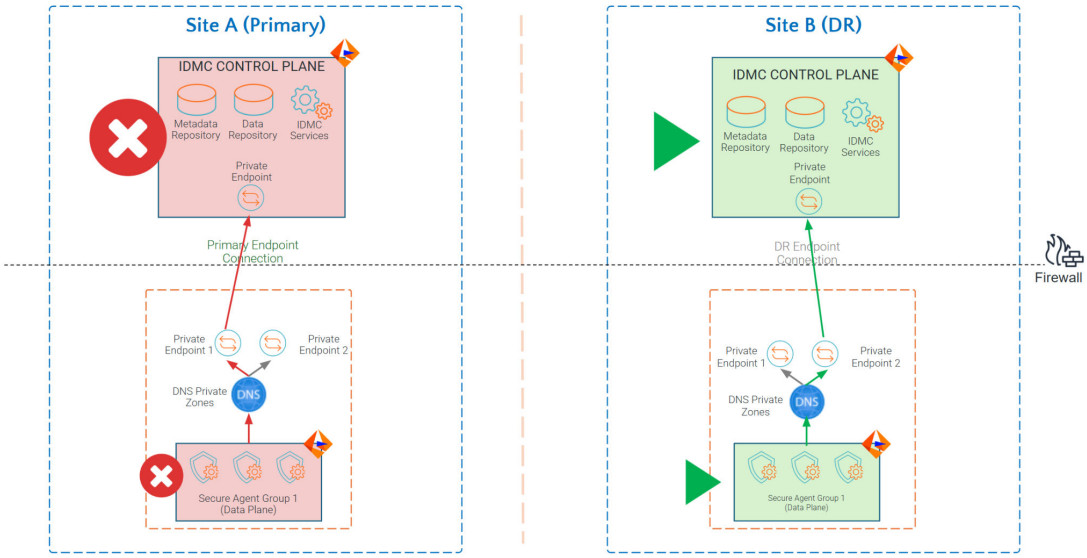

When the cloud provider outage scenario occurs, note the following points:

- Both the customer's primary VPC endpoint and Informatica's primary service endpoint are unavailable.
- DNS private hosted zone records might still be readable (Route 53 is global), but they point to an unreachable endpoint.
- All Secure Agent connectivity is severed.
- Recovery depends entirely on having a pre-provisioned DR VPC endpoint in an unaffected region.

How to prepare for and handle scenario 3

You can handle this scenario by preparing ahead of time and then performing certain steps during the disaster recovery (DR) event.

Complete the following steps during initial setup, before any incident has occurred:

1. Provision a DR VPC endpoint in a different AWS region.

   For more information, see "Step 5. Set up a VPC endpoint for disaster recovery (optional)" on page 10.
2. Configure networking rules in the DR region.

   For more information, see "Step 3. Configure networking rules and private hosted zone on AWS" on page 7.
3. Configure DNS records in the DR region.

   For more information, see "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9.

If an outage occurs, perform the following steps:

1. Confirm the scope of the regional failure by using the AWS Service Health Dashboard.
2. Contact Informatica Informatica Global Customer Support to confirm Informatica's DR status and verify that your account is allowlisted for the DR endpoint.
   For more information, see "Step 1. Open a support case with Informatica Global Customer Support" on page 5.
3. Confirm the DR VPC endpoint is in "Available" state. Update Route 53 DNS records to resolve each IDMC service hostname to the DR endpoint's private IP.
4. Start Secure Agent instances in the DR region.
5. Verify connectivity.
   For more information, see "Step 6. Verify the IP address" on page 10.

The disaster recovery should produce the following results:

- All traffic routes through the DR VPC endpoint in the secondary region.
- DNS resolves IDMC service hostnames to the DR endpoint's private IP.
- Secure Agents in the DR region are running and show as "Running" in Administrator.
- IDMC jobs can be restarted from the DR region.

Disaster recovery readiness checklist

Use the following checklist to ensure that you are prepared for disaster recovery.

The following table describes the steps you should take before any outages occur:

Step	Action	References
1	Complete primary PrivateLink setup.	"Step 1. Open a support case with Informatica Global Customer Support" on page 5 "Step 2. Create a VPC endpoint in your Amazon account" on page 6 "Step 3. Configure networking rules and private hosted zone on AWS" on page 7 "Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9
2	Provision secondary (DR) VPC endpoint.	"Step 5. Set up a VPC endpoint for disaster recovery (optional)" on page 10

Step	Action	References
3	Configure networking rules for the DR VPC.	"Step 3. Configure networking rules and private hosted zone on AWS" on page 7
4	Create Route 53 DNS records for DR endpoint.	"Step 4. Open the hosted zone and create a record for each Informatica Intelligent Cloud Services service" on page 9
5	Verify primary endpoint connectivity.	"Step 6. Verify the IP address" on page 10
6	Verify DR endpoint connectivity.	"Step 6. Verify the IP address" on page 10
7	Provision Data Quality/Profiling endpoint, if applicable.	"Step 7. Provision an interface endpoint for Data Quality and Data Profiling" on page 10
8	Make note of the DR endpoint ARN, private IPs, and DNS names.	Internal runbook
9	Prepare the Secure Agent launch templates for DR region.	Internal runbook
10	Perform a DR failover test.	Recommended quarterly

Author

Informatica Cloud Trust Team