How-To Library

Informatica

Deploy and configure Informatica Intelligent Data Management Cloud on Oracle Cloud Infrastructure

© Copyright Informatica LLC 2022, 2025. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https:// www.informatica.com/trademarks.html.

Abstract

Supported Versions

- Informatica Intelligent Cloud Services .

Table of Contents

Abstract. 0

Overview. 2

Intended audience. 2

Deployment prerequisites. 2

Supported configurations. 3

Architecture. 4

Deploying Informatica Intelligent Data Management Cloud on the Oracle Cloud Infrastructure. 4

Specify compute configuration details. 5

Specify network configuration details. 5

Specify Informatica Intelligent Data Management Cloud configuration details. 8

Troubleshooting. 8

Overview

Use the Marketplace solution to launch, configure, and run the virtual machines, virtual network, and other services required to deploy Informatica Intelligent Data Management Cloud (IDMC) on Oracle Cloud Infrastructure. You can connect to the IDMC services using the Informatica Secure Agent to leverage your computing needs.

Deploy the Informatica Secure Agent from Oracle Cloud Infrastructure. You can add as many secure agents as your license permits. This deployment reference provides step-by-step instructions to deploy IDMC on Oracle Cloud Infrastructure.

Intended audience

This article is for users who are responsible for deploying the Marketplace solution of IDMC on Oracle Cloud Infrastructure.

As a user with administrator privileges to deploy applications on Oracle Cloud Infrastructure, you must be familiar with Oracle Cloud platform elements. For more information, see the Oracle Cloud Infrastructure documentation.

Deployment prerequisites

Before you deploy Informatica Intelligent Cloud Services (IICS) on Oracle Cloud Infrastructure, verify that you have the following prerequisites:

- An Oracle Cloud Account. For information on creating an Oracle Cloud Account, see Oracle Documentation.
- Access and permissions to create the following resources on the Oracle Cloud platform:

  - Virtual Cloud Network

- Subnet
- Route Table
- Internet Gateway
- NAT Gateway
- Network security group
- Virtual machines

- Permission to create, modify, and delete instances
- Permission to create and delete stack
- An Informatica Intelligent Data Management Cloud account

To register a new user with an IICS account, go to Informatica Cloud and fill in the form. You will receive a registration confirmation email that contains a link to create your password. After you have created your password, log in to your account using the region of the POD you chose at the time of registration.

To create a Secure Agent group in IICS, perform the following steps:

1. Log in to Informatica Intelligent Data Management Cloud.
2. Click **Administrator**.
3. From the left pane, choose **Runtime environments**.
   The list of secure agents that you configured appears.
4. To create a Secure Agent group, click **New Runtime Environment**.
5. Enter a name for the group, and then click **OK**.
   After you create a group, you can add Secure Agents to the group.

Supported configurations

You are responsible for the cost of the Oracle services used while running this deployment. There is no additional cost for using this Marketplace deployment. This deployment requires a license for Informatica Intelligent Data Management Cloud.

The following sections list the supported operating systems and instance sizes that you can choose based on your requirements:

Operating System

Oracle Linux 8


Instance Sizes

A list of supported instances sizes are available in the Oracle Documentation. Default is VM.Standard3.Flex.

Architecture

When you deploy IDMC on a virtual network, the Oracle Cloud Infrastructure Marketplace solution creates and connects the Informatica Secure Agent to the network.

The following image shows the architecture of IDMC on Oracle Cloud Infrastructure:

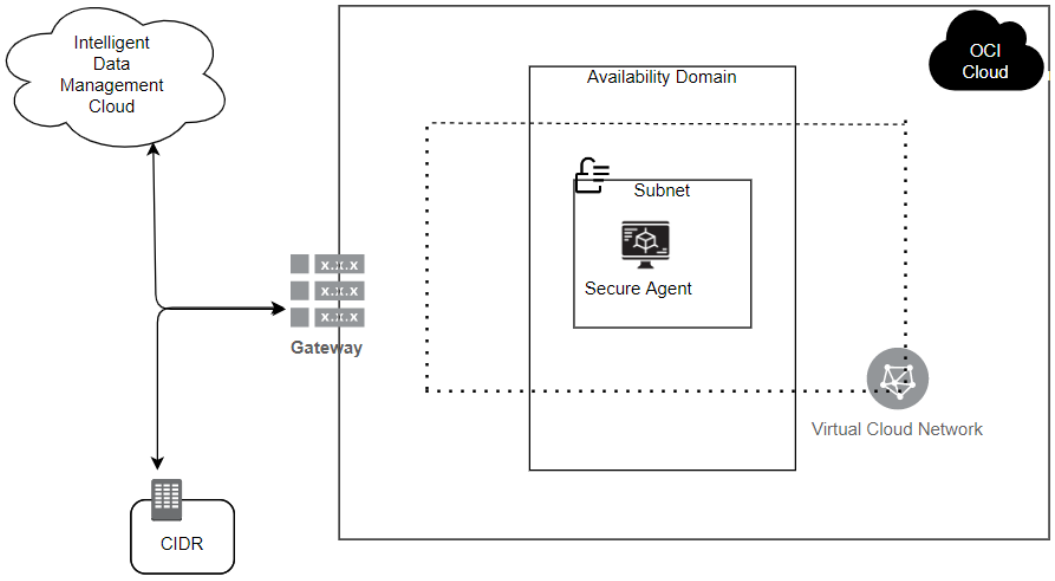

Deploying Informatica Intelligent Data Management Cloud on the Oracle Cloud Infrastructure

To provision the IDMC solution on the Oracle Cloud Infrastructure, launch the stack wizard and configure the properties.

To deploy IDMC on Oracle Cloud Infrastructure, perform the following steps:

1. Log in to Oracle Cloud Marketplace website.
2. Use the search box to search for Informatica Intelligent Data Management Cloud.
3. From the search result, select Informatica Intelligent Data Management Cloud.
4. Click **Get App** to launch the solution wizard.
5. Select the appropriate version and compartment, and click **Launch Stack**.
6. In the **Stack Information** panel, review the parameters and click **Next**.
7. Specify the compute configuration details. For more information, see the "Specify compute configuration details" on page 5 topic.
8. Specify the network configuration details. For more information, see the "Specify network configuration details" on page 5 topic.
9. Specify the Informatica Intelligent Data Management Cloud configuration details. For more information, see the "Specify Informatica Intelligent Data Management Cloud configuration details" on page 8 topic.
10. After you configure the parameters, click **Next**.
    The template validates the values that you entered and displays a review page.
11. Verify your choices in the **Review** panel.

12. Select the **Run Apply** check box to deploy the resources immediately.
13. Click **Create**.
    Oracle deploys the IDMC solution on the new stack and creates resources in the environment that you configured.

Specify compute configuration details

1. Enter the following information in the **Compute Configuration** panel:

Parameter label	Description
Compute Compartment	Required. The compartment where you want to create the compute resources.
Instance Name	Required. The instance name to identify the VM.
DNS Hostname Label	Required. DNS hostname label. Make sure that the DNS hostname label is unique across all VNICs in the subnet and complies with RFC 952 and RFC 1123.
Compute Shape	Required. The compute shape for the VM. See the Oracle documentation to learn about the CPU and RAM sizes for the selected compute shape. For flex type, you can specify the CPU and RAM sizes.
Flex Shape OCPUs	Required for flex type compute shape. The number of OCPUs that you want to allocate to this instance. See the Oracle documentation to learn about the maximum supported value for the selected flex type.
Flex Shape RAM in GB	Required for flex type compute shape. The amount of RAM that you want to allocate to this instance. See the Oracle documentation to learn about the maximum supported value for the selected flex type.
Availability Domain	Required. The availability domain to contain the IDMC deployment.
Public SSH Key String	Required. The public SSH key to access the VM through SSH. You can either choose the SSH key file or paste the SSH key in the text box.

Specify network configuration details

You can choose to deploy IDMC on a new VCN or an existing VCN.

- If you want to deploy IDMC on a new VCN, see "Deploy IDMC on a new VCN" on page 6 to configure the parameters.
- If you want to deploy IDMC on an existing VCN, see "Deploy IDMC on an existing VCN" on page 7 to configure the parameters.

Deploy IDMC on a new VCN

To deploy IDMC on a new VCN, perform the following steps:

1. Enter the following information in the **Virtual Cloud Network** panel:

Parameter label	Description
Network Compartment	Required. The identifier for the Oracle virtual network compartment where you want to deploy IDMC.
Network Strategy	Required. Select **Create New VCN and Subnet**.
Configuration Strategy	Required. Choose whether to use the recommended configuration for the VCN or customize it.
Name	Required for customized network configuration. The name of the new VCN.
DNS Label	Required for customized network configuration. The VCN DNS label. The DNS label can contain only letters and numbers. The label must start with a letter. The maximum supported length for the label is 15 characters.
CIDR Block	Required for customized network configuration. The CIDR of the new VCN. If you plan to peer this VCN with another VCN, the VCNs must not have overlapping CIDRs.

2. Enter the following information in the **Subnet** panel:

Parameter label	Description
Subnet Type	Required. Choose between private and public subnets.
Name	Required. The name of the new subnet.
DNS Label	Required. The subnet DNS label. The DNS label can contain only letters and numbers. The label must start with a letter. The maximum supported length for the label is 15 characters.
CIDR Block	Required. The CIDR of the new subnet. The CIDR of the new subnet must not overlap with any other subnet CIDRs.
Network Security Group Configuration	Required. Choose whether to use the recommended network security group configuration or customize it.

3. If you have selected **Customize Network Security Group** in the **Network Security Group Configuration** field, enter the following information in the **Network Security Group** panel:

Parameter label	Description
Name	Required for customized network configuration. The name of the Network Security Group.
Allowed Ingress Traffic (CIDR Block)	Required for customized network configuration. The CIDR IP range that is permitted to access IDMC Secure Agent. Format is x.x.x.x/x.

Deploy IDMC on an existing VCN

To deploy IDMC on an existing VCN, perform the following steps:

1. Enter the following information in the **Virtual Cloud Network** panel:

Parameter label	Description
Network Compartment	Required. The identifier for the Oracle virtual network compartment where you want to deploy IDMC.
Network Strategy	Required. Select **Use Existing VCN and Subnet**.
Existing VCN	Required. The VCN where you want to create the compute instances and network resources.

2. Enter the following information in the **Subnet** panel:

Parameter label	Description
Subnet Type	Required. Choose between private and public subnets. Make sure that you choose the correct subnet type for the existing subnet. If there is a mismatch in subnet type, the deployment may fail.
Existing Subnet	Required. The subnet within the selected VCN. For private subnet type, make sure that the selected subnet can connect to IDMC by using any type of connectivity option.
Network Security Group Configuration	Required. Choose whether to use the recommended network security group configuration or customize it.

3. If you have selected **Customize Network Security Group** in the **Network Security Group Configuration** field, enter the following information in the **Network Security Group** panel:

Parameter label	Description
Name	Required for customized network configuration. The name of the Network Security Group.
Allowed Ingress Traffic (CIDR Block)	Required for customized network configuration. The CIDR IP range that is permitted to access IDMC Secure Agent. Format is x.x.x.x/x.

Specify Informatica Intelligent Data Management Cloud configuration details

1. Enter the following information in the **Informatica Intelligent Data Management Cloud Details** panel:

Parameter label	Description
Data Center Location	Required. The data center location for the deployment. Choose the data center location based on the user details registered in IDMC.
Username	Required. The user name to access IDMC.
Secure Agent Installation Token	Required. Paste the Secure Agent install token that you get from the IDMC Administrator service. To get the install token, perform the following steps: 1. Log in to IDMC. 2. Select **Administrator**, and then click **Runtime Environments**. 3. Click **Generate Install Token**. 4. Click **Copy** to copy the install token string.
Secure Agent Group Name	Optional. Name of the Secure Agent group. If your account does not contain the group specified or if you do not specify a group name, the Secure Agent is assigned to an unnamed group.

Troubleshooting

View the log files to know the status of the deployment and troubleshoot any issues.

You can access the log files at the following locations:

```
<INFA_HOME>/agentcore/agentcore.log
<INFA_HOME>/infaagent.log
<INFA_HOME>/agent_setup.log
```

Where "<INFA_HOME>" is the location where agentcore is installed.

Author