How-To Library

Informatica

Microsoft Azure Private Link Onboarding Guide for Informatica Intelligent Data Management Cloud

© Copyright Informatica LLC 2023, 2026. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

If you use a Microsoft Azure private virtual network (VNet), you can configure a private connection between your Azure account and Informatica® Intelligent Data Management Cloud™ (IDMC) using Azure Private Link.

You can use Azure Private Link with the following services:

- API Manager
- Application Integration
- B2B Gateway
- Cloud Data Integration for PowerCenter (CDI-PC)
- Data Governance and Catalog
- Data Integration, excluding Data Integration Elastic
- Data Marketplace
- Data Profiling
- Data Quality
- Integration Hub
- Data Ingestion and Replication
- MDM SaaS services (Customer 360 SaaS, Multidomain MDM SaaS, Product 360 SaaS, Reference 360 Saas, and Supplier 360 SaaS)
- Metadata Command Center

Supported Versions

- Intelligent Data Management Cloud July 2026

Table of Contents

Overview. . . . 3
Before you begin. . . . 4
Step 1. Open a support case with Informatica Global Customer Support. . . . 5
Step 2. Set up a virtual network and subnet. . . . 5
Step 3. Create a private endpoint. . . . 7
Step 4. Create a private DNS zone and link it to your virtual network. . . . 11
Step 5. Associate the private DNS zone with the private endpoint. . . . 14
Step 6. Launch a VM where the Secure Agent will be installed. . . . 15
Step 7. Install the Secure Agent on the virtual machine. . . . 17
Step 8. Verify the IP address. . . . 17
Using Application Integration with Azure Private Link. . . . 18
Appendix A: DNS names for IDMC services. . . . 18
Appendix B: Worksheet for setting up Azure Private Link. . . . 27
Appendix C: Disaster recovery. . . . 28
Architecture overview. . . . 29
Scenario 1: IDMC outage. . . . 30

Scenario 2: Customer environment outage. 31
Scenario 3: Cloud provider outage. 33
Disaster recovery readiness checklist. 35

Overview

If you use a Microsoft Azure private virtual network (VNet), you can configure a private connection between your Azure account and IDMC using Azure Private Link.

Note: Access to the IDMC UI isn't supported through Private Link. Private Link connectivity is intended for data plane/API traffic only. You can access the UI through a standard public endpoint.


To use Azure Private Link, you must purchase the appropriate SKU through Informatica. Azure Private Link communication works with Intelligent Data Management Cloud instances that are deployed on Microsoft Azure infrastructure.

You can use Azure Private Link with the following services:

- API Manager
- Application Integration
- B2B Gateway
- Cloud Data Integration for PowerCenter (CDI-PC)
- Data Governance and Catalog
- Data Integration, excluding Data Integration Elastic
- Data Marketplace
- Data Profiling
- Data Quality
- Integration Hub
- Data Ingestion and Replication
- MDM SaaS services (Customer 360 SaaS, Multidomain MDM SaaS, Product 360 SaaS, Reference 360 Saas, and Supplier 360 SaaS)
- Metadata Command Center

When you use Azure Private Link, the Secure Agent in your VNet communicates with IDMC securely through Azure Private Link instead of going over the public internet.

The following image shows an overview of the communication between your Azure account and IDMC when you use Azure Private Link:

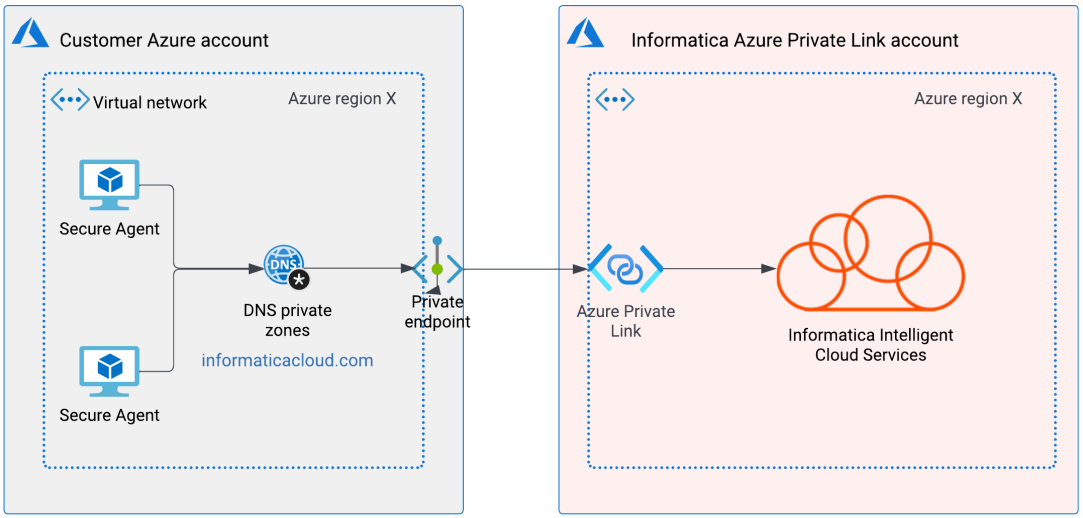

For all services except Application Integration, communication between IDMC and the Secure Agent in your VNet is two-way. For Application Integration, communication is from Application Integration to the Secure Agent only. For more information about using Application Integration with Azure Private Link, see "Using Application Integration with Azure Private Link" on page 18.

To configure IDMC to work with Azure Private Link, complete the following steps:

1. Open a support case with Informatica Global Customer Support to request access to IDMC using Azure Private Link.
2. Set up an Azure virtual network and subnet if you don't already have one.
3. Create a private endpoint in your Azure account.
4. Create a private DNS zone and link it to your virtual network.
5. Associate the private DNS zone with the private endpoint.
6. Launch a virtual machine (VM) where the Secure Agent will be installed.
7. Install a Secure Agent on the VM.
8. Verify the IP address to ensure that you're connecting to IDMC using Azure Private Link.

The following sections in this guide provide details about each of these steps.

Before you begin

Before you begin, verify that you have an Azure account with an active subscription. You'll also need to note the IP address that you use to connect to IDMC over the public internet.

If you don't have an Azure account, you can create one for free.

You'll also need to note the IP address that you use to connect to IDMC. When you finish configuring an Azure Private Link connection, you'll need to verify that this IP address differs from the one you use to connect to IDMC using Azure Private Link.

To verify the IP address, open a terminal in Azure and use the ping command to ping IDMC from a VM in your Azure account.

For example, if your IDMC login URL is `https://dm1-us.informaticacloud.com/identity-service/home`, use the following command to ping IDMC:

```
ping dm1-us.informaticacloud.com
```

The command returns output like the following example:

```
Pinging dm1-us.informaticacloud.com [40.12.34.567] with 32 bytes of data:
Reply from 40.12.34.567: bytes=32 time=58ms TTL=111
Reply from 40.12.34.567: bytes=32 time=41ms TTL=111
Reply from 40.12.34.567: bytes=32 time=39ms TTL=111
Reply from 40.12.34.567: bytes=32 time=44ms TTL=111

Ping statistics for 40.12.34.567:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 39ms, Maximum = 58ms, Average = 45ms
```

The IP address is the value within the square brackets. You can record this value in "Appendix B: Worksheet for setting up Azure Private Link" on page 27.

Step 1. Open a support case with Informatica Global Customer Support

To start, you'll need to open a support case with Informatica Global Customer Support requesting access to IDMC through Azure Private Link. Informatica Global Customer Support will provide you with the resource ID and target sub-resource for your POD and region.

If you need help creating a support case, contact your client services manager.

1. Open a support case with Global Customer Support and request access to IDMC using Azure Private Link. Provide the following information in your support case:
   - Your IDMC organization ID.
   - Your Azure region.
     For more information about finding your Azure region, see Find or change your organization region in the Azure documentation.

     Note: If your private endpoint region differs from your IDMC region, let Global Customer Support know that you need cross-region support, and provide both your private endpoint region and your IDMC region.

   You can record these values in "Appendix B: Worksheet for setting up Azure Private Link" on page 27.
2. Wait for Informatica to respond to your request.

   You should receive a response within two business days.

When Informatica responds to your request, we'll provide you with the resource ID and target sub-resource for your POD and region. You can record these values in "Appendix B: Worksheet for setting up Azure Private Link" on page 27. We'll also enable the appropriate license for your organization.

Step 2. Set up a virtual network and subnet


If you don't already have a VNet and subnet that you'll use to connect to IDMC, you'll need to set one up. Your VNet will contain the virtual machines (VMs) that host the Secure Agent.

If you plan to use an existing VNet to connect to IDMC, you can skip this step and go to "Step 3. Create a private endpoint" on page 7.

1. Sign in to the Azure portal.
2. In the portal, search for and select **Virtual networks**.
3. On the **Virtual networks** page, select **Create**.

4. On the **Basics** tab of the **Create virtual network** screen, enter or select the following values:

Property	Value
Subscription	Select your subscription.
Resource group	Select the resource group or create a new one. The resource group you choose should have the Network Contributor role assigned so that you can create resources in this group.
Name	Enter a name for the VNet.
Region	Select your region. The region should be the same as your IDMC region.

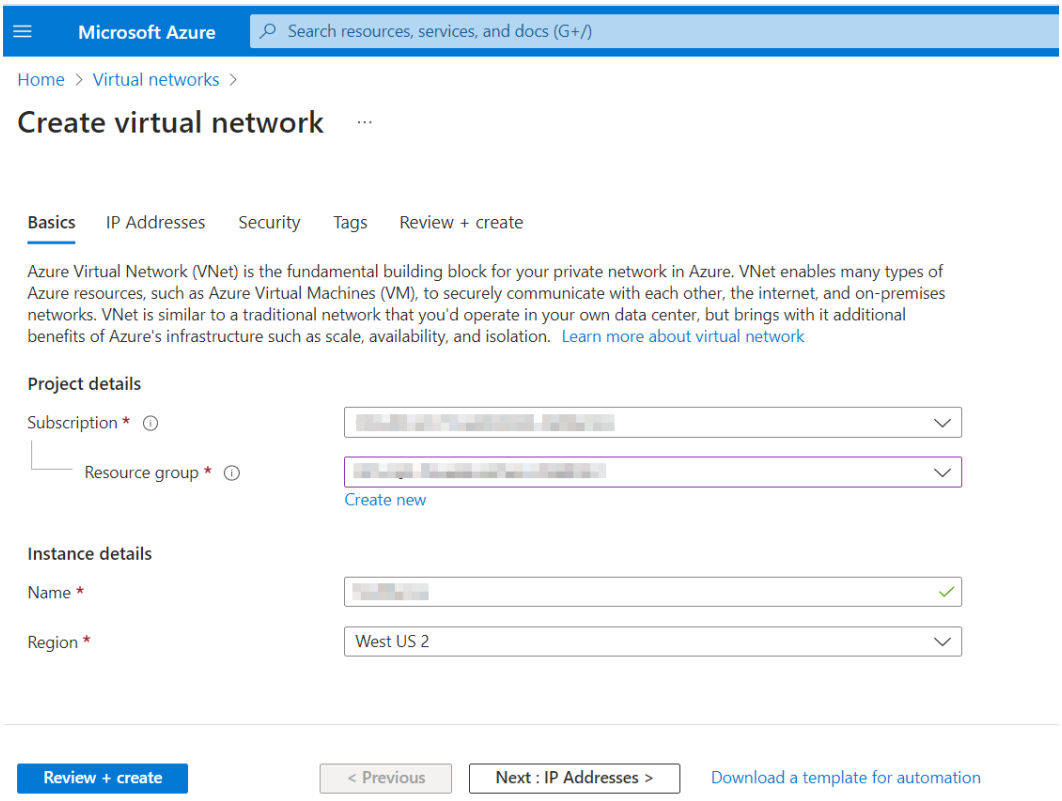

5. Click **Next: IP Addresses**.
6. Select a subnet.


   If a subnet is not available, on the **IP Addresses** tab, click **+ Add subnet** and enter the subnet name and IP address range.
7. Click **Review + create**.
8. Click **Create**.

Step 3. Create a private endpoint

After you've created your VNet and subnet, create a private endpoint. A private endpoint is a network interface that uses a private IP address from your VNet. You connect privately and securely to IDMC through the private endpoint that you create.

1. Sign in to the Azure portal.
2. In the search box at the top of the portal, search for and select **Private endpoints**.
3. On the **Private endpoints** page, select **+ Create**.
4. On the **Basics** tab of the **Create a private endpoint** screen, enter or select the following values:


Property	Value
Subscription	Select your subscription.
Resource group	Select the resource group. This is the same resource group that you selected when you created the VNet.
Name	Enter a name for the private endpoint.
Network interface name	Enter a network interface name.
Region	Select the region where your VNet is located.

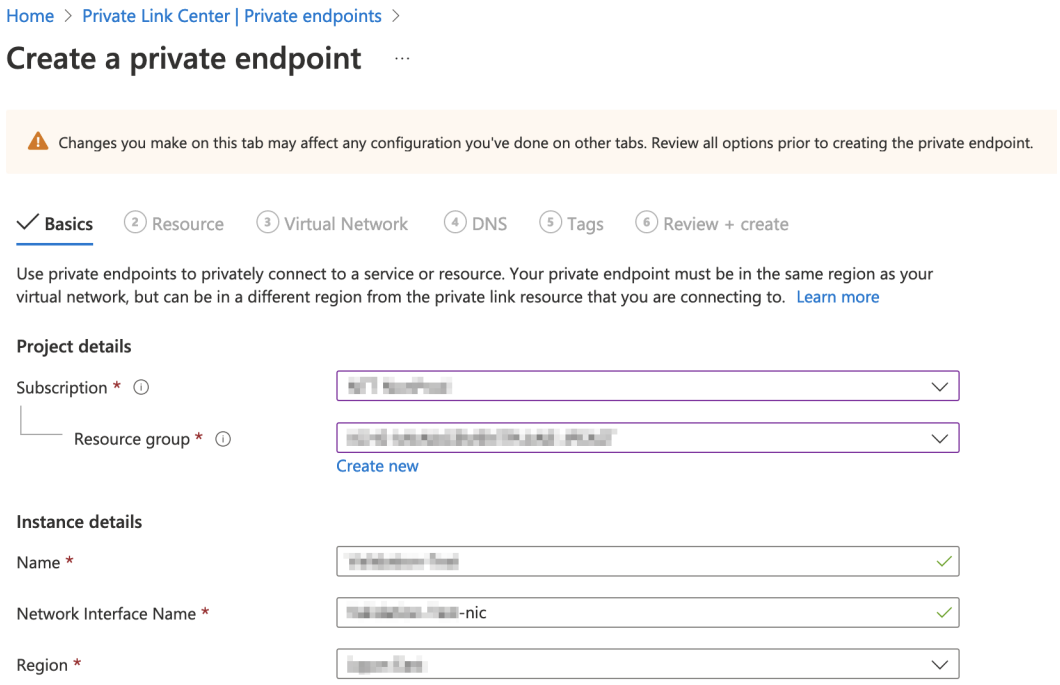

5. Click **Next: Resource**.

6. On the **Resource** tab, enter or select the following values:


Property	Value
Connection method	Select **Connect to an Azure resource by resource ID or alias**.
Resource ID or alias	Enter the resource ID that you received from Informatica.
Target sub-resource	Enter the target sub-resource that you received from Informatica.
Request message	Enter a message like, "We'd like to use this endpoint to connect to IICS through Azure Private Link." Include your customer name and organization ID in the message.

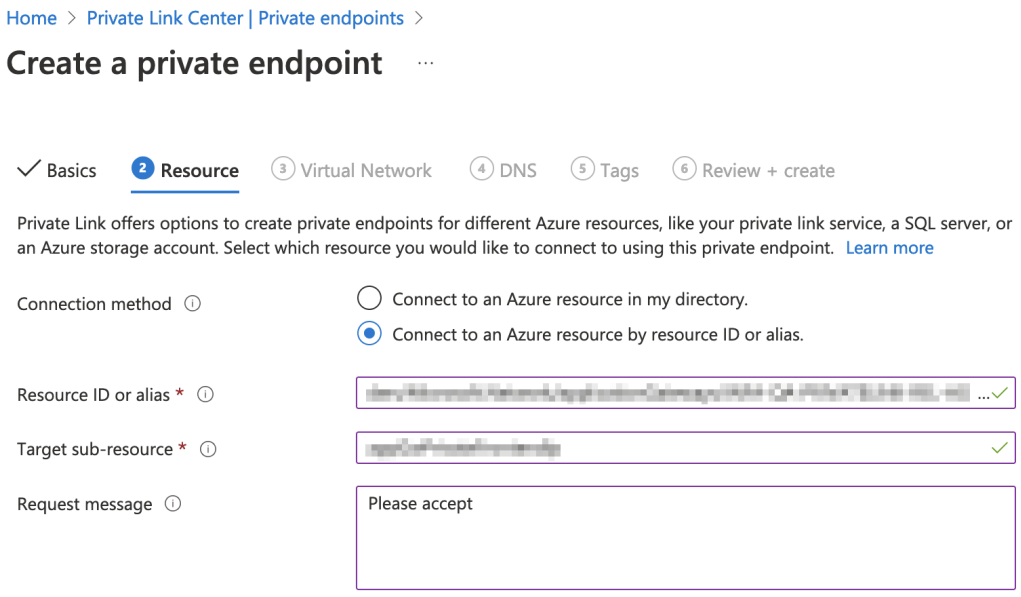

7. Click **Next: Virtual Network**.
8. On the **Virtual Network** tab, enter or select the following values:


Property	Value
Virtual network	Select your VNet.
Subnet	Select your subnet.

Property	Value
Network policy for private endpoints	Accept the default value (**Disabled**).
Private IP configuration	Select **Dynamically allocate IP address**.

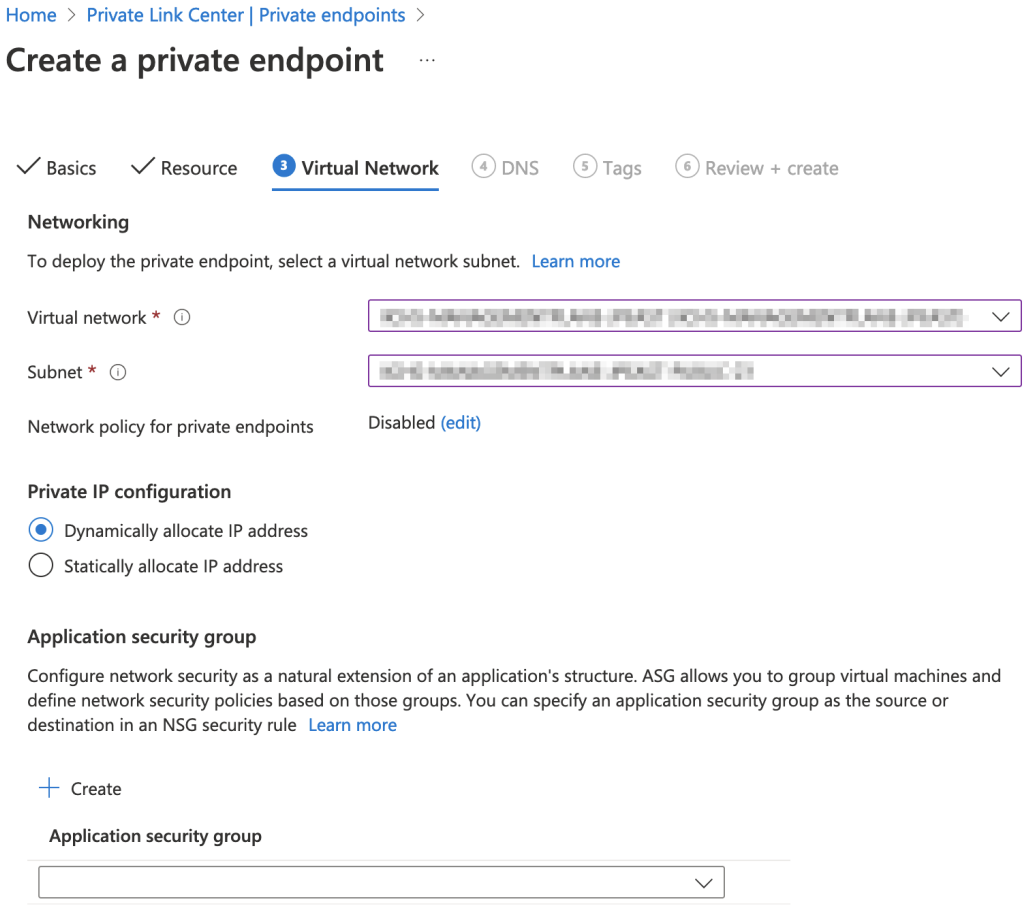

9. Click **Next: DNS** and accept the default values.
10. Click **Next: Tags** and, optionally, add tags.

11. Click **Next: Review + create**.

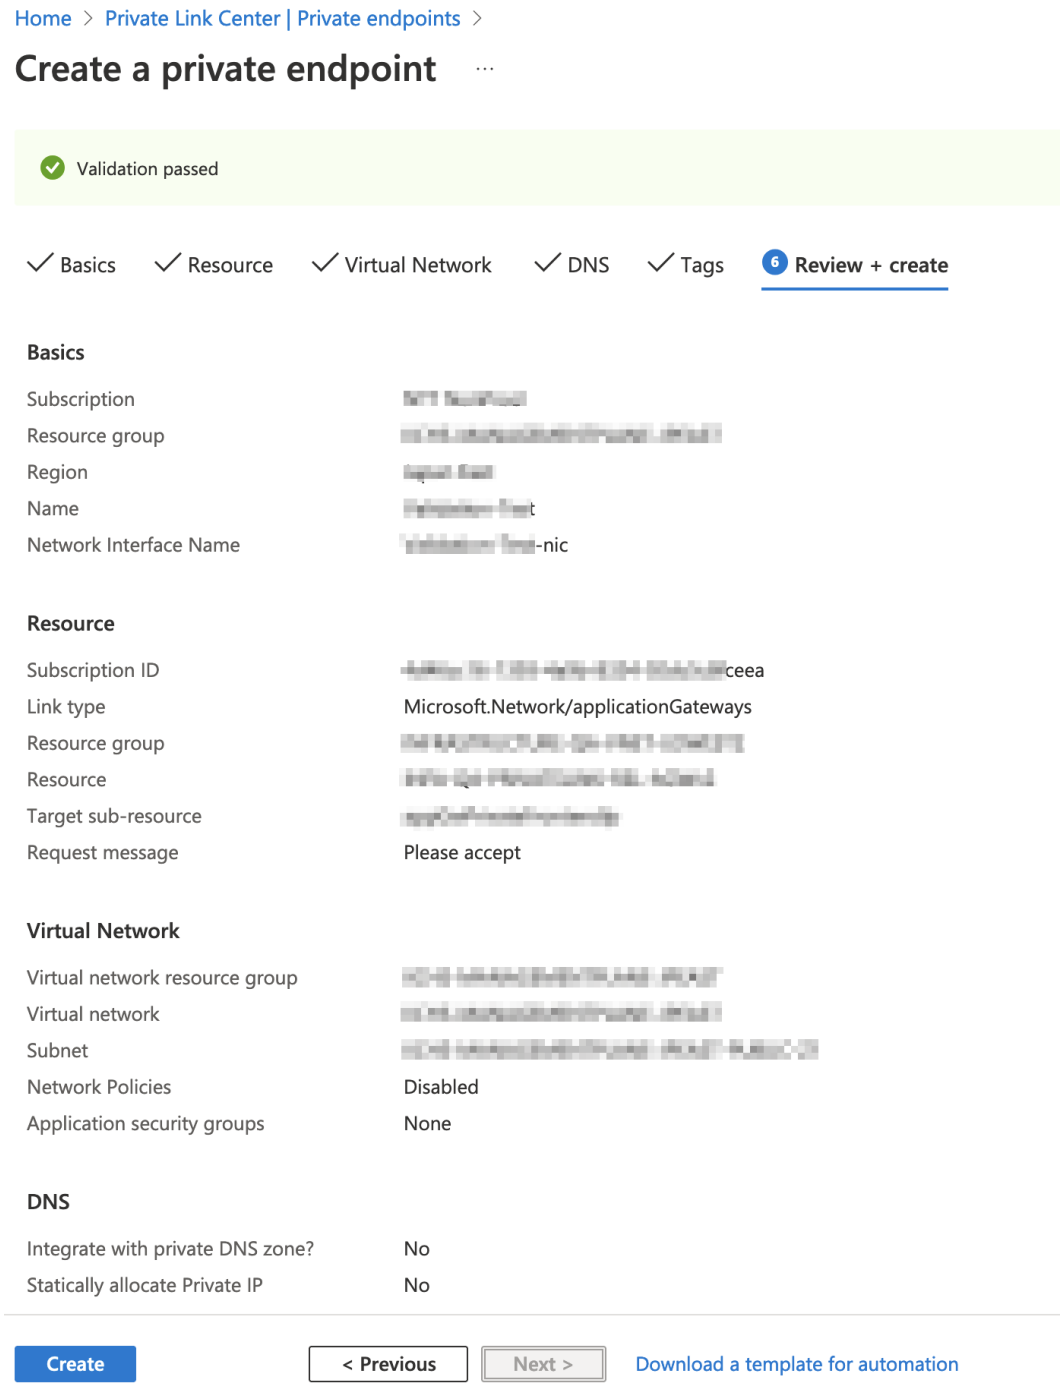

12. Click **Create** to create the private endpoint.
13. When the private endpoint has been created, click the **DNS** tab and copy the IP address.

    You can record the IP address in "Appendix B: Worksheet for setting up Azure Private Link" on page 27.

    You'll need the IP address when you create a private DNS zone and link it to your VNet.


Informatica Global Customer Support will notify you when your request has been approved. Normally, notification takes two business days or less.

Step 4. Create a private DNS zone and link it to your virtual network

After Informatica accepts your endpoint connection request, you'll need to create a private DNS zone and link it to your VNet. A DNS zone contains the DNS entries for a domain. A linked VNet is allowed to resolve records within the DNS zone.


1. In the search box at the top of the Azure portal, search for and select **Private DNS zones**.
2. Select **Create private DNS zone**.
3. On the **Basics** tab of the **Create Private DNS zone** screen, enter or select the following values:

Property	Value
Subscription	Select your subscription.
Resource group	Select the resource group. This is the same resource group that you selected when you created the VNet.
Name	Enter `informaticacloud.com`.

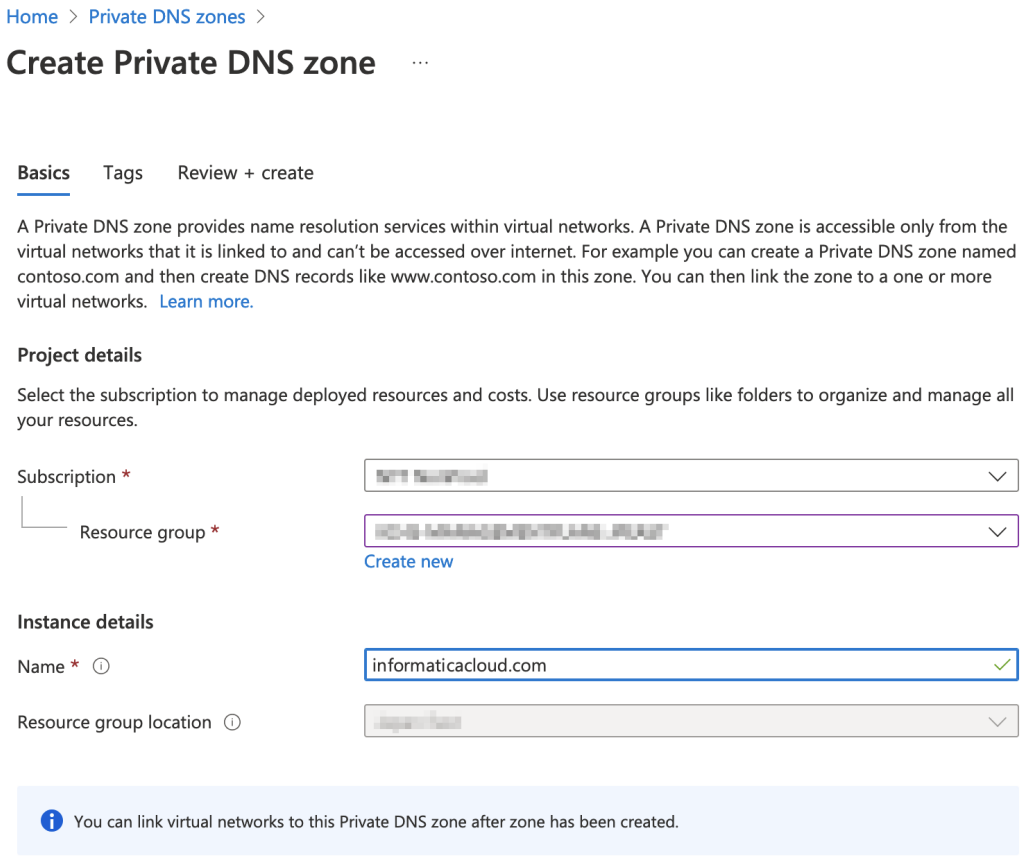

4. For the **Resource group location**, select the same region as your VNet.
5. Click **Next** and optionally add tags.


6. Click **Next**.
7. Click **Review + Create**.

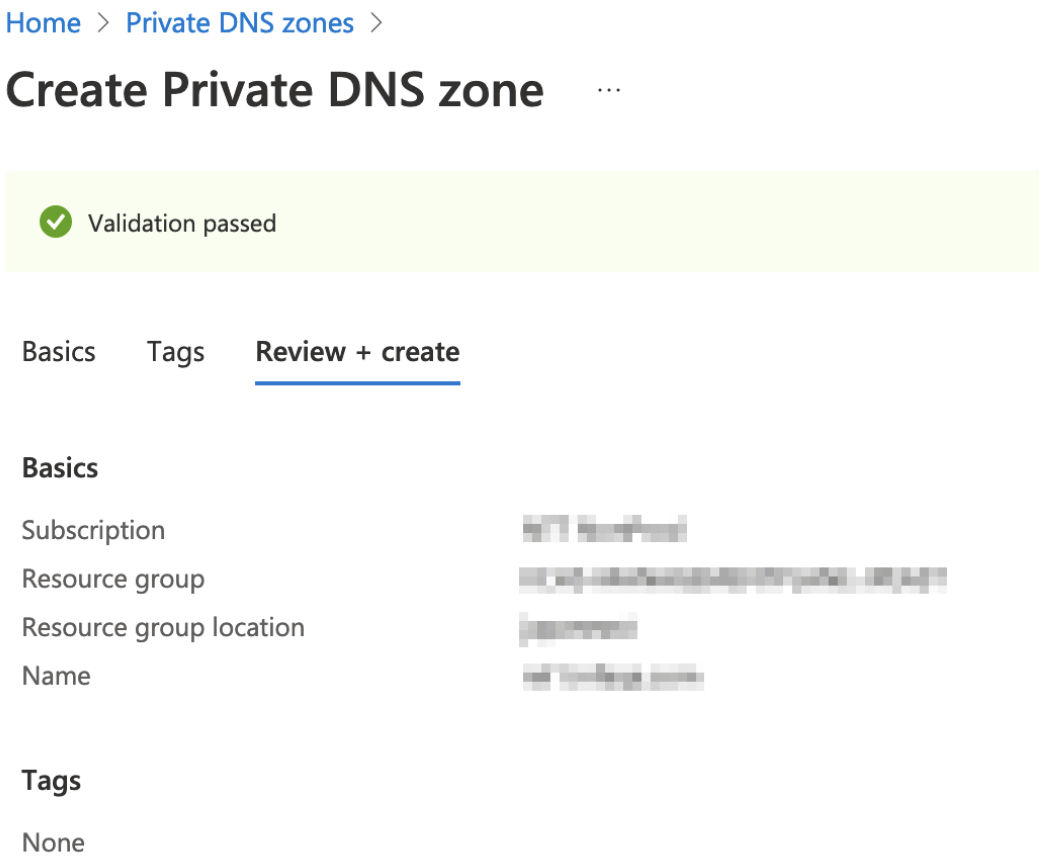

8. Click **Create**.
   It might take a few minutes to create the DNS zone.
9. Open the private zone you created and click **+ Record set**.
10. On the **Add record set** page, enter or select the following values:

Property	Value
Name	Enter the DNS name that you use to access the service over the public internet. For information on how to obtain the DNS name for each service, see "Appendix A: DNS names for IDMC services" on page 18. You can record the DNS names you need in "Appendix B: Worksheet for setting up Azure Private Link" on page 27.
Type	Select **A - Alias record to IPv4 address**.
TTL	Enter a time-to-live (TTL) of the DNS request or accept the default value.

Property	Value
TTL unit	Select a time unit for the TTL or accept the default value.
IP address	Enter the IP address of the private endpoint. This is the IP address you copied at the end of "Step 3. Create a private endpoint" on page 7.

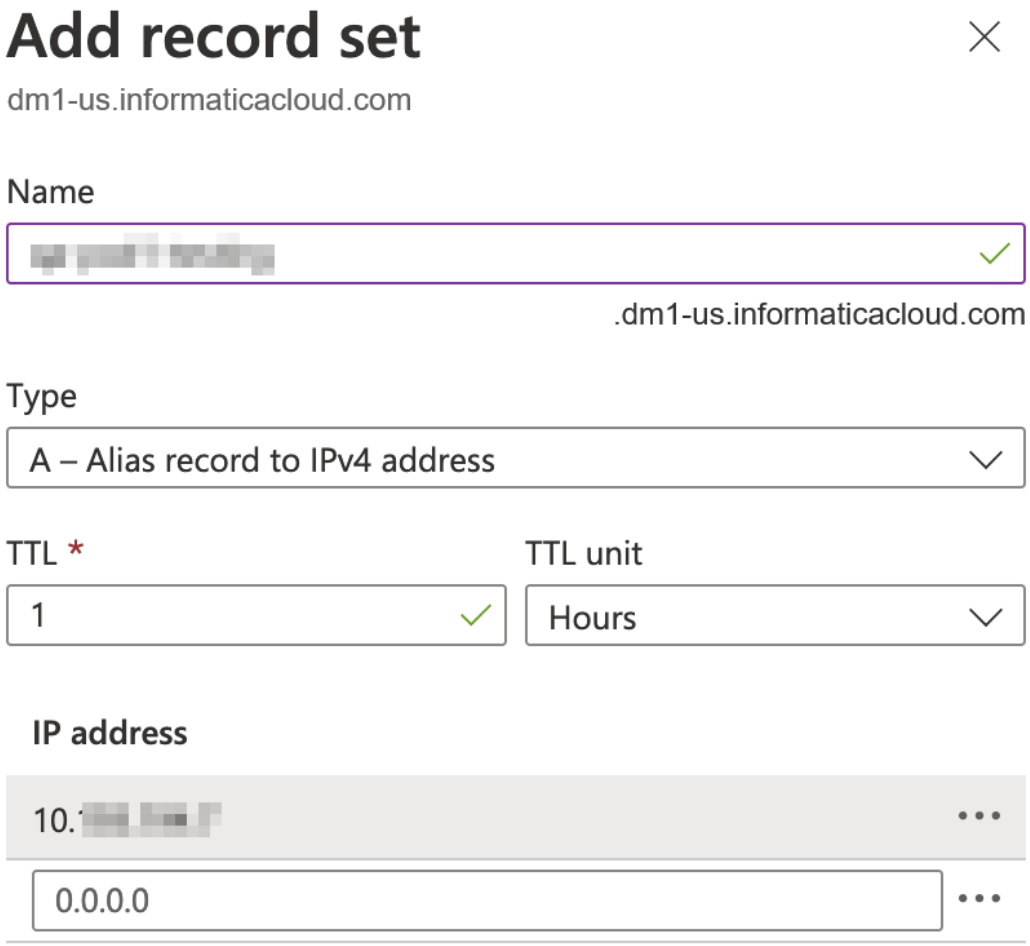

11. Click **OK** to create the record.
12. If you use more than one IDMC service, repeat steps 9 - 11 for each of the other services.
13. When the records are created, under **Settings**, select **Virtual network links**.
14. Click **Add**.

15. On the **Add virtual network link** page, enter or select the following values:

Property	Value
Link name	Enter a name for the link.
Subscription	Select your subscription.
Virtual network	Select the VNet you created.


16. Click **OK**.

Step 5. Associate the private DNS zone with the private endpoint

After you link your private DNS zone to your VNet, you'll need to add the DNS zone details to your private endpoint.

1. In the search box at the top of the Azure portal, search for and select **Private endpoints**.
2. Select the private endpoint you created.
3. Under **Settings**, select **DNS configuration**.
4. Click **+ Add configuration**.
5. On the **Add configuration** tab, enter or select the following values:

Property	Value
Configuration name	Enter a configuration name.
Subscription	Select your subscription.
Private DNS zone	Select the private DNS zone you created.
DNS zone group	Select the same group as the DNS zone you already created.

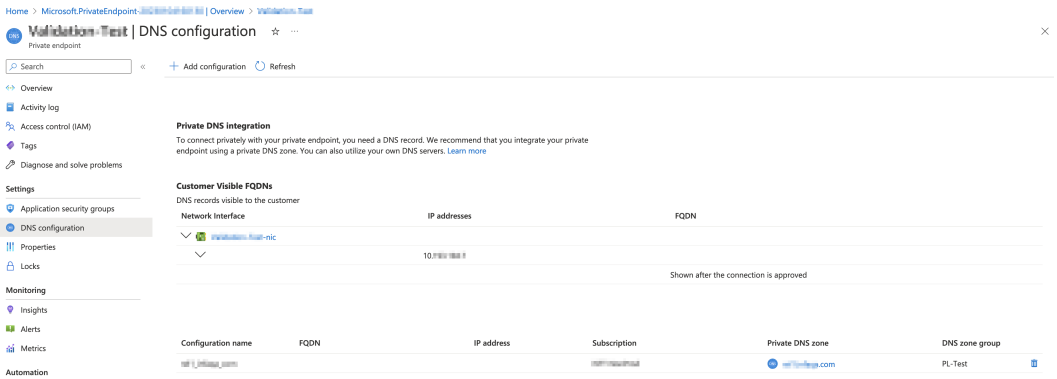

6. Click **Add**.


Step 6. Launch a VM where the Secure Agent will be installed

After you create and link the DNS zone, create a VM where you'll install the Secure Agent. Be sure that you create the VM in the same VNet as the private endpoint you created.

1. In the search box at the top of the Azure portal, search for and select **Virtual machines**.
2. On the **Virtual machines** page, click **+ Create**, and select **Azure virtual machine**.
3. On the **Create a virtual machine** screen, enter or select the following values:

Property	Value
Subscription	Select your subscription.
Resource group	Select the resource group. This is the same resource group that you selected when you created the VNet.
Virtual machine name	Enter a name for the VM.
Region	Select the region where your VNet is located.
Availability options	Select **No infrastructure redundancy required**.
Security type	Select the security type you plan to use or accept the default value.
Image	Select the appropriate image type. You can create a Linux or Windows machine.


For the other properties, enter or select the appropriate values according to your usage.

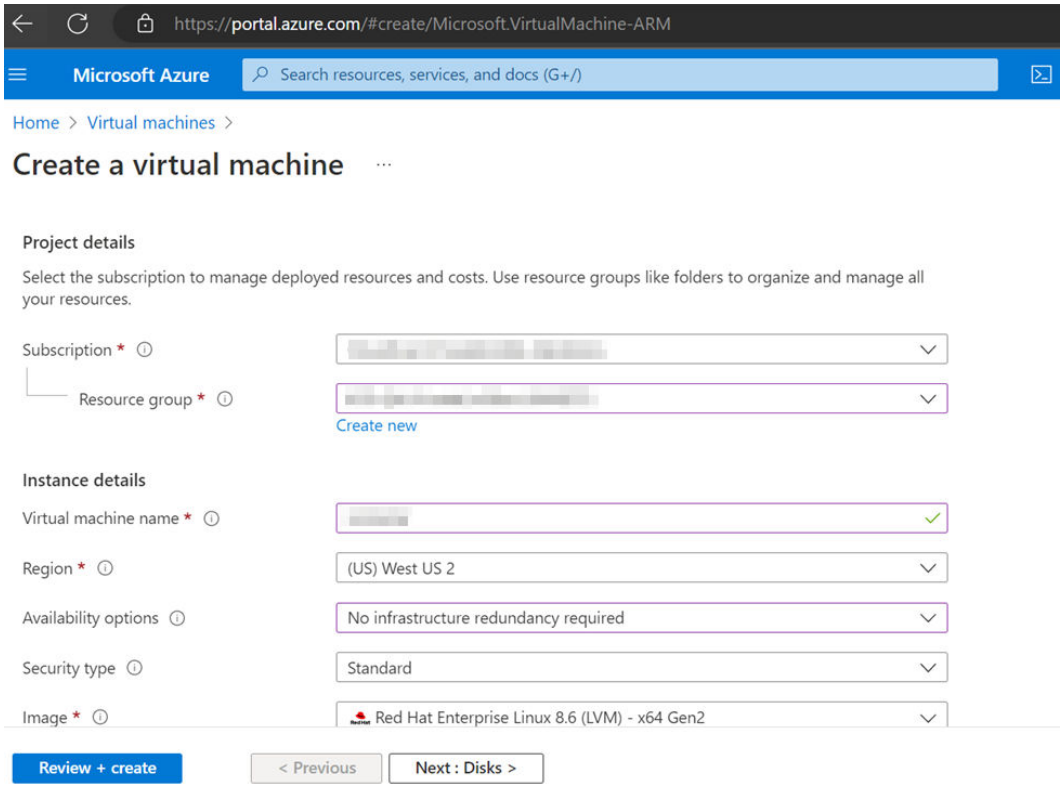

4. Select the **Networking** tab at the top of the page.
5. On the **Networking** page, enter or select the following values:

Property	Value
Virtual network	Select the VNet that you used to when creating the private endpoint.
Subnet	Select the subnet inside the virtual network that you used when creating the private endpoint.

For the other properties, enter or select the appropriate values according to your usage.

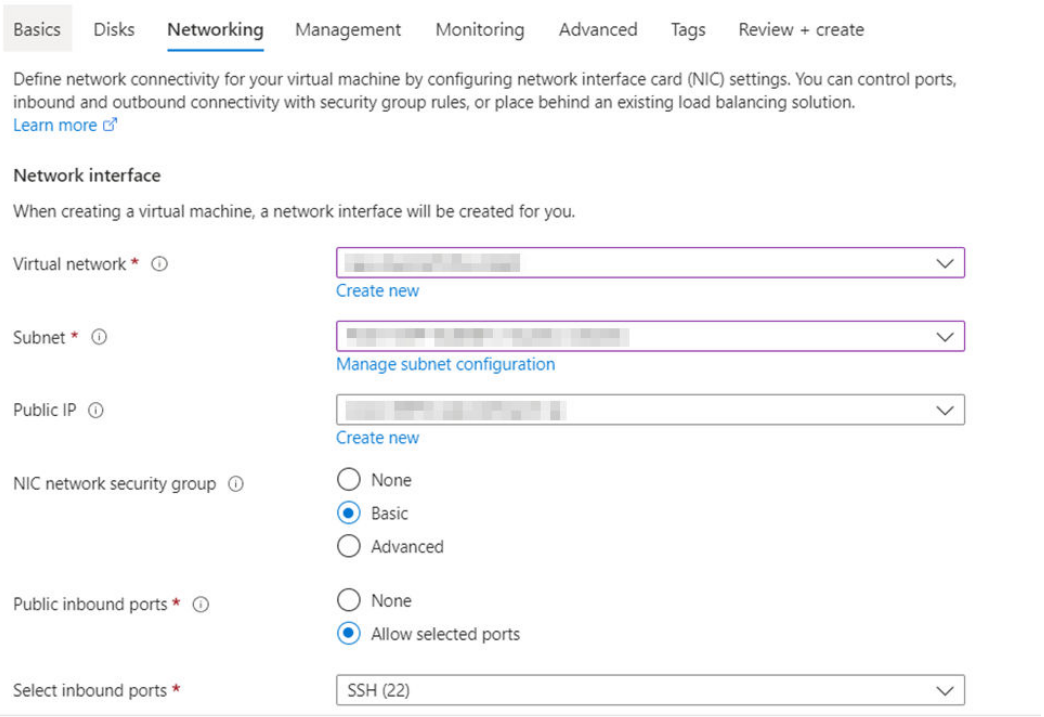


6. Click **Review + create**.
7. Review the settings and then click **Create**.

Once the VM is deployed, you can install a Secure Agent on the machine.

Step 7. Install the Secure Agent on the virtual machine

Download and install a Secure Agent from IDMC Administrator. You download the Secure Agent installer on the **Runtime Environments** page.

The following image shows the **Download Secure Agent** button on the **Runtime Environments** page:

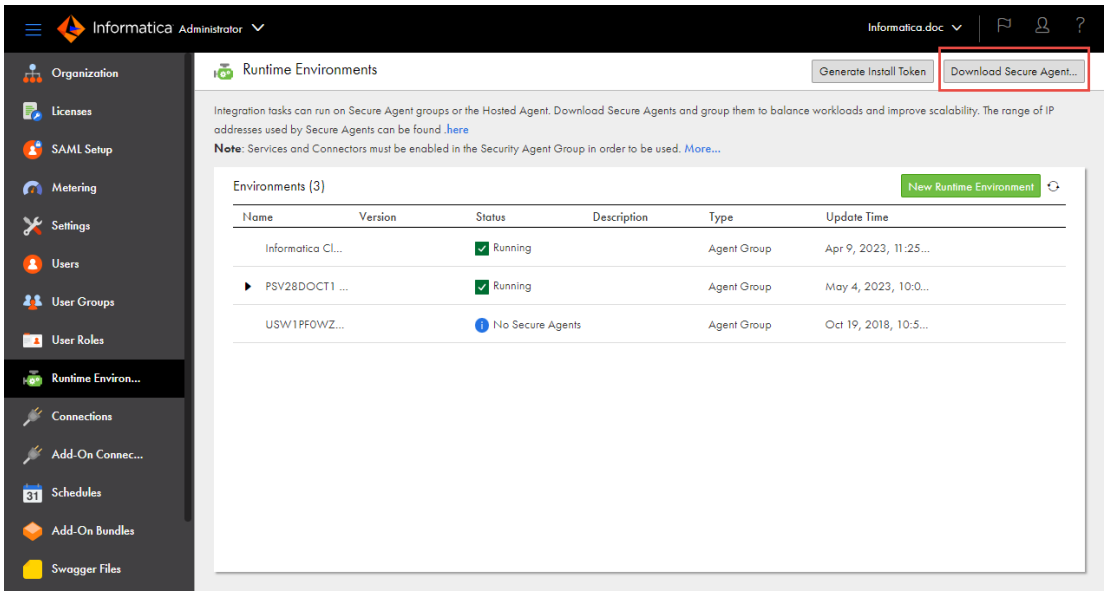

The steps you perform to install a Secure Agent vary based on whether you are installing the agent onto a Windows or Linux VM:

- To install a Secure Agent onto a Windows VM, see Secure Agent installation on Windows in the Administrator *Runtime Environments* guide.
- To install a Secure Agent onto a Linux VM, see Secure Agent installation on Linux in the Administrator *Runtime Environments* guide.

Step 8. Verify the IP address

To verify that you are using Azure Private Link to connect to IDMC, verify the IP address. The IP address you use should differ from the one you noted in the "Before you begin" step.

Open a terminal in your Azure VNet and use the ping command to verify that the IP address now differs from the one returned in "Before you begin" on page 4.

For example, if your IDMC login URL is `https://dm1-us.informaticacloud.com/identity-service/home`, use the following command to ping IDMC:

```
ping dm1-us.informaticacloud.com
```

The command returns output like the following example:

```
Pinging dm1-us.informaticacloud.com [10.98.76.543] with 32 bytes of data:
Reply from 10.98.76.543: bytes=32 time=58ms TTL=111
Reply from 10.98.76.543: bytes=32 time=41ms TTL=111
Reply from 10.98.76.543: bytes=32 time=39ms TTL=111
Reply from 10.98.76.543: bytes=32 time=44ms TTL=111

Ping statistics for 10.98.76.543:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 39ms, Maximum = 58ms, Average = 45ms
```

The IP address is the value within the square brackets. The new IP address should start with the same numbers as the IP address for your VNet.

Using Application Integration with Azure Private Link

Application Integration supports only one-way communication through Azure Private Link, that is, from Application Integration to the Secure Agent.

You can invoke processes that are published on a Secure Agent through any REST client such as Postman or cURL only if the ports are allowed in the Azure security group. However, you cannot access Azure resources using an Application Integration service connector or connection.

After you enable a Secure Agent that is installed in an Azure VNet, the agent connects directly to the connection endpoints through Azure Private Link. You can perform all the Application Integration operations that the Secure Agent supports. However, if the process runs on a Secure Agent that is installed on an Azure VNet, you cannot invoke the process using the endpoint URL in a browser. Instead, you can invoke the process endpoint URL using the cURL command from a machine where the Secure Agent is installed.

To invoke a process using the cURL command, use the following syntax:

```
curl -X PUT -k https://<host_name>:<port_number>/process-engine/public/rt/<process_name>
```

You can also invoke scheduled processes.

For more information about Application Integration, see the Application Integration help.

Appendix A: DNS names for IDMC services

When you create records in the hosted zone for the informaticacloud.com domain, you need to allow the DNS names for each IDMC service that you use. DNS names vary based on your POD.

When you enter DNS names to allow, enter the global service DNS names and the Data Integration DNS name for your POD. If you use any service other than Data Integration, you also need to enter the DNS names for the service.

For example, if you're on the APNE1 POD and you use Application Integration (CAI), Data Profiling (CDP), and Data Quality (CDQ), you would allow the following DNS names:

```
dm1-ap.informaticacloud.com
content.dm-ap.informaticacloud.com
global-package.dm.informaticacloud.com
apne1.dm1-ap.informaticacloud.com
apne1-cai.dm1-ap.informaticacloud.com
apne1-dqprofile.dm1-ap.informaticacloud.com
apne1-dqcloud.dm1-ap.informaticacloud.com
```

If you are unsure of your POD or your organization uses a custom URL to log in to IDMC, contact your Informatica representative to find the DNS names.

Asia/Pacific/Australia Central (APAUC1)

If your POD is APAUC1, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-apau.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	apauc1.dm1-apau.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	apauc1-cai.dm1-apau.informaticacloud.com
Application Integration (Salesforce)	apauc1-sfdc-cai.dm1-apau.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	apauc1-idms.dm1-apau.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-apau.informaticacloud.com cdgc.dm1-apau.informaticacloud.com cdmp-app.dm1-apau.informaticacloud.com idmc-api.dm1-apau.informaticacloud.com idmcp-api.dm1-apau.informaticacloud.com idmcp-mgmt.dm1-apau.informaticacloud.com mcc.dm1-apau.informaticacloud.com
Data Ingestion and Replication	apauc1-ing.dm1-apau.informaticacloud.com
Data Profiling (CDP)	apauc1-dqprofile.dm1-apau.informaticacloud.com
Data Quality (CDQ)	apauc1-dqcloud.dm1-apau.informaticacloud.com
Integration Hub (CIH)	apauc1-cih.dm1-apau.informaticacloud.com
MDM SaaS services	apauc1-mdm.dm1-apau.informaticacloud.com

Asia/Pacific/Japan Northeast (APNE1)

If your POD is APNE1, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-ap.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	apne1.dm1-ap.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	apne1-apim.dm1-ap.informaticacloud.com apne1-apigw.dm1-ap.informaticacloud.com
Application Integration (CAI)	apne1-cai.dm1-ap.informaticacloud.com
Application Integration (Salesforce)	apne1-sfdc-cai.dm1-ap.informaticacloud.com
B2B Gateway	apne1-b2bgw.dm1-ap.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-ap.informaticacloud.com cdgc.dm1-ap.informaticacloud.com cdmp-app.dm1-ap.informaticacloud.com idmc-api.dm1-ap.informaticacloud.com idmcp-api.dm1-ap.informaticacloud.com idmcp-mgmt.dm1-ap.informaticacloud.com mcc.dm1-ap.informaticacloud.com
Data Ingestion and Replication	apne1-ing.dm1-ap.informaticacloud.com
Data Profiling (CDP)	apne1-dqprofile.dm1-ap.informaticacloud.com
Data Quality (CDQ)	apne1-dqcloud.dm1-ap.informaticacloud.com
Integration Hub (CIH)	apne1-cih.dm1-ap.informaticacloud.com
MDM SaaS services	apne1-mdm.dm1-ap.informaticacloud.com

Asia/Pacific/Japan Southeast (APSE2)

If your POD is APSE2, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-apse.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	apse1.dm1-apse.informaticacloud.com

If you use any of the following services, enter their DNS names as well:

Service	DNS names
API Manager	apse1-apim.dm1-apse.informaticacloud.com apse1-apigw.dm1-apse.informaticacloud.com
Application Integration (CAI)	apse1-cai.dm1-apse.informaticacloud.com
Application Integration (Salesforce)	apse1-sfdc-cai.dm1-apse.informaticacloud.com
B2B Gateway	apse1-b2bgw.dm1-apse.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	apse1-idms.dm1-apse.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc.dm1-apse.informaticacloud.com cdmp-app.dm1-apse.informaticacloud.com mcc.dm1-apse.informaticacloud.com
Data Ingestion and Replication	apse1-ing.dm1-apse.informaticacloud.com
Data Profiling (CDP)	apse1-dqprofile.dm1-apse.informaticacloud.com
Data Quality (CDQ)	apse1-dqcloud.dm1-apse.informaticacloud.com
Integration Hub (CIH)	apse1-cih.dm1-apse.informaticacloud.com
MDM SaaS services	apse1-mdm.dm1-apse.informaticacloud.com

Canada Central (CAC2)

If your POD is CAC2, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-ca.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	cac2.dm1-ca.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	cac2-cai.dm1-ca.informaticacloud.com
Application Integration (Salesforce)	cac2-sfdc-cai.dm1-ca.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	cac2-idms.dm1-ca.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-ca.informaticacloud.com cdgc.dm1-ca.informaticacloud.com cdmp-app.dm1-ca.informaticacloud.com icd-app.dm1-ca.informaticacloud.com idmc-api.dm1-ca.informaticacloud.com idmcp-api.dm1-ca.informaticacloud.com idmcp-mgmt.dm1-ca.informaticacloud.com mcc.dm1-ca.informaticacloud.com
Data Ingestion and Replication	cac2-ing.dm1-ca.informaticacloud.com
Data Profiling (CDP)	cac2-dqprofile.dm1-ca.informaticacloud.com
Data Quality (CDQ)	cac2-dqcloud.dm1-ca.informaticacloud.com
Integration Hub (CIH)	cac2-cih.dm1-ca.informaticacloud.com
MDM SaaS services	cac2-mdm.dm1-ca.informaticacloud.com

European Union (EMC1)

If your POD is EMC1, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-em.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	emc1.dm1-em.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	emc1-apim.dm1-em.informaticacloud.com emc1-apigw.dm1-em.informaticacloud.com
Application Integration (CAI)	emc1-cai.dm1-em.informaticacloud.com
Application Integration (Salesforce)	emc1-sfdc-cai.dm1-em.informaticacloud.com
B2B Gateway	emc1-b2bgw.dm-em.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	emc1-idms.dm1-em.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-em.informaticacloud.com cdgc.dm1-em.informaticacloud.com cdmp-app.dm1-em.informaticacloud.com icd-app.dm1-em.informaticacloud.com idmc-api.dm1-em.informaticacloud.com idmcp-api.dm1-em.informaticacloud.com idmcp-mgmt.dm1-em.informaticacloud.com mcc.dm1-em.informaticacloud.com
Data Ingestion and Replication	emc1-ing.dm1-em.informaticacloud.com
Data Profiling (CDP)	emc1-dqprofile.dm1-em.informaticacloud.com
Data Quality (CDQ)	emc1-dqcloud.dm1-em.informaticacloud.com
Integration Hub (CIH)	emc1-cih.dm1-em.informaticacloud.com
MDM SaaS services	emc1-mdm.dm1-em.informaticacloud.com

European Union (EMC2)

If your POD is EMC2, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-emce.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	emc2.dm1-emce.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
Application Integration (CAI)	emc2-cai.dm1-emce.informaticacloud.com
B2B Gateway	emc2-b2bgw.dm1-emce.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	emc2-idms.dm1-emce.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc.dm1-emce.informaticacloud.com mcc.dm1-emce.informaticacloud.com idmcp-api.dm1-emce.informaticacloud.com cdmp-app.dm1-emce.informaticacloud.com idmcp-mgmt.dm1-emce.informaticacloud.com idmc-api.dm1-emce.informaticacloud.com cdgc-api.dm1-emce.informaticacloud.com
Data Ingestion and Replication	emc2-ing.dm1-emce.informaticacloud.com
Data Profiling (CDP)	emc2-dqprofile.dm1-emce.informaticacloud.com
Data Quality (CDQ)	emc2-dqcloud.dm1-emce.informaticacloud.com
MDM SaaS services	emc2-mdm.dm1-emce.informaticacloud.com

United Arab Emirates (EMSE1)

If your POD is EMSE1, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-emse.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	emse1.dm1-emse.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	emse1-apim.dm1-emse.informaticacloud.com emse1-apigw.dm1-emse.informaticacloud.com
Application Integration (CAI)	emse1-cai.dm1-emse.informaticacloud.com
Application Integration (Salesforce)	emse1-sfdc-cai.dm1-emse.informaticacloud.com
B2B Gateway	emse1-b2bgw.dm1-emse.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	emse1-idms.dm1-emse.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-emse.informaticacloud.com cdgc.dm1-emse.informaticacloud.com cdmp-app.dm1-emse.informaticacloud.com idmc-api.dm1-emse.informaticacloud.com idmcp-api.dm1-emse.informaticacloud.com idmcp-mgmt.dm1-emse.informaticacloud.com mcc.dm1-emse.informaticacloud.com
Data Ingestion and Replication	emse1-ing.dm1-emse.informaticacloud.com
Data Profiling (CDP)	emse1-dqprofile.dm1-emse.informaticacloud.com
Data Quality (CDQ)	emse1-dqcloud.dm1-emse.informaticacloud.com
Integration Hub (CIH)	emse1-cih.dm1-emse.informaticacloud.com
MDM SaaS services	emse1-mdm.dm1-emse.informaticacloud.com

United States West (USW1-1)

If your POD is USW1-1, allow the following DNS names:

Service	DNS names
Global Identity Service	dm1-us.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	usw1.dm1-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	usw1-apim.dm1-us.informaticacloud.com usw1-apigw.dm1-us.informaticacloud.com
Application Integration (CAI)	usw1-cai.dm1-us.informaticacloud.com
Application Integration (Salesforce)	usw1-sfdc-cai.dm1-us.informaticacloud.com
B2B Gateway	usw1-b2bgw.dm1-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	usw1-idms.dm1-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-us.informaticacloud.com cdgc.dm1-us.informaticacloud.com cdmp-app.dm1-us.informaticacloud.com idmc-api.dm1-us.informaticacloud.com idmcp-api.dm1-us.informaticacloud.com idmcp-mgmt.dm1-us.informaticacloud.com mcc.dm1-us.informaticacloud.com
Data Ingestion and Replication	usw1-ing.dm1-us.informaticacloud.com
Data Profiling (CDP)	usw1-dqprofile.dm1-us.informaticacloud.com
Data Quality (CDQ)	usw1-dqcloud.dm1-us.informaticacloud.com
Integration Hub (CIH)	usw1-cih.dm1-us.informaticacloud.com
MDM SaaS services	usw1-mdm.dm1-us.informaticacloud.com

United States West (USW3-1)

If your POD is USW3-1, enter the following DNS names:

Service	DNS names
Global Identity Service	dm1-us.informaticacloud.com content.dm-ap.informaticacloud.com
Global Package Delivery Manager	global-package.dm.informaticacloud.com
Data Integration (CDI)	usw3.dm1-us.informaticacloud.com

If you use any of the following services, allow their DNS names as well:

Service	DNS names
API Manager	usw3-apim.dm1-us.informaticacloud.com usw3-apigw.dm1-us.informaticacloud.com
Application Integration (CAI)	usw3-cai.dm1-us.informaticacloud.com
Application Integration (Salesforce)	usw3-sfdc-cai.dm1-us.informaticacloud.com
B2B Gateway	usw3-b2bgw.dm1-us.informaticacloud.com
Cloud Data Integration for PowerCenter (CDI-PC)	usw3-idms.dm1-us.informaticacloud.com
Data Governance and Catalog, Data Marketplace, and Metadata Command Center	cdgc-api.dm1-us.informaticacloud.com cdgc.dm1-us.informaticacloud.com cdmp-app.dm1-us.informaticacloud.com idmc-api.dm1-us.informaticacloud.com idmcp-api.dm1-us.informaticacloud.com idmcp-mgmt.dm1-us.informaticacloud.com mcc.dm1-us.informaticacloud.com
Data Ingestion and Replication	usw3-ing.dm1-us.informaticacloud.com
Data Profiling (CDP)	usw3-dqprofile.dm1-us.informaticacloud.com
Data Quality (CDQ)	usw3-dqcloud.dm1-us.informaticacloud.com
Integration Hub (CIH)	usw3-cih.dm1-us.informaticacloud.com
MDM SaaS services	usw3-mdm.dm1-us.informaticacloud.com

Appendix B: Worksheet for setting up Azure Private Link

Use the following worksheet to record the information that you need to configure IDMC to work with Azure Private Link.

The following table lists the information you'll need and the reason you need it:

Information needed	Reason	My value
Original IDMC IP address	Used to verify your Azure Private Link connection.	
IDMC organization ID	Needed by Informatica Global Customer Support.	
Azure region	Needed by Informatica Global Customer Support.	
Resource ID that you received from Informatica	Needed to create your private endpoint.	

Information needed	Reason	My value
Target sub-resource that you received from Informatica	Needed to create your private endpoint.	
IP address for the private endpoint	Needed to create records in the private DNS zone for your IDMC services.	
DNS names for the IDMC services for which you want to create an Azure Private Link connection	Needed to create records in the private DNS zone for your IDMC services. To find the DNS names, see "Appendix A: DNS names for IDMC services" on page 18.	
New IDMC IP address	Used to verify your Azure Private Link connection. If successful, this address will differ from the original IP address.	

Appendix C: Disaster recovery

Azure Private Link connectivity with IDMC is robust, but outages are possible. Learn how to perform disaster recovery (DR) if an outage occurs.

This appendix provides the following information:

- Overview of the architecture and its normal running state
- How to handle an IDMC outage (Scenario 1)
- How to handle a customer environment outage (Scenario 2)
- How to handle a cloud provider outage (Scenario 3)


The following table summarizes each scenario:

Scenario	Who is affected	Endpoint status	Recovery path
Ideal state	No one	✅ Primary active, ✅ DR standby	None, but continue to monitor.
Scenario 1: IDMC outage	Informatica Control Plane	✅ Customer healthy, ❌ Informatica down	Update DNS Zone A records to the DR endpoint. No new allowlisting should be needed if DR is preprovisioned.
Scenario 2: Customer outage	Customer VNet or Secure Agent	❌ Customer down, ✅ Informatica up	Repair the primary or fail over to the DR endpoints and restart the Secure Agent VMs.
Scenario 3: Full regional failure	Both customer and Informatica	❌ Both down	Activate the pre-provisioned DR endpoint. Redirect the DNS Zone A records to these endpoints. Start the Secure Agent VMs in the DR region.

Architecture overview

Azure Private Link provides a private, secure connection between your Azure Virtual Network (VNet) and IDMC. The Secure Agent in your VNet communicates with IDMC securely through Azure Private Link instead of going over the public internet.

The following image shows the normal working state of the connection:

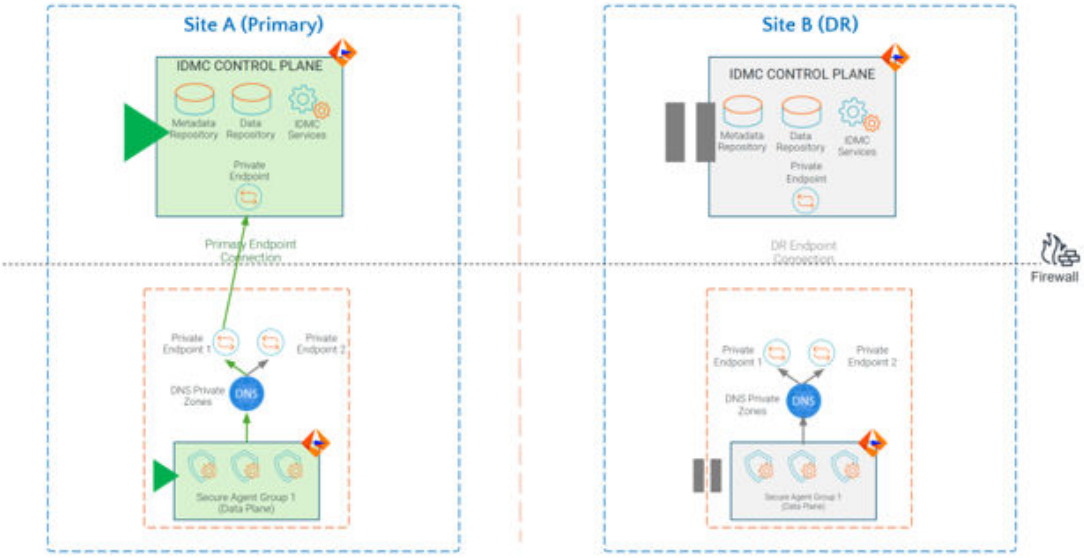

The following table describes the components within the image:

Component	Description
IDMC Control Plane	Informatica-managed plane that hosts the metadata repository, data repository, and IDMC services.
Private endpoint (primary)	Network interface with a private IP from your VNet, connecting your VNet to the Informatica service.
Private endpoint (DR)	Optional secondary endpoint in a different Azure region. Used for failover purposes.
Azure private DNS zone	Private DNS zone named `informaticacloud.com` with A records for each IDMC service that point to the private endpoint NIC's private IP address.
Secure Agent group	Customer-managed data plane (Azure VMs) that runs in your VNet.

The following points describe the ideal working state:

- The Secure Agent communicates with IDMC exclusively through the primary private endpoint.
- DNS resolves all IDMC service hostnames to the private IP of the primary private endpoint NIC via the Azure private DNS zone (informaticacloud.com).
- All traffic stays within the Azure network. Nothing goes through the public internet.
- A secondary (DR) private endpoint is provisioned in the DR site in standby mode, ready to take over if the primary endpoint fails.


Scenario 1: IDMC outage

In this scenario, the IDMC infrastructure in the primary region is unavailable, and the cloud provider's availability is affected. Informatica manages and maintains endpoints in the primary region.

The following table summarizes this scenario:

Status	IDMC Primary Cloud is down
Customer VNet	Healthy
Informatica endpoint	Unavailable
DR endpoint	Available, if pre-provisioned

The following image illustrates this scenario:

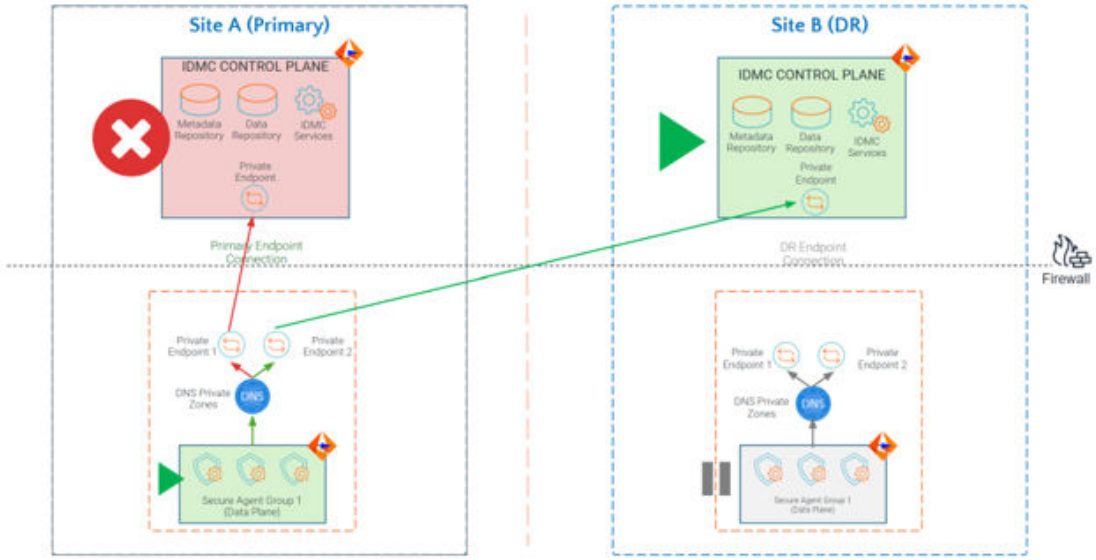

When this scenario occurs, the following behavior is observed:

- The private endpoint on your side remains active and healthy. Your endpoint hasn't failed.
- DNS resolution continues to function normally.
- Connections through the endpoint fail because the Informatica service-side endpoint is unavailable.
- Informatica manages failover of the IDMC Control Plane to its DR region. The Private Link resource ID and alias might change after failover.

How to prepare for and handle scenario 1

You can handle this scenario by preparing ahead of time and then updating the DNS resolution to point to the DR endpoint if an outage occurs.

Before an outage

Complete the following steps during initial setup, before any incident has occurred:

1. Open a support case with Informatica to request access to the DR POD and obtain its resource ID and target sub-resource.
   For more information, see "Step 1. Open a support case with Informatica Global Customer Support" on page 5.
2. Create a private endpoint that connects to Informatica's DR POD resource ID, and get it approved by Informatica Global Customer Support.
   For more information, see "Step 3. Create a private endpoint" on page 7.

During an outage

If an outage occurs, update DNS resolution to point to the DR endpoint. Update the A records in your Azure Private DNS Zone (informaticacloud.com) to resolve IDMC service hostnames to the DR Private Endpoint NIC's private IP.

For more information, see "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 and "Step 5. Associate the private DNS zone with the private endpoint" on page 14.

Note: Your customer account is already allow-listed for the DR endpoint during the initial setup, so no additional allow-listing is required during the DR event.

Expected outcome

The disaster recovery should produce the following results:

- The Secure Agent connects to IDMC through the DR endpoint.
- IP address verification confirms that a private IP matching your VNet range is in use.
  For more information, see "Step 8. Verify the IP address" on page 17.
- IDMC jobs and integrations resume their normal operations.


Scenario 2: Customer environment outage

In this scenario, your primary Azure VNet, Secure Agent VMs, or supporting infrastructure (Azure Private DNS Zone, NSGs, or NAT Gateway) becomes unavailable, but IDMC continues to operate normally.

The following table summarizes this scenario:

Status	🔴 Your primary environment is down
Customer VNet	❌ Degraded or unavailable
Informatica endpoint	✅ Fully operational
DR endpoint	✅ Available, if pre-provisioned

The following image illustrates this scenario:

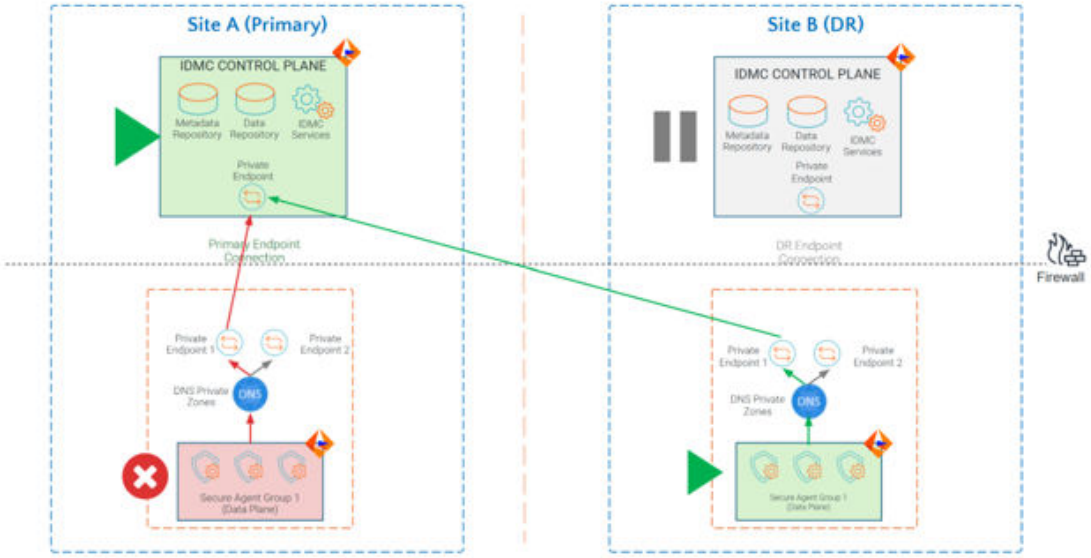

When this scenario occurs, the following behavior is observed:

- The Informatica service endpoint remains fully operational.
- The private endpoint in the affected region might become unreachable if its VNet or networking components are down.
- DNS resolution might fail if the Azure private DNS zone or its VNet link is affected.
- The Secure Agent goes offline, and IDMC reports agent connectivity loss.

How to prepare for and handle scenario 2

You can handle this scenario by preparing ahead of time and then performing certain steps during the disaster recovery (DR) event.

Before an outage

Complete the following steps during initial setup, before any incident has occurred:

1. Create a DR VNet and subnet in a secondary Azure region.
   For more information, see "Step 2. Set up a virtual network and subnet" on page 5.
2. Create a DR private endpoint connected to Informatica's service in that region.
   For more information, see "Step 3. Create a private endpoint" on page 7.
3. Create an Azure Private DNS Zone (informaticacloud.com) with A records for the DR endpoint NIC's private IP and link it to the DR VNet.
   For more information, see "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 and "Step 5. Associate the private DNS zone with the private endpoint" on page 14.
4. Prepare Secure Agent VM images for the DR region.
   For more information, see "Step 6. Launch a VM where the Secure Agent will be installed" on page 15 and "Step 7. Install the Secure Agent on the virtual machine" on page 17.

During an outage

If an outage occurs, assess the scope by checking the private endpoint status, the Secure Agent VM health, and the Azure private DNS Zone A records.

If you're recovering in the primary region, perform the following steps:

1. Recreate the private endpoint.
   For more information, see "Step 3. Create a private endpoint" on page 7.
2. Reestablish the VNet/subnet, if required.
   For more information, see "Step 2. Set up a virtual network and subnet" on page 5.
3. Validate and relink the DNS zone records.
   For more information, see "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 and "Step 5. Associate the private DNS zone with the private endpoint" on page 14.

If you're failing over to the DR region, update DNS Zone A records to resolve IDMC service hostnames to the DR Private Endpoint NIC's private IP address, start the Secure Agent VMs in the DR region, and verify connectivity. For more information, see "Step 8. Verify the IP address" on page 17.

Expected outcome

The disaster recovery should produce the following results:

- The private endpoint status shows "Approved" or "Connected" in the Azure Portal.
- The DNS resolves IDMC service hostnames to the correct private IP matching your VNet range.
- The Secure Agent status is "Running" in Administrator.
- Pipelines and integrations resume normal operation.


Scenario 3: Cloud provider outage

In this scenario, a complete Azure regional failure affects your VNet and the IDMC infrastructure in the same region. Your endpoints and Informatica's primary endpoints aren't accessible.

The following table summarizes this scenario:

Status	🔴 Complete regional failure
Customer VNet	❌ Unavailable (regional failure)
Informatica endpoint	❌ Unavailable (regional failure)
DR endpoint	✅ Available in secondary region, if pre-provisioned

The following image illustrates this scenario:

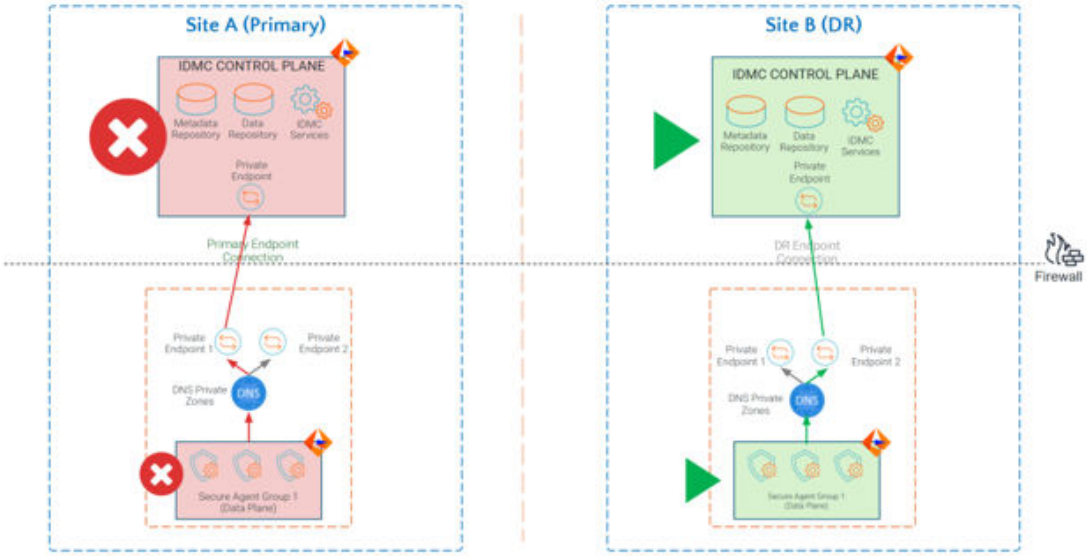

When this scenario occurs, the following behavior is observed:

- Your primary private endpoint and Informatica's primary service endpoint are unavailable.
- The Azure Private DNS Zone records might still be readable because DNS zones are zone-redundant, but they point to an unreachable endpoint.
- All Secure Agent connectivity is severed.

Recovery depends entirely on having a pre-provisioned DR private endpoint in an unaffected region.

How to prepare for and handle scenario 3

You can handle this scenario by preparing ahead of time and then performing certain steps during the disaster recovery event.

Important: Without a pre-provisioned DR private endpoint, recovery requires opening a new Informatica support case and waiting for resource ID provisioning and allowlisting, which significantly extends your recovery time objective. Pre-provisioning is strongly recommended.

Before an outage

Complete the following steps during initial setup, before any incident has occurred:

1. Open a support case to obtain the resource ID for Informatica's DR POD in a different Azure region.
   For more information, see "Step 1. Open a support case with Informatica Global Customer Support" on page 5.
2. Create a DR VNet and subnet.
   For more information, see "Step 2. Set up a virtual network and subnet" on page 5.
3. Create the DR private endpoint.
   For more information, see "Step 3. Create a private endpoint" on page 7.
4. Configure the DNS zone and A records, and configure Application Integration endpoints, if applicable.
   For more information, see "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 and "Step 5. Associate the private DNS zone with the private endpoint" on page 14.

5. Document the DR endpoint resource ID, NIC private IPs, and DNS names in your runbook.
6. Prepare Secure Agent VM images for the DR region.
   For more information, see "Step 6. Launch a VM where the Secure Agent will be installed" on page 15 and "Step 7. Install the Secure Agent on the virtual machine" on page 17.
7. Verify DR endpoint connectivity.
   For more information, see "Step 8. Verify the IP address" on page 17.

During an outage

If an outage occurs, perform the following steps:

1. Confirm the regional failure scope via the Azure Service Health Dashboard.
2. Contact Informatica Global Customer Support to confirm Informatica's DR status and verify your subscription is allowlisted for the DR endpoint.
   For more information, see "Step 1. Open a support case with Informatica Global Customer Support" on page 5.
3. Confirm that the DR private endpoint shows "Approved" or "Connected" in the Azure Portal.
4. Update the Azure Private DNS Zone A records to resolve each IDMC service hostname to the DR endpoint NIC's private IP.
   For more information, see "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 and "Step 5. Associate the private DNS zone with the private endpoint" on page 14.
5. Start Secure Agent VMs in the DR region, and verify connectivity by pinging the Informatica login domain and confirming the returned IP matches your DR VNet range.
   For more information, see "Step 8. Verify the IP address" on page 17.

Expected outcome

The disaster recovery should produce the following results:

- All traffic routes through the DR private endpoint in the secondary region.
- The DNS resolves IDMC service hostnames to the DR endpoint NIC's private IP matching your DR VNet range.
- The status of the Secure Agents in the DR region is "Running" in Administrator.
- IDMC jobs can be restarted from the DR region.

Disaster recovery readiness checklist

Use the following checklist to ensure that you're prepared for disaster recovery.

Step	Action	References
1	Complete primary Private Link setup.	"Step 1. Open a support case with Informatica Global Customer Support" on page 5 "Step 2. Set up a virtual network and subnet" on page 5 "Step 3. Create a private endpoint" on page 7 "Step 4. Create a private DNS zone and link it to your virtual network" on page 11 "Step 5. Associate the private DNS zone with the private endpoint" on page 14 "Step 6. Launch a VM where the Secure Agent will be installed" on page 15 "Step 7. Install the Secure Agent on the virtual machine" on page 17

Step	Action	References
2	Open a support case for the DR POD resource ID.	“Step 1. Open a support case with Informatica Global Customer Support” on page 5
3	Create DR VNet and subnet in secondary region.	“Step 2. Set up a virtual network and subnet” on page 5
4	Provision a secondary (DR) private endpoint.	“Step 3. Create a private endpoint” on page 7
5	Create an Azure Private DNS Zone and link to DR VNet.	“Step 4. Create a private DNS zone and link it to your virtual network” on page 11
6	Associate the Private DNS Zone with the DR private endpoint.	“Step 5. Associate the private DNS zone with the private endpoint” on page 14
7	Verify primary endpoint connectivity.	“Step 8. Verify the IP address” on page 17
8	Verify DR endpoint connectivity.	“Step 8. Verify the IP address” on page 17
9	Provision a Data Quality/Profiling endpoint in the DR region, if applicable)	“Step 3. Create a private endpoint” on page 7
10	If you use Application Integration, configure Application Integration endpoints in the primary and DR VNets.	“Using Application Integration with Azure Private Link” on page 18
11	Document the DR endpoint resource ID, NIC private IPs, and DNS names.	Internal runbook
12	Prepare the Secure Agent VM images for the DR region.	Internal runbook
13	Perform a DR failover test.	Recommended quarterly

Author

Informatica Cloud Trust Team