How-To Library

Informatica

Configure HashiCorp Vault for Informatica Intelligent Clouds Services

© Copyright Informatica LLC 2025, 2026. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

This article helps you configure a HashiCorp Vault for use as a secrets manager in Informatica Intelligent Cloud Services.

Supported Versions

- Informatica Intelligent Cloud Services April 2026.2026.04.M

Table of Contents

Overview. 2
Step 1. Create Vault cluster. 2
Step 2. Download and install HashiCorp Vault CLI. 3
Step 3. Configure Vault policies and roles. 3
Step 4. Integrate Vault with Informatica Intelligent Cloud Services. 5
Step 5. Create secret key-value pairs. 6
Step 6. Enable your connectors to use Vault. 6

Overview

The HashiCorp Vault is an external secrets manager to store sensitive information for use in Informatica Intelligent Cloud Services.

Complete the following steps to integrate HashiCorp Vault with Informatica Intelligent Cloud Services:

- Step 1. Create the Vault cluster.
- Step 2. Download HashiCorp Vault CLI on the Secure Agent machine.
- Step 3. Configure Vault policies and roles.
- Step 4: Integrate Vault with Informatica Intelligent Cloud Services.
- Step 5. Create secret key-value pairs.
- Step 6: Enable your connectors to use Vault.


Step 1. Create Vault cluster

Create a Vault cluster on the HashiCorp web interface.

1. Log in to HashiCorp web interface and select **Vault Dedicated** from the side panel.
2. Click **Create cluster**.
3. Select your cloud provider and then enter a name for your cluster.
4. Under Templates, select **Key-value secrets** and then create the cluster.

   This may take several minutes to complete.

5. Once the cluster is created, note the VAULT_ADDR and VAULT_NAMESPACE for your cluster, as shown in the following image:

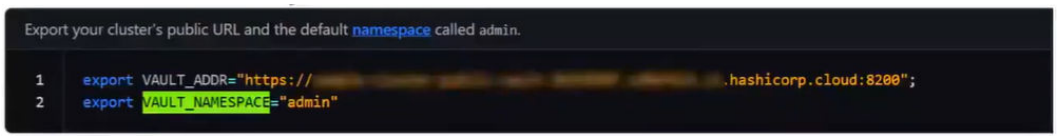

You will need this information later.

Step 2. Download and install HashiCorp Vault CLI

Download and install the HashiCorp Vault command line interface (CLI) onto your Secure Agent machine.

1. Download and install the appropriate version of Vault for your operating system from the following location:

   ```
   https://developer.hashicorp.com/vault/install
   ```

2. If you install the Linux version, enter the following command from the command shell:

   ```
   # which vault
   ```

   Note the directory where Vault is installed.

Step 3. Configure Vault policies and roles

Configure the Vault policies and assign roles.

1. Create a configuration file with the extension ".hcl" and save it on the Secure Agent machine, for example in the directory where the Vault is installed. The configuration file is written in HashiCorp configuration language and defines what a user can do in Vault.

   Add the following permission to the configuration file:

   ```
   # Write test data
   path "secret/data/ *" {
     capabilities = [ "read", "list" ]
   }
   ```

   This permission defines a user's level of access to a particular secret stored within a particular path.

2. On the Secure Agent machine, enter the following commands to set the system variables VAULT_ADDRESS and VAULT_NAMESPACE:

   ```
   # export VAULT_ADDR="https://<address>.hashicorp.cloud:8200";
   # export VAULT_NAMESPACE="<namespace>"
   ```

   Tip: You noted this information in "Step 1. Create Vault cluster" on page 2.

3. Enter the following command to log in to Vault:

   ```
   # vault login
   ```

4. When prompted for a token, perform the following steps to obtain one:
   1. Log on to the HashiCorp web interface and select **Vault Dedicated** from the side panel.
   2. Select the cluster that you just created.
   3. On the **Overview** tab of the cluster, scroll to the bottom to **Quick actions**.
   4. Click **Generate token** under **New admin token**.
      The new token is automatically copied to the clipboard.

5. Return to the command shell and paste the token at the prompt, and then press **Enter**.

   You have now logged into Vault from this particular instance on the agent machine.

6. Enter the following command to create and upload an access policy named `mypolicy` using the .hcl configuration file that you created in step 1:

   ```
   # vault policy write mypolicy ./<configFileName>.hcl
   ```

   You should see a success message indicating that the policy uploaded successfully.

7. Enter the following command to create a role and associate it with the access policy that you just created:

   ```
   # vault write auth/approle/role/<roleName> token_ttl=30m token_policies="mypolicy"
   ```

8. Enter the following command to display the role ID for the role that you just created:

   ```
   # vault read auth/approle/role/<roleName>/role-id
   ```

   Make a note of the role ID.

9. Enter the following command to create a secret ID for this particular role:

   ```
   # vault write -force auth/approle/role/roleName/secret-id
   ```

   Make a note of the secret ID.

10. Enter the following command to authenticate the vault:

    ```
    # vault write auth/approle/login role_id=<roleID> secret_id=<secretID>
    ```

    This command returns a new token that you will use when prompted in future vault logins, instead of using the token obtained from the HashiCorp UI. Make a note of this token.

11. Enter the following command to set the system variable VAULT_TOKEN:

    ```
    # export VAULT_TOKEN=$(curl -s --header "X-Vault-Namespace: $VAULT_NAMESPACE" --request
    POST --data '{"role_id": "<roleID>", "secret_id": "<secretID>" '}' $VAULT_ADDR/v1/auth/
    approle/login | jq -r '.auth.client_token' )
    ```


    Tip: To see the vault token stored in the system variable, use the following command:

    ```
    # echo $VAULT_TOKEN
    ```

Step 4. Integrate Vault with Informatica Intelligent Cloud Services


Once your HashiCorp Vault is configured, you can integrate and test the vault in Informatica Intelligent Cloud Services.

1. Ensure that the **Secret Manager** service is enabled for your runtime environment, as shown in the following image:

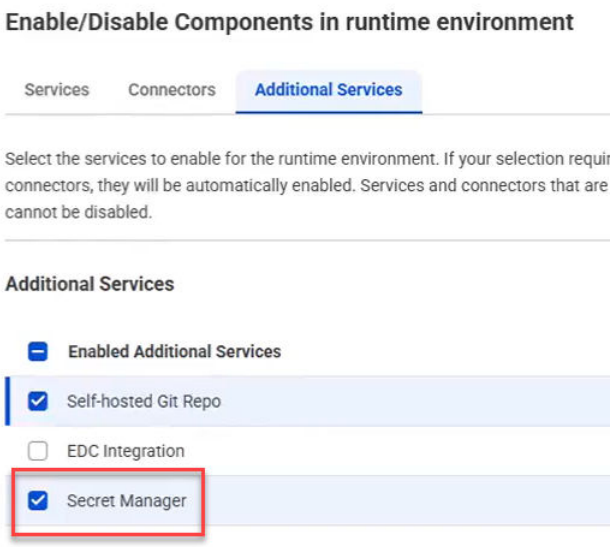

   For more information, see Enabling or disabling services and connectors for a Secure Agent group in the *Runtime Environments* guide.

2. Set HashiCorp Vault as the secrets manager as shown in the following image, and then configure the connection properties:

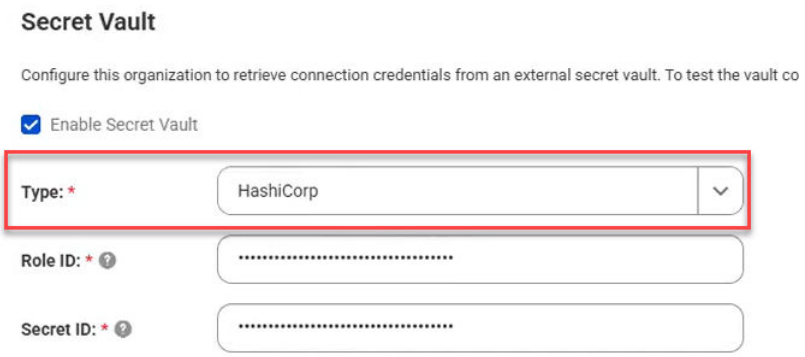

   For more information, see the following topics in the *Organization Administration* guide:

   - Secrets manager
   - HashiCorp Vault connection properties

3. On the **Security** tab, click **Test Vault Connection**.
4. Select the runtime environment that was used to install the vault and then click **Test**.

   You should see a success message.

Step 5. Create secret key-value pairs

Create key-value pairs in HashiCorp Vault to store your secret data, such as passwords, API keys, certificates, or configuration data.

1. On the Secure Agent machine, enter the following command to create your key-value pairs:

   ```
   # vault kv put secret/<secretPath> <key1>=<value1>, <key2>=<value2> ...
   ```

   Where:

   - <secretPath> is the specific location under the 'secret' mount where you want to store the secret. This path is optional.
   - <key1>=<value1> pairs are the actual secret data you want to store.

   For example, the following command stores a secret at `secret/mysecret` with two key-pairs: `username=admin` and `password=pass123`:

   ```
   # vault kv put secret/mysecret username=admin password=pass123
   ```

2. To verify that your vault-level secrets were created correctly, use the following command:


   ```
   # vault kv get secret/<secretPath>
   ```

   The secret keys and values are displayed. Verify that everything is correct.


Step 6. Enable your connectors to use Vault

When you've configured the HashiCorp Vault and integrated it in Informatica Intelligent Cloud Services, you can retrieve sensitive information from the vault when configuring the connector. .

1. When you configure a new connection in Informatica Intelligent Cloud Services, select **Use Secret Vault** in the connection details, as shown in the following image:



2. To retrieve a connection property value from the secrets manager, enable the slider for that field as shown in the following image:

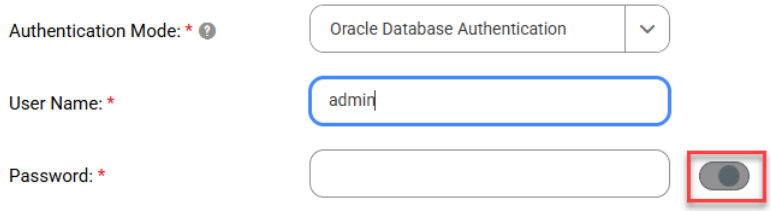

3. Enter the reference to the secret in the HashiCorp Vault in the following format: `<secretFullPath>:<key>`

   For example, if you use Vault secrets engine v2, the full path to the secret is `secret/data/mysecret` and the key to the password `password`.
   So the complete reference in the **Password** field is `secret/data/mysecret:password`.

Author

Informatica Documentation Team