Informatica® Cloud Data Integration
October 2026

CLAIRE® Copilot for Data Integration

Informatica Cloud Data Integration CLAIRE® Copilot for Data Integration
October 2026

© Copyright Informatica LLC 2025, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-16

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- IDMC Communities 5
- IDMC Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- IDMC Pulse Dashboard 6
- Informatica Global Customer Support 6

Chapter 1: Getting started with CLAIRE Copilot 7

Enable CLAIRE generative AI services 8

Open CLAIRE Copilot and start a conversation 9

Create an asset 9

Summarize an asset 10

Ask questions about the Informatica help 10

Get the best results from CLAIRE Copilot 11

Leave feedback 12

Clear conversation memory 12

Chapter 2: Using CLAIRE Copilot with Data Integration 13

Prerequisites 14

Create a mapping 14

- Submit a complete mapping prompt 16
- Start with a basic prompt 19
- Fill in missing details 20
- Add and correct details 21

Generate configured transformations 22

- Prompts to generate configured transformations 23

Generate an expression 23

- Rules and guidelines for generating expressions 24
- Prompts to generate expressions 25

Chapter 3: Using CLAIRE Copilot with Data Ingestion and Replication 29

Prerequisites 29

Create an ingestion and replication task 30

Guidelines for writing effective prompts 31

Sample prompts for ingestion and replication tasks 33

Database Ingestion and Replication examples of creating a task. 34
Example: Create a database ingestion task for a combined load from Oracle to Amazon S3. . . 35
Example: Create a database ingestion task for a combined load from Oracle to PostgreSQL. . . 38
Application Ingestion and Replication examples of creating a task. 40
Example: Create an application ingestion task for an combined load from Salesforce to Amazon S3. 41
Example: Create an application ingestion task for an incremental load from Salesforce to Kafka. 44

Index. 46

Preface

Use *CLAIRE® Copilot for Data Integration* to learn how to use natural language prompts to create and summarize assets in Data Integration and Data Ingestion and Replication.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Getting started with CLAIRE Copilot

CLAIRE Copilot is a conversational user interface that you can use to create and understand assets in your organization using natural language prompts.

CLAIRE Copilot is available for the following services:

- Application Integration
- Data Integration
- Data Ingestion and Replication
- Customer 360 SaaS
- Product 360 SaaS
- Supplier 360 SaaS
- Multidomain MDM SaaS

You can use CLAIRE Copilot for the following tasks:

Create assets

CLAIRE Copilot can create assets based on a natural language prompt, making it easier and faster than configuring the asset from scratch. If you're just beginning to create assets in your organization, CLAIRE Copilot can help you get started.

In Data Integration Copilot, CLAIRE Copilot can help you create the following assets:

- Application ingestion and replication task
- Database ingestion and replication task
- Mapping

Summarize mappings

CLAIRE Copilot can help you summarize mappings that have been created in your organization. You can open a mapping and ask CLAIRE Copilot to summarize it without manually analyzing transformation to understand how it's configured.

Ask questions about IDMC

CLAIRE Copilot can answer questions about information available in the Informatica documentation portal, Knowledge Base articles, and How-To Library articles.

CLAIRE Copilot can't help you with other tasks that aren't listed here.

Enable CLAIRE generative AI services

As an organization administrator, you need to authorize users of your organization to utilize Informatica's CLAIRE services either by enabling CLAIRE generative AI services in Administrator or by providing consent to use CLAIRE services in CLAIRE Copilot.

You can enable CLAIRE generative AI services for your organization in one of the following ways:


- In Administrator > **Settings**, select **Enable CLAIRE Generative AI Services**.
- Click **Yes, I agree** on the **Welcome to CLAIRE Copilot!** dialog box in your service.

  Note: After you give consent to use CLAIRE services, the **Enable CLAIRE Generative AI Services** check box in Administrator appears enabled.

After you enable CLAIRE generative AI services, tasks run in the background to make CLAIRE available for all users in your organization, and this could take several minutes to complete. You can continue to use other services during this time.

CLAIRE services from Informatica operate with a level of autonomy to provide information, suggestions, or other outputs in response to natural language queries from users. CLAIRE services are designed to facilitate the use of applicable cloud services by users but might generate errors. Your organization is responsible for reviewing the outputs to ensure they are appropriate for your business needs.

The following image shows the consent dialog box in CLAIRE Copilot:

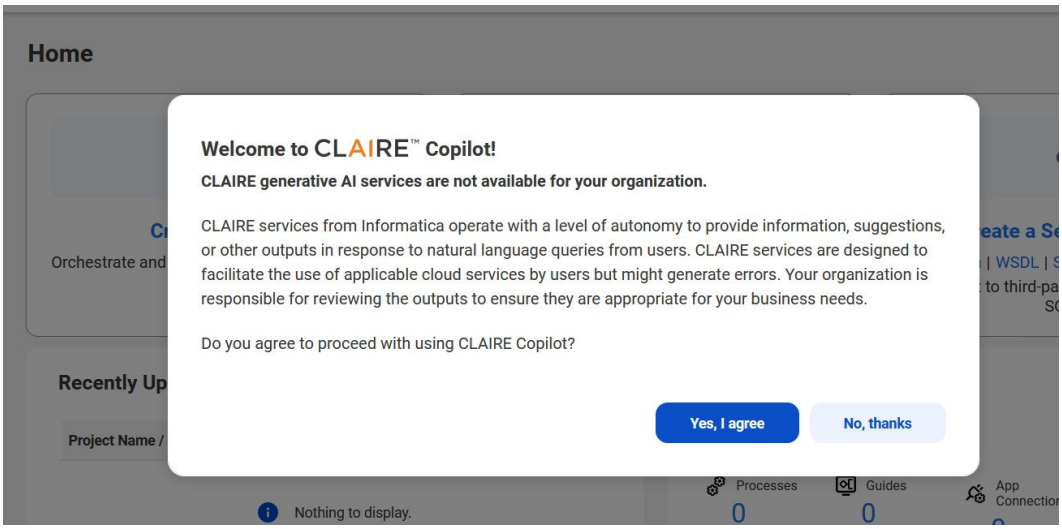


For more information about how to enable CLAIRE generative AI services in Administrator, see *Organization Administration* in Administrator.

Open CLAIRE Copilot and start a conversation

Open CLAIRE Copilot from the **Home** page of your service. When you open CLAIRE Copilot, a conversation window appears where you can start or continue a conversation.

1. On the **Home** page of your service, select the CLAIRE Copilot icon to open the conversation window.

   The following image shows the CLAIRE Copilot icon and the conversation window:

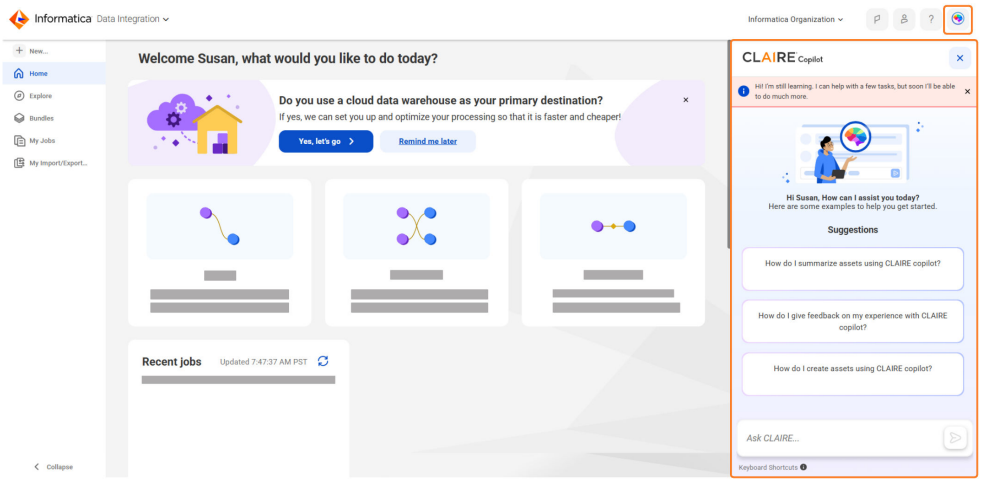

2. Select one of the sample prompts, or type your own prompt in the prompt text box.

   Optionally, hover over the keyboard shortcuts to help you write a prompt.

3. Submit the prompt and wait for CLAIRE Copilot to return a response.

   To cancel a prompt, select **Stop generating response** before CLAIRE Copilot displays the response.

Create an asset

Use CLAIRE Copilot to create an asset by describing your use case in the conversation window. When CLAIRE Copilot processes the use case, it determines the best asset type for the use case, configures the asset, and creates it.

You can specify all of the asset details in the first prompt, or you can let CLAIRE Copilot ask you for the details it needs. Then, you can ask CLAIRE Copilot to create the asset and open it. In the asset editor, you can edit the asset manually and save it, or you can discard it and start a new conversation with CLAIRE Copilot.

If you make changes to the asset and the asset is saved and valid, you can ask CLAIRE Copilot to summarize the updated asset.

When you open the asset in the future, the conversation history with CLAIRE Copilot remains available. To view the conversation history that's associated with an asset, open the asset and then open CLAIRE Copilot.

Summarize an asset

CLAIRE Copilot can summarize assets to help you understand how they're configured. To summarize an asset, the asset must be saved and valid.

CLAIRE Copilot can create the following types of summaries:

Brief summary

A brief summary is a high-level summary that you can use to quickly understand what an asset does, the data sources it uses, and its purpose.

To get a brief summary, enter the prompt `Summarize this asset`.

Detailed summary

A detailed summary explains every part of the asset so that you can understand how each part is configured.

To get a detailed summary, enter the prompt `Generate detailed summary`.

You can ask CLAIRE Copilot to summarize an asset while CLAIRE Copilot is helping you create it so that you can understand the configurations that have been made so far.

Note: The types of summaries that CLAIRE Copilot can create depend on each service. For more information, see the help for the appropriate service.

Ask questions about the Informatica help

CLAIRE Copilot can answer questions about IDMC on the Informatica Documentation Portal, in Knowledge Base articles, and in How-To Library articles.

CLAIRE Copilot has access to the following documentation:

- Informatica Documentation Portal
- Knowledge Base articles
- How-To Library articles

You can ask CLAIRE Copilot questions about the functionality that's available in IDMC, how to create assets, how to resolve errors, and best practices. You can also ask CLAIRE Copilot about its own capabilities.

For example, you can ask the following question:

```
What can CLAIRE Copilot do today in Data Integration?
```

Use the following guidelines to improve responses:

Provide context for the question.

Provide the the context, details, and service name for CLAIRE Copilot to understand how and where it can find the answer to your question in the Informatica help.

For example, the following questions specify the service name:

```
What's the difference between a mapping and a mapping task in Data Integration?
```

Rephrase the question.

CLAIRE Copilot answers questions based on the information that's available in the Informatica help. If CLAIRE Copilot doesn't return the answer you expected, try rephrasing the question or using terminology from the Informatica help.

For example, if CLAIRE Copilot doesn't understand `basic summary`, try `brief summary`.

Get the best results from CLAIRE Copilot

To get the best results from CLAIRE Copilot, use the guidelines to learn how to interact with CLAIRE Copilot and submit prompts that improve the output you receive.

Interacting with CLAIRE Copilot

Use the following guidelines to improve how you interact with CLAIRE Copilot:

Open CLAIRE Copilot in the appropriate service.

To create a mapping or an ingestion and replication task, or to summarize a mapping, open CLAIRE Copilot in Data Integration.

Create assets on the Home page.

Before asking CLAIRE Copilot to create an asset, navigate to the **Home** page of your service and then open the conversation window.

Validate, save, and run assets manually.

CLAIRE Copilot can't validate, save, publish, or run assets. To validate, save, publish, or run an asset, open the asset editor and select the appropriate option.

Open a mapping, and then summarize it.

To summarize an existing mapping, open the mapping in the Mapping Designer, and then ask CLAIRE Copilot to summarize it.

Creating assets

Use the following guidelines to improve the prompts that you use to create assets:

Gather all details to create the asset.

Before you ask CLAIRE Copilot to create an asset, gather all the details you need. To create an asset in Data Integration, gather details about source and target connections, objects, and schemas.

Provide all details in the first prompt.

To improve performance, provide all details in the first prompt that you submit to CLAIRE Copilot.

Be clear and concise in prompts.

Be clear and concise when you write prompts. Tell CLAIRE Copilot exactly what you want it to do and in the appropriate order.

Use keyboard shortcuts to help you write prompts.

You can use the following keyboard shortcuts:

- To view the sample prompts, type `#` in the prompt text box.
- To reference objects in the organization, type `@` in the prompt text box. CLAIRE Copilot displays a list of objects that you can select from.
- To access previously sent prompts, use the **Up** and **Down** arrow keys. You can resend the same prompt, or press **Tab** to modify it first.

Review the asset description before opening the asset.

Before you ask CLAIRE Copilot to open the asset, review the asset description to make sure that all configurations are present and correct.

After you open an asset, CLAIRE Copilot can't make any more changes to the asset and you can edit it only manually.

Leave feedback

We welcome feedback on your experience with CLAIRE Copilot. You can use the **Like** and **Dislike** icons to rate responses. To provide more details, select **Add Comments** or send an email to `copilot-feedback@informatica.com`.

If you need to report an issue, you can copy the conversation ID from the **Actions** menu of the conversation window. Include the conversation ID in the issue.

Informatica carefully reviews your feedback and uses it to improve CLAIRE Copilot for everyone.

Clear conversation memory

CLAIRE Copilot remembers the prompts and responses during your conversation so it can help you continue working on the same asset.

If you don't want CLAIRE Copilot to refer to information in previous prompts and responses, you can clear the conversation memory. For example, you might want to clear the conversation memory if you want to start working on a new asset.

You can clear the conversation memory in one of the following ways:

- Start a new conversation. To start a new conversation, click the **Plus** icon. CLAIRE Copilot clears its memory and resets the conversation window.
- Enter the prompt `Start Over`. CLAIRE Copilot clears its memory but you can still see the previous conversation in the conversation window.

CHAPTER 2

Using CLAIRE Copilot with Data Integration

Use CLAIRE Copilot to help you create and summarize mappings and to answer questions about Data Integration.

You can use CLAIRE Copilot for the following tasks:

Create mappings

You can ask CLAIRE Copilot to create a mapping by describing a use case and data flow in the conversation window.

Generate configured transformations

You can use CLAIRE Copilot to add and configure transformations in the mapping canvas by entering a prompt in your own words.

Generate expressions

You can use CLAIRE Copilot to generate expressions in the Aggregator and Expression transformations by entering a prompt in your own words or using pseudocode.

Summarize mappings

You can ask CLAIRE Copilot to provide a brief summary or a detailed summary of an existing mapping. A brief summary returns a high-level overview of the mapping, and a detailed summary returns information about how the individual transformations in the mapping are configured.

Ask questions about Data Integration

CLAIRE Copilot can answer questions to help you use Data Integration. For example, you can ask CLAIRE Copilot about mappings, transformations, and functions so that you can use the information to write a mapping prompt.

The following sample prompts show the types of use cases and data flows that CLAIRE Copilot can configure in a mapping:

```
Copy all data from ProductIO table in Salesforce custom table to a file.

Find the total salary of each department from the Aggregator_source file and write it to a different file.

I want to identify all the team members for each account in AccountHistory table and write it to a file. The team member details are present in the Account Team member custom object in Salesforce.

I want to get the vehicles details from the Vehicle__c object in Salesforce for the vehicles which were delivered in the last week from yesterday and move it to a service plan prepare file.

Identify the rows log entries where the statuscode is 200 or 201. Separate them to a folder 1 and the keep the remaining rows in folder 2.

Create 2 copies of the latest manifest file data for esl transaction files to audit/target/esl_transactions/ and source/billing/esl_transactions/. Add a new column with the system timestamp and arrange the data based on the transaction ids from the earliest to the latest.
```

CLAIRE Copilot doesn't create or summarize mappings in advanced mode or in SQL ELT mode.

Prerequisites

Complete prerequisite tasks to use CLAIRE Copilot in Data Integration.

Before you use CLAIRE Copilot in Data Integration, perform the following tasks:

- Make sure your user has the following privileges:
  - Data Integration feature privilege "Access Data Integration Copilot". The privilege is required to use CLAIRE Copilot in Data Integration and Data Ingestion and Replication.
  - Create privilege for the asset that you want to create in CLAIRE Copilot.
  - Read privilege for the asset that you want to summarize in CLAIRE Copilot.
- Configure a runtime environment that's up and running. You can use a Secure Agent group or the Hosted Agent.
- Create and test source and target connections in Administrator.

For more information, see *Getting Started* or see the Administrator help.

Create a mapping

To create a mapping using CLAIRE Copilot, you can submit a complete mapping prompt to CLAIRE Copilot or you can start with a basic prompt and then fill in, add, and correct details through the conversation interface.

CLAIRE Copilot can create mappings that include the following transformations:

Source

Target

Aggregator

Expression

Filter

Joiner

Lookup

Rank

Router

Sorter

Union

You can create and design mappings in the following ways:

Submit a complete mapping prompt

For best results and performance, provide all details about the mapping in the first prompt that you submit to CLAIRE Copilot.

A complete mapping prompt includes the following details:

- Source and target connection names
- Source and target object names
- Optionally, transformation details

For example, the following prompt specifies the source and target connections, source and target objects, and transformations in the mapping:

```
Read 'DEPT_MAIN' from Oracle connection 'Oracle_connection', group the incoming data
based on field 'DEPTNAME', and create a new field named 'MIN_SALARY' that has the
minimum value of the 'SALARY' field and a field named 'AVE_SALARY' which has the
average salary. Write the resulting data to a table named 'DEPT_P' in the same
Oracle connection.
```

Start with a basic prompt

If you don't have a complete mapping prompt, you can start the conversation with a basic prompt like `I want to create a mapping` and design the mapping in subsequent prompts by filling in, adding, and correcting details.

When you start the conversation with a basic prompt, CLAIRE Copilot asks you to provide the details it needs to create the mapping, such as source and target connections or source and target objects. If CLAIRE Copilot gives you a list of options for connections or objects to choose from, you can enter the name or number of the list item. Otherwise, you can type the name of the connection or object in the prompt text box.

You can also submit prompts to add details to the mapping or correct prior details. For example, you can submit a prompt to specify an additional filter condition for a Filter or Router transformation. Or, you can change the connection or object for the source or target.

Note: If you previously specified a filter condition, you can't change it during the same conversation. To specify a different filter condition, start a new conversation or type `Start Over`.

When CLAIRE Copilot has enough information to create the mapping, it generates a brief summary that you can review. You can continue making changes to the mapping in the conversation window, or you can ask CLAIRE Copilot to create it and open it.

Note: After CLAIRE Copilot opens the mapping, you can't edit the asset in the conversation window, but you can continue to make edits manually.

Submit a complete mapping prompt

For best results, provide all details about the mapping in the first prompt that you submit to CLAIRE Copilot. To improve the accuracy of the mappings that CLAIRE Copilot creates, provide clear and specific details that describe the data flow in the mapping.

To create a complete mapping prompt, use the following guidelines:

- Be clear and concise when you describe the use case and mapping details.
- Provide all details about source and target objects, source and target connections, and the transformations in the mapping. For each transformation, specify what the transformation does.
- Use key words for transformations and functions. For more information about the transformations, transformation capabilities, and functions; see *Transformations* and *Function Reference*.
- Start the prompt by providing source and target details. Then, provide transformation details in the same order that the transformations appear in the mapping.
- Specify only one data flow. CLAIRE Copilot can't create mappings with multiple data flows.

Create a mapping to filter and route accounts

Let's break down the following prompt:


```
Create a mapping to extract data from Account table in Salesforce connection and write
it to a new table in Snowflake connection. Get the accounts where created year is 2025
and route the accounts in “USA” to one table and the remaining accounts to another table.
```

The prompt provides the source and target details, including the respective source and target connections. Then, it describes the data flow in the mapping. First, the mapping filters the data by accounts that were created in 2025. Then, the mapping routes the account data to two tables.

The following table lists the key words and how they correspond to mapping elements:

Key words	Mapping element
Account table	Source object in the Source transformation
Salesforce connection	Source connection in the Source transformation
new table	Target object in the Target transformation
Snowflake connection	Target connection in the Target transformation
where created year is 2025	Filter transformation
route the accounts in "USA"	Router transformation

The following image shows each key word in the prompt:

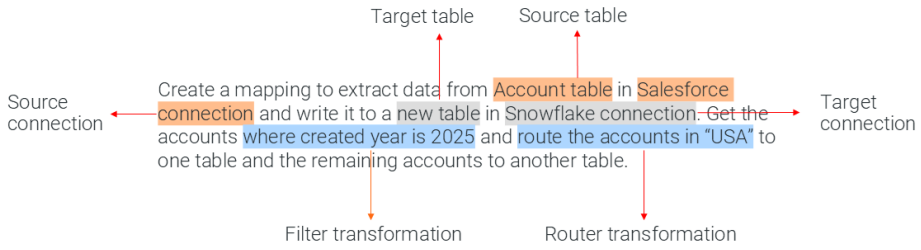

When CLAIRE Copilot creates a mapping based on the prompt, it adds the transformations in the following order: Source, Filter, Router, and Target.

Create a mapping to transform account data


Let's break down the following prompt:

```
Create a mapping to read data from Account table using Salesforce connection and write
it to a new table in Snowflake connection. Join the Account and Orders tables on
AccountId. Trim all except the last 6 characters from the ID field and filter only for
Accounts where Ownership is 2. Find total employees for each Type by counting account
IDs. Route the rows where Type is "Customer - Direct" to one table, ones where Type is
"Customer - Channel" to a different table, and the remaining to a third table.
```

The following table lists the key words and how they correspond to transformations in the mapping:

Key word	Transformation
Join	Joiner transformation
Trim	Expression transformation with the LTRIM function
filter	Filter transformation
counting	Aggregator transformation with the COUNT function
Route	Router transformation

The following image shows each key word in the prompt:

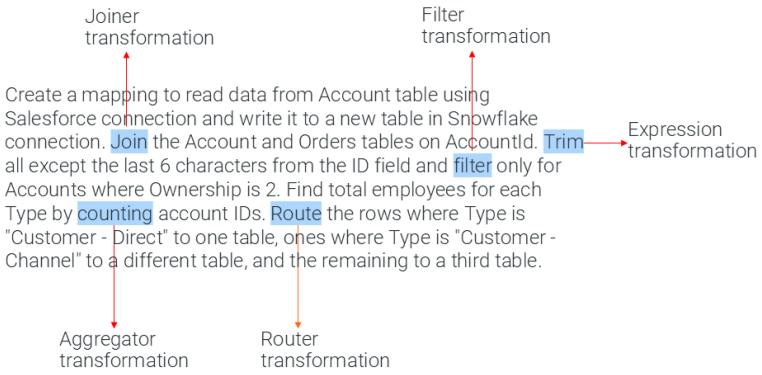

When CLAIRE Copilot creates a mapping based on the prompt, it adds the transformations in the following order: Source, Joiner, Expression, Filter, Aggregator, Router, and Target.


Combine and extract data from Snowflake

Let's ask CLAIRE Copilot to combine and extract data from Snowflake and demonstrate how the results appear in Data Integration. We'll specify the source objects, source connection, transformations, target objects, and target connection for CLAIRE Copilot to configure in the mapping.

We'll use the following prompt:

```
Combine and extract data from table EMPLOYEE_DETAILS and EMPLOYEE_SALES using the
connection SnowflakeAnalytics2. Lookup the region name from the REGION_MASTER table
based on region id. Filter only for employees in North America region. Aggregate the
records by summing up the sales for each quarter for each Employee. Then create a full
name for each employee and sort the data by Region. Route Q1, Q2, Q3 and Q4 records to
new tables Q1_sales, Q2_sales, Q3_sales and Q4_sales respectively using the
SnowflakeAnalytics2 connection.
```

1. Enter the prompt in the conversation window.
2. Click **Yes**.
   The following image shows the response from CLAIRE Copilot and the created mapping:

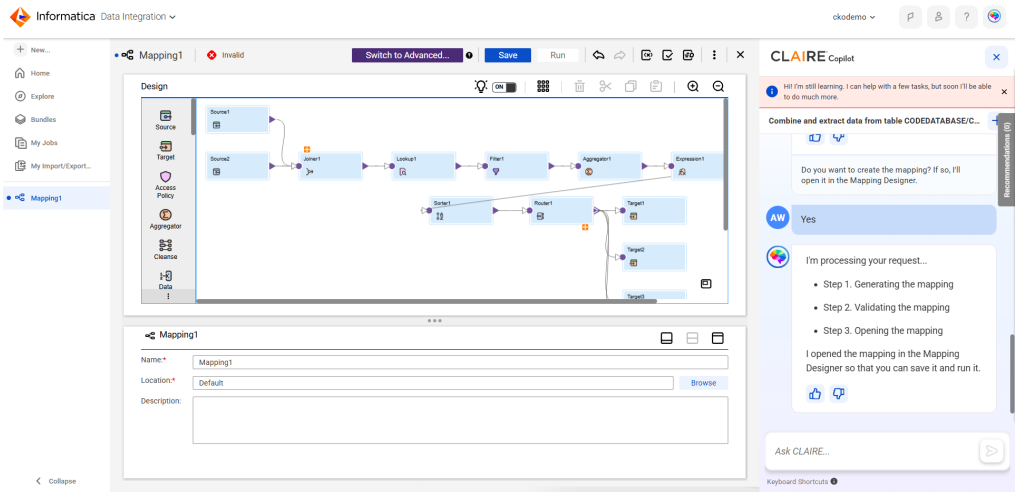

3. Resolve the validation errors in the mapping, if any, and then save and run the mapping.

Start with a basic prompt

Let's take a look at an example that demonstrates how you can create a mapping by starting the conversation with a basic prompt.

1. You submit the following basic prompt to start the conversation:

   ```
   I want to create an integration pipeline. I'll figure out my sources and targets on
   the fly.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   It looks like you're trying to create a mapping.
   Let's gather some more information.
   Here's a list of connections for the source:
   1. Fabric_SalesProd
   2. Snowflake_AnalyticsDev
   3. OneLake_MarketingStaging
   4. Snowflake_FinanceProd
   5. OneLake_OperationsStaging
   ```

2. You submit the following prompt:

   ```
   I don't want to use any of these connections. List all Oracle connections for me.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   Here's a list of connections:
   1. OracleSource_ProdDB
   2. OracleSource_SalesDB
   3. Oracle_Connection_Finance
   4. OracleSource_Dev
   5. OracleSource_HRData
   ```

3. You submit the following prompt:

   ```
   Great. I want to use OracleSource_Dev.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I made a note of source connection OracleSource_Dev.
   I'm trying to find a source object using OracleSource_Dev.
   ```

4. You submit the following prompt:

   ```
   Let's use the CUSTOMERS table.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I successfully validated source connection OracleSource_Dev and source object
   CUSTOMERS.
   Here's a list of connections for the target:
   1. OneLake_DataHub
   2. Fabric_SalesAnalytics
   3. Snowflake_MarketingDB
   4. Fabric_DevOps
   5. OneLake_FinanceLake
   ```

5. You submit the following prompt:

   ```
   List all CSV file connections so I can choose a target.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   Here's a list of connections:
   1. CSV_SalesData_Q1
   2. CSV_MarketingCampaigns_2025
   3. CSV_FinanceReports_Archive
   4. CSV_FlatFile_Target
   5. CSV_Inventory_Updates
   ```

6. You submit the following prompt:

   ```
   Awesome. Let's use CSV_FlatFile_Target as my target connection.
   ```

CLAIRE Copilot replies with the following statement:

```
I made a note of target connection CSV_FlatFile_Target.
I'm trying to find a target object using CSV_FlatFile_Target.
```

7. You submit the following prompt:

```
Let's create a new file called test_object.csv for the target object.
```

CLAIRE Copilot replies with the following statement:

```
I successfully validated target connection CSV_FlatFile_Target and source object
test_object.csv.
```

Now that the mapping has a source and target, CLAIRE Copilot generates a summary of the mapping and asks you if you want to create it.

Fill in missing details

Let's take a look at an example that demonstrates how you can fill in missing details during the conversation.

1. You submit the following prompt to start the conversation:

```
Create a mapping to read data from Account table using the "Salesforce" source
connection and write it to a new table. Trim all except the last 6 characters from
the Id field and Filter only for Accounts where Ownerid is "2". Find total employees
for each Type by counting account IDs.
```

CLAIRE Copilot replies with the following statement:

```
It looks like you're trying to create a mapping.
Let's gather some more information.
Here's a list of connections for the target:
1. Fabric_SalesProd
2. Snowflake_AnalyticsDev
3. OneLake_MarketingStaging
4. Snowflake_FinanceProd
5. OneLake_OperationsStaging
```

2. You submit the following prompt:

```
Show me all Snowflake connections instead.
```

CLAIRE Copilot replies with the following statement:

```
Here's a list of connections:
1. Snowflake_ProdDB
2. Snowflake_SalesWarehouse
3. Snowflake_MarketingAnalytics
4. Snowflake_DevEnvironment
5. Snowflake_FinanceReporting
```

3. You submit the following prompt:

```
Great. I know there are more Snowflake connections than the ones listed here. I want
to use 'Snowflake' as my target connection for all my targets.
```

CLAIRE Copilot replies with the following statement:

```
I made a note of target connection Snowflake.
I can't find target object [Missing] using connection Snowflake. You can check the
spelling or ask me to find a different object.
```

4. You submit the following prompt:

```
Let's use Customer_Direct.
```

CLAIRE Copilot replies with the following statement:

```
I successfully validated target connection Snowflake and source object
Customer_Direct.
```

Because you provided all missing details, CLAIRE Copilot generates a summary of the mapping and asks you if you want to create it.

Add and correct details

Let's take a look at an example that demonstrates how you can add and correct mapping details during a conversation.

1. You submit the following prompt to start the conversation:

   ```
   Create an integration pipeline to move records from Oracle to a flat file.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   It looks like you're trying to create a mapping.
   Let's gather some more information.
   Here's a list of connections for the source:
   1. OracleSource_ProdDB
   2. OracleSource_SalesDB
   3. Oracle_Connection
   4. OracleSource_DevEnvironment
   5. OracleSource_HRData
   ```

2. You submit the following prompt:

   ```
   Let's use 3.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I made a note of source connection Oracle_Connection.
   I'm trying to find a source object using Oracle_Connection.
   ```

3. You submit the following prompt:

   ```
   Check if the EMPLOYEE table is present and use it if it's there.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I successfully validated source connection Oracle_Connection and source object
   EMPLOYEE.
   Here's a list of connections for the target:
   1. FF_SalesData_2025
   2. FF_CustomerRecords
   3. FF_InventoryUpdate
   4. FF_Target
   5. FF_EmployeeDetails
   ```

4. You submit the following prompt:

   ```
   Wait, I wanted to use EMPLOYEE using FF_Source connection. Can you change the source
   connection?
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I successfully validated source connection FF_Source and source object EMPLOYEE.
   Here's a list of connections for the target:
   1. FF_SalesData_2025
   2. FF_CustomerRecords
   3. FF_InventoryUpdate
   4. FF_Target
   5. FF_EmployeeDetails
   ```

5. You submit the following prompt:

   ```
   I want to insert the data into a file called "Employee_Oracle_Records" using the
   FF_Target connection.
   ```

   CLAIRE Copilot replies with the following statement:

   ```
   I successfully validated target connection FF_Target and source object
   Employee_Oracle_Records.
   All connections have been identified and updated.
   ```

   Then, CLAIRE Copilot generates a summary of the mapping and asks you if you want to create it.

6. You submit the following prompt:

   ```
   Can you filter the records where location is 'US'?
   ```

   CLAIRE Copilot updates the mapping summary and asks you again if you want to create the mapping.

Generate configured transformations


Use CLAIRE Copilot to add and configure transformations in the mapping canvas based on a natural language prompt. You can generate configured transformations in mappings and mappings in SQL ELT mode that run in the Snowflake ecosystem.

You can prompt CLAIRE Copilot to generate one or multiple transformations at a time. CLAIRE Copilot can generate the following types of transformations:

- Source
- Target
- Aggregator
- Expression
- Filter
- Joiner
- Lookup
- Rank
- Router
- Sequence Generator
- Union
- Sorter

To generate configured transformations, hover over the link between two transformations on the mapping canvas. Click the Add Transformation icon and then select **Generate Transformations** from the menu.


The following image shows the Add Transformation menu:

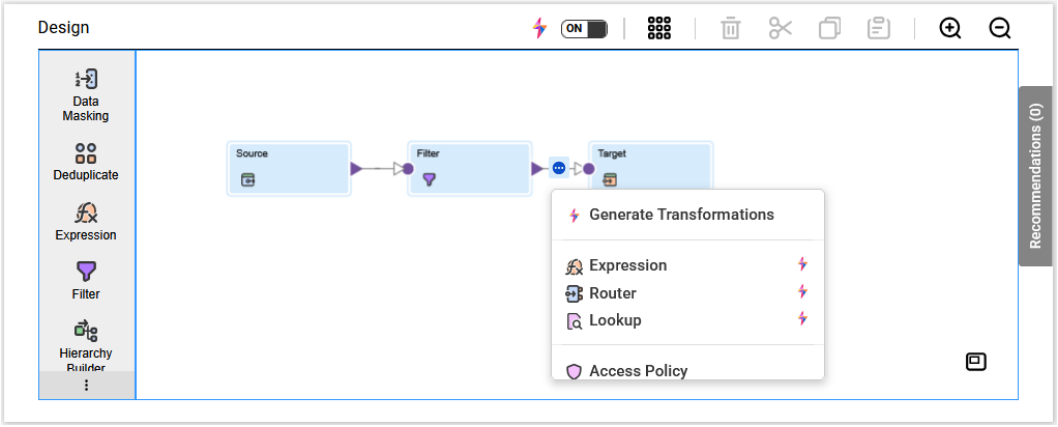

CLAIRE Copilot usually adds transformations to the place in the data flow where you selected **Generate Transformations**. However, if you prompt CLAIRE Copilot to read from a specific source or write to a specific target, CLAIRE Copilot generates a new data flow.

Until you save the mapping, transformations that CLAIRE Copilot adds to the mapping canvas appear in pink with a lightning bolt icon. While the mapping is open, you can review the prompts you've submitted to generate transformations. To review prompts, open the **Generate Transformations** dialog box and use the arrows to navigate through your prompts. After you save and close the mapping, you can no longer see the prompts or see which transformations CLAIRE Copilot added to the mapping.

The following image shows a mapping with generated transformations:

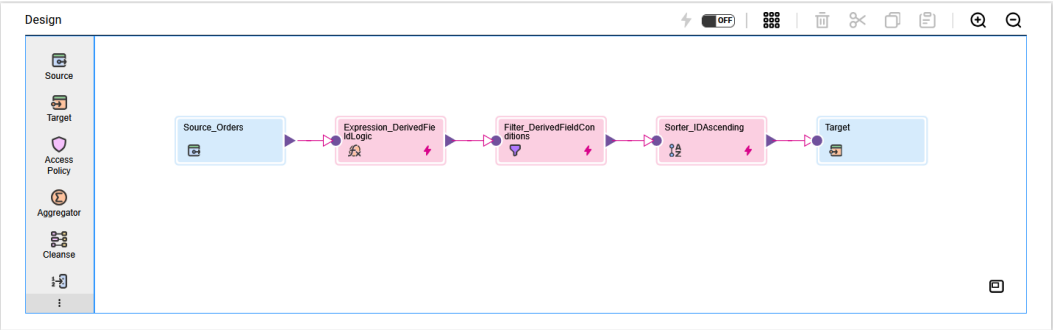

When CLAIRE Copilot generates an Expression transformation, it doesn't validate the configured expression. To validate the expression, open the expression dialog box and click **Validate**.

Prompts to generate configured transformations

To generate configured transformations, you can describe how you want to transform the data in your own words.

The following sample prompts show how you can describe data transformation:

```
Aggregate orders by state

Apply a filter to include only records where order value is greater than 100

Count the total records where either ID or name is not null and ensure name is distinct

Extract data from AUTO_PRODUCT_CATEGORIES_H using 'OracleConnection'

Create a mapping reading from Merch_Inventory_Table through OracleConnection.
Trim all fields.
Use a router to direct records to two output groups:
Extract the year from the DATE_VAL field using the GET_DATE_PART function and include it
in both output groups.
First output group should contain records where QUAN is greater than 0 and year is 2025.
Second output group should contain records where QUAN is less than or equal to zero and
year is less than 2020.
Write records from 1st group to Group1 in OracleConnection and 2nd group to Group2 in
OracleConnection.
```


Note: To generate a transformation that uses an existing connection or object, ensure that the prompt has the exact name of the connection or object that exists in your organization.

Generate an expression

Generate an expression using CLAIRE Copilot to define mapping logic in your own words or using pseudocode. You can submit a natural language prompt and CLAIRE Copilot converts it into transformation language.

CLAIRE Copilot can generate expressions in the Aggregator and Expression transformations.

The following image shows CLAIRE Copilot in the expression editor:

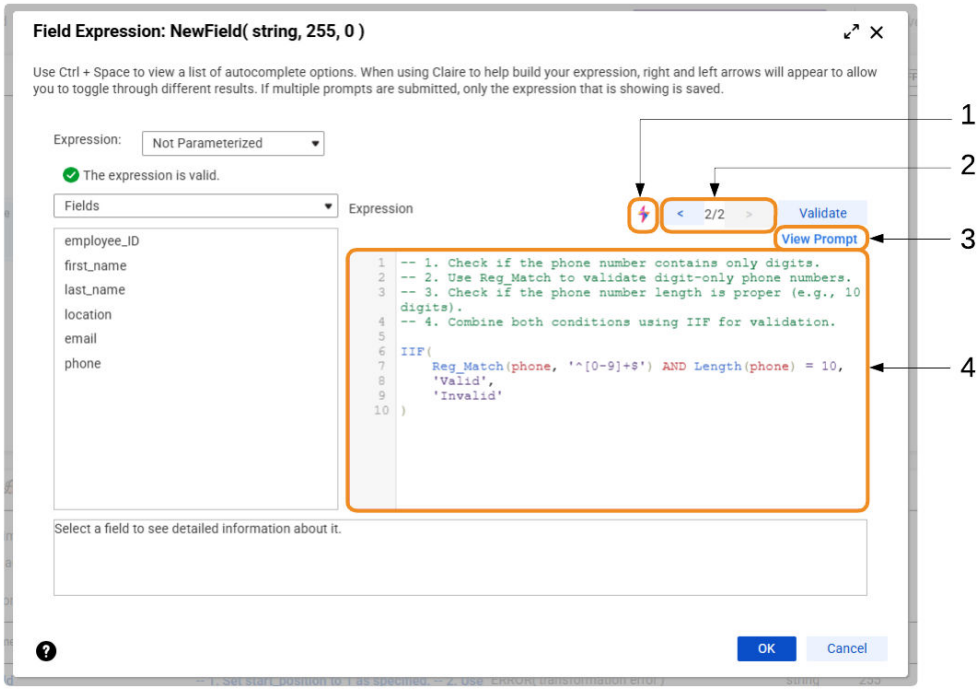

1. Open the **Generate Expression** dialog box to generate an expression using CLAIRE Copilot.
2. Use the left and right arrows to view different versions of the expression.
3. View the prompt that CLAIRE Copilot used to generate the current version of the expression.
4. View and edit the generated expression. The expression includes comments that explain how CLAIRE Copilot generated it.

Note: When you select **OK** to exit the expression editor, the current version of the expression is saved. For example, if you navigate to version 3 out of 4 and exit the editor, then version 3 is saved. The other versions are discarded.

Rules and guidelines for generating expressions

Use the following rules and guidelines when you use CLAIRE Copilot to generate an expression:

- CLAIRE Copilot doesn't create fields based on the generated expression. When you specify a field in a prompt, make sure that it exists in the mapping or create it manually.
- CLAIRE Copilot doesn't create or use user-defined functions, unconnected lookups, or in-out parameters.
- In mappings and mappings in advanced mode, CLAIRE Copilot generates expressions using functions that are common to both mapping types. For example, CLAIRE Copilot can't generate expressions that use window functions because they're available only in advanced mode.
- In mappings in SQL ELT mode that run in the Snowflake ecosystem, CLAIRE Copilot generates expressions using Snowflake functions. CLAIRE Copilot can't generate expressions in mappings in SQL ELT mode that run in other cloud ecosystems.
- For synonymous Snowflake functions, such as LENGTH and LEN, CLAIRE Copilot might generate either function.

Prompts to generate expressions

To generate an expression using CLAIRE Copilot, you can describe the expression in your own words or using pseudocode. In mappings in SQL ELT mode, CLAIRE Copilot generates expressions using cloud ecosystem functions.

Your own words

The following sample prompts show how you can describe an expression in your own words:

```
Write a regex to standardize phone numbers by applying formatting logic to match the pattern (XXX) XXX-XXXX.

Create a condition to route separate records by month and assign them to different targets.

Check if address1 contains USA. If yes, concatenate address1 and address2. If not, convert the mod of the ASCII code of the first letter in both the city and state to string.

Extract the month from the start date and compare it to the end date.
```

The following example shows a prompt in your own words:

```
1. Cast all columns to string. Do a left or right trim.
2. Make sure all fields aren't null.
3. If there's a null, replace it with null stringConcatenate all the above using the || operator and don't use the concat function.
4. Create an MD5 function out of the concatenated value.
```

The following image shows the generated expression for mappings and mappings in advanced mode:

```
-- 1. Trim all fields and cast them to string.
-- 2. Replace null values with an empty string.
-- 3. Concatenate all fields using the `||` operator.
-- 4. Apply MD5 function to the concatenated string.

MD5(
  IIF(ISNULL(LTRIM(RTRIM(Id))), '', LTRIM(RTRIM(Id))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(IsDeleted)))), '', LTRIM(RTRIM(TO_CHAR(IsDeleted)))) ||
  IIF(ISNULL(LTRIM(RTRIM(MasterRecordId))), '', LTRIM(RTRIM(MasterRecordId))) ||
  IIF(ISNULL(LTRIM(RTRIM(Name))), '', LTRIM(RTRIM(Name))) ||
  IIF(ISNULL(LTRIM(RTRIM(Type))), '', LTRIM(RTRIM(Type))) ||
  IIF(ISNULL(LTRIM(RTRIM(RecordTypeId))), '', LTRIM(RTRIM(RecordTypeId))) ||
  IIF(ISNULL(LTRIM(RTRIM(ParentId))), '', LTRIM(RTRIM(ParentId))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingStreet))), '', LTRIM(RTRIM(BillingStreet))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingCity))), '', LTRIM(RTRIM(BillingCity))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingState))), '', LTRIM(RTRIM(BillingState))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingPostalCode))), '', LTRIM(RTRIM(BillingPostalCode))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingCountry))), '', LTRIM(RTRIM(BillingCountry))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(BillingLatitude)))), '', LTRIM(RTRIM(TO_CHAR(BillingLatitude)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(BillingLongitude)))), '', LTRIM(RTRIM(TO_CHAR(BillingLongitude)))) ||
  IIF(ISNULL(LTRIM(RTRIM(BillingGeocodeAccuracy))), '', LTRIM(RTRIM(BillingGeocodeAccuracy))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingStreet))), '', LTRIM(RTRIM(ShippingStreet))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingCity))), '', LTRIM(RTRIM(ShippingCity))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingState))), '', LTRIM(RTRIM(ShippingState))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingPostalCode))), '', LTRIM(RTRIM(ShippingPostalCode))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingCountry))), '', LTRIM(RTRIM(ShippingCountry))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(ShippingLatitude)))), '', LTRIM(RTRIM(TO_CHAR(ShippingLatitude)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(ShippingLongitude)))), '', LTRIM(RTRIM(TO_CHAR(ShippingLongitude)))) ||
  IIF(ISNULL(LTRIM(RTRIM(ShippingGeocodeAccuracy))), '', LTRIM(RTRIM(ShippingGeocodeAccuracy))) ||
  IIF(ISNULL(LTRIM(RTRIM(Phone))), '', LTRIM(RTRIM(Phone))) ||
  IIF(ISNULL(LTRIM(RTRIM(Fax))), '', LTRIM(RTRIM(Fax))) ||
  IIF(ISNULL(LTRIM(RTRIM(AccountNumber))), '', LTRIM(RTRIM(AccountNumber))) ||
  IIF(ISNULL(LTRIM(RTRIM(Website))), '', LTRIM(RTRIM(Website))) ||
  IIF(ISNULL(LTRIM(RTRIM(PhotoUrl))), '', LTRIM(RTRIM(PhotoUrl))) ||
  IIF(ISNULL(LTRIM(RTRIM(Sic))), '', LTRIM(RTRIM(Sic))) ||
  IIF(ISNULL(LTRIM(RTRIM(Industry))), '', LTRIM(RTRIM(Industry))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(AnnualRevenue)))), '', LTRIM(RTRIM(TO_CHAR(AnnualRevenue)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(NumberOfEmployees)))), '', LTRIM(RTRIM(TO_CHAR(NumberOfEmployees)))) ||
  IIF(ISNULL(LTRIM(RTRIM(Description))), '', LTRIM(RTRIM(Description))) ||
  IIF(ISNULL(LTRIM(RTRIM(OwnerId))), '', LTRIM(RTRIM(OwnerId))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(CreatedDate)))), '', LTRIM(RTRIM(TO_CHAR(CreatedDate)))) ||
  IIF(ISNULL(LTRIM(RTRIM(CreatedById))), '', LTRIM(RTRIM(CreatedById))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(LastModifiedDate)))), '', LTRIM(RTRIM(TO_CHAR(LastModifiedDate)))) ||
  IIF(ISNULL(LTRIM(RTRIM(LastModifiedById))), '', LTRIM(RTRIM(LastModifiedById))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(SystemModstamp)))), '', LTRIM(RTRIM(TO_CHAR(SystemModstamp)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(LastActivityDate)))), '', LTRIM(RTRIM(TO_CHAR(LastActivityDate)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(LastViewedDate)))), '', LTRIM(RTRIM(TO_CHAR(LastViewedDate)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(LastReferencedDate)))), '', LTRIM(RTRIM(TO_CHAR(LastReferencedDate)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(IsCustomerPortal)))), '', LTRIM(RTRIM(TO_CHAR(IsCustomerPortal)))) ||
  IIF(ISNULL(LTRIM(RTRIM(Jigsaw))), '', LTRIM(RTRIM(Jigsaw))) ||
  IIF(ISNULL(LTRIM(RTRIM(JigsawCompanyId))), '', LTRIM(RTRIM(JigsawCompanyId))) ||
  IIF(ISNULL(LTRIM(RTRIM(AccountSource))), '', LTRIM(RTRIM(AccountSource))) ||
  IIF(ISNULL(LTRIM(RTRIM(SicDesc))), '', LTRIM(RTRIM(SicDesc))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(IsBuyer)))), '', LTRIM(RTRIM(TO_CHAR(IsBuyer)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(calculated_number__c)))), '', LTRIM(RTRIM(TO_CHAR(calculated_number__c)))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(External_ID__c)))), '', LTRIM(RTRIM(TO_CHAR(External_ID__c)))) ||
  IIF(ISNULL(LTRIM(RTRIM(ContactId__c))), '', LTRIM(RTRIM(ContactId__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(firstname__c))), '', LTRIM(RTRIM(firstname__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(lastname__c))), '', LTRIM(RTRIM(lastname__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(currency__c))), '', LTRIM(RTRIM(currency__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(autopay__c))), '', LTRIM(RTRIM(autopay__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(billCycleDay__c)))), '', LTRIM(RTRIM(TO_CHAR(billCycleDay__c)))) ||
  IIF(ISNULL(LTRIM(RTRIM(SoldToCountry__c))), '', LTRIM(RTRIM(SoldToCountry__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(SoldToFirstName__c))), '', LTRIM(RTRIM(SoldToFirstName__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(SoldToLastName__c))), '', LTRIM(RTRIM(SoldToLastName__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(TO_CHAR(Number__c)))), '', LTRIM(RTRIM(TO_CHAR(Number__c)))) ||
  IIF(ISNULL(LTRIM(RTRIM(Text__c))), '', LTRIM(RTRIM(Text__c))) ||
  IIF(ISNULL(LTRIM(RTRIM(DMASK_EXTERNAL_ID__c))), '', LTRIM(RTRIM(DMASK_EXTERNAL_ID__c)))
)
```

The following example shows another prompt in your own words:

```
Cast all columns to string. Do a left or right trim. Join all.
```

The following image shows the generated expression for mappings in SQL ELT mode:

```
-- 1. Convert all columns to string using TO_CHAR.
-- 2. Apply LTRIM and RTRIM to remove leading/trailing spaces.
-- 3. Concatenate all columns using "||" operator.

LTRIM(RTRIM(TO_CHAR(ID))) ||
LTRIM(RTRIM(REGION)) ||
LTRIM(RTRIM(COUNTRY)) ||
LTRIM(RTRIM(ITEM_TYPE)) ||
LTRIM(RTRIM(SALES_CHANNEL)) ||
LTRIM(RTRIM(ORDER_PRIORITY)) ||
LTRIM(RTRIM(ORDER_DATE)) ||
LTRIM(RTRIM(TO_CHAR(ORDER_ID))) ||
LTRIM(RTRIM(SHIP_DATE)) ||
LTRIM(RTRIM(TO_CHAR(UNITS_SOLD))) ||
LTRIM(RTRIM(TO_CHAR(UNIT_PRICE))) ||
LTRIM(RTRIM(TO_CHAR(UNIT_COST))) ||
LTRIM(RTRIM(TO_CHAR(TOTAL_REVENUE))) ||
LTRIM(RTRIM(TO_CHAR(TOTAL_COST))) ||
LTRIM(RTRIM(TO_CHAR(TOTAL_PROFIT)))
```

Pseudocode

The following sample prompt shows how you can describe an expression using pseudocode:

```
if order status is New or Processing and order date in January
    set order status to Fulfilled
else if order date in February
    set order status to Delayed
```

The following example shows a prompt using pseudocode:

```
    // --- TIER 1: STRATEGIC & HIGH-GROWTH ---
    // Criteria: Very high revenue, large size, and an active client in a key industry.
    IF (Revenue >= 25,000,000 AND
        NumberOfEmployees >= 5,000 AND
        (Industry == 'Technology' OR Industry == 'Financial Services') AND
        Type == 'Active Client') THEN

        Priority_Bucket = 'Tier 1 - Strategic & High-Growth'

    // --- TIER 2: KEY ACCOUNTS ---
    // Criteria: High revenue, significant size, OR an active client in any target
industry.
    ELSE IF ((Revenue >= 10,000,000 AND
              NumberOfEmployees >= 1,000) OR
             (Revenue >= 5,000,000 AND
              Type == 'Active Client' AND
              (Industry == 'Healthcare' OR Industry == 'Manufacturing'))) THEN

        Priority_Bucket = 'Tier 2 - Key Accounts'

    // --- TIER 3: STANDARD ACCOUNTS ---
    // Criteria: Established revenue, moderate size, typically a Prospect or long-term
Client.
    ELSE IF (Revenue >= 1,000,000 AND
             Revenue < 10,000,000 AND
             NumberOfEmployees >= 100 AND
             (Type == 'Client' OR Type == 'Prospect')) THEN


        Priority_Bucket = 'Tier 3 - Standard Accounts'

    // --- TIER 4: DEVELOPMENTAL ACCOUNTS ---
    // Criteria: Smaller, but strategic as a new Partner or a small company in a key
industry.
    ELSE IF (Revenue >= 100,000 AND
             NumberOfEmployees >= 50 AND
             (Industry == 'Technology' OR Type == 'Partner')) THEN

        Priority_Bucket = 'Tier 4 - Developmental Accounts'
```

```
    // --- TIER 5: SME/OTHER ---
    // Criteria: All remaining items.
    ELSE
        Priority_Bucket = 'Tier 5 - SME/Other'
    END IF
```

The following image shows the generated expression for mappings and mappings in advanced mode:

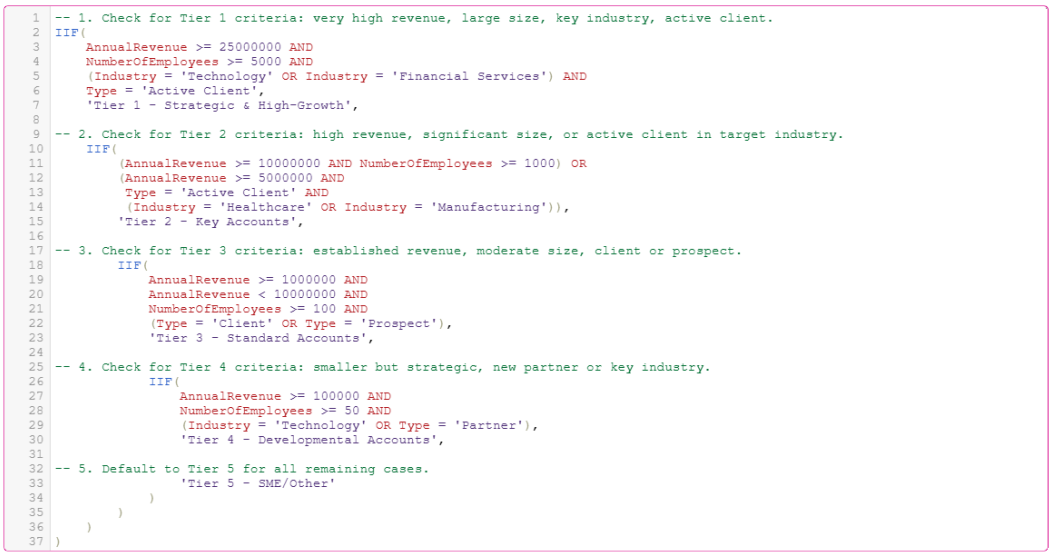

```
-- 1. Check for Tier 1 criteria: very high revenue, large size, key industry, active client.
IIF(
    AnnualRevenue >= 25000000 AND
    NumberOfEmployees >= 5000 AND
    (Industry = 'Technology' OR Industry = 'Financial Services') AND
    Type = 'Active Client',
    'Tier 1 - Strategic & High-Growth',

-- 2. Check for Tier 2 criteria: high revenue, significant size, or active client in target industry.
    IIF(
        (AnnualRevenue >= 10000000 AND NumberOfEmployees >= 1000) OR
        (AnnualRevenue >= 5000000 AND
         Type = 'Active Client' AND
         (Industry = 'Healthcare' OR Industry = 'Manufacturing')),
        'Tier 2 - Key Accounts',

-- 3. Check for Tier 3 criteria: established revenue, moderate size, client or prospect.
        IIF(
            AnnualRevenue >= 1000000 AND
            AnnualRevenue < 10000000 AND
            NumberOfEmployees >= 100 AND
            (Type = 'Client' OR Type = 'Prospect'),
            'Tier 3 - Standard Accounts',


-- 4. Check for Tier 4 criteria: smaller but strategic, new partner or key industry.
            IIF(
                AnnualRevenue >= 100000 AND
                NumberOfEmployees >= 50 AND
                (Industry = 'Technology' OR Type = 'Partner'),
                'Tier 4 - Developmental Accounts',

-- 5. Default to Tier 5 for all remaining cases.
                'Tier 5 - SME/Other'
            )
        )
    )
)
```

The following example shows another prompt using pseudocode:

```
SELECT totalAmount,
CASE
WHEN TO_NUMBER(totalAmount) > 1000 THEN 'High Value'
ELSE 'Standard'
END AS amount_category
FROM your_table;
```

The following image shows the generated expression for mappings in SQL ELT mode:

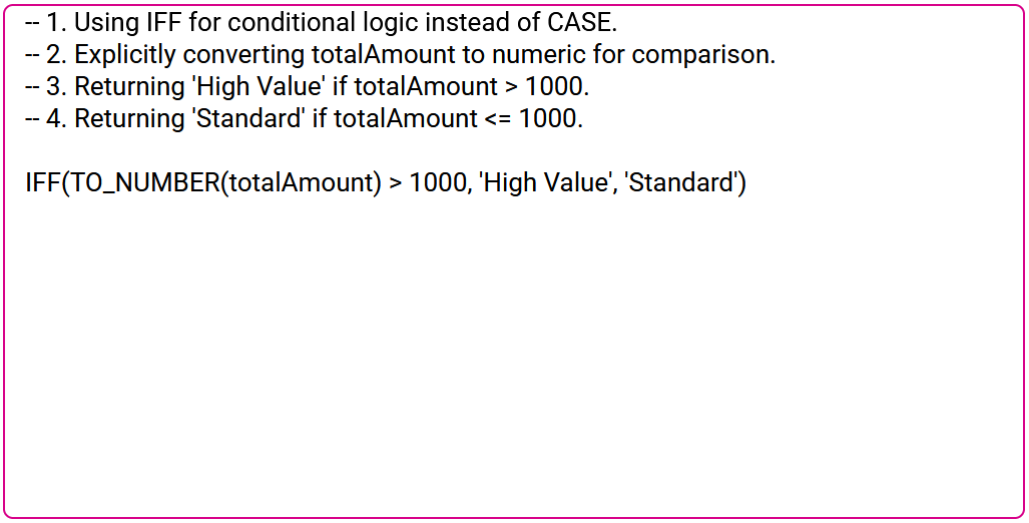

```
-- 1. Using IFF for conditional logic instead of CASE.
-- 2. Explicitly converting totalAmount to numeric for comparison.
-- 3. Returning 'High Value' if totalAmount > 1000.
-- 4. Returning 'Standard' if totalAmount <= 1000.

IFF(TO_NUMBER(totalAmount) > 1000, 'High Value', 'Standard')
```

CHAPTER 3

Using CLAIRE Copilot with Data Ingestion and Replication

Use CLAIRE Copilot to create and summarize application ingestion and replication tasks and database ingestion and replication tasks. It can also answer questions about Data Ingestion and Replication.

You can use CLAIRE Copilot for the following tasks:

Create ingestion and replication tasks

You can ask CLAIRE Copilot to create an application ingestion and replication task or database ingestion and replication task by describing a use case and key parameters in the conversation window. Copilot picks the task type to use based on your input.

Summarize a task

You can ask CLAIRE Copilot to provide a brief summary or a detailed summary of an existing task. A brief summary returns a high-level overview of the task, and a detailed summary returns the details about how the individual task is configured.

Ask questions about Data Ingestion and Replication

CLAIRE Copilot can answer questions to help you use Data Ingestion and Replication effectively. For example, you can ask CLAIRE Copilot about application and database ingestion and replication tasks so that you can use the information to write a prompt that creates the task definition you need.

For information about CLAIRE Copilot's general purpose and interface, see Chapter 1, “Getting started with CLAIRE Copilot” on page 7.

Prerequisites

Complete prerequisite tasks to use CLAIRE Copilot in Data Ingestion and Replication.

Before you use CLAIRE Copilot in Data Ingestion and Replication, perform the following tasks:

- Make sure your user has the following privileges:
  - Data Integration feature privilege "Access Data Integration Copilot". The privilege is required to use CLAIRE Copilot in Data Integration and Data Ingestion and Replication.
  - Create privilege for the asset that you want to create in CLAIRE Copilot.
  - Read privilege for the asset that you want to summarize in CLAIRE Copilot.
  - Privileges to access metadata about the source or target. For more information, see the Application Ingestion and Replication and Database Ingestion and Replication documentation.

- Configure a runtime environment that's up and running.
- Create and test source and target connections in Administrator.
- Identify which source and target schemas you want to use for the task. Depending on the source or target type, you might need only the source schema name or only the target schema name.
- Identify which source tables you want to use for the task, if you don't want to select all tables. You can use specific table names or table-name masks as the selection criteria.
- Make sure the latest Data Ingestion and Replication configuration wizard is enabled for your organization. If necessary, ask Informatica Global Customer Support to enable it. CLAIRE Copilot opens the tasks it generates in the latest task wizard only. After you save the task in the latest wizard and it's visible in Explore, you can open it in either the latest wizard or the pre-existing wizard.

Create an ingestion and replication task

In CLAIRE Copilot, you can quickly and easily create an application ingestion and replication task or database ingestion and replication task. The task can use any supported load type and source and target combination.

Based on the information you provide in the first prompt, CLAIRE Copilot determines the asset type to use, considering both Data Ingestion and Replication assets and Data Integration assets. It then helps you configure the asset and creates it. You can customize the asset in the latest Data Ingestion and Replication task wizard according to your requirements.

CLAIRE Copilot can guide you through performing the following high-level configuration steps:

1. Select a target connection.
2. Select a source connection.
3. Select a running runtime environment.
4. Select the target schema, if required for the target type.
5. Select the source schema, if required for the source type.
6. Identify the source tables or objects from which to replicate data, if you didn't include this information in the first prompt.
7. Review a generated summary of the task definition.
8. Confirm the task definition to create the task and open it in the task configuration wizard.

Note: CLAIRE Copilot skips steps if you entered the information in the first prompt or set a default runtime environment. For example, if you enter a specific connection name or schema name in the first prompt, the step for entering that information is skipped during the conversation. If you previously set a default runtime environment, the step for entering a runtime environment is skipped.

After the task is generated and opened in the task wizard, you can finalize it by performing the following steps:

1. Edit the task to customize it or set additonal fields.
2. Save the task.
3. Deploy the task to create a job instance, which you can then run from a monitoring interface.

Guidelines:

When using CLAIRE Copilot for creating ingestion and replication tasks, consider the following guidelines:

- CLAIRE Copilot can't create file ingestion and replication tasks or streaming ingestion and replication tasks. Configure these task types in the older task configuration wizard.
- If you previously set a default runtime environment from the task configuration wizard, CLAIRE Copilot uses that runtime environment and doesn't display the step for entering it during the conversation.
- During a conversation, you can't return to previous entries to change them. Start a new conversation or edit the task later in the task configuration wizard.
- Prompts for selecting source and target connections display up to five connections. If you need to use another existing connection, you can type the name of the connection.
- You can't change to another connection type during the conversation. CLAIRE Copilot expects the source and target types that you specified in the first prompt. However, you can change to another connection of the same type, for example, change an Oracle Database Ingestion connection to another Oracle Database Ingestion connection.
- In the first prompt, you can include criteria for selecting the source tables or objects. You can enter include and exclude criteria that contain table names or name masks with the * and ? wildcards, or say "select all" to select all tables in the schema. If you don't enter this criteria in the first prompt, you'll be prompted to enter it during the conversation. Once entered, you can't change or delete your table or object selection criteria in CLAIRE Copilot. However, you can still modify which tables or objects are selected when you edit the task in the task configuration wizard.
- If multiple CDC methods are available for a database ingestion and replication source, CLAIRE Copilot generates the task with the default method. If you want to use another method, edit the task in the task configuration wizard.
- A few required fields are currently not included in CLAIRE Copilot, such as the Stage field for Snowflake targets. You'll need to set them in the task wizard.
- CLAIRE Copilot doesn't recognize any Data Ingestion and Replication custom properties that you enter in the prompt. You must enter them in the task configuration wizard.

Guidelines for writing effective prompts

Use the following guidelines to write effective prompts for creating ingestion and replication tasks in CLAIRE Copilot.

- Be clear and concise when you describe the use case and task details.
- Use terminology consistent with the published documentation.
- When you refer to the service, use the proper name of "Data Ingestion and Replication" instead of an acronym such as CDIR.
- When you refer to a specific ingestion type, use "Application Ingestion and Replication" or "Database Ingestion and Replication" instead of an abbreviation such as app ingestion or db ingestion.
- Use the proper names of the source and target types and connector types.

- In prompts for creating tasks, you can include the following details:
  - The source and target types or connector types. You can also include the connection names if you know them.
    Include the source type and target type only to display filtered lists of connections to choose from. Or specify the source and target connection names to skip the connection selection step. If you enter neither the source or target type nor connections in the initial prompt, all connections will be available for selection later. After you select a connection or connection type, you can't change the connection type later in the conversation.
  - The load type, which can be initial load, incremental load, or combined initial and incremental load. You can use "combined load" as the short form.
  - The source and target schema names.
  - Source table or object selection criteria. Enter table names or name masks with wildcards.
  - The task type, which can be either "application ingestion and replication" or "database ingestion and replication."

  The source table selection criteria is optional in the first prompt. If you don't include it, you can enter it during the conversation. Enter include or exclude criteria that contains specific table or object names, the initial part of the names, or name masks with wildcards, for example, include tables with names starting with prod. In masks, you can use the * wildcard to represent multiple characters, or use the ? character to represent a single character. Alternatively, you can say "Select All" to select all tables or objects. When CLAIRE Copilot displays a summary for the task, your selection criteria is shown. In the task configuration wizard, the selection criteria is translated to include and exclude rules.

  Examples of valid table selection criteria:

Text in the Prompt	Resulting Rule
Include tables with names starting with PROD.	Include PROD*
Exclude tables with names containing Temp	Exclude *Temp*
I want to include tables with names starting with order followed by any single character.	Include order?
I want to select the tables named contacts and lead.	Include contacts, Include lead

  Note: Table selection text can't contain negative phrases with "not," for example, "include all tables with names that do not begin with TEMP" or "exclude tables that don't have names starting with US." These criteria are ignored.

Example prompt

Let's break down the following example prompt:

```
Create a database ingestion and replication task that performs a combined load of data
from an Oracle source to an Oracle target. Use the xxx source connection, the bbb source
schema, and the yyy target connection. Include source tables that have names starting
with Cust and exclude tables that have names starting with Temp.
```

The following table lists the keywords in the prompt and how they correspond to elements of the task definition:

Text in prompt	Task element
database ingestion and replication	Task type
combined load	Load type
Oracle source	Source type
Oracle target	Target type
xxx source connection	Name of the Oracle Database Ingestion connection to use for the source
yyy target connection	Name of the Oracle Database Ingestion connection to use for the target
bbb source schema	Name of the Oracle schema that contains the source tables
Include source tables that have names starting with Cust and exclude tables that have names starting with Temp.	Source table selection criteria, which will be translated to the rules Include Cust* and Exclude Temp*.

Sample prompts for ingestion and replication tasks

In the first prompt, you can enter a natural language statement for creating an application ingestion and replication task or database ingestion and replication task. For best results, include key details such as the source and target connection names and schemas. Optionally, you can include criteria for selecting the source tables or objects.

The following sample prompts demonstrate the various ways you can enter a prompt:

```
I want to perform an initial load of data from Salesforce to Snowflake using the xxxx
source connection and yyyy target connection. The target schema is def. Select source
tables that have names starting with Sales, but do not select the Sales1 and Sales5
tables. Also select tables that have names starting with Cust.

Create a database ingestion task that has a PostgreSQL source and Amazon S3 target. Use
the pgsqlRDS source connection and CDIR_S3 target connection. Use the CDIRCDC source
schema. Include tables with names starting with pgs. Exclude tables with names ending
with temp.

Create a combined initial and incremental load task with an Oracle source and PostgreSQL
target. Use the source schema SYS and the source connection Ora1. Use the target schema
QATEST and the target connection Postgres1. Include source tables with names matching
AB*.

Create a task that performs both an initial load of data and then captures changes in
near real time from an Oracle database to a PostgreSQL target. Use the Oracle source
schema abc and the source connection xxxx. Also use the target schema def and target
```

connection yyyy. Include source tables that have names starting with SALES but exclude tables that have names starting with SALES_LASTYR.

Create a task that loads data in batch from Workday using xxxx connection to Amazon S3 using yyyy connection.

Create a data flow from SAP HANA source tables in the abc schema to Kafka. Use source connection xxxx and target connection yyyy.

From the SAP source system accessed with connection xxxx, transfer data to the Amazon S3 target bucket. Exclude tables with names matching pattern TEMP_* and include file partitioning by date with a maximum of 100 files. The target file format is Parquet.

Set up a data pipeline from an SAP source system to an Amazon S3 bucket using the connection xxxx. Use the Avro format for the output for efficient storage.

Load from Workday to Snowflake using the source connection xxxx and target connection yyyy. This task should be configured to pull records and prioritize the ingestion of tables with the prefix INC_PAYROLL_. If schema changes occur, such as column drops or renames, alert the maintenance team but continue processing.

Perform change data capture from Oracle schema abc with connection xxxx and replicate the data to the Kafka target using the yyyy target connection. Enable comprehensive logging for all changes and use a high-throughput Kafka topic to handle the volume. Filter out any transient records marked for deletion within the source database.

Generate a task that moves data from the PostgreSQL database accessed with the connection xxxx to Amazon S3. Select the source tables in the abc schema.

Set up a task that moves data in bulk from the PostgreSQL database using source connection xxxx to the SQL Server target using the target connection yyyy, in order to materialize the target.

Move new DML records from Oracle source tables in the src schema to the Snowflake destination on an ongoing basis. Use the xxxx source connection and yyyy destination connection.

Generate a task to load data in bulk from PostgreSQL to Oracle. Use the source connection xxxx and source schema abc.

Read bulk data from Netsuite using the xxxx connection and load it into Kafka.

Transfer data at a point in time from Oracle to Kafka using the xxxx source connection and yyyy target connection. Source schema is abc.

Perform an initial data load from the Db2 source using the xxxx connection and schema abc to the Oracle target using the connection yyyy.

Move records from SAP using the xxxx source connection to Snowflake using the yyyy connection.

Replicate change records from an SAP source using the xxxx connection to an Oracle target using the yyyy connection. The Oracle target schema is def.

Database Ingestion and Replication examples of creating a task


Let's look at some examples of configuring a database ingestion and replication task in CLAIRE Copilot

Example: Create a database ingestion task for a combined load from Oracle to Amazon S3

You want to replicate data from an Oracle database to an Amazon S3 target that's used as a data lake for big data analysis and AI initiatives.

First you need to perform a point-in-time initial load of data to the target and then switch to replicating DML changes in near real time continually to keep the target up to date. To do this, let's create a database ingestion and replication combined initial and incremental load task in CLAIRE Copilot


1. Open CLAIRE Copilot.
2. In the *Ask CLAIRE* box, type the prompt `Create a database ingestion combined load task with an Oracle source and Amazon S3 target`. Then click the Submit icon.
   A list of Amazon S3 target connections available in your organization appears:

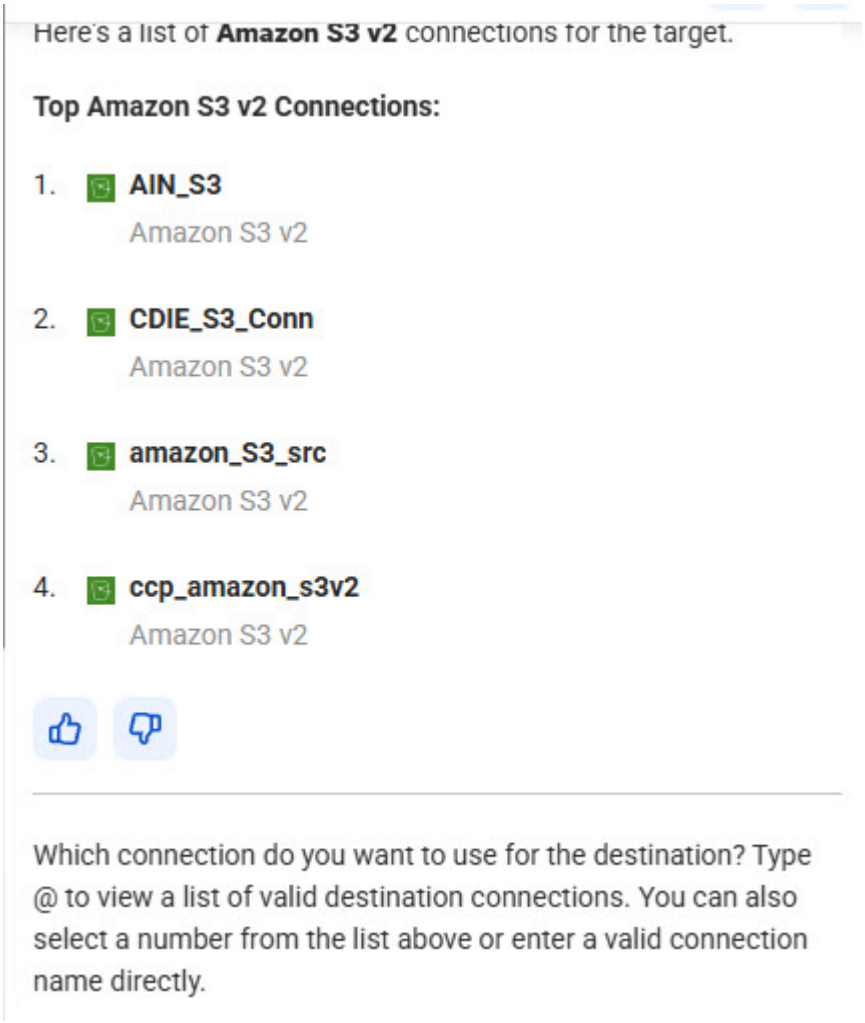


3. Type the number associated with the Amazon S3 target connection you want to use. In this example, let's type **1** for the AIN_S3 connection.
   Up to five connections are listed.

   Note: If the connection isn't listed, you can type the name of a valid Amazon S3 connection. Specify an existing connection that you have previously tested.

A list of Oracle source connections available in your organization appears:

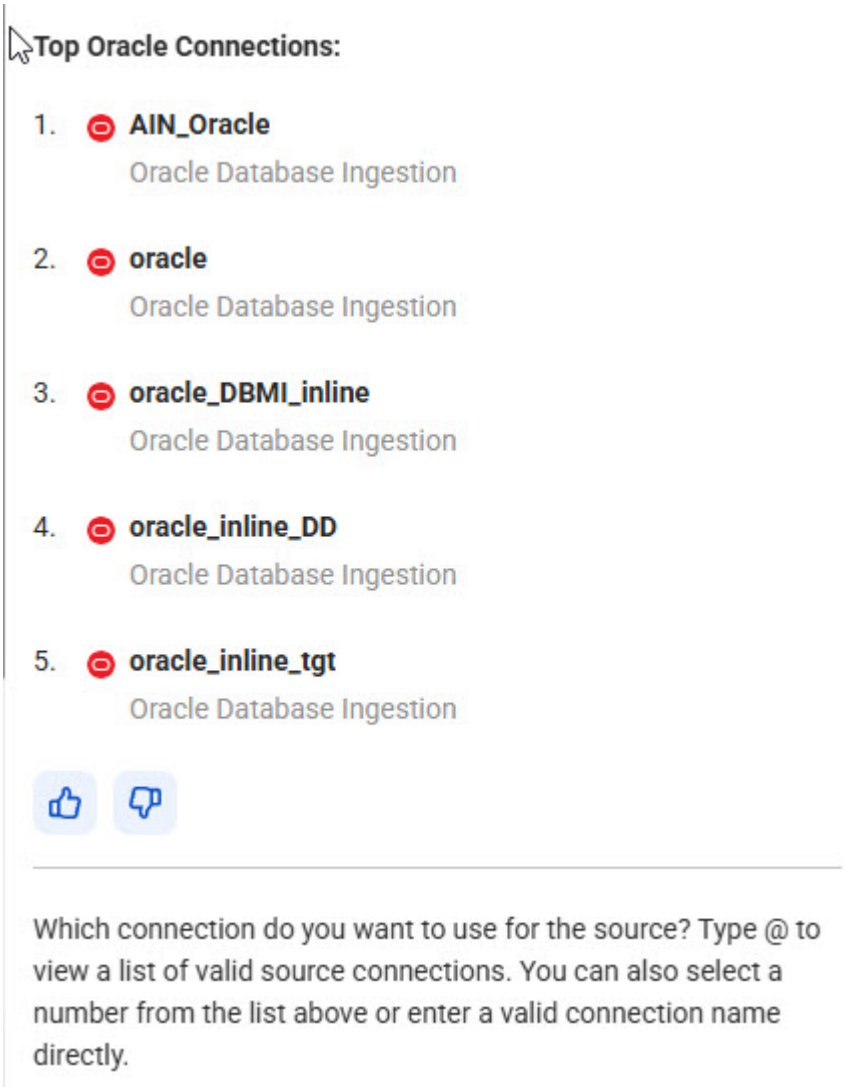


4. Type the number associated with the Oracle source connection you want to use. In this example, let's type **1** for the AIN_Oracle connection.
5. If a request for a runtime environment appears, type @ to list runtime environments. Then click a running runtime environment and click the Submit icon.

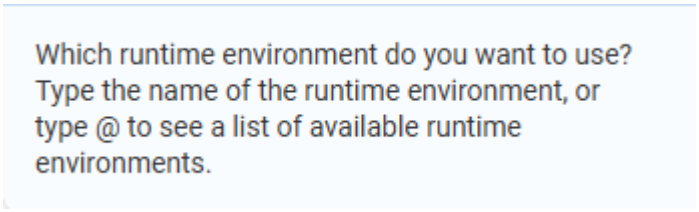


This step is skipped if you previously set a default runtime environment for your use.


6. At the request for the Oracle source schema, type @ to list the available schema and then click the one you want to use. Alternatively, type the schema name.

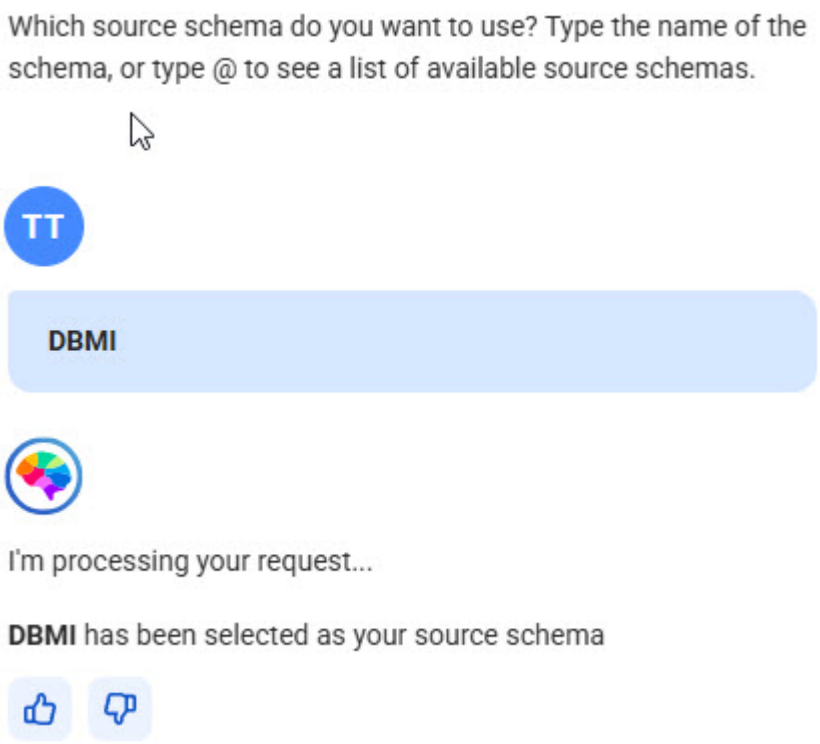

7. At the request for the source tables, type "select all" to select all source tables in the selected schema, or enter the table names or name masks that include the * and ? wildcards.
In this example, let's select all tables to initially populate the data lake.

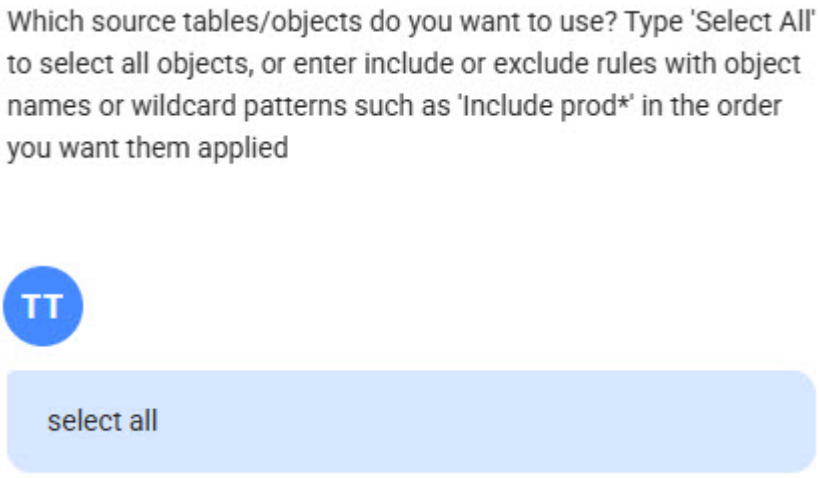

8. A task summary appears. Review the summary to confirm your settings:

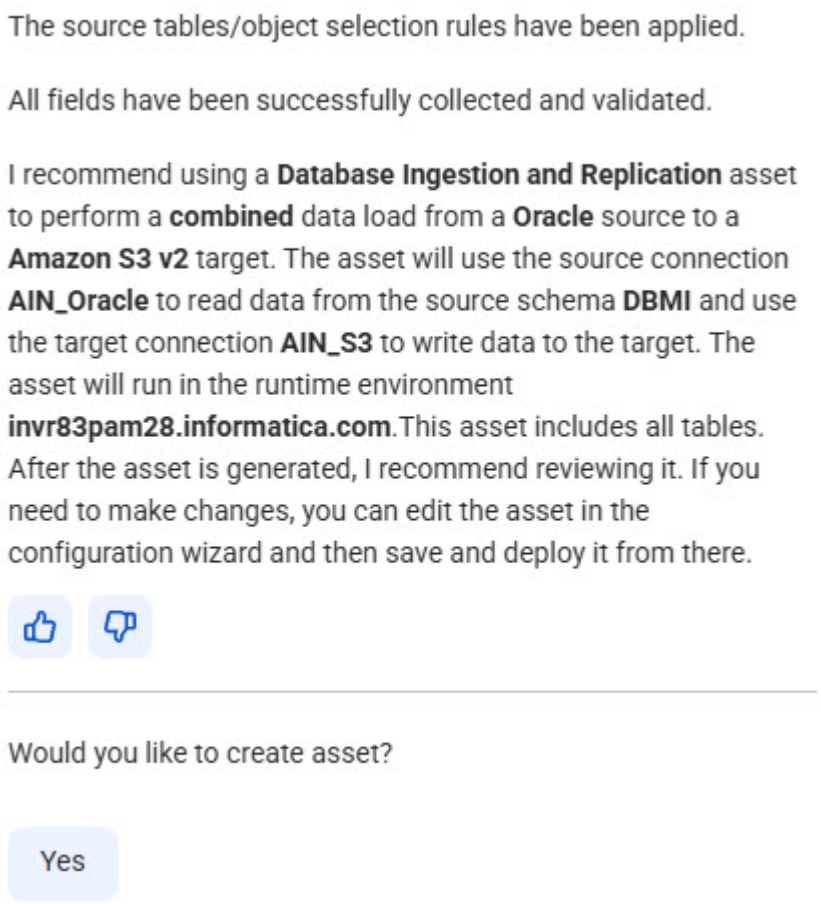

9. To create the task asset, click **Yes** and click Submit.
   CLAIRE Copilot generates the task and opens it in the task configuration wizard.
10. Verify the task definition.
    You can edit field values and set additional fields on the **Task Details**, **Transform**, and **Let's Go** pages. Toggle on **Show Advanced Options** to see all fields. However, do not change the source and target connections.
11. Save the task.
12. Deploy the task to create a job instance.
    You can now run the job from **My Jobs** or another monitoring interface.


Example: Create a database ingestion task for a combined load from Oracle to PostgreSQL

You want to load data from a Oracle database to a PostgreSQL database that you use as the primary data store for analytics. You also want to keep the databases in sync to ensure up-to-date information for real-time analytics.


To do this, let's create a database ingestion and replication combined initial and incremental load task in CLAIRE Copilot. We've already gathered the source and target connection names and schema names so we'll include that information in the first prompt to streamline the process.

1. Open CLAIRE Copilot.

2. In the *Ask CLAIRE* box, type the prompt `Create an ingestion task that performs an initial data load and then captures ongoing changes from an Oracle source to a PostgreSQL target. Use the source AIN_Oracle connection and DBMI schema. Use the target pgsql connection and test schema.` Then click the Submit icon.
   A summary of task information is displayed:

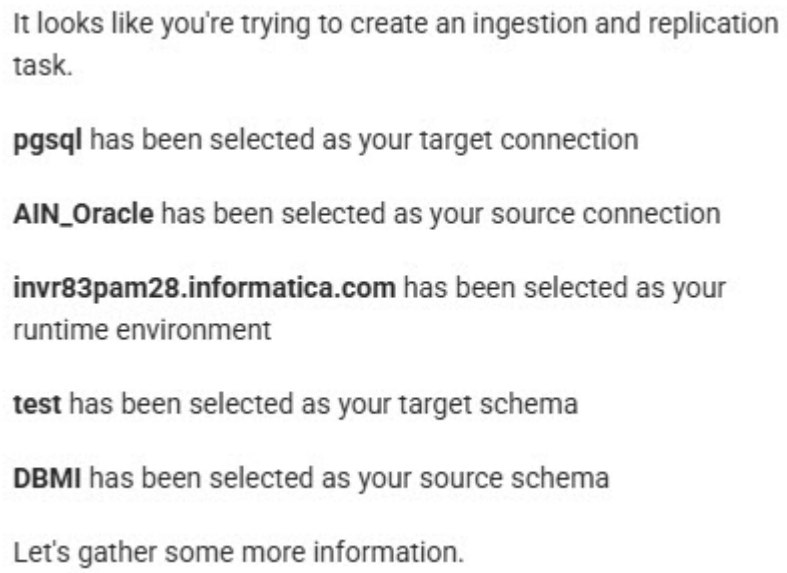


3. At the prompt for selecting source tables, type "select all" for all tables in the source schema or enter table names or name masks that include the * and ? wildcards. In this example, let's include table name masks that use the * wildcard to represent one or more characters.

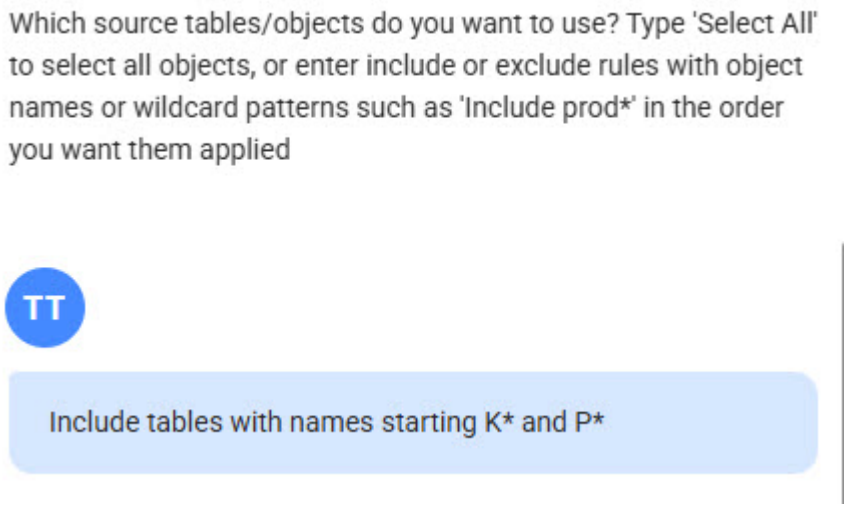

   A summary of the task definition appears for your review:

4. Review the summary to verify your settings:

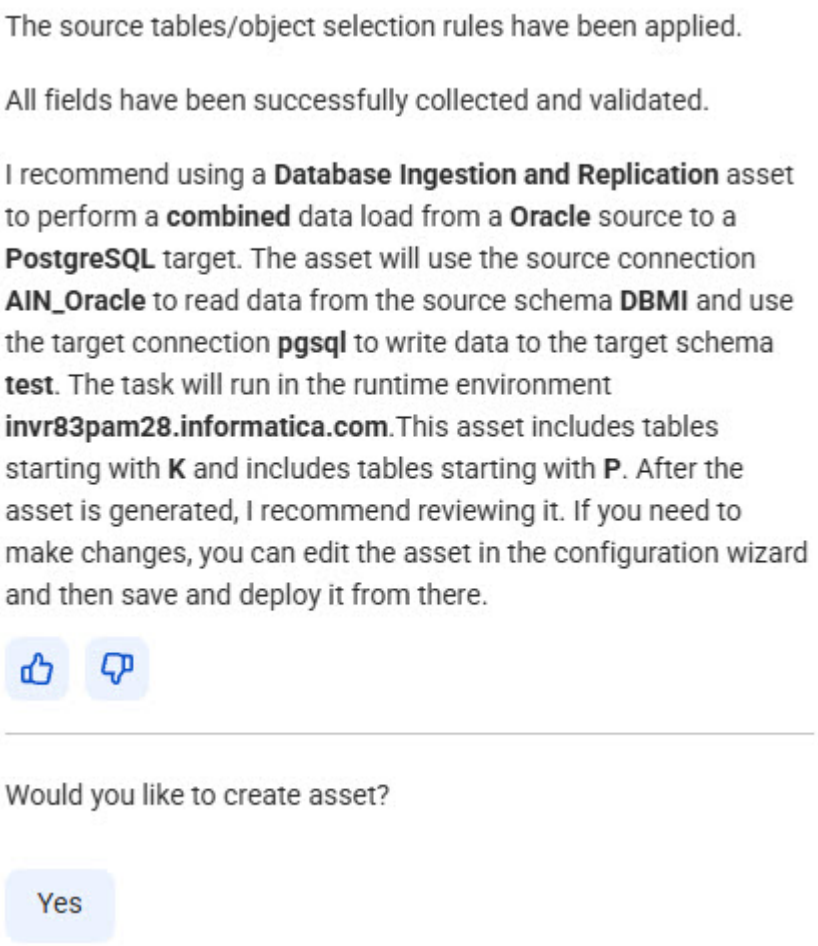

5. To create the task asset, click **Yes** and click the Submit icon.
   CLAIRE Copilot generates the task and opens it in the task configuration wizard.
6. Verify the task definition.
   You can edit field values and set additional fields on the **Task Details**, **Transform**, and **Let's Go** pages. Toggle on **Show Advanced Options** to see all fields. However, do not change the source and target connections.

   For example, on the **Let's Go** page, enter a custom name and description for the task and your project location so that you can find the task again easily.
7. Save the task.
8. Deploy the task to create a job.
   You can now run the job from **My Jobs** or another monitoring interface.

Application Ingestion and Replication examples of creating a task


Let's look at some examples of configuring an application ingestion and replication task in CLAIRE Copilot.

Example: Create an application ingestion task for an combined load from Salesforce to Amazon S3


You want to replicate Salesforce data changes continuously to an Amazon S3 target to make sure downstream applications get the latest customer information.

To do this, let's create an application ingestion and replication combined load task in CLAIRE Copilot


1. Open CLAIRE Copilot.
2. In the *Ask CLAIRE* box, type the prompt `Create a combined load task that has a Salesforce source and Amazon S3 target`. Then click the Submit icon.
   A list of Amazon S3 target connections available in your organization appears:

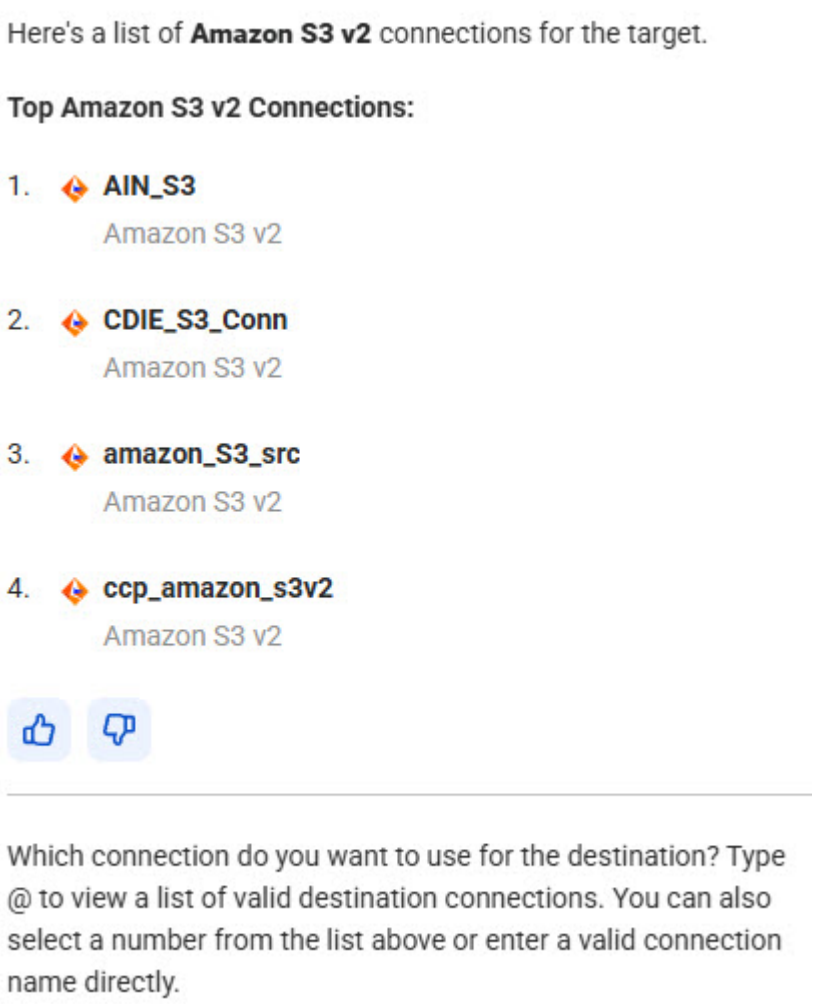

   Note: Up to five connections are listed.
3. Type the number associated with the Amazon S3 target connection you want to use, or if the connection isn't listed, you can type the name of a valid connection that you've previously tested. In this example, let's type **1** for the AIN_S3 target connection. Then click the Submit button.
   A list of Salesforce source connections available in your organization appears:

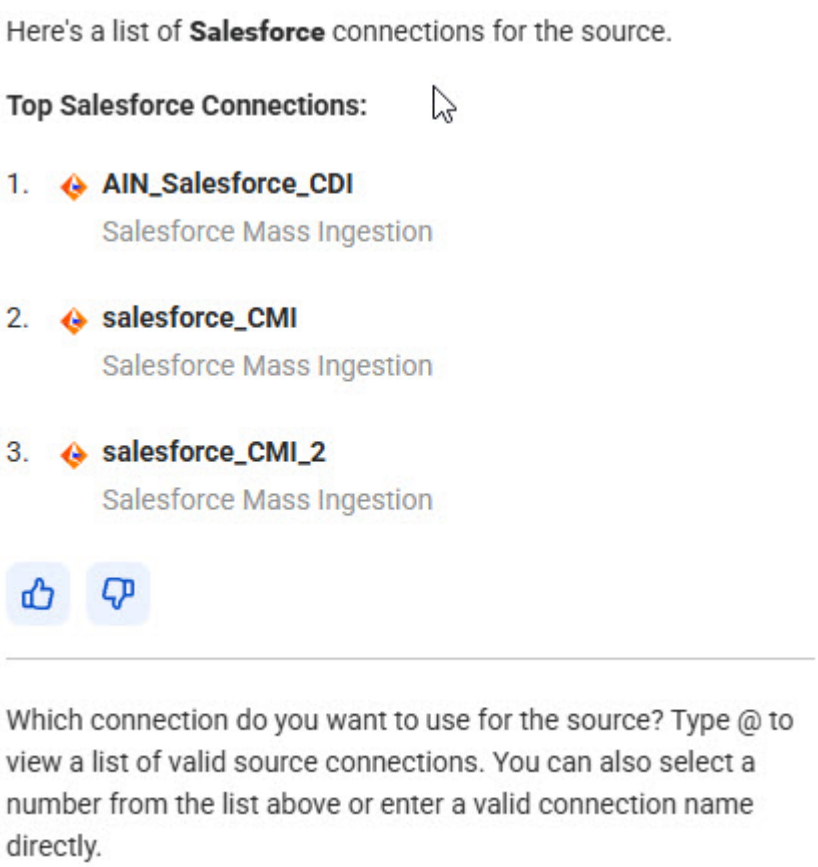


4. Type **2** for the salesforce_CMI source connection and then click the Submit button.
5. If a request for a runtime environment appears, type @ to list runtime environments. Then click a running runtime environment and click the Submit icon.

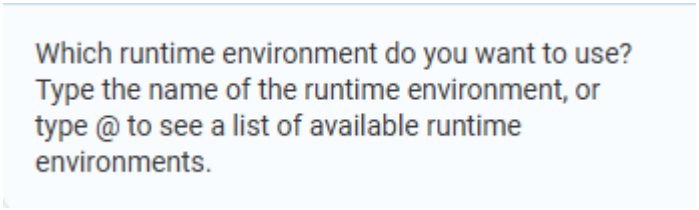


This step is skipped if you previously set a default runtime environment for your use.

6. At the request for the source objects, type "select all" to select all source objects, or enter object names or name masks with wildcards.
In this example, let's select tables with names starting with "A" and exclude any tables with names starting with "AC":

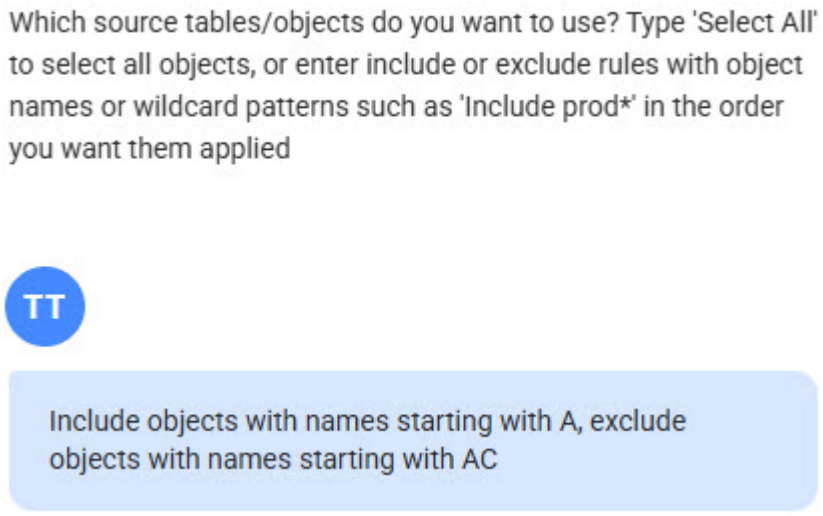

7. A task summary appears. Review the summary to confirm your settings: correct:

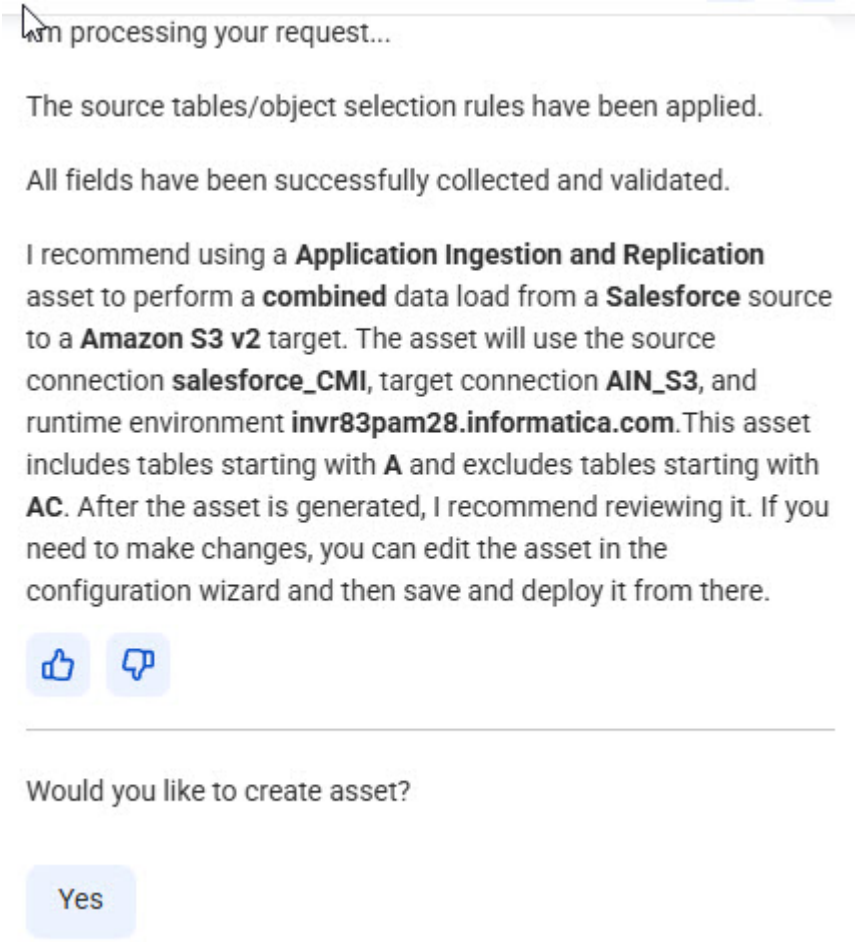

8. To create the task asset, click **Yes**.
   The task is generated and opens in the task configuration wizard.


9. Verify the task definition. You can edit field values and set additional fields on the **Task Details**, **Transform**, and **Let's Go** pages. Toggle on **Show Advanced Options** to see all fields. However, do not change the source and target connections.
10. Save the task.
11. Deploy the task to create a job instance.
    You can now run the job from **My Jobs** or another monitoring interface.

Example: Create an application ingestion task for an incremental load from Salesforce to Kafka


You want to replicate change data from a Salesforce source to a Kafka messaging system in real time. Kafka can then stream the data with low latency to downstream consumer applications.

To do this, let's create an application ingestion and replication incremental load task in CLAIRE Copilot. Since we know the source and target connection names, we'll include them in the first prompt to streamline the process.

1. Open CLAIRE Copilot.
2. In the *Ask CLAIRE* box, type the prompt `Create an incremental load task that has a Salesforce source that uses the salesforce_CMI connection and a Kafka target that uses the Kafka1 connection. Select all source objects.` Then click the Submit icon.
   A list of your settings is displayed:

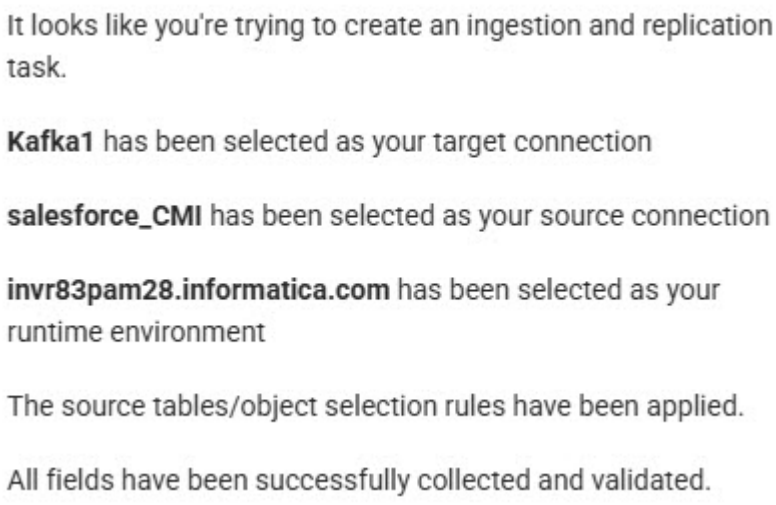3. Because no further information is required, the task summary is displayed.
   Review it to ensure the task is properly configured.

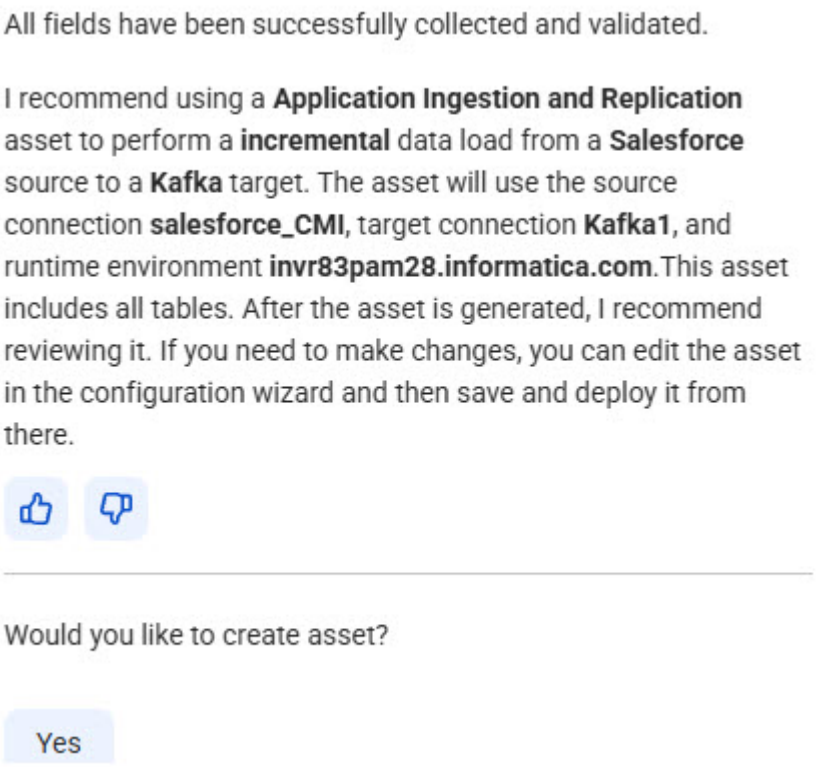

4. To create the task asset, click **Yes**.
   The task is generated and opens in the task configuration wizard.
5. Verify the task definition. You can edit field values and set additional fields on the **Task Details**, **Transform**, and **Let's Go** pages. Toggle on **Show Advanced Options** to see all fields. However, do not change the source and target connections.
   On the **Let's Go** page, you can enter a custom name and description for the task and your project location so that you can find the task again easily.
6. Save the task.
7. Deploy the task to create a job instance.
   You can now run the job from **My Jobs**.

INDEX

C

CLAIRE Copilot
  getting started 7
Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5

D

Data Integration community
  URL 5

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5