Informatica®

Informatica® Cloud Data Integration

JIRA Cloud Connector

Informatica Cloud Data Integration JIRA Cloud Connector
July 2025

© Copyright Informatica LLC 2017, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-03

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to JIRA Cloud Connector 6

JIRA Cloud Connector Overview 6

JIRA Cloud Connector Supported Tasks and Object Types 7

Chapter 2: JIRA Cloud Connections 8

JIRA Cloud Connection Overview 8

JIRA Cloud connection properties 8

Chapter 3: Mappings and Mapping Tasks with JIRA Cloud Connector 10

JIRA Cloud Sources in Mappings 10

JIRA Cloud Targets in Mappings 11

JIRA Cloud Midstream Transformation in Mappings 12

- Advanced Midstream Properties 12

JIRA Cloud Midstream Transformation Mapping Example 12

Index 17

Preface

Use *JIRA Cloud Connector* to learn how to read from or write to the JIRA web service application by using Cloud Data Integration. Learn to create a connection, develop mappings, and run mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to JIRA Cloud Connector

This chapter includes the following topics:

- JIRA Cloud Connector Overview, 6
- JIRA Cloud Connector Supported Tasks and Object Types, 7

JIRA Cloud Connector Overview

You can use JIRA Cloud Connector to connect to JIRA Cloud from Data Integration. You can use JIRA Cloud Connector on Windows and Linux operating systems.

Use JIRA Cloud Connector to securely read data from or write data to JIRA Cloud. You can use JIRA Cloud objects as sources and targets in mappings and mapping tasks.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

Use JIRA Cloud Connector to interact with JIRA web service application, which supports REST API. You can use JIRA Cloud Connector in a midstream in a Web Services transformation.

You can use JIRA Cloud Connector midstream in a mapping to pass a single or multiple requests to the JIRA web service application and process the response data. You can also pass data obtained from multiple transformations in the mapping pipeline and process the data.

When you use JIRA Cloud Connector midstream in a mapping, you first create a business service for the operation that you want to perform in the JIRA web service application. You then associate the business service in the Web Services transformation midstream in a mapping to read data from or write data to the web service application. For example, you can use JIRA Cloud Connector as a midstream transformation to perform PUT operation on the JIRA web service application.

Use JIRA Query Language (JQL) to build structured queries to search issues and attachments in JIRA.

JIRA Cloud Connector Supported Tasks and Object Types

The following table lists the objects, tasks, and transformation types that JIRA Cloud Connector supports:

Task Type	Transformation Type	Object
Mapping Task	Source, Target, and Midstream	GET_ISSUES
		POST_ISSUES
		PUT_ISSUES
		DELETE_ISSUES
		GET_ATTACHMENT
		POST_ATTACHMENT
		DELETE_ATTACHMENT

CHAPTER 2

JIRA Cloud Connections

This chapter includes the following topics:

- JIRA Cloud Connection Overview, 8
- JIRA Cloud connection properties, 8

JIRA Cloud Connection Overview

Create a JIRA Cloud connection to connect to JIRA Cloud so that the agent can read data from and write data to JIRA Cloud. You can use JIRA Cloud connections to specify sources and targets in mappings and mapping tasks.

You can create a JIRA Cloud connection to make calls to the JIRA web service application by using midstream transformation.

You create a JIRA Cloud connection on the **Connections** page. Use the connection when you create a mapping or mapping task.

JIRA Cloud connection properties

When you set up a JIRA Cloud connection, you must configure the connection properties.

The following table describes the JIRA Cloud connection properties:

Connection property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.

Connection property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run the tasks. Select a Secure Agent or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Authentication	Authentication type for the connection. Select JiraCloud.
URI	The base JIRA URI of JIRA instance to connect. For example, `https://abcd.atlassian.net`.
Username	User name for the JIRA account.
Password	The API token for the JIRA account. For more information on how to create an API token, see https://kb.informatica.com/solution/23/Pages/70/576517.aspx.

CHAPTER 3

Mappings and Mapping Tasks with JIRA Cloud Connector

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source or target to represent the object.

In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

JIRA Cloud Sources in Mappings

In a mapping, you can configure a Source transformation to represent a JIRA Cloud source.

The following table describes the JIRA Cloud source properties that you can configure in a Source transformation:

Property	Description
Connection	Name of the source connection.
Operation	Source operation. Select the source operation.
Request Message	A JSON request message for the operation that you want to perform in JIRA Cloud. Specify the data that you want to enter into the data flow.

The following table describes the advanced properties that you can configure in a Source transformation:

Advanced Property	Description
Tracing Level	Amount of detail that appears in the log for the source transformation. Use one of the following tracing levels: - Terse - Normal - Verbose Initialization - Verbose Data Default is Normal.
Cache Size for Web Service Response (KB)	Memory available for the web service response. If the web service response contains many rows or columns, you can increase the cache size. Default is 1024 KB.
Optimize transformation	Select to improve performance for processing records at run time. Default is disabled.

JIRA Cloud Targets in Mappings

In a mapping, you can configure a target transformation to represent a JIRA Cloud target.

The following table describes the JIRA Cloud target properties that you can configure in a Target transformation:

Property	Description
Connection	Name of the target connection.
Operation	Target operation. Select the target operation.

The following table describes the advanced properties that you can configure in a Target transformation:

Advanced Property	Description
Cache Size for Web Service Request (KB)	Memory available for the web service request. If the web service request contains many rows or columns, you can increase the cache size. Default is 1024.
Transaction Commit Control	Control to commit or roll back transactions based on the set of rows that pass through the transformation. Use the transaction commit control if you have a large amount of data and you want to control how it is processed.
Transformation Scope	The method in which the Secure Agent applies the transformation logic to incoming data. Default is All Input.
Optimize transformation	Select to improve performance for processing records at run time. Default is disabled.

JIRA Cloud Midstream Transformation in Mappings

Before you configure a midstream transformation, you must create a business service from the **Configure** tab. You must select a JIRA Cloud connection and an operation when you create a business service.

When you configure the midstream transformation, select the business service and the operation on the **Web Service** tab.

You can map the incoming fields from source file to elements in request structure on the **Request Mapping** tab.

You can view the response structure on the **Response Mapping** tab. When you map the elements from the response structure to the output fields, the Secure Agent creates the output groups, along with the primary and foreign keys for the field names.

Advanced Midstream Properties

The following table describes the advanced properties that you can configure for a midstream transformation:

Property	Description
Cache Size for Web Service Request (KB)	Memory available for the web service request. If the request is more than 100 KB, you can increase the cache size. Default is 100 KB.
Cache Size for Web Service Response (KB)	Memory available for the web service response. If the web service response contains many rows or columns, you might want to increase the cache size. Default is 100 KB.
Allow Input Flush	Not applicable.
Transaction Commit Control	Not applicable.


JIRA Cloud Midstream Transformation Mapping Example

You are a project manager and you want to retrieve details of all the bugs for your project.

To retrieve the bug details for your project from JIRA and to write the bug details to a flat file, perform the following tasks:

1. Create a JIRA Cloud connection to read data from JIRA.

   The following image shows the configured JIRA Cloud connection:

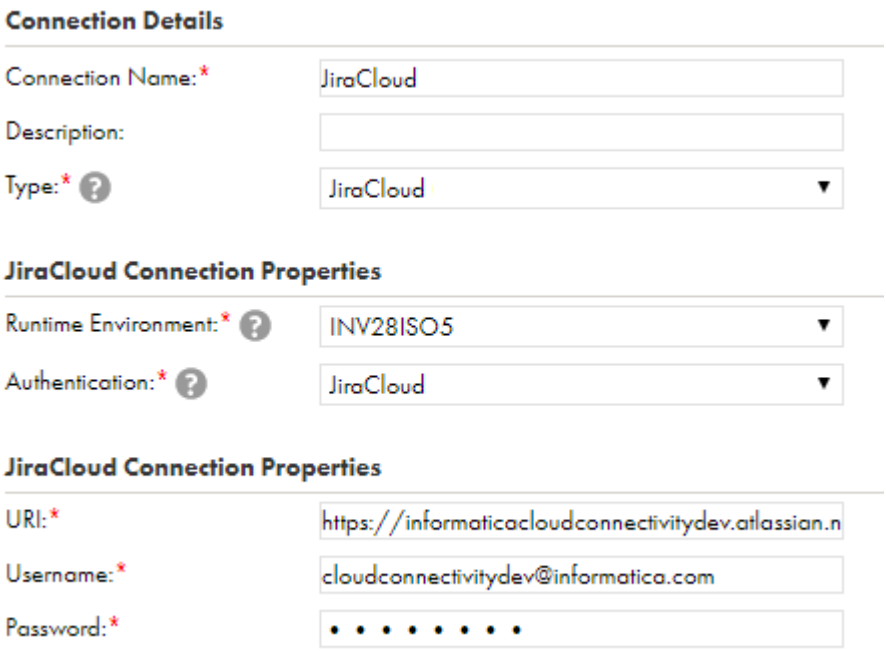

2. Create a business service to associate the JIRA Cloud connection and an operation.

The following image shows the configured business service:

Business Service Details


Name:	jiracloud_midstream_win
Location:*	Default
Description:	
Connection:	JiraCloud
Created On:	Nov 27, 2017 4:23:30 AM
Updated On:	Nov 27, 2017 4:23:30 AM
Created By:	cloudoemlabs@gmail.com
Updated By:	cloudoemlabs@gmail.com

Operations


Name	Origin Name	Description
GET_ISSUES	GET_ISSUES	

3. Create a JIRA Cloud mapping.
4. Add a Web Services transformation. Specify a name and description in the general properties.

   The following image shows the source, web service, and target in the JIRA Cloud mapping:

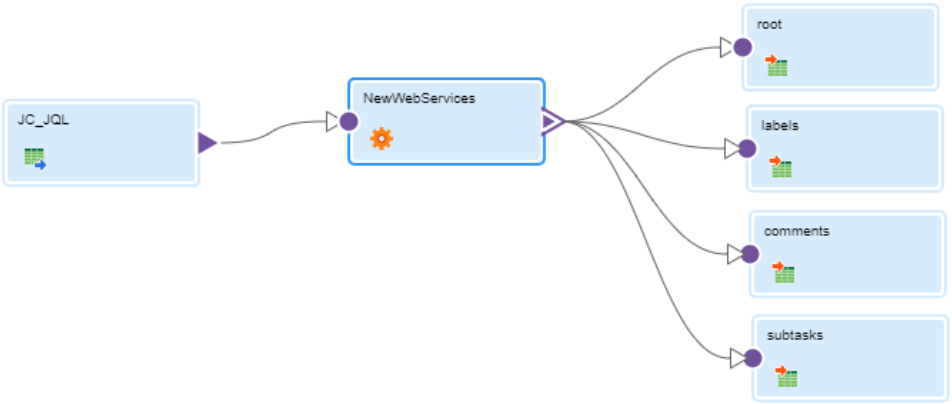

   The following image shows the .csv source file with the JQL query, which enables you to read all the bugs for the CLOUD project:



5. On the **Web Service** tab, select the business service and the operation that you configured.

The following image shows the configured web service:




6. On the **Request Mapping** tab, map the incoming fields from the source to the elements of Request Structure to form a web service request:

   The following image shows the fields that you map:



7. On the **Response Mapping** tab, select the jira details fields that you want to write to the target file on the **Response Structure**.
8. On the **Advanced** tab, specify the cache size details.

   The fields that you select from the **Response Structure** of the Web Service transformation appear as incoming fields for the target object.
9. If required, map the incoming fields to the flat file fields.

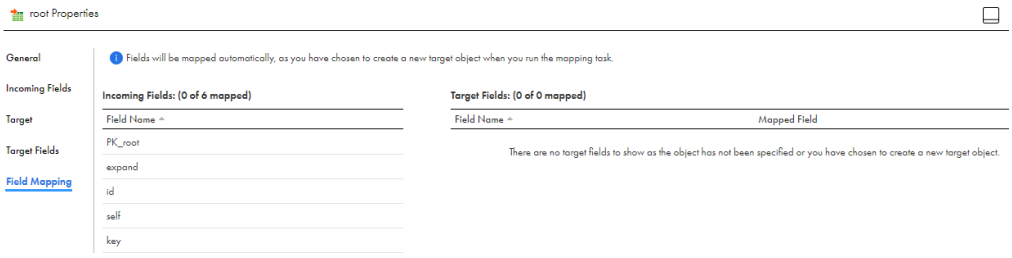

10. Click **Task Wizards** > **Mapping Task**, and select the mapping for the task.

11. When you save and run the mapping, the Secure Agent retrieves the details for the jira that you map on the **Request Mapping** tab from JIRA and writes the data to the corresponding flat files.

    The following image shows the jira details that the Secure Agent writes to the root target based on the fields you mapped in the Mapping Configuration task:

PK_root	expand	id	self	key	self1	id1
1	operations,versionedRe	83558	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83558	CLOUD-67	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
3	operations,versionedRe	83553	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83553	CLOUD-62	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
5	operations,versionedRe	83548	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83548	CLOUD-57	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
8	operations,versionedRe	83547	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83547	CLOUD-56	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
11	operations,versionedRe	83546	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83546	CLOUD-55	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
14	operations,versionedRe	83545	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83545	CLOUD-54	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
17	operations,versionedRe	83544	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83544	CLOUD-53	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
20	operations,versionedRe	83543	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83543	CLOUD-52	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
23	operations,versionedRe	83542	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83542	CLOUD-51	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
26	operations,versionedRe	83541	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83541	CLOUD-50	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
29	operations,versionedRe	83540	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83540	CLOUD-49	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
32	operations,versionedRe	83539	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83539	CLOUD-48	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
34	operations,versionedRe	83538	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83538	CLOUD-47	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
36	operations,versionedRe	83537	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83537	CLOUD-46	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
38	operations,versionedRe	83536	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83536	CLOUD-45	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003
40	operations,versionedRe	83535	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83535	CLOUD-44	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issuetype/10003	10003

    The following image shows the jira details that the Secure Agent writes to the labels target:

FK_root	labels	jql
3	labelcreate1	project='CLOUD' AND issuetype='Bug'
6	label1	project='CLOUD' AND issuetype='Bug'
6	label2	project='CLOUD' AND issuetype='Bug'
6	label3	project='CLOUD' AND issuetype='Bug'
12	label1	project='CLOUD' AND issuetype='Bug'
12	label2	project='CLOUD' AND issuetype='Bug'
12	label3	project='CLOUD' AND issuetype='Bug'
18	label1	project='CLOUD' AND issuetype='Bug'
18	label2	project='CLOUD' AND issuetype='Bug'
18	label3	project='CLOUD' AND issuetype='Bug'
24	label1	project='CLOUD' AND issuetype='Bug'
24	label2	project='CLOUD' AND issuetype='Bug'
24	label3	project='CLOUD' AND issuetype='Bug'

    The following image shows the jira details that the Secure Agent writes to the comments target:

FK_root	self15	id14	self16	name11	key5	accountId	emailAddress	_48x481	_24x241	_16x161	_32x321	displayNa
74	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83513/comment/11811	11811	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
84	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83508/comment/11805	11805	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
84	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83508/comment/11806	11806	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
92	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83506/comment/11801	11801	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
92	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83506/comment/11802	11802	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
92	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83506/comment/11812	11812	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
118	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83500/comment/11803	11803	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
118	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83500/comment/11804	11804	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic
118	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83500/comment/11810	11810	https://in	admin	admin	557058:4098a3f	cloudconnectivi	https://av	https://av	https://av	https://av	Informatic

    The following image shows the jira details that the Secure Agent writes to the subtasks target:

FK_root	id15	key7	self18	summary1	self19	descrip	iconUrl6	name13
92	83518	CLOUD-27	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/issue/83518	Sub-task for CLOUD-15	https://informaticacloudconnectivitydev.atlassian.net/rest/api/2/status/10000		https://in	To Do

INDEX

B

business service 12

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connection properties 8
connections
  JIRA Cloud 8

D

Data Integration community
  URL 4

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

J

JIRA Cloud connection 8
JIRA Cloud Connector
  overview 6
  supported object types 7
  supported tasks 7
  supported transformation 7
JIRA Query Language 6

M

maintenance outages 5
mapping
  source properties 10
  sources 10
  target 11
  target properties 11
mapping task
  source properties 10
  sources 10
  target 11
  target properties 11
midstream transformation
  advanced properties 12
  example 12
  request mapping 12
  response mapping 12
  web service 12

S

status
  Informatica Intelligent Cloud Services 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web service application 6
web site 4