Informatica®

Informatica® Cloud Data Integration

Filelo Connector

Informatica Cloud Data Integration Filelo Connector
April 2026

© Copyright Informatica LLC 2015, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-04-10

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to FileIo Connector 6

FileIo Connector Overview 6

Supported Modules and Task Operations 6

Pre-requisites to Install FileIo Connector 6

Enabling FileIo Connector 7

Chapter 2: FileIo Connections 8

FileIo Connections Overview 8

FileIO connection properties 8

Chapter 3: Synchronization Tasks with FileIo 10

Creating a FileIo Synchronization Task 10

- Using FileIo as Source 10
- Using FileIo as Target 11

Data Filters 12

Editing the Data Types in the Field Mapping 13

Unmapping Fields 13

Creating a .infaccess file 14

Maintaining the Lookup File for Salesforce Attachment Parent Object ID 14

Chapter 4: Troubleshooting 15

Troubleshooting Overview 15

Troubleshooting Synchronization Task 15

Handling Duplicate Files 15

Handling Large Attachments 16

- Increasing the Field Buffer Size 16
- Increasing the secure agent memory 17

Index 19

Preface

Use *FileIo Connector* to learn how to export Salesforce attachments to a file system and upload files from a local system to Salesforce by using Cloud Data Integration. Learn to create a FileIo connection and run synchronization tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to FileIo Connector

This chapter includes the following topics:

- FileIo Connector Overview, 6
- Supported Modules and Task Operations, 6
- Pre-requisites to Install FileIo Connector, 6
- Enabling FileIo Connector, 7

FileIo Connector Overview

The FileIo Connector exports Salesforce attachments to a file system. It also uploads files from a local file system to Salesforce. FileIo Connector works with any source or target that supports binary or base64 encoded content.

Supported Modules and Task Operations

The following table provides the list of supported modules and operations by FileIo Connector.

Objects	Read	Insert	Update	Upsert	Delete	Data Preview	Lookup
anyfileobject	Yes	Yes	NA	NA	NA	NA	NA

Pre-requisites to Install FileIo Connector

You need Salesforce application/portal access (user credentials) to create integration tasks for FileIo to Salesforce or vice-versa in Data Integration. You need to have `.infaccess` file in the folder from where you need to upload attachment or download attachment.

Note: `.infaccess` is an empty file. For more information about how to create a `.infaccess` file, see "Creating a .infaccess file" on page 14

Enabling FileIo Connector

To enable FileIo Connector, contact Informatica support or Informatica representative. It usually takes 15 minutes for the connector to download to secure agent, after it is enabled.

CHAPTER 2

FileIo Connections

This chapter includes the following topics:

- FileIo Connections Overview, 8
- FileIO connection properties, 8

FileIo Connections Overview

Create a FileIo connection in Data Integration before you use FileIo Connector in a synchronization task.

You can create a FileIo connection on the **Connections** page. When you create the FileIo connection, you can enter the connection attributes specific to FileIo Connector. You can use FileIo connections to specify sources and targets in a synchronization tasks.

FileIO connection properties

When you set up a FileIO connection, you must configure the connection properties.

The following table describes the FileIO connection properties:

Connection property	Description
Connection Name	Enter a unique name for the connection.
Description	Provide a relevant description for the connection.

Connection property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. Select a Secure Agent or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Parent Directory	Enter the parent directory path. The parent directory is the folder that contains the files to perform read and write operations. The parent directory must contain an `.infaccess` empty file. Create a folder within the parent directory with any name other than inprocess, success, and error. For example, you can create a `read`, `write`, or `test` folder. The empty file will be listed as objects when you select this connection as source or target in the task.
Process File Content As	Select the required option from the list of available options to process the file content. The following file processing options are available: - Binary: When you select Binary, you must map FileContentAsBinary in the **Field Mapping** tab of the synchronization task. - base64 encoded string: By default this option is selected. When you select this option, you must map FileContentAsBase64String in the **Field Mapping** tab of the synchronization task.
Overwrite Target Files	Enables overwriting of target files. If you don't select the checkbox, files with duplicate names are not overwritten. Instead, new files are created with a numeric prefix that starts with 001 and increments with each new file, followed by two underscores and the original filename. For example, when you don't enable the overwrite target file option and a file named ABCD already exists, new files with the names 001__ABCD, 002__ABCD, and so on is created, preserving the original file without overwriting it.
Auto Archive Source Files	Select the checkbox to enable automatic archiving of source files. This option allows you to move the files from source directory after the file is processed.
In Process Directory	Mention the directory path to be used for file processing. By default, parent directory is considered.
Success Directory	Mention the directory path where the files will be moved after processing. By default, parent directory is considered. Mention the success directory path only when **Auto Archive Source Files** option is enabled.
Error Directory	Mention the error directory path. When they are issues/errors in file processing. Such files are moved to error directory.

CHAPTER 3

Synchronization Tasks with FileIo

This chapter includes the following topics:

- Creating a FileIo Synchronization Task, 10
- Data Filters, 12
- Editing the Data Types in the Field Mapping, 13
- Unmapping Fields, 13
- Creating a .infaccess file, 14
- Maintaining the Lookup File for Salesforce Attachment Parent Object ID, 14

Creating a FileIo Synchronization Task

Perform the following tasks to create a synchronization task in Data Integration.

Note: You need to create a connection before you create a synchronization task.

Using FileIo as Source

Let us consider the task operation Insert to perform the synchronization task.

1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Tasks**, and click **Create**.

   The **Definition** tab appears.
3. Specify the **Task Name**, provide a **Description** and select Insert as the **Task Operation**.
4. Click **Next**.

   The Source tab appears.




5. In the **Source** tab, select **FileIo** as the **Connection** and **read** as the **Source Object**.

6. Click **Next**.
7. In the **Target** tab, select **Connection Salesforce** and **Target Object Attachment**.



8. Click **Next**.
9. In **Data Filters** tab by default, Process all rows is selected by default. See "Using FileIo as Target" on page 11.
10. Click **Next**.
11. In the **Field Mapping** tab, map source fields to target fields accordingly.

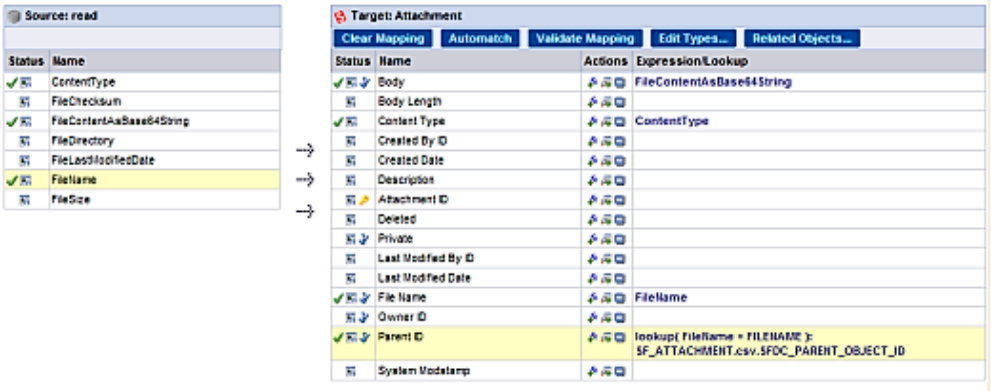

12. Click **Next**.

    The **Schedule** tab appears.
13. In **Schedule** tab, you can schedule the task as per the requirement, and save.
14. Click **Save** and then **Finish**.
15. From the **Explore** page, select the task, and click **Actions** > **Run**.


    In Monitor, you can monitor the status of the logs after you run the task.

Using FileIo as Target

When you use FileIo as a Target connection, follow the same procedures mentioned above to setup a synchronization task.

1. In the **Definition** tab, mention the generic details of the task.
2. In the **Source** tab, select **Salesforce** as the **Connection** and **Attachment** as the **Source Object**.
3. In the **Target** tab, select **Connection FileIo** and **Write** as the **Target object**.
4. In the **Data Filters** tab, Process all rows is selected by default. See "Data Filters" on page 12.

5. In the **Field Mapping** tab, map source fields to target fields accordingly.

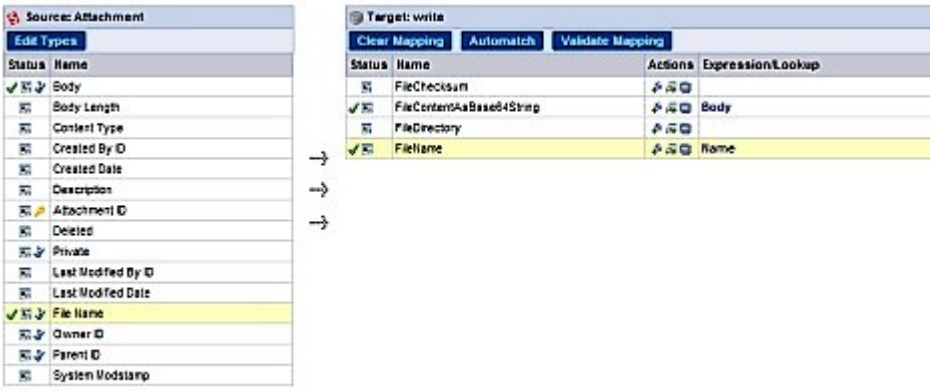

- File Directory Field: By default, the file will be written to the directory that is selected as the target object. If you wish to overwrite the default target directory, map a valid directory to the FileDirectory field.
- FileCheckSum Field: If you wish, map the MD5 checksum of the file you want to write. This field will help to verify whether the content of the file is not modified.

And then follow the procedures provided in Creating Synchronization Task (DSS) to proceed further.

Data Filters

Data filters help you to fetch specific data of a particular object. The synchronization task will process the data based on the filter field assigned to the object.


Note: You cannot use Advanced Data Filters with FileIo Connector.

Note: Data filter operator Ends With is in feature enhancement mode. It will be available in the future release.

Follow the steps given below to set data filters:

1. In the Synchronization Task wizard, select **Data Filters** tab.

   The **Data Filters** tab appears.
2. Click **New** as shown in the following figure.

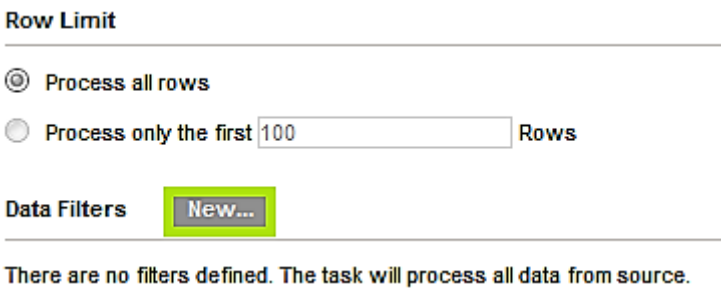

   The **Data Filter** dialog box appears.

3. Specify the following details.

Field Type	Description
Object	Select the object for which you want to assign filter fields.
Filter By	Select the Filter Field.
Operator	Select the corresponding operator.
Filter Value	Enter the Filter value.

4. Click **OK**.


Editing the Data Types in the Field Mapping

You can edit field data types to customize the precision, scale and data types of fields.

Perform the following steps to edit field data types in Field Mapping.

1. In **Field Mapping** tab, click **Edit Types**.

   The Edit Field Data Types page appears.

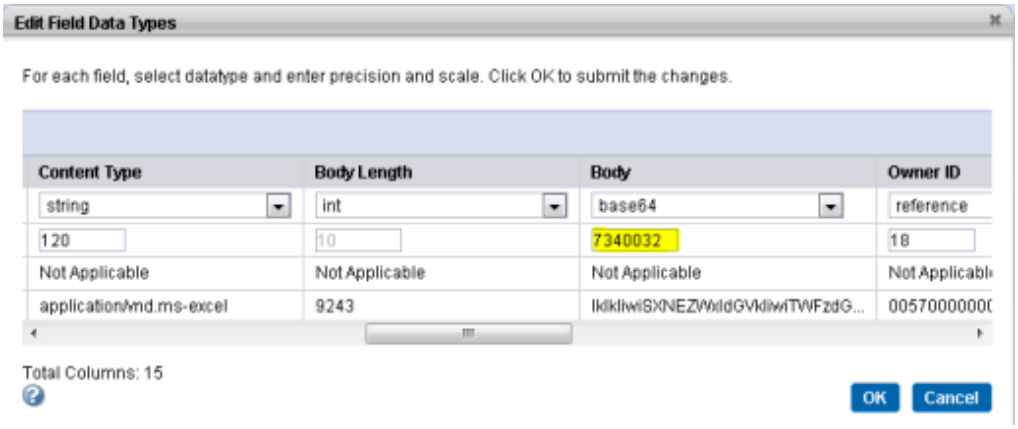

2. From the list of available fields, select the field which you want to modify.

   You can modify the Datatype, Precision, and scale for each of the available fields.

3. Click **OK** to save.

Unmapping Fields

Perform the following steps to unmap the file content:

1. In **Field Mapping** tab, select field you want to unmap.

2. Click (clear expression/lookup) to unmap file content.

   The field appears blank after you unmap the corresponding field. Refresh field mapping, once the required fields are unmapped.

Creating a .infaccess file

The FileIo Connector accesses directories that have an empty file named `.infaccess`. The connection fails if the file does not exist.

Create an empty file .infaccess in the directory where you want to read or write files

1. Open a command prompt.
2. Specify the parent directory where you want to read or write the file.
3. Enter the following commands:
   - For Windows users: `echo %CD% >.infaccess`
   - For Linux users: `touch .infaccess`

Maintaining the Lookup File for Salesforce Attachment Parent Object ID

You must know the Parent ID of the associated file in order to upload a file to Salesforce attachment object.

Maintain the filename and parent ID relationship information in a csv file.

FILENAME	SFDC_PARENT_OBJECT_ID
Account.csv	5007000000R07NJAAZ
CookBook.doc	5007000000Qz9lFAAR
CookBook.docx	5007000000QdHLpAAN
EWMBA_295A_Entrepreneurship_Syllabus_Fall_2010.pdf	5007000000Di9xaAAB
Facebook_Presentation031311.ppt	5007000000Di9xaAAB
Informatica cloud toolkit - technical enblement.ppt	5007000000R07NJAAZ
informatica_file_connector.zip	5007000000R07NJAAZ
ItineraryReceipt_NYC_121412.pdf	5007000000QzJ7QAAV
Large.txt	5007000000Qz9lFAAR
wrapper.txt	0067000000Ul0S9AAJ

CHAPTER 4

Troubleshooting

This chapter includes the following topics:

- Troubleshooting Overview, 15
- Troubleshooting Synchronization Task, 15
- Handling Duplicate Files, 15
- Handling Large Attachments, 16

Troubleshooting Overview

The log and exception messages thrown are captured in the log files. The log files are saved in specific location.

For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\logs`.

Troubleshooting Synchronization Task

While creating a synchronization task, the NULL error message appears when a connector with invalid configuration is selected. The null error message files are saved in specific location.

For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\logs`

The log and exception details of a failed synchronization task are captured under Session Log. You require special permission privileges to run the application in debug mode.

Note: You can enable logs to verify request and SOAP response. For higher batch size (Fetch size) such as 5000 and above, the connector throws a DTM termination error. In such case, it is recommended to set False in Enable Debugger present in connection parameters.

Handling Duplicate Files

When the connector encounters a file which already exists in the target directory and `overwrite files` flag is set to false, then connector assigns a number to the file name and saves it. For example, if a file name is `wrapper.txt` then the duplicate file name will be 001_wrapper.txt, 002_wrapper.txt and so on.

Handling Large Attachments

You can transfer large files by the following ways:

- Increasing the field buffer size
- Increasing Secure Agent memory


Note: You can upload or download files with maximum size of 75 MB using FileIO Connector.

Increasing the Field Buffer Size

In case you need to process or transfer a large file, you must increase the body field size in both source and target section of field mapping tab. Refer field Mapping on page 11


Follow the steps given below to increase the field buffer size:

1. In **Field Mapping** section of the synchronization task, click **Edit Types** and select **Body** field in the Source section. Refer 11.
2. **Edit Field Data Types** dialog box appears
3. Select **Base64** from the list.
4. Mention the character Size in the field as shown in the figure.
5. Click **OK**.

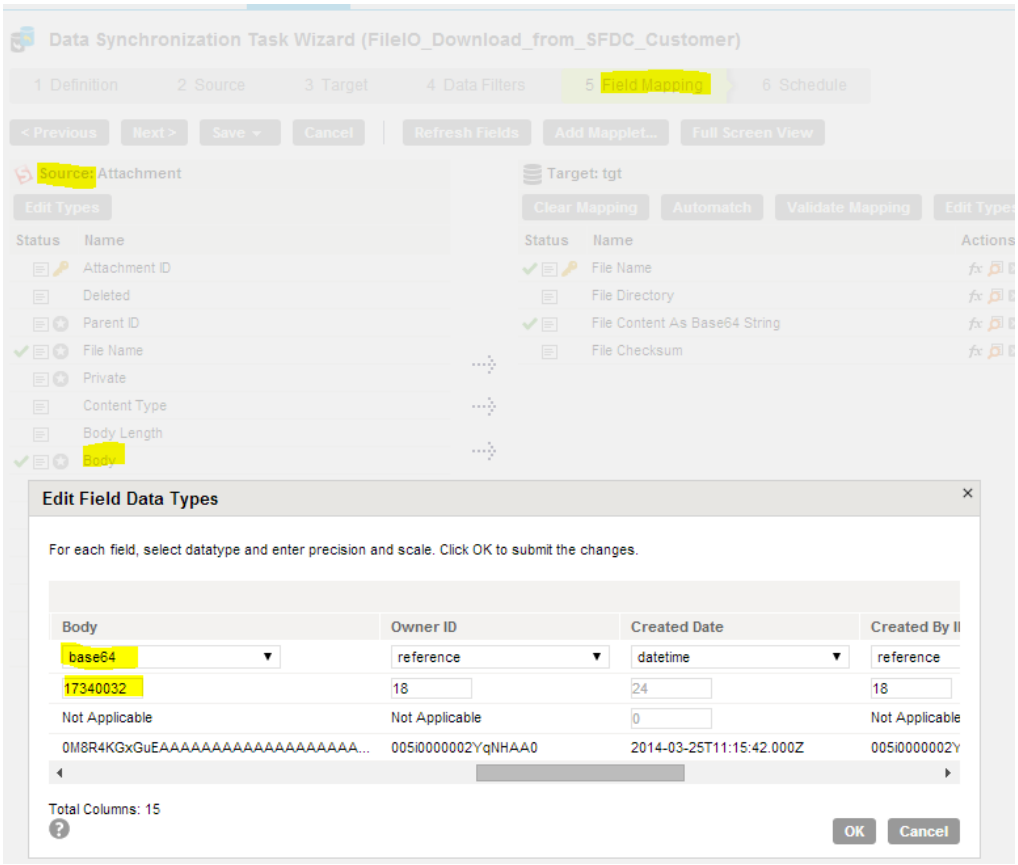

6. In the Target section, click **Edit Types** and select **Body** field next to **File Content As Base64 String** field as shown in figure given below.

7. The **Edit Field Data Types** dialog box appears.
8. Increase the character size in precision field of **File Content as Base64 String**.
9. Click **OK**.

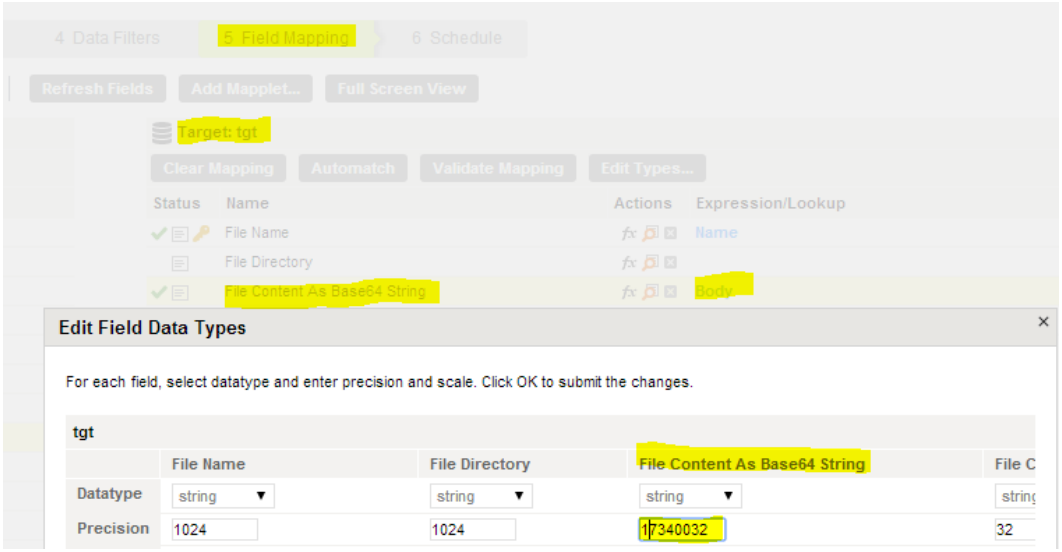

This will increase the file size. An error `FATAL ERROR: Failed to allocate memory. Out of virtual memory` is thrown, when you try to transfer the file which exceeds the maximum limit.


You can overcome the above error by increasing the secure agent memory.

Increasing the secure agent memory

To increase performance and avoid runtime environment memory issues, perform the following steps:


1. In Administrator, select **Runtime Environments**.
2. Select the Secure Agent for which you want to increase memory from the list of available Secure Agents.
3. In the upper-right corner, click **Edit**.
4. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
5. Edit **JVMOption1** as **-Xms4056m** and **JVMOption2** as **-Xmx4056m**.

   The following image shows the **Details** page:

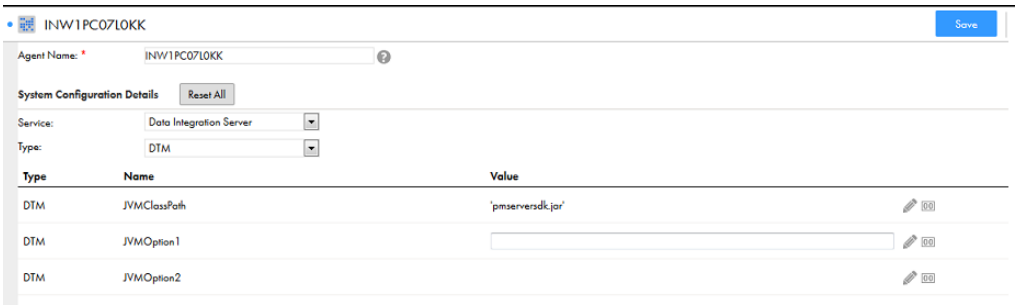

6. In the **System Configuration Details** section, select the **Type** as **TomCatJRE**
7. Edit **INFA_memory** as **-Xms256m -Xmx512m**.

The following image shows the **Agent Details** page:

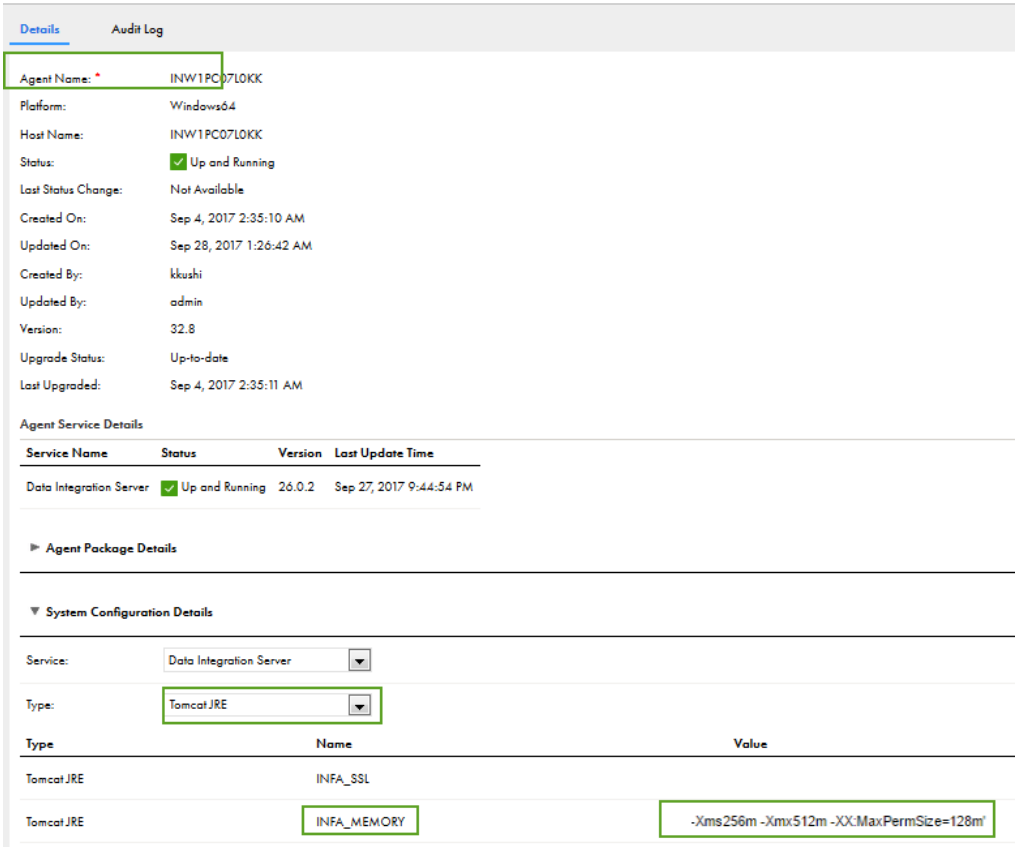

Note: The minimum and maximum values for the Java heap size are given as an example. Specify the size according to your requirements.

8. Restart the Secure Agent.

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  FileIO 8
creating
  Data Synchronisation Task 10

D

Data Integration community
  URL 4
Data Synchronisation Task
  creating 10

F

FileIO
  connection properties 8
FileIO Connector
  operations 6
  pre-requisites 6

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

M

maintenance outages 5

S

Secure Agent
  increasing memory 17
status
  Informatica Intelligent Cloud Services 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4