Informatica® Cloud Data Integration

SuccessFactors SOAP Connector

Informatica Cloud Data Integration SuccessFactors SOAP Connector
July 2025

© Copyright Informatica LLC 2016, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-05-12

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Network 4
- Informatica Knowledge Base 4
- Informatica Documentation 4
- Informatica Product Availability Matrices 5
- Informatica Velocity 5
- Informatica Marketplace 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to SuccessFactors SOAP Connector 6

SuccessFactors SOAP Connector Overview 6

SuccessFactors SOAP Connector Tasks and Object Types 7

Introduction to SuccessFactors 7

SuccessFactors SOAP Connector Example 8

Chapter 2: SuccessFactors SOAP Connections 9

SuccessFactors SOAP Connections Overview 9

SuccessFactors SOAP connection properties 9

Troubleshooting a SuccessFactors SOAP Connection 10

Chapter 3: Synchronization Tasks with SuccessFactors SOAP 13

SuccessFactors Sources in Synchronization Tasks 13

SuccessFactors Targets in Synchronization Tasks 14

Chapter 4: Mappings and Mapping Tasks with SuccessFactors SOAP 15

Mappings and Mapping Tasks with SuccessFactors SOAP Connector Overview 15

SuccessFactors Sources in Mappings 15

SuccessFactors Targets in Mappings 16

SuccessFactors Mapping Task Example 17

Appendix A: Data Type Reference 19

Data Type Reference Overview 19

SuccessFactors Data Types and Transformation Data Types 19

Index 21

Preface

Use *Data Integration SuccessFactors SOAP Connector* to learn how to set up and use SuccessFactors by using Cloud Data Integration. Learn to create a SuccessFactors SOAP connection, develop mappings, and run mapping and synchronization tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Velocity

Informatica Velocity is a collection of tips and best practices developed by Informatica Professional Services and based on real-world experiences from hundreds of data management projects. Informatica Velocity represents the collective knowledge of Informatica consultants who work with organizations around the world to plan, develop, deploy, and maintain successful data management solutions.

You can find Informatica Velocity resources at http://velocity.informatica.com. If you have questions, comments, or ideas about Informatica Velocity, contact Informatica Professional Services at ips@informatica.com.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to SuccessFactors SOAP Connector

This chapter includes the following topics:

- SuccessFactors SOAP Connector Overview, 6
- SuccessFactors SOAP Connector Tasks and Object Types, 7
- Introduction to SuccessFactors, 7
- SuccessFactors SOAP Connector Example, 8

SuccessFactors SOAP Connector Overview

You can use SuccessFactors SOAP Connector to connect to SuccessFactors from Data Integration.

Use SuccessFactors SOAP Connector to read data from SuccessFactors and to integrate SuccessFactors HCM Suite with other applications, databases, and flat files using the SuccessFactors SOAP API (SFAPI). You can read data from SuccessFactors or from other applications and write the data to SuccessFactors. You can use SuccessFactors objects as sources and targets in mappings, synchronization tasks, and mapping tasks.

When you run a synchronization task or a mapping task, the agent uses the SuccessFactors SOAP API (SFAPI) to perform the specified operation and read data from or write data to SuccessFactors.

SuccessFactors SOAP Connector Tasks and Object Types

When you create a SuccessFactors SOAP connection to perform a task, you can select the objects supported by SuccessFactors SOAP Connector for the task.

The following table provides the list of tasks and object types supported by SuccessFactors SOAP Connector:

Task Type	Source	Target	Lookup
Synchronization Task	Yes	Yes	No
Mapping	Yes	Yes	No
Mapping Task	Yes	Yes	No

For information about SuccessFactors objects, see the SuccessFactors documentation.

Introduction to SuccessFactors

SuccessFactors is a cloud-based human capital management software that organizations use to manage essential services related to human resource management.

You can use recruiting services of SuccessFactors to hire best talents. You can use SuccessFactors to manage the on-boarding process of new hires, track performance and goals of the employees, and manage employee compensation details. You can use the learning management services provided by SuccessFactors to improve the skills and productivity of your employees, reduce compliance risks, and cater to the needs of external audiences. The succession and development services help you to increase organizational strength by identifying and recognizing potential talents in your company. You can increase communication and collaboration between individuals and teams in your company by using the social networking services provided by SuccessFactors.

SuccessFactors tables are called entities or SFObjects. SuccessFactors integrates with external systems through SuccessFactors SOAP API (SFAPI), Open Data Protocol (OData) API, Employee Central Compound (ECC) API, or file based communication.

You can choose one of the following deployment models of SuccessFactors:

- Talent Hybrid
- Full Cloud HCM
- Side-by-Side

SuccessFactors SOAP Connector Example

You are a Human Resource Manager in a pharmaceutical company. The business of your company has grown but it has introduced a range of HR policies and tools. You are finding it difficult to manage the recruiting, on-boarding, leave policies, travel policies, performance management, and appraisal process.

Your company uses SuccessFactors to automate the human capital management system.

You can now use SuccessFactors SOAP Connector to configure a synchronization task or mapping task and read performance management data from SuccessFactors and write data to your local system. Your team can then analyze the data and provide feedback, direction, or recognition to respective employees.

CHAPTER 2

SuccessFactors SOAP Connections

This chapter includes the following topics:

- SuccessFactors SOAP Connections Overview, 9
- SuccessFactors SOAP connection properties, 9
- Troubleshooting a SuccessFactors SOAP Connection, 10

SuccessFactors SOAP Connections Overview

Create a SuccessFactors SOAP connection to connect to SuccessFactors so that the agent can read data from and write data to SuccessFactors. You can use SuccessFactors SOAP connections to specify sources and targets in mappings, mapping tasks, or synchronization tasks.

You can create a SuccessFactors SOAP connection on the **Connections** page. Use the connection when you create a synchronization task or a mapping task.

SuccessFactors SOAP connection properties

When you set up a SuccessFactors SOAP connection, you must configure the connection properties.

Important: SuccessFactors SOAP Connector is deprecated and has been moved to maintenance mode. Informatica intends to drop support in a future release. Informatica recommends that you use SuccessFactors ODATA Connector to access SuccessFactors.

The following table describes the SuccessFactors SOAP connection properties:

Connection property	Description
Connection Name	Enter a unique name for the connection.
Description	Provide a relevant description for the connection.

Connection property	Description
Runtime Environment	The name of the runtime environment where you want to run tasks. Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
URL	SuccessFactors service root URL. For example, enter https://apisalesdemo8.successfactors.com/sfapi/v1/soap?wsdl.
Company ID	Enter your company ID.
User name	Enter the username.
Password	Enter the password.

Troubleshooting a SuccessFactors SOAP Connection

The solution to the following situation might help you troubleshoot SuccessFactors SOAP connections:

I failed to authenticate to the SuccessFactors instance.


SuccessFactors does not allow unauthorized IPs to access the SuccessFactors instance. When you use mappings, synchronization tasks, or mapping tasks to access SuccessFactors instance through SuccessFactors APIs, the following error might appear:

```
FAILED_AUTHENTICATION</errorCode><errorMessage>Authentication failed. Attempted
login from unauthorized ip: xxx.xxx.xxx.xxx
to company id: xxxx by username: user(status code = 8)
```


Perform the following steps to authorize an IP address:

1. Log in to SuccessFactors.
2. Go to **Admin Center** > **Company Settings** > **Password & Login Policy Settings**.

The following image shows the Admin Center page:

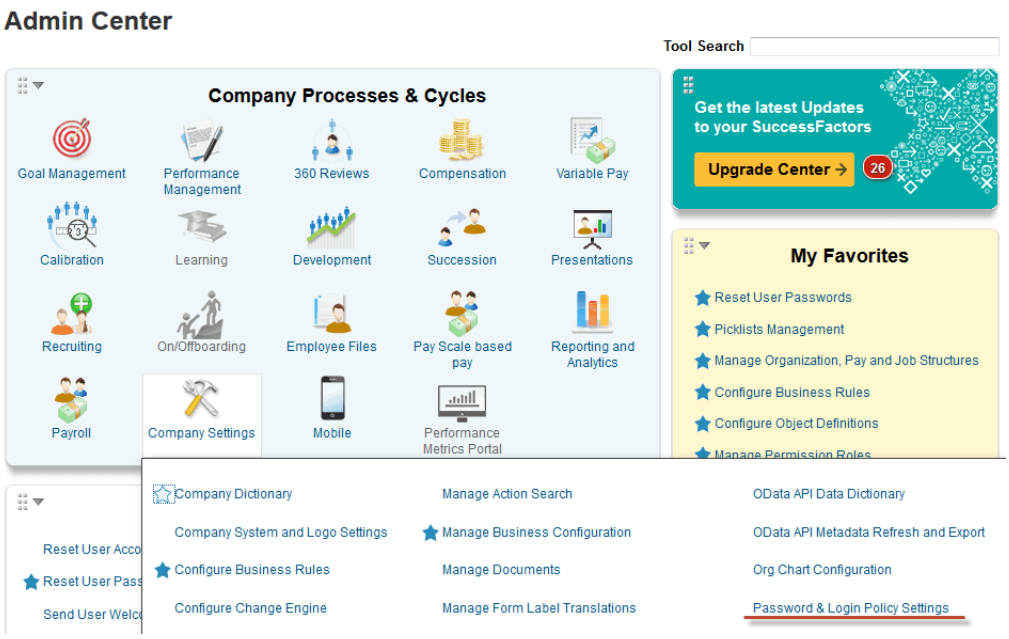


The Password & Login Policy Settings: Applied to All Employees page appears.

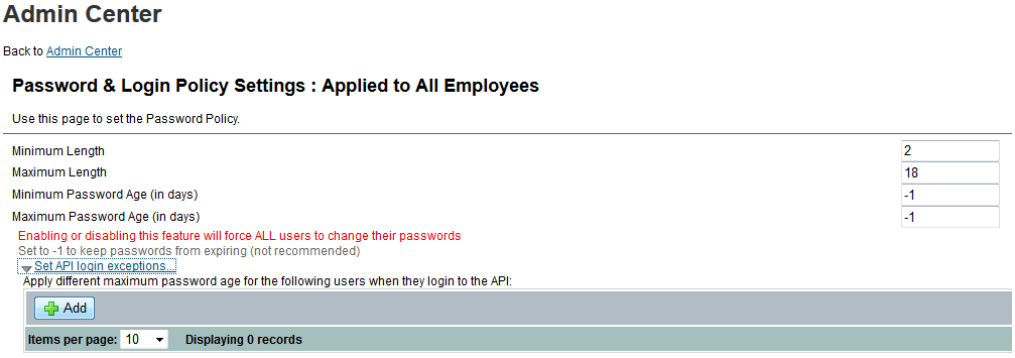

3. Select **Set API login exceptions...** and click **Add**.

The Create New User Security Setting page appears.

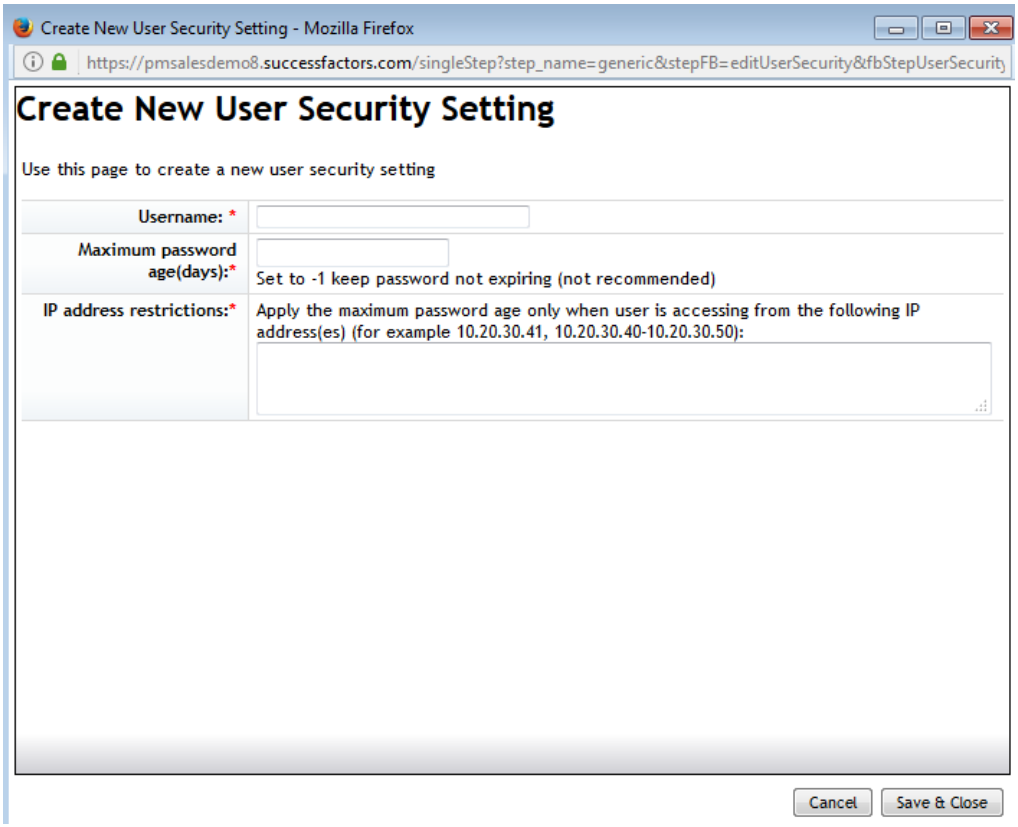

4. Enter a username with sfapi permissions, maximum password age, and IP address restrictions. Add the IP from the error message in IP address restrictions field.
5. Click **Save & Close**.

CHAPTER 3

Synchronization Tasks with SuccessFactors SOAP

This chapter includes the following topics:

- SuccessFactors Sources in Synchronization Tasks, 13
- SuccessFactors Targets in Synchronization Tasks, 14

SuccessFactors Sources in Synchronization Tasks

You can use a SuccessFactors object as a single source in a synchronization task. You can configure the SuccessFactors source properties on the **Source** page of the Synchronization Task wizard.

The following table describes the SuccessFactors source properties:

Property	Description
Connection	The source connection for the task.
Source Type	Type of the source object. Select Single object.
Source Object	The source object for the task. Select the source object for a single source.
Display technical names instead of labels	Displays technical names instead of business names.
Display source fields in alphabetical order	Displays source fields in alphabetical order instead of the order returned by the source system.

When you configure a synchronization task to use a SuccessFactors source, you can configure the advanced source properties. Advanced source properties appear on the **Schedule** page of the Synchronization Task wizard.

The following table describes the SuccessFactors advanced source properties:

Advanced Property	Description
Page Size	Size of the page set to retrieve the maximum number of entries for each request. You can set the page size for a query to an integer value from 1 to 800. The default page size is 200. The maximum page size is 800.

SuccessFactors Targets in Synchronization Tasks

When you run a synchronization task, specify the operation and the source that you want the agent to write to the target. The agent inserts, updates, or deletes source rows that you specify in the target based on the configured operation for the target object. You can configure the SuccessFactors target properties on the **Target** page of the Synchronization Task wizard.

The following table describes the SuccessFactors target properties:

Property	Description
Connection	The target connection for the task.
Target Object	The target object that the task populates.
Child Object	Not supported.
Display technical names instead of labels	Displays technical names instead of business names.
Display target fields in alphabetical order	Displays source fields in alphabetical order instead of the order returned by the source system.

When you configure a synchronization task, you can configure the advanced target properties. The advanced target properties appear on the **Schedule** page of the Synchronization Task wizard.

The following table describes the SuccessFactors advanced target properties:

Advanced Property	Description
Success File Directory	Directory for the success file. Specify a directory path that is available on each agent machine in the runtime environment. By default, Data Integration writes the success file to the following directory: `<Secure Agent installation directory>\apps\Data_Integration_Server\data\success`.
Error File Directory	Directory for the error file. Specify a directory path that is available on each agent machine in the runtime environment. By default, Data Integration writes the error file to the following directory: `<Secure Agent installation directory>\apps\Data_Integration_Server\data\error`.

CHAPTER 4

Mappings and Mapping Tasks with SuccessFactors SOAP

This chapter includes the following topics:

- Mappings and Mapping Tasks with SuccessFactors SOAP Connector Overview, 15
- SuccessFactors Sources in Mappings, 15
- SuccessFactors Targets in Mappings, 16
- SuccessFactors Mapping Task Example, 17

Mappings and Mapping Tasks with SuccessFactors SOAP Connector Overview

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source or target to represent a single SuccessFactors object.

Describe the flow of data from the source to the target along with the required transformations. When you create a mapping task, select the mapping that you want to use. Use the Mapping Task wizard to create a mapping task. The mapping task processes data based on the data flow logic you define in the mapping.

SuccessFactors Sources in Mappings

In a mapping, you can configure a Source transformation to represent a SuccessFactors source.

The general properties display the name and description of the SuccessFactors source. Configure the source and advanced properties for the source object.

The following table describes the source properties that you can configure in a Source transformation:

Property	Description
Connection	Name of the source connection.
Source Type	Type of source object. Select Single or Parameter as the source type.

Property	Description
Object	Name of the object. You can choose a source object when you read data from SuccessFactors.
Parameter	The parameter for the source object. Create or select the parameter for the source object. **Note:** The parameter property appears only if you select parameter as the source type.
Filter	Adds conditions to filter records. You can add multiple conditions for each object.
Sort	Adds conditions to sort records. You can add multiple conditions for each object.

The following table describes the advanced properties that you can configure in a Source transformation:

Advanced Property	Description
Page Size	Size of the page set to retrieve the maximum number of entries for each request. You can set the page size for a query to an integer value from 1 to 800. The default page size is 200. The maximum page size is 800.
Tracing Level	Amount of detail that appears in the log for this transformation. You can choose terse, normal, verbose initialization, or verbose data. Default is normal.

SuccessFactors Targets in Mappings

In a mapping, you can configure a Target transformation to represent a single SuccessFactors target.

The general properties display the name and description of the SuccessFactors target. Configure the target and advanced properties for the target object.

The following table describes the SuccessFactors target properties that you can configure in a Target transformation:

Property	Description
Connection	Name of the target connection.
Target Type	Type of target object. Select Single Object or Parameter.
Object	Name of the target object. You can choose a target object when you write data to SuccessFactors.
Parameter	The parameter for the target object. Create or select the parameter for the target object. **Note:** The parameter field appears only if you select parameter as the target type.

Property	Description
Operation	The target operation. Select Insert, Update, or Delete.
Data Driven Condition	Not supported.

The following table describes the SuccessFactors target advanced properties that you can configure in a Target transformation:

Advanced Property	Description
Success File Directory	Directory for the success rows file. Specify a directory path that is available on each Secure Agent machine in the runtime environment. By default, Data Integration writes the success rows file to the following directory: `<Secure Agent installation directory>\apps\Data_Integration_Server\data\success`.
Error File Directory	Directory for the error rows file. Specify a directory path that is available on each Secure Agent machine in the runtime environment. By default, Data Integration writes the error rows file to the following directory: `<Secure Agent installation directory>\apps\Data_Integration_Server\data\error`.
Forward Rejected Rows	Forwards rejected rows to the next transformation.

SuccessFactors Mapping Task Example

You work in the human resource management team of a manufacturing organization and you need to export all SuccessFactors Background_Awards activities. You want to review the Background_Awards activities in an analytics tool. Create a mapping task to use the insert operation. You use the following objects in the SuccessFactors mapping:

Source Object

The source object for a mapping task is a SuccessFactors Background_Awards. Use the SuccessFactors connection to connect to SuccessFactors and read data from SuccessFactors. The Background_Awards object is a single source in the mapping task.

Target Object

Use the .csv file as the target object in the mapping task. The target in a mapping task is a flat file. The target includes the id, userId, lastModified, Honor_or_Award, Description, Institution and Issue_Date fields.

Mapping

Map the fields of the SuccessFactors Background_Awards source to the flat file target.

The following image shows the SuccessFactors mapping:



When you run the mapping, the agent writes the Background_Awards activities to the flat file.

The following image shows the Background_Awards activities that the agent writes based on the fields you mapped in the mapping task:

id	userId	lastModified	Honor_or_Award	Description	Institution	Issue_Date
BKG-21	USR-91	2016-05-26T05:16:57	Sales Success	Exceeding Sales Quota 2001		
BKG-22	USR-91	2016-05-26T05:16:57	Sales Success	Exceeding Sales Quota 2002		
BKG-23	USR-91	2016-05-26T05:16:57	Sales Success	Exceeding Sales Quota 2003		
BKG-28	USR-93	2016-05-26T05:16:58	New Account Sales Leader	Sales	ACE Corporation	31-12-2009
BKG-115	USR-148	2016-05-26T05:16:58	Annual award for leadership in clinic	Outstanding Leadership in Nursing		
BKG-354	USR-58	2016-05-26T05:16:58	Ausgezeichneter Service Mitarbeiter	Auszeichnung zur Anerkennung auÃŸergewÃ¶hnlicher Leistungen im Personalwesen		
BKG-393	USR-203	2016-05-26T05:16:59	äºæé–ç™ºå—ãƒ—ãƒã‚°ãƒ©ãƒ	äºæé–ç™ºå«é–¢ã—ã¦å¦å„ªã‚Œæ¥ç¸¾ã‚'é"æ^ã—ãŸã‚¨ãƒ¼ã‚¸ã‚§ãƒ³ãƒˆ		1/8/2005
BKG-467	USR-94	2016-05-26T05:16:59	Highest sales of quarter	Generated the highest sales of the quarter for over $3	Ford Motors	
BKG-494	USR-115	2016-05-26T05:17:00	Employee of the Month	Highest rated employees by upper management	Yahoo Inc	
BKG-522	USR-120	2016-05-26T05:17:00	Valedictorian	Highest GPA of graduating class	Vanderbilt University	
BKG-865	USR-101	2016-05-26T05:17:00	Outstanding profit margin	Highest profit margin generated in sales department		
BKG-873	USR-117	2016-05-26T05:17:01	Outstanding Performance			14-09-2004
BKG-879	USR-95	2016-05-26T05:17:01	High Honors in Sales	Highest sales figures in quarter		30-09-2001
BKG-893	USR-111	2016-05-26T05:17:01	Outstanding Sales, Q2			
BKG-1195	USR-156	2016-05-26T05:17:02	Outstanding Leadership in Healthcare			
BKG-1395	USR-183	2016-05-26T05:17:02	Employee of the Quarter	Most outstanding performer for Q3 2007		
BKG-1528	USR-171	2016-05-26T05:17:02	Profesional Distinguido	ConcesiÃ³n para reconocer el logro excepcional en prÃ¡ctica de Recursos Humanos		

APPENDIX A

Data Type Reference

This appendix includes the following topics:

- Data Type Reference Overview, 19
- SuccessFactors Data Types and Transformation Data Types, 19

Data Type Reference Overview

Data Integration uses the following data types in mappings, synchronization tasks, and mapping tasks with SuccessFactors:

SuccessFactors Data Types

SuccessFactors native data types appear in the Fields tab for Source and Target transformations when you choose to edit metadata for the fields.

Transformation Data Types

Set of data types that appear in the transformations. They are internal data types based on ANSI SQL-92 generic data types, which the agent uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data. When Data Integration writes to a target, it converts the transformation data types to the comparable native data types.

SuccessFactors Data Types and Transformation Data Types

The following table lists the SuccessFactors data types that Data Integration supports and the corresponding transformation data types:

SuccessFactors Data Type	Transformation Data Type	Description
Binary	Binary	1 to 104,857,600 bytes
Boolean	String	True or false

SuccessFactors Data Type	Transformation Data Type	Description
Date	Date/Time	Precision 29, scale 9
DateTime	String	1 to 65,536 characters
Double	Decimal	Precision 28, scale 5
Float	Double	Precision 15
Long	BigInt	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807 Precision 19, scale 0
Integer	Integer	Precision 12, scale 0
String	String	1 to 2,147,483,647 characters

INDEX

C

connection properties 9
connections 9

D

data type reference
  overview 19

I

Informatica Global Customer Support
  contact information 5

M

mapping
  advanced source properties 15
  advanced target properties 16
  source properties 15
  sources 15
  target properties 16
  targets 16
mapping tasks 15
mappings and mapping tasks
  example 17
mappings and mapping tasks *(continued)*
  overview 15

S

SuccessFactors
  introduction 7
SuccessFactors Connector
  connection properties 9
  example 8
  overview 6
SuccessFactors SOAP Connector
  supported object types 7
  supported tasks 7
synchronization tasks
  advanced source properties 13
  advanced target properties 14
  source properties 13
  sources 13
  target properties 14
  targets 14

T

transformation data types 19
troubleshooting 10