Informatica

Informatica® Data Integration

Amazon Aurora Connector

Informatica Data Integration Amazon Aurora Connector
October 2025

© Copyright Informatica LLC 2017, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-02-01

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Amazon Aurora Connector overview 6

Introduction to Amazon Aurora 6

Amazon Aurora supported objects and task operations 7

Administration of Amazon Aurora Connector 7

Chapter 2: Amazon Aurora Connections 8

Amazon Aurora connections overview 8

Amazon Aurora connection properties 8

Chapter 3: Synchronization tasks with Amazon Aurora 10

Amazon Aurora sources in synchronization task 10

Amazon Aurora targets in synchronization task 11

Synchronization task example 12

Chapter 4: Mappings and mapping tasks with Amazon Aurora 14

Amazon Aurora sources in mapping 14

Key range partitioning 15

- Configuring key range partitioning 16

Amazon Aurora targets in mapping 16

Amazon Aurora mapping task example 17

Chapter 5: Data type reference 20

Data type reference overview 20

Amazon Aurora and transformation data types 20

Index 22

Preface

Use *Amazon Aurora Connector* to learn how to read from or write to Amazon Aurora by using Cloud Data Integration. You can also learn to create an Amazon Aurora connection, develop and run synchronization tasks, mappings, and mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Amazon Aurora Connector overview

Amazon Aurora Connector enables you to securely read data from or write data to Amazon Aurora databases.

You can use Amazon Aurora objects as sources and targets in synchronization tasks, mappings, and mapping tasks.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

When you use Amazon Aurora Connector to write data, you can perform insert, update, upsert or delete operations. When you configure field mappings in a synchronization task or mapping task, you can create a lookup to an Amazon Aurora object.

Note: You cannot create an unconnected lookup when you configure field mappings.

Example

You work in the IT department of an international bank and are responsible for storing huge volumes of transaction files in a relational database. You want to store the data in Amazon Aurora database to avoid data loss if the relational database fails. You can use Amazon Aurora Connector to upload huge volumes of transactional files to Amazon Aurora from any location and at any time. You can back up data in Aurora for disaster recovery purposes and retrieve the data later.

Introduction to Amazon Aurora

Amazon Aurora is a cloud-based relational database engine that is compatible with MySQL. You can use the push-button migration tools to convert existing Amazon RDS for MySQL applications to Amazon Aurora. Amazon Aurora offers fault tolerance, scalability, continuos backup, and automatic detection of database crashes. You can use Amazon Aurora to set up and scale MySQL sever deployments. Amazon Relational Database Service (RDS) performs the administration tasks for Amazon Aurora.

Amazon Aurora supported objects and task operations

When you use Amazon Aurora Connector, you can include the following Data Integration assets:

- Data transfer task
- Mapping
- Mapping task
- Synchronization task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

Administration of Amazon Aurora Connector

As a user, you can use Amazon Aurora Connector after the organization administrator performs the following tasks:

- Enable the connector for the runtime environment. For more information about enabling connectors, see *Service and connector assignment* in the Administrator help.
- If the Secure Agent that runs the Amazon Aurora tasks is on a Linux machine, ensure that the `libssl.so.10` and `libcrypto.so.10` OpenSSL libraries are available and added to the `LD_LIBRARY_PATH` environment variable.
  For information on how to configure the `libssl.so.10` and `libcrypto.so.10` OpenSSL libraries, see Error while running an Aurora task on the Secure Agent Linux machine.

CHAPTER 2

Amazon Aurora Connections

Create an Amazon Aurora connection to connect to Amazon Aurora and read data from or write data to Amazon Aurora. You can use Amazon Aurora connection in synchronization tasks, mappings, and mapping tasks.

Amazon Aurora connections overview

You can create an Aurora connection on the **Connections** page and create a synchronization task, mapping, or mapping task.

Amazon Aurora connection properties

When you set up an Amazon Aurora connection, configure the connection properties.

Important: Amazon Aurora Connector is deprecated and has been moved to maintenance mode. Informatica intends to drop support in a future release. Informatica recommends that you use MySQL Connector to access Amazon Aurora MySQL.

The following table describes the Amazon Aurora connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Runtime Environment	Name of the runtime environment where you want to run the tasks. Select a Secure Agent, Hosted Agent, or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.

Property	Description
Host	Amazon Aurora server host name. For example, `xyzcloud-cluster.cluster-cj8irztl1mku.us-west-2.rds.amazonaws.com`.
Port	Amazon Aurora directory server port number.
Database Name	Name of the Amazon Aurora database.
Code Page	The code page of the database server defined in the connection. Select one of the following code pages: - MS Windows Latin 1 - UTF-8 - Shift-JIS - ISO 8859-15 Latin 9 (Western European) - ISO 8859-2 Eastern European - ISO 8859-3 Southeast European - ISO 8859-5 Cyrillic - ISO 8859-9 Latin 5 (Turkish) - IBM EBCDIC International Latin-1
Metadata Advanced Connection Properties	Additional properties for the JDBC driver to fetch metadata from the source. For example, `connectTimeout=180000` For more metadata advanced connection properties, see MariaDB Connector for JDBC.
Run-time Advanced Connection Properties	Additional properties for the ODBC driver required at run time. For example, `charset=sjis;readtimeout=180` For more run-time advanced connection properties, see MariaDB Connector for ODBC.
Username	User name of the Amazon Aurora account.
Password	Password of the Amazon Aurora account.

CHAPTER 3

Synchronization tasks with Amazon Aurora

This chapter includes the following topics:

- Amazon Aurora sources in synchronization task, 10
- Amazon Aurora targets in synchronization task, 11
- Synchronization task example, 12

Amazon Aurora sources in synchronization task

When you configure a synchronization task to use an Amazon Aurora source, you can read data from a single or multiple object.

To optimize performance, you can configure a filter on the **Data Filters** tab. You can also configure an advanced filter to define a more complex filter condition, which can include multiple conditions by using the AND or OR logical operators.

The following table describes the Amazon Aurora source properties:

Property	Description
Connection	Name of the Amazon Aurora source connection.
Source Type	Type of the Amazon Aurora source object available. You can choose from the following source types: - Single - Multiple
Source Object	Name of the Amazon Aurora source object.
Display source fields in alphabetical order	Displays source fields in alphabetical order. By default, fields appear in the order returned by the source system.

When you configure a synchronization task, you can configure the advanced source properties. The advanced source properties appear on the **Schedule** page of the Synchronization Task wizard.

The following table describes the Amazon Aurora advanced source properties:

Property	Description
Pre SQL	Pre-SQL command to run before reading data from the source.
Post SQL	Post-SQL command to run after reading data from the source.
Output is deterministic	When you configure this property, the Secure Agent does not stage source data for recovery if transformations in the pipeline produce repeatable data.
Output is repeatable	When the output is deterministic and the output is repeatable, the Secure Agent does not stage the source data for recovery.

Amazon Aurora targets in synchronization task

When you configure a synchronization task to write to an Amazon Aurora target, you can configure the target properties. The target properties appear on the **Target** page of the Synchronization Task wizard when you specify an Amazon Aurora connection. You can only insert, update, upsert, or delete data in an Amazon Aurora target.

The following table describes the Amazon Aurora target properties:

Property	Description
Connection	Name of the active target connection.
Target Object	Name of target objects available in the connection.

When you configure a synchronization task, you can configure the advanced target properties.

The following table describes the Amazon Aurora advanced target properties:

Property	Description
Success File Directory	Directory for the success file. Specify a directory path that is available on each Secure Agent machine in the runtime environment. By default, Data Integration writes the success file to the following directory: `<Secure Agent installation directory>/apps/Data_Integration_Server/data/success`
Error File Directory	Directory for the error rows file. Specify a directory path that is available on each Secure Agent machine in the runtime environment. By default, Data Integration writes the error rows file to the following directory: `<Secure Agent installation directory>\apps\Data_Integration_Server\data\error`

Synchronization task example

You can create a synchronization task to read data from an Amazon Aurora source and write data to the Amazon Aurora target.

Perform the following task to create a synchronization task:

Note: You need to create an Amazon Aurora connection before you configure the synchronization task.

1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Task**, and click **Create**.

   The **Definition** tab appears.
3. Configure the following fields on the **Definition** tab:

Field	Description
Task Name	Name of the synchronization task.
Description	Description of the synchronization task. Maximum length is 255 characters.
Task Operation	Select the task operation that you want to perform.

4. Click **Next**.

   The **Source** tab appears.
5. Configure the following fields on the **Source** tab:

Field	Description
Connection	Select an Amazon Aurora connection you created.
Source Type	Select the source type. By default, **Single** is selected.
Source Object	Select the required object from the list.
Display technical names instead of labels	Displays technical names instead of business names.
Display source fields in alphabetical order	Displays source fields in alphabetical order. By default, fields appear in the order returned by the source system.

6. Click **Next**.

   The **Target** tab appears.

7. Configure the following fields on the **Target** tab:

Field	Description
Connection	Select a flat file connection.
Target Object	Select the target object.
Display target fields in alphabetical order	Displays target fields in alphabetical order. By default, fields appear in the order returned by the target system.

8. Click **Next**.

   The **Data Filters** tab appears.
9. Select the filter object, filter field, and filter operator to create a data filter on the **Data Filters** page.
10. Click **Next**.

    The **Field Mapping** tab appears.
11. Click **Automatch** on the **Field Mapping** tab to map source fields to target fields accordingly.
12. Click **Validate Mapping** to validate the mapping.
13. Click **Next**.

    The **Schedule** tab appears where you can schedule the task for each requirement and save.
14. Configure the advanced source properties on the **Schedule** tab.
15. Click **Save** > **Finish**.
16. From the **Explore** page, select the synchronization task, and click **Actions** > **Run**.

    In Monitor, you can monitor the status of the logs after you run the task.

CHAPTER 4

Mappings and mapping tasks with Amazon Aurora

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source or target to represent the object.

In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

When you create a mapping, you configure a source to represent an Amazon Aurora object. Use the Mapping Task wizard to create a mapping task. The mapping task processes data based on the data flow logic you define in the mapping.

Amazon Aurora sources in mapping

To read data from an Amazon Aurora database, configure an Amazon Aurora object as the Source transformation in a mapping. Configure partitioning when you configure the Source transformation in the Mapping Designer to optimize the performance of the mapping task.

Specify the name and description of the Amazon Aurora source. Configure the source, query options, and advanced properties for the source object.

The following table describes the source properties that you can configure for an Amazon Aurora source:

Property	Description
Connection	Name of the Amazon Aurora source connection.
Source Type	Type of the Amazon Aurora source object available. You can choose from the following source types: - Single - Multiple - Query - Parameter
Object	Name of the Amazon Aurora source object.

Property	Description
Filter	A simple filter includes a field name, operator, and value. Use an advanced filter to define a more complex filter condition, which can include multiple conditions using the AND or OR logical operators.
Select distinct rows only	Select this option to extract only distinct rows.

When you configure a mapping, you can configure the advanced source properties. The following table describes the Amazon Aurora advanced source properties:

Property	Description
Tracing level	Amount of detail that appears in the log for this transformation. You can choose terse, normal, verbose initialization, or verbose data. Default is normal.
Pre SQL	Pre-SQL command to run before reading data from the source.
Post SQL	Post-SQL command to run after writing data to the target.
Output is Deterministic	When you configure this property, the Secure Agent does not stage source data for recovery if transformations in the pipeline always produce repeatable data.
Output is repeatable	When the output is deterministic and the output is repeatable, the Secure Agent does not stage the source data for recovery.

Key range partitioning

You can configure key range partitioning when you use a mapping task to read data from Amazon Aurora sources. With key range partitioning, the Secure Agent distributes rows of source data based on the field that you define as partition keys. The Secure Agent compares the field value to the range values for each partition and sends rows to the appropriate partitions.

Use key range partitioning for columns that have an even distribution of data values. Otherwise, the partitions might have unequal size. For example, a column might have 10 rows between key values 1 and 1000 and the column might have 999 rows between key values 1001 and 2000. If the mapping includes multiple sources, use the same number of key ranges for each source.

When you define key range partitioning for a column, the Secure Agent reads the rows that are within the specified partition range. For example, if you configure two partitions for a column with the ranges as 10 through 20 and 30 through 40, the Secure Agent does not read the rows 20 through 30 because these rows are not within the specified partition range.

You can configure a partition key for fields of the following data types:

- String
- Number data type. However, you cannot use decimals in key range values.
- Date/time. Use the following format: MM/DD/YYYY HH24:MI:SS

You cannot use key range partitions when a mapping includes any of the following transformations:

- Web Services
- XML to Relational


Configuring key range partitioning

Perform the following steps to configure key range partitioning for Amazon Aurora sources:

1. In the **Source Properties** page, click the **Partitions** tab.
2. Select the required partition key from the list.
3. Click **Add New Key Range** to define the number of partitions and the key ranges based on which the Secure Agent must partition data.

   Use a blank value for the start range to indicate the minimum value. Use a blank value for the end range to indicate the maximum value.

   The following image displays the details of **Partitions** tab:

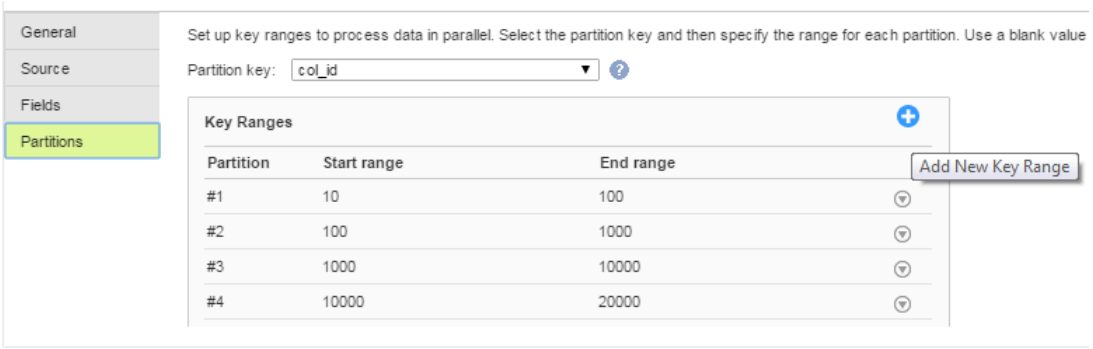

Amazon Aurora targets in mapping

To write data to an Amazon Aurora database, configure an Amazon Aurora object as the Target transformation in a mapping.

Specify the name and description of the Amazon Aurora target. Configure the target and advanced properties for the target object.

The following table describes the target properties that you can configure for an Amazon Aurora target:

Property	Description
Connection	Name of the active Amazon Aurora target connection.
Target Type	Type of the Amazon Aurora target object available. You can choose from the following source types: - Single - Parameter

Property	Description
Object	Name of the Amazon Aurora target object based on target type selected.
Operation	Select the target operation. You can perform the following operations on an Amazon Aurora target: - Insert - Update - Upsert - Delete

If you select the **Forward Rejected Rows** option, the Secure Agent flags the rows for reject and writes them to the reject file. If you do not select the **Forward Rejected Rows** option, the Secure Agent drops rejected rows and writes them to the session log file. The Secure Agent does not write the rejected rows to the reject file.


Amazon Aurora mapping task example

You can create a mapping task to read data from an Amazon Aurora source and write data to the Amazon Aurora target.

Perform the following task to create a mapping task:


1. In Data Integration, click **New** > **Mapping** > **Create** .
2. To configure the source properties and the advanced source properties, select **Source** from the selection panel under the **Design** section.

The following image shows details of the **Source Properties** page:

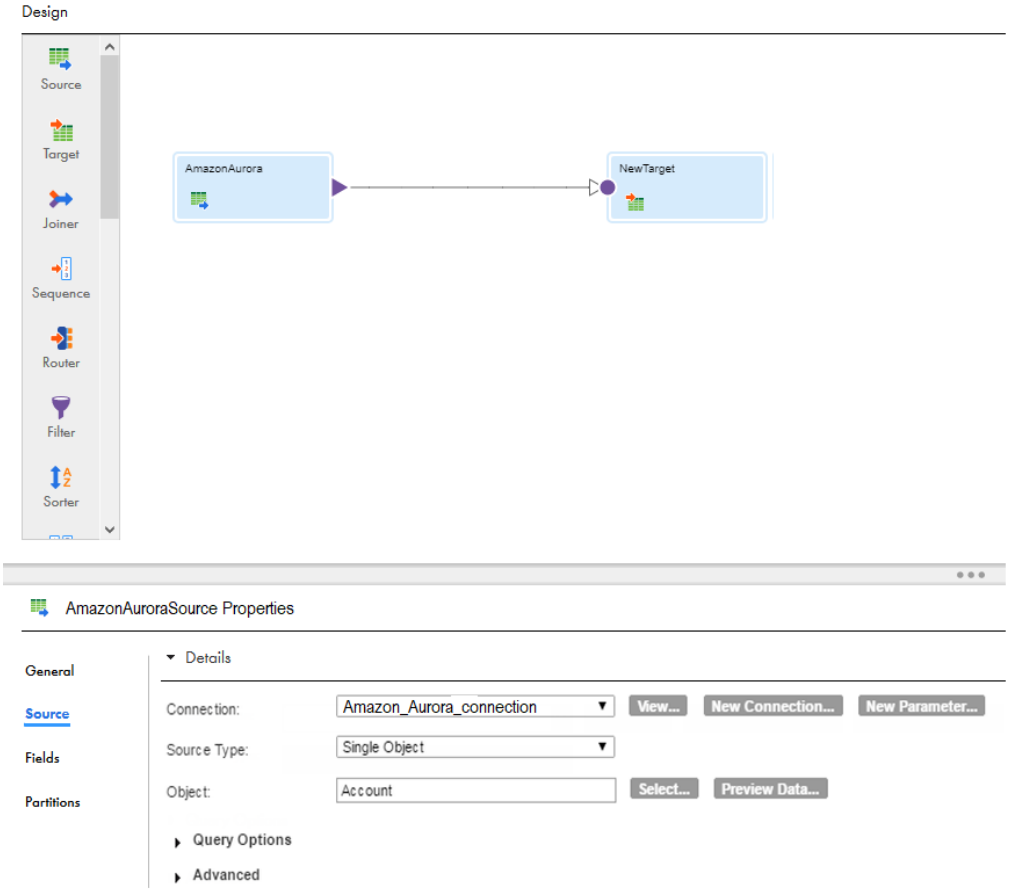

3. To configure the target properties and the advanced target properties, select **Target** from the selection panel under the **Design** section.

The following image shows details of the **Target Properties** page:

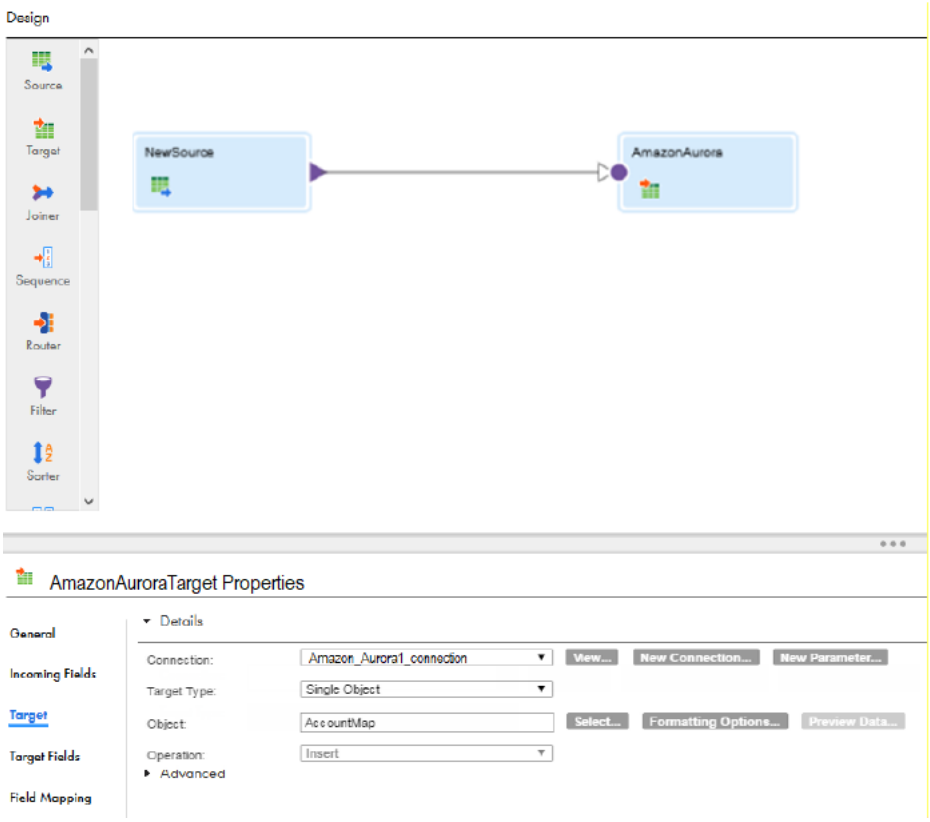

4. Map the source and target.



5. Click **Save** and then click **Run.**

   In Monitor, you can monitor the status of the logs after you run the task.

CHAPTER 5

Data type reference

Data Integration uses the following data types in synchronization tasks, mappings, and mapping tasks with Amazon Aurora:

Data type reference overview

Data Integration uses the following data types in synchronization tasks, mappings, and mapping tasks with Amazon Aurora:

Amazon Aurora native data types

Amazon Aurora data types appear in the source and target transformations when you choose to edit metadata for the fields.

Transformation data types

Set of data types that appear in the transformations. They are internal data types based on ANSI SQL-92 generic data types, which the Secure Agent uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data. When Data Integration writes to a target, it converts the transformation data types to the comparable native data types.

Amazon Aurora and transformation data types

The following table lists the Amazon Aurora data types that Data Integration supports and the corresponding transformation data types:

Amazon Aurora Data Type	Transformation Data Type	Description
BIGINT	Bigint	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807 Precision 19, scale 0
BINARY	Binary	1 to 104,857,600 bytes
BIT	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0

Amazon Aurora Data Type	Transformation Data Type	Description
BLOB	Binary	1 to 104,857,600 bytes
BOOLEAN	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0
CHAR	String	1 to 104,857,600 characters
DATE	Date/time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
DATETIME	Date/time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
DECIMAL	Decimal	Precision 1 to 28, scale 0 to 28
DOUBLE	Double	Precision 15
ENUM	String	1 to 104,857,600 characters
FLOAT	Double	Precision 15
INT	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0
LONGBLOB	Binary	1 to 104,857,600 bytes
LONGTEXT	String	1 to 104,857,600 characters
MEDIUMBLOB	Binary	1 to 104,857,600 bytes
MEDIUMTEXT	String	1 to 104,857,600 characters
SET	String	1 to 104,857,600 characters
SMALLINT	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0
TEXT	String	1 to 104,857,600 characters
TIME	Date/time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
TINYBLOB	binary	1 to 104,857,600 bytes
TINYINT	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0
TINYTEXT	String	1 to 104,857,600 characters
VARBINARY	Binary	1 to 104,857,600 bytes
VARCHAR	String	1 to 104,857,600 characters
YEAR	String	1 to 104,857,600 characters

INDEX

A

Amazon Aurora
  connection properties 8
  data types 20
  introduction 6
Amazon Aurora connector
  overview 6
Amazon Aurora Connector
  task and object types 7
Aurora connections
  overview 8

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Amazon Aurora 8

D

Data Integration community
  URL 4
data type reference
  overview 20

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

K

key range partition
  configuration 16
Key Range Partitioning 15

M

maintenance outages 5
mapping task
  example 17
mappings
  Aurora sources 14
  Aurora targets 16

S

status
  Informatica Intelligent Cloud Services 5
Synchronization task
  example 12
  sources 10
  targets 11
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4