Informatica®

Informatica® Cloud Data Integration

BigMachines Connector

Informatica Cloud Data Integration BigMachines Connector
October 2025

© Copyright Informatica LLC 2018, 2026

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2026-04-09

Table of Contents

Preface 6

Informatica Resources 6

- Informatica Documentation 6
- Informatica Intelligent Cloud Services web site 6
- Informatica Intelligent Cloud Services Communities 6
- Informatica Intelligent Cloud Services Marketplace 6
- Data Integration connector documentation 7
- Informatica Knowledge Base 7
- Informatica Intelligent Cloud Services Trust Center 7
- Informatica Global Customer Support 7

Chapter 1: Introduction to BigMachines Connector 8

Overview 8

Introduction to BigMachines 8

- Commerce Module 9
- Parts Module 10
- Data Tables Module 10
- Configuration Module 10
- Price Book Association Module 11

Supported Objects and Task Operations 11

Administration of BigMachines Connector 12

Chapter 2: BigMachines Connections 13

BigMachines Connections Overview 13

BigMachines connection properties 13

Configure proxy settings 15

- Configuring the Proxy Settings on Windows 15
- Configuring the Proxy Settings on Linux 17

Chapter 3: Synchronization Tasks with BigMachines Connector 19

Creating a BigMachines Synchronization Task 19

Data Filters 21

- Modules and Operators 22
- Advanced Data Filters 23

Generating Client-Stub for BigMachines WSDL using WS Import 23

- To Create Login JAR/WSDL 23
- Commands to generate a Quote.WSDL file 25
- Commands to generate a DataTables.WSDL file 25
- Commands to generate a Parts.WSDL file 25
- Commands to generate a Config.WSDL file 26

Commands to generate a PriceBookAssoc.WSDL file. 26
Adding Data Tables. 27
Sample Datatables.tbl file. 27
Creating Schema File. 28
Sample Schema file. 29
Getting the Schema Names. 29

Chapter 4: Frequently Asked Questions and Answers. 32

Frequently Asked Questions and Answers. 32

Index. 34

Preface

Use BigMachines Connector to learn how to read from or write to BigMachines by using Cloud Data Integration. Learn to create a BigMachines connection, develop and run synchronization tasks, mappings, and mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to BigMachines Connector

This chapter includes the following topics:

- Overview, 8
- Introduction to BigMachines, 8
- Supported Objects and Task Operations, 11
- Administration of BigMachines Connector, 12

Overview

You can use Data Integration BigMachines Connector to connect to BigMachines from Data Integration. Use BigMachines Connector to read data from and write data to BigMachines. You can use a BigMachines object as a source and a target in synchronization tasks.

You can use BigMachines Connector to integrate modules such as parts, transactions (quotes),and data tables. You can use Data Integration BigMachines Connector to configure on-premise or cloud applications such as Salesforce.

You can use the connector to extract custom objects such as data tables from BigMachines and load them to on-premise or cloud applications.

Introduction to BigMachines

BigMachines is a configure, price, and quote solution that the organization can use to capture orders for complex products, services, and generate quotes within minutes. You can use BigMachines to make CRM and ERP systems more efficient. You can use BigMachines to increase the quote throughput, reduce sales cycles, and get accurate data.

You can use Informatica Cloud Big Machines Connector to integrate parts, transactions such as quotes, attachments with on-premise or cloud Applications like Salesforce.

Data Integration Big Machines Connector supports extracting custom objects or Data Tables from BigMachines and loading them to on-premise or cloud applications.

BigMachines Connector supports the following modules:

- Commerce Module
- Parts Module
- Configuration Module
- Data Tables Module

Commerce Module

You can use commerce module to create transactions.

The Commerce module supports the following operations:

- Insert: You can use insert to insert a transaction.
  The insert operation supports Quote_Import_Attachment object. You can use Quote_Import_Attachment object to add and remove an attachment from a quote.
- Update: You can use update to add a line or update a quote.
- Delete: You can use delete to delete a quote. You can delete only line item from the quote.
- Query: You can use query to query details of multiple lines with the quote.
  The query operation supports Quote_Export_Attachment, QuoteV2, and QuoteV2LineItem objects. You can use Quote_Export_Attachment object to query an attachment from quote.

The Quotes module supports following features:

- Multi source and multi target
- Attachment import or export
- Batch insert based on external transaction ID
- Batch update
- Use of external keys file for two-way integration
- Batch processing for import attachments, where the file contains the input.

The insert operation in Quotes module generates a file named `externalkeys.csv`. If you want to integrate the transactions with any other system, you can use the file to insert quote into BigMachines. The file generates unique transaction ID and quote ID.

The following table displays sample externalkeys.csv files.

External_Transaction_Id	Transaction_Id	Quote_Id	External_LineItem_Id	LineItem_Id
1	3.26E+08	DEV298035		
1	3.26E+08	DEV298036		
1	3.26E+08	DEV298037		
1	3.26E+08	DEV298038		
1	3.26E+08	DEV298041		
1	3.26E+08	DEV298042		
6.57E+08	3.26E+08	DEV298043	null	

External_Transaction_Id	Transaction_Id	Quote_Id	External_LineItem_Id	LineItem_Id
9898889	3.26E+08	DEV298044	null	
78	3.26E+08	DEV298045	null	
69898	3.26E+08	DEV298046	null	
89	3.26E+08	DEV298047	null	

Parts Module

You can access the products by using Parts Module API. The transactions and configurations are based on the Parts module . You can use parts module to add a new product or modify the product.

The Parts module supports the following operations:

- Insert
- Update
- Delete
- Query
- Upsert
- Batch processing based on the part number

Data Tables Module

Data Tables module is custom table feature in BigMachines. You can design your own custom table (data table) and populate with data. Commit points defined by a deploy SOAP API call in BigMachines performs the write operation to push data in to data table. Big Machines Connector uses REST API to read data from Big Machines.

You can use BigMachines Connector to read large number of data rows.

The Data Table module supports the following operations:

- Insert
- Fetch
- Update
- Delete
- Upsert

Note: After the completion of insert operation the deploy function is implicitly called.

Configuration Module

You can use SOAP API to configure parts for an unsubmitted quote or to create a new quote. You can use configuration module to fetch data for materials, spares, and price of a part.

The Configuration module supports the following operations:

- Insert

- Deploy
- Configure
- Query
- Price
- BoM
- Spare

Note: You must select configure_deploy object as a target object to call the deploy function.

Price Book Association Module

You can use Price Book Association module to associate the price books with the part numbers. You can add new price book and product associations or change the existing associations. The Price Book Association module supports the following operations:

- Insert
- Fetch
- Update
- Delete
- Upsert

Supported Objects and Task Operations

You can access BigMachines objects when you connect to BigMachines.

The following table lists the objects and operations that BigMachines Connector supports.

Objects	Read	Insert	Update	Delete	Upsert	Data Preview	Lookup
Quote	Yes	Yes	Yes	Yes	NA	NA	NA
QuoteV2	Yes	NA	NA	NA	NA	NA	NA
QuoteV2LineItem	Yes	NA	NA	NA	NA	NA	NA
Quote_Attachment_Export	Yes	NA	NA	NA	NA	NA	NA
Quote_Attachment_Import	NA	Yes	NA	NA	NA	NA	NA
Parts	Yes	Yes	Yes	Yes	Yes	NA	NA
Data Tables	Yes	Yes	Yes	Yes	Yes	NA	NA
Configure	NA	Yes	NA	NA	NA	NA	NA
Price	Yes	NA	NA	NA	NA	NA	NA
BoM	Yes	NA	NA	NA	NA	NA	NA

Objects	Read	Insert	Update	Delete	Upsert	Data Preview	Lookup
Spare	Yes	NA	NA	NA	NA	NA	NA
Config_Deploy	NA	Yes	NA	NA	NA	NA	NA
PriceBookAssocs	Yes	Yes	Yes	Yes	Yes	NA	NA

Note: The objects of Data Tables module contain a prefix `DT_`. For example, `DT_abcd`.

Note: BigMachines Connector does not support the Object data type in the column fields for QuoteV2 and QuoteV2LineItem.

Administration of BigMachines Connector

Enable the BigMachines Connector before you create a BigMachines Connector.

To enable BigMachines Connector, contact Informatica Global customer support or an Informatica representative. After you enable the BigMachines Connector, the Secure Agent might take a few minutes to download.

Note: For more information about installing the Secure Agent, see Installing Informatica Secure Agent.

CHAPTER 2

BigMachines Connections

This chapter includes the following topics:

- BigMachines Connections Overview, 13
- BigMachines connection properties, 13
- Configure proxy settings, 15

BigMachines Connections Overview

You can use BigMachines Connector to connect to BigMachines from Data Integration. You can use BigMachines Connector to read data from and write data to BigMachines.

You can use BigMachines objects as sources and targets in synchronization tasks.

BigMachines connection properties

When you set up a BigMachines connection, you must configure the connection properties.

Important: BigMachines Connector is deprecated and has been moved to maintenance mode. Informatica intends to drop support in a future release. Informatica recommends that you use REST V2 Connector to access BigMachines.

The following table describes BigMachines connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.

Property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	Name of the runtime environment where you want to run tasks. Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Username	Username of the BigMachines account.
Password	Password of the BigMachines account.
DataTables Schema Path	Provide the path of the data table schema file. For example, `:...\...\BigMachines\config\Datatables.tbl` **Note:** The Data Table schema file name must contain a `.tbl` extension. The table header names mentioned in the schema file must have a separate `.sch` file in the same directory. The `.sch` files define field details of the table names present in the schema file.
WSDL Folder Path	Provide the WSDL file path. **Note:** If you do not specify WSDL URL in the connection properties, the default WSDL file path is selected as WSDL URL. The default WSDL URL file path is: `<Secure Agent installation directory>\downloads\<latest connector zip package>\package\plugins\<Plugin ID>\<WSDL>\`
Endpoint URL	Path of the BigMachines endpoint URL.
Attribute Control File Path	Provide the attribute control path. The attribute control path controls the metadata. The default control file path is `<Secure Agent installation directory>\downloads\<latest connector zip package>\package\plugins\`
Enable Logging	Select the property to enable logging.
PagingSize	Number of records to fetch for each request.
Transaction Schema Name	Name of the REST document to fetch a transaction.
Transaction Line Item Schema Name	Name of the REST document to fetch the transaction line item details.
Batch Size	Specify the batch size to perform a bulk upsert operation on a Data Tables object.

Configure proxy settings

If your organization uses an outgoing proxy server to connect to the Internet, you can use the agent to connect to Informatica Intelligent Cloud Services through the proxy server.

You can configure the Secure Agent and serverless runtime environment to use the proxy server on Windows and Linux. You can use the unauthenticated or authenticated proxy server.

To configure the proxy settings for the serverless runtime environment, see *Runtime Environments* in the Administrator help.

Configuring the Proxy Settings on Windows

To configure the proxy server settings for the Secure Agent on a Windows machine, you must configure the proxy server settings through the Secure Agent Manager and the JVM options of the Secure Agent.

Contact your network administrator for the correct proxy settings.

1. Click **Start** > **All Programs** > **Informatica Cloud Secure Agent** > **Informatica Cloud Secure Agent** to launch the Secure Agent Manager.

   The Secure Agent Manager displays the Secure Agent status.
2. Click **Proxy** in the Secure Agent Manager page.
3. Click **Use a Proxy Server** to enter proxy server settings.
4. Configure the following proxy server details:

Field	Description
Proxy Host	Required. Host name of the outgoing proxy server that the Secure Agent uses.
Proxy Port	Required. Port number of the outgoing proxy server.
User Name	User name to connect to the outgoing proxy server.
Password	Password to connect to the outgoing proxy server.

5. Click **OK**.
6. Log in to Informatica Intelligent Cloud Services.
7. Open Administrator and select **Runtime Environments**.
8. Select the Secure Agent for which you want to configure a proxy server.
9. On the upper-right corner of the page, click **Edit**.
10. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
    - To use an unauthenticated proxy server, add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:

Parameter	Description
-Dhttp.proxyHost=	Host name of the outgoing HTTP proxy server.
-Dhttp.proxyPort=	Port number of the outgoing HTTP proxy server.

Parameter	Description
-Dhttps.proxyHost=	Host name of the outgoing HTTPS proxy server.
-Dhttps.proxyPort=	Port number of the outgoing HTTPS proxy server.

For example,

```
JVMOption1=-Dhttp.proxyHost=<proxy_server_hostname>
JVMOption2=-Dhttp.proxyPort=8081
JVMOption3=-Dhttps.proxyHost=<proxy_server_hostname>
JVMOption4=-Dhttps.proxyPort=8081
```

- To use an authenticated proxy server, add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:

Parameter	Description
-Dhttp.proxyHost=	Host name of the outgoing HTTP proxy server.
-Dhttp.proxyPort=	Port number of the outgoing HTTP proxy server.
-Dhttp.proxyUser=	User name for the HTTP proxy server.
-Dhttp.proxyPassword=	Password for the user.
-Dhttps.proxyHost=	Host name of the outgoing HTTPS proxy server.
-Dhttps.proxyPort=	Port number of the outgoing HTTPS proxy server.
-Dhttps.proxyUser=	User name for the HTTPS proxy server.
-Dhttps.proxyPassword=	Password for the user.
-Djdk.http.auth.tunneling.disabledSchemes=	Specify an empty string ("") to enable tunneling using basic authentication for a HTTPS proxy server. For more information about enabling basic authentication for a HTTPS proxy server, click the following URL: http://www.oracle.com/technetwork/java/javase/8u111-relnotes-3124969.html

For example,

```
JVMOption1=-Dhttp.proxyHost=<proxy_server_hostname>
JVMOption2=-Dhttp.proxyPort=8008
JVMOption3=-Dhttp.proxyUser=adminuser
JVMOption4=-Dhttp.proxyPassword=password
JVMOption5=-Dhttps.proxyHost=<proxy_server_hostname>
JVMOption6=-Dhttps.proxyPort=8008
JVMOption7=-Dhttps.proxyUser=adminuser
JVMOption8=-Dhttps.proxyPassword=password
```

```
JVMOption9=-Djdk.http.auth.tunneling.disabledSchemes=""
```

Note: You can configure only five **JVMOption** fields in the **System Configuration Details** section. To configure the remaining parameters, you must add the **JVMOption** fields in the **Custom Configuration Details** section. In the **Custom Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service, add the **JVMOption** fields, and specify the remaining parameters and appropriate values for each parameter.

11. Click **Save**.

    The Secure Agent restarts to apply the settings.

Configuring the Proxy Settings on Linux

You can update the proxy server settings defined for the Secure Agent from the command line. To configure the proxy server settings for the Secure Agent on a Linux machine, you must use a shell command that updates the `proxy.ini` file and configure the JVM options of the Secure Agent.

Contact your network administrator for the correct proxy settings.

1. Navigate to the following directory:

   ```
   <Secure Agent installation directory>/apps/agentcore
   ```

2. To update the `proxy.ini` file, enter the following command:

   ```
   consoleAgentManager.bat configureProxy <proxy host> <proxy port> <proxy user name> <proxy password>
   ```

3. Log in to Informatica Intelligent Cloud Services.
4. Open Administrator and select **Runtime Environments**.
5. Select the Secure Agent for which you want to configure a proxy server.
6. On the upper-right corner of the page, click **Edit**.
7. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
   - To use an unauthenticated proxy server, add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:

Parameter	Description
-Dhttp.proxyHost=	Host name of the outgoing HTTP proxy server.
-Dhttp.proxyPort=	Port number of the outgoing HTTP proxy server.
-Dhttps.proxyHost=	Host name of the outgoing HTTPS proxy server.
-Dhttps.proxyPort=	Port number of the outgoing HTTPS proxy server.

For example,

```
JVMOption1=-Dhttp.proxyHost=<proxy_server_hostname>
JVMOption2=-Dhttp.proxyPort=8081
JVMOption3=-Dhttps.proxyHost=<proxy_server_hostname>
JVMOption4=-Dhttps.proxyPort=8081
```

- To use an authenticated proxy server, add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:

Parameter	Description
-Dhttp.proxyHost=	Host name of the outgoing HTTP proxy server.
-Dhttp.proxyPort=	Port number of the outgoing HTTP proxy server.
-Dhttp.proxyUser=	User name for the HTTP proxy server.
-Dhttp.proxyPassword=	Password for the user.
-Dhttps.proxyHost=	Host name of the outgoing HTTPS proxy server.
-Dhttps.proxyPort=	Port number of the outgoing HTTPS proxy server.
-Dhttps.proxyUser=	User name for the HTTPS proxy server.
-Dhttps.proxyPassword=	Password for the user.
-Djdk.http.auth.tunneling.disabledSchemes=	Specify an empty string (`""`) to enable tunneling using basic authentication for a HTTPS proxy server. For more information about enabling basic authentication for a HTTPS proxy server, click the following URL: http://www.oracle.com/technetwork/java/javase/8u111-relnotes-3124969.html

For example,

```
JVMOption1=-Dhttp.proxyHost=<proxy_server_hostname>
JVMOption2=-Dhttp.proxyPort=8008
JVMOption3=-Dhttp.proxyUser=adminuser
JVMOption4=-Dhttp.proxyPassword=password
JVMOption5=-Dhttps.proxyHost=<proxy_server_hostname>
JVMOption6=-Dhttps.proxyPort=8008
JVMOption7=-Dhttps.proxyUser=adminuser
JVMOption8=-Dhttps.proxyPassword=password
JVMOption9=-Djdk.http.auth.tunneling.disabledSchemes=""
```

Note: You can configure only five **JVMOption** fields in the **System Configuration Details** section. To configure the remaining parameters, you must add the **JVMOption** fields in the **Custom Configuration Details** section. In the **Custom Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service, add the **JVMOption** fields, and specify the remaining parameters and appropriate values for each parameter.

8. Click **Save**.

   The Secure Agent restarts to apply the settings.

CHAPTER 3

Synchronization Tasks with BigMachines Connector

This chapter includes the following topics:

- Creating a BigMachines Synchronization Task, 19
- Data Filters, 21
- Generating Client-Stub for BigMachines WSDL using WS Import, 23
- Adding Data Tables, 27
- Creating Schema File, 28

Creating a BigMachines Synchronization Task

To insert data to BigMachines, create a Data Synchronization task.

To set up a Data Synchronization task in Informatica Cloud, perform the following tasks:

1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Tasks**, and click **Create** to create a synchronization task.


   The **Definition** tab appears.
3. Configure the following fields on the **Definition** tab:

Field	Description
Task Name	Name of the synchronization task. The name of a synchronization task must be unique within the organization. A synchronization task name can contain alphanumeric characters, spaces, and the following special characters:_ . + -. A synchronization task name is not case sensitive.
Description	Description of the synchronization task. Maximum length is 255 characters.
Task Operation	Select Insert.


4. Click **Next**.

   The **Source** tab appears.


5. Select the source connection, source type, and source object for the task, and click **Next**.

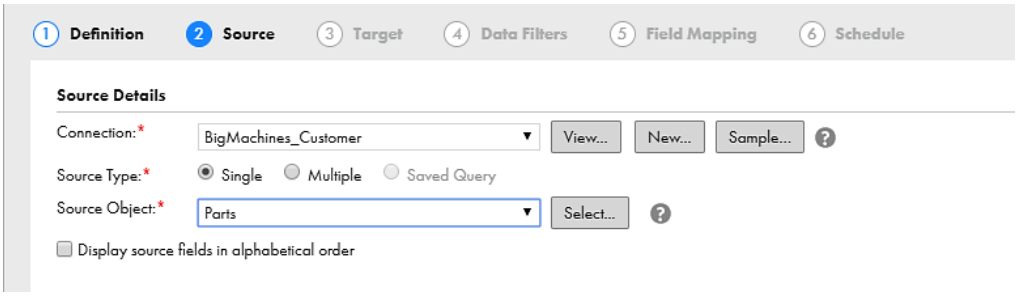

6. Select the target connection, target type, and target object for the task, and click **Next**.

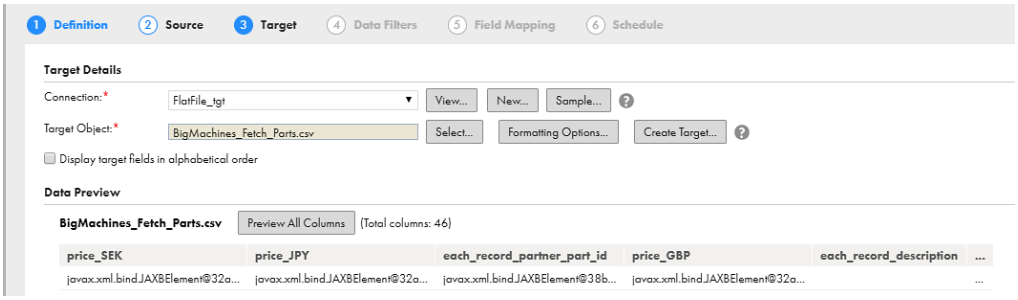

7. To assign filters to a task, see "Data Filters" on page 21. To select all rows, click **Data Filters**, and then click **Next**.
8. In the **Field Mapping** tab, map the source fields to the appropriate target fields.

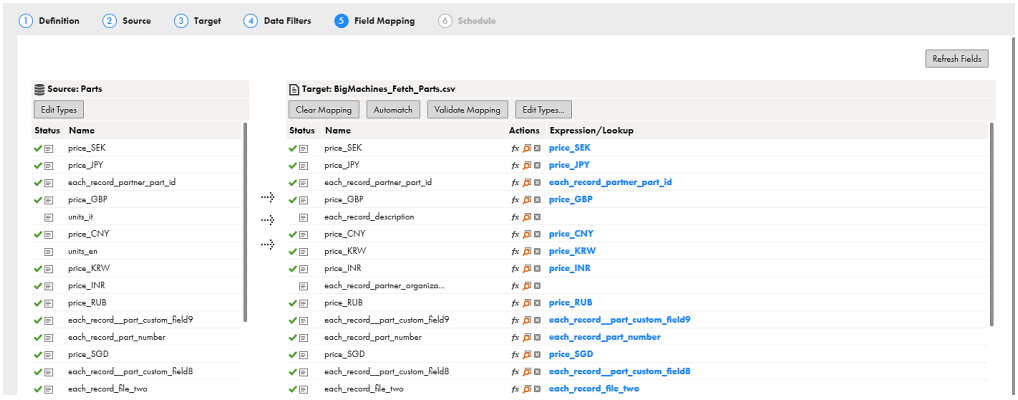

   a. Click **Edit Types** in the Source column to edit the precision and scale of the source objects. Note that this option is not available for all source types.
   b. Click **Automatch** to match source and target fields with similar names.
   c. Click **Edit Types** in the Target column to edit the data type, precision, and scale of the target object.
   d. Select a source field and drag it to the target field to map the source and target fields. Repeat for all the fields that you want to map.
   e. Click the **Add or Edit Expression** icon to define a field expression to transform data.
   f. Click **Validate Mapping** to validate all the field mappings.
   g. Click **Clear Mapping** to clear all the field mappings.

9. Click **Next** to configure a schedule and advanced options. Perform any of the following steps based on your requirements.
    a. Click **Run this task on schedule** and specify the schedule you want to use.
    b. Configure the email notification options.
    c. Configure advanced options for the task.
    d. Configure the advanced source and target properties.
    e. Specify the execution mode.
10. Click **Save** and then **Finish**.
11. From the **Explore** page, select the task, and click **Actions** > **Run**.

    In Monitor, you can monitor the status of the logs after you run the task.


Data Filters

You can use data filters to fetch specific data of a particular object. The synchronization task processes the data based on the filter field assigned to the object. Informatica Cloud BigMachines Connector supports basic filters.

You can use all the fields present in data tables object as data filters. You can create custom filter fields for parts and data tables object. When you setup the synchronization task for Quote object, you must apply the filter field _FLT_TransactionFileName. The transaction file must contain a column with header name `transaction_id`. Filters are not mandatary for QuoteV2 and QuoteV2LineItem objects.
Perform the following steps to use data filters:


1. Select **Data Filters** tab in the synchronization task wizard.

    The **Data Filters** tab appears.
    The following image shows the **Data Filters** tab:

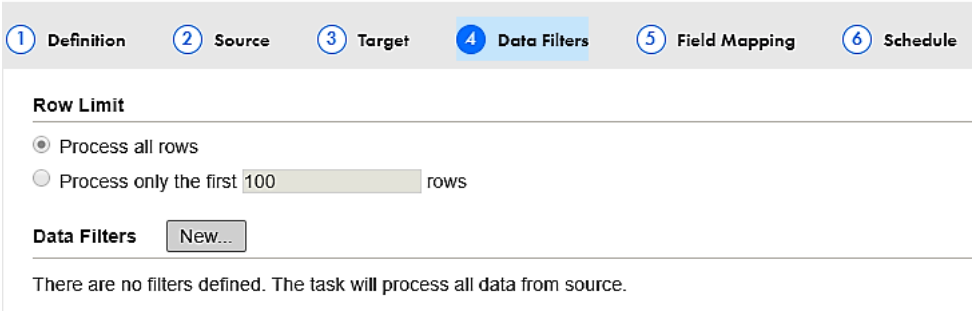

2. Select **New**.

The **Data Filter** dialog box appears. The following image shows the **Data Filter** page:

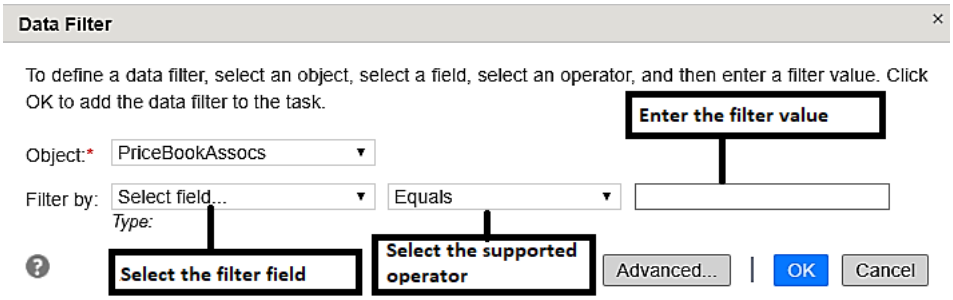

3. Specify the following details in the **Data Filter** page:

Field Type	Description
Object	Select object for which you want to assign filter fields.
Filter By	Select the Filter Field.
Operator	Select the corresponding operator.
Filter Value	Enter the filter value.

4. Click **OK**.

Note: The data filters support only Equals operator for the objects of Quote module.

Modules and Operators

The following table describes the operators that Bigmachines modules support:

Modules	Objects	Supported Operators
Transaction	Quote_ExportAttachment, QuoteV2, QuoteV2LineItem	Equals Equals, notEquals, greaterThan, lessThan, greaterOrEquals, lessOrEquals, contains
Parts	Parts	Equals, notEquals, contains
Data Tables	Data Tables	Equals, notEquals, greaterThan, lessThan, greaterOrEquals, lessOrEquals, contains
Configuration	BoM	Equals
	Spare	Equals
	Price	Equals

Note: The supported operators are valid only for query or fetch operation.

Advanced Data Filters

You can use advanced data filter to run search queries that contain complex filter expressions. You can configure advanced filters for Data Tables objects, QuoteV2, and QuoteV2LineItem object.

Perform the following steps to configure advanced data filters:

1. Select **Advanced** in the **Data Filter** tab.

   The Advanced Data Filter dialog box appears.
2. Provide the Filter Expression. Use MongoDB format to configure advanced data filter. For more information about MongoDB format, see https://docs.mongodb.com/manual/tutorial/query-documents.
3. Click OK.

Generating Client-Stub for BigMachines WSDL using WS Import

A Stub is a jar file. For example, `BigMachines-<ModuleName>.jar`.

The following table displays the file name format you need to follow to create the WSDL files for different services:


Service	File name
SecurityService	Login.wsdl
PartService	Parts.wsdl
CommerceService	Quote.wsdl
DataTablesService	DataTables.wsdl
ConfigurationService	Configure.wsdl
PriceBookAssocsService	PriceBookAssocs.wsdl

To Create Login JAR/WSDL

Perform the following steps to create a JAR/WSDL login

1. Go to jdk1.7.0_25 download page.

2. Download the Java Development Kit(JDK) that is compatible with your system. The following image shows the Java Develoment Kit(JDK):

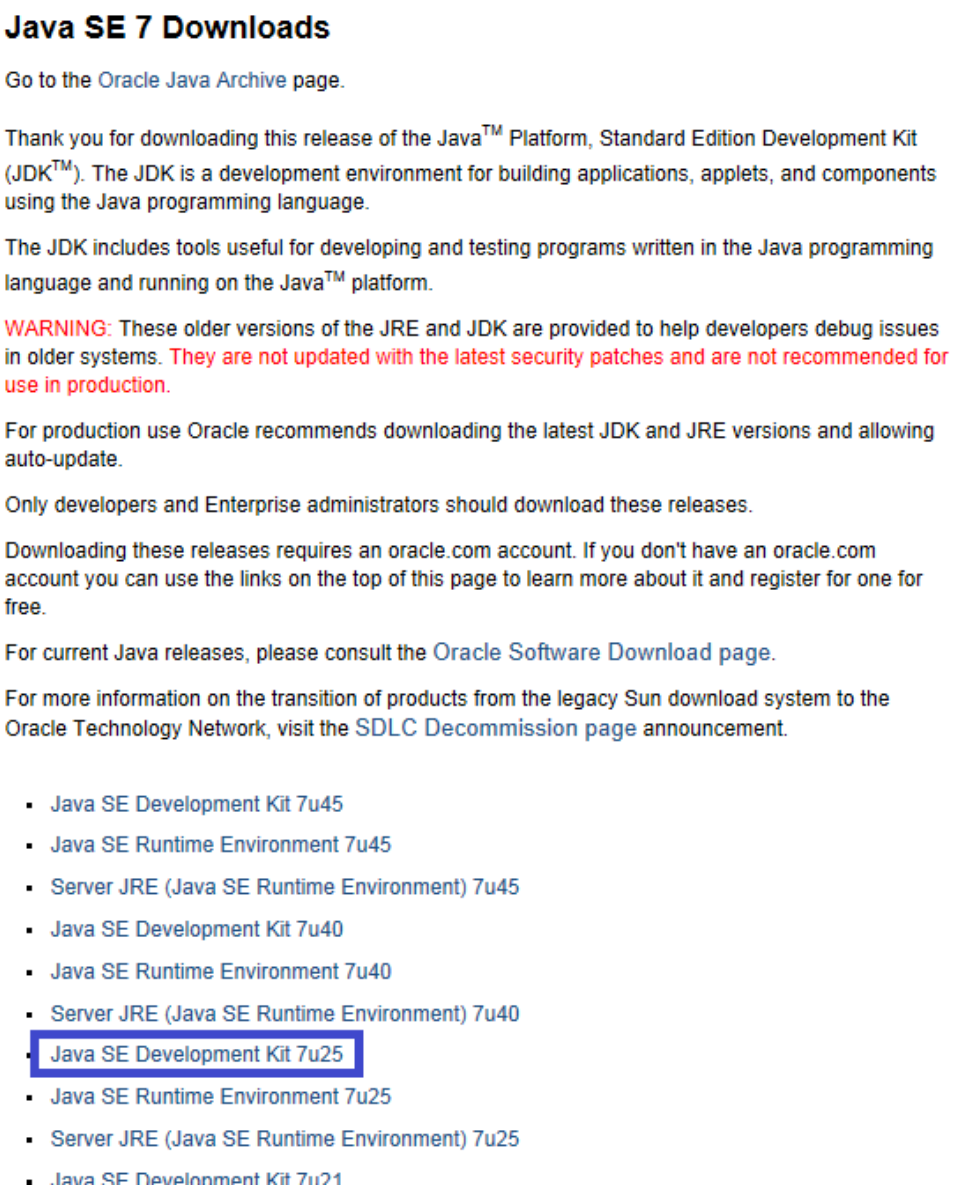

Java SE 7 Downloads

Go to the Oracle Java Archive page.

Thank you for downloading this release of the Java™ Platform, Standard Edition Development Kit (JDK™). The JDK is a development environment for building applications, applets, and components using the Java programming language.

The JDK includes tools useful for developing and testing programs written in the Java programming language and running on the Java™ platform.

WARNING: These older versions of the JRE and JDK are provided to help developers debug issues in older systems. They are not updated with the latest security patches and are not recommended for use in production.

For production use Oracle recommends downloading the latest JDK and JRE versions and allowing auto-update.

Only developers and Enterprise administrators should download these releases.

Downloading these releases requires an oracle.com account. If you don't have an oracle.com account you can use the links on the top of this page to learn more about it and register for one for free.

For current Java releases, please consult the Oracle Software Download page.

For more information on the transition of products from the legacy Sun download system to the Oracle Technology Network, visit the SDLC Decommission page announcement.

- Java SE Development Kit 7u45
- Java SE Runtime Environment 7u45
- Server JRE (Java SE Runtime Environment) 7u45
- Java SE Development Kit 7u40
- Java SE Runtime Environment 7u40
- Server JRE (Java SE Runtime Environment) 7u40
- Java SE Development Kit 7u25
- Java SE Runtime Environment 7u25
- Server JRE (Java SE Runtime Environment) 7u25
- Java SE Development Kit 7u21

3. Install JDK.
4. Run the following commands to create a BigMachines stub

   You can run the command in the command prompt or run it as a batch file on the win batch file.

```
set JAVA_HOME= C:\Program Files\Java\jdk1.7.0_25\bin
set classpath=%JAVA_HOME%
set PATH=%JAVA_HOME%;%PATH%
mkdir C:\Applications\BigMachines\MetaData_Jars\BM
mkdir C:\Applications\BigMachines\MetaData_Jars\classes
wsimport C:\Applications\BigMachines\MetaData_Jars\Login.wsdl -B-XautoNameResolution
-XadditionalHeaders -Xnocompile -d C:\Applications\BigMachines\MetaData_Jars\BM -
keep -p com.bigmachines.login.api
javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com
\bigmachines\login\api\*.java  C:\Applications\BigMachines\MetaData_Jars\BM\com
```

```
\bigmachines\login\api\runtime\*.java -d C:\Applications\BigMachines\MetaData_Jars
\classes
jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-login.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

If the commands run successfully, the `BigMachines-login.jar` is created.

5. Stop the Secure Agent.
6. Copy and replace the `BigMachines-login.jar` in the following locations:
   - `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \rdtm\javalib\<Plugin ID>`
   - `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \plugins\<Plugin ID>`
7. Restart the Secure Agent.

Repeat this procedure to generate other JAR or WSDL files and replace only the set of commands applicable to generate different WSDL files. For more information, see "To Create Login JAR/WSDL" on page 23,

Note: Delete the content of `C:\temp\BM` and `C:\temp\classes` before creating the jar for next WSDL.

Commands to generate a Quote.WSDL file

The following code snippet displays the commands you must use to generate a Quote.WSDL file:

```
wsimport C:\Applications\BigMachines\MetaData_Jars\Quote.wsdl -B-XautoNameResolution -
XadditionalHeaders -Xnocompile -d C:\Applications\BigMachines\MetaData_Jars\BM -keep -p
com.bigmachines.quote.api -b C:\Applications\BigMachines\MetaData_Jars\bm.jxb

javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\quote\api\*.java C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines\quote\api
\runtime\*.java -d  C:\Applications\BigMachines\MetaData_Jars\classes

jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-quote.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

Commands to generate a DataTables.WSDL file

The following code snippet displays the commands you must use to generate a DataTables.WSDL file:

```
wsimport C:\Applications\BigMachines\MetaData_Jars\DataTables.wsdl -B-
XautoNameResolution -XadditionalHeaders -Xnocompile -d C:\Applications\BigMachines
\MetaData_Jars\BM -keep -p com.bigmachines.datatable.api

javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\datatable\api\*.java C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\datatable\api\runtime\*.java -d C:\Applications\BigMachines\MetaData_Jars\classes

jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-datatable.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

Commands to generate a Parts.WSDL file

The following code snippet displays the commands you must use to generate a Parts.WSDL file:

```
wsimport C:\Applications\BigMachines\MetaData_Jars\Parts.wsdl -B-XautoNameResolution -
XadditionalHeaders -Xnocompile -d
C:\Applications\BigMachines\MetaData_Jars\BM -keep -p com.bigmachines.parts.api

javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\parts\api\*.java C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines\parts\api
\runtime\*.java -d C:\Applications\BigMachines\MetaData_Jars\classes
```

```
jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-parts.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

Commands to generate a Config.WSDL file

The following code snippet displays the commands you must use to generate a Config.WSDL file:

```
wsimport C:\Applications\BigMachines\MetaData_Jars\Configure.wsdl -B-XautoNameResolution
-XadditionalHeaders -Xnocompile -d C:\Applications\BigMachines\MetaData_Jars\BM -keep -p
com.bigmachines.configure.api

javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\configure\api\*.java C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\configure\api\runtime\*.java -d  C:\Applications\BigMachines\MetaData_Jars\classes

jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-config.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

Commands to generate a PriceBookAssoc.WSDL file


The following code snippet displays the commands you must use to generate a PriceBookAssoc.WSDL file:

```
wsimport C:\Applications\BigMachines\MetaData_Jars\PriceBookAssocs.wsdl -B-
XautoNameResolution -XadditionalHeaders -Xnocompile -d
C:\Applications\BigMachines\MetaData_Jars\BM -keep -p com.bigmachines.pricebookassocs.api

javac -cp .;"%classpath%" C:\Applications\BigMachines\MetaData_Jars\BM\com\bigmachines
\pricebookassocs\api\*.java -d C:\Applications\BigMachines\MetaData_Jars\classes

jar -cvf C:\Applications\BigMachines\MetaData_Jars\BigMachines-pricebookassocs.jar -C
C:\Applications\BigMachines\MetaData_Jars\classes com
```

The following image shows the location of all the WSDL files.

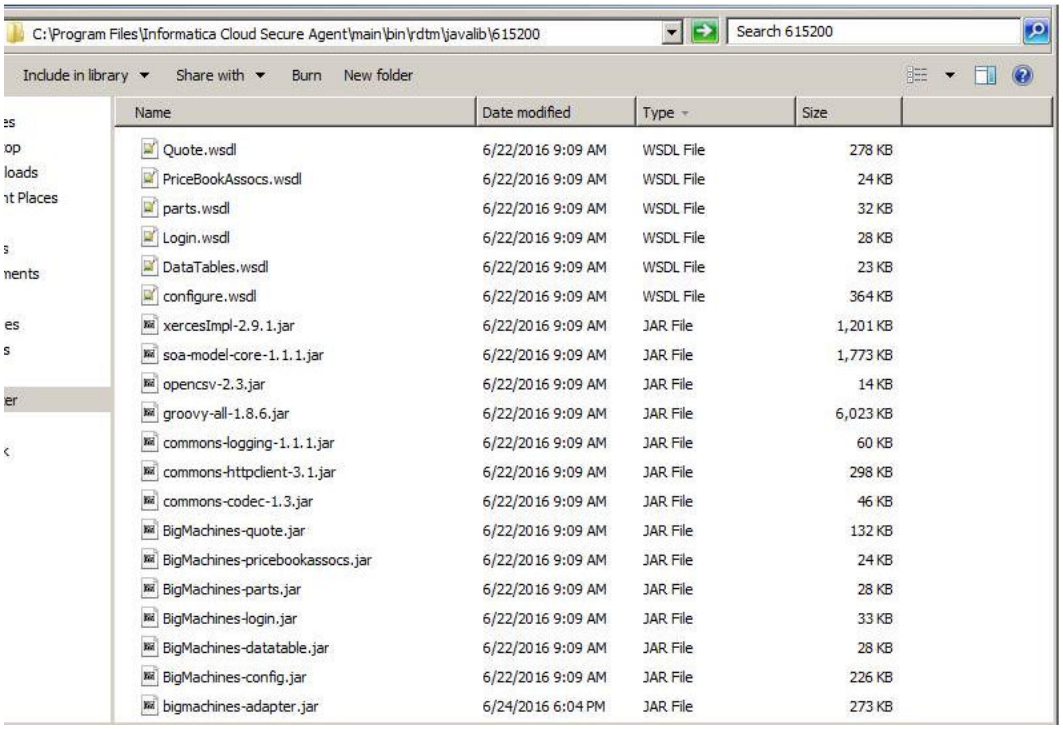


Adding Data Tables

Perform the following steps to add Data Tables in a BigMachines source or target in a synchronization task:

1. Specify the `Datatables.tbl` file name in **Data Tables Schema Path** field while creating a BigMachines connection.
2. The default `Datatables.tbl` file saves in the following directory. `C:\a_IOD\Files\BigMachines\Datatables.tbl`

   You must create a `Datatables.tbl` in a specific format.

   The following image shows the `Datatables.tbl` file.

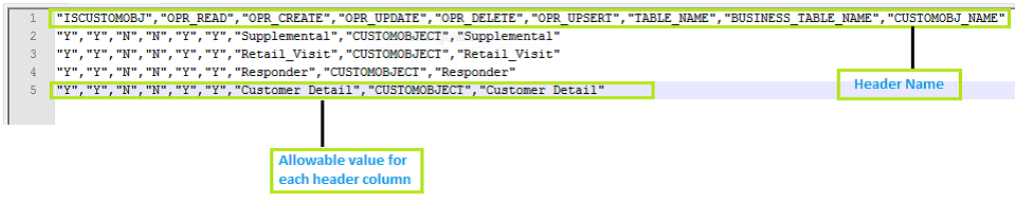

   You can use the following table definitions to create `Datatables.tbl`.

Header Name	Allowable Value	Remarks
ISCUSTOMOBJ	Y	Only Y is supported in the current release.
OPR_READ	Y,N, Any Character	When you enter Y, the table is displayed in source tab. When you enter any other character, the table does not display in source tab.
OPR_CREATE	Y, N	Insert (create) task operation is not supported for Data Table.
OPR_UPDATE	Y, N	Update task operation is not supported for Data Table.
OPR_DELETE	Y, N, Any Character	Enter Y to support the delete task operation.
OPR_UPSERT	Y,N, Any Character	Enter Y to support the upsert task operation.
TABLE_NAME	<object Name>	Object name as shown in Data Integration UI.
OBJECT_TYPE	CUSTOMOBJECT	Enter the CUSTOMOBJECT as static value, same as table_name.
CUSTOMOBJ_NAME	<object Name>	Custom object, mostly same as table name.

Sample Datatables.tbl file

Perform the following steps to create a sample `Datatables.tbl` file.

1. Copy and paste the following code sample in a blank text file.


```
"ISCUSTOMOBJ","OPR_READ","OPR_CREATE","OPR_UPDATE","OPR_DELETE","OPR_UPSERT","TABLE_NAME","BUSINESS_TABLE_NAME","CUSTOMOBJ_NAME"
"Y","Y","N","N","Y","Y","Supplemental","Supplemental","Supplemental"
"Y","Y","N","N","Y","Y","Retail_Visit","Retail_Visit","Retail_Visit"
```

2. Name the file as `Datatables.tbl`.
3. Click **Save**.

Creating Schema File

You must create schema file to define each Data Table added in `Datatables.tbl` file.

You can use schema file to configure each Datatable parameter. The schema file name must be similar to the value mentioned in the TABLE_NAME Field of `Datatables.tbl` file. You must create a schema file in the format shown below:

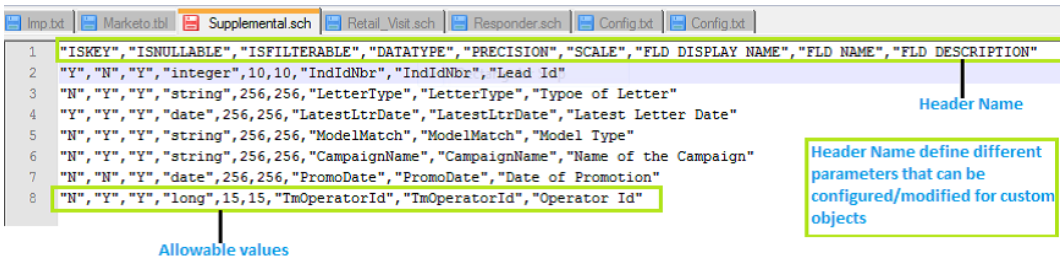

Header Name	Allowable Value	Remarks
ISKEY	Y,N, Any Character	When you type Y, the Key Field is active. Define Key field, when you want to add Upsert operation for Datatable.
ISNULLABLE	Y,N, Any Character	When you type Y, the field is defined as mandatory or non-nullable in Informatica Cloud DSS Task.
ISFILTERABLE	Y,N, Any Character	When you type Y, the field is displayed in the data filters tab for the selected Datatable.
DATATYPE	Integer, string, date, Boolean, long, float	Any data type mentioned in the 'Allowable Value' is supported in the schema file.
PRECISION	<Valid Number>	Set the precision required using this field. Note: Precision for string data type is variable, while for other data types it is constant.
SCALE	<Valid Number>	The scale value should be equal to precision value.
FLD_DISPLAY_NAME	<Characters A to Z or a to z. Only special character allowed is Underscore.>	The field name that is visible in Informatica Cloud UI. Alphabets (both Caps and small) are allowed. Only underscore '_' special character is allowed.
FLD_NAME	<Any MS Latin1 Characters>	This name is used for RPC call to the Webservice Endpoint.
FLD_DESCRIPTION	-	Field description

Sample Schema file

Perform the following steps to create a sample schema file.

1. To create a schema file copy and paste the following sample data in a blank text file:

```
ISKEY","ISNULLABLE","ISFILTERABLE","DATATYPE","PRECISION","SCALE","FLD_DISPLAY_NAME",
"FLD_NAME","FLD_DESCRIPTION"
"Y","N","Y","integer",10,10,"IndIdNbr","IndIdNbr","Lead Id"
"N","Y","Y","string",256,256,"LetterType","LetterType","Typoe of Letter"
"Y","Y","Y","date",256,256,"LatestLtrDate","LatestLtrDate","Latest Letter Date"
"N","Y","Y","string",256,256,"ModelMatch","ModelMatch","Model Type"
"N","Y","Y","string",256,256,"CampaignName","CampaignName","Name of the Campaign"
"N","N","Y","date",256,256,"PromoDate","PromoDate","Date of Promotion"
"N","Y","Y","long", 15, 15,"TmOperatorId","TmOperatorId","Operator Id"
```


2. Name the file with the file name extension `.SCH`.
3. Click **Save**.

Getting the Schema Names

Perform the following steps to get the schema names for quoteV2 and quoteV2LineItem using BigMachines portal:

1. Go to the **BigMachines** portal.

   The following image displays the BigMachines portal page:

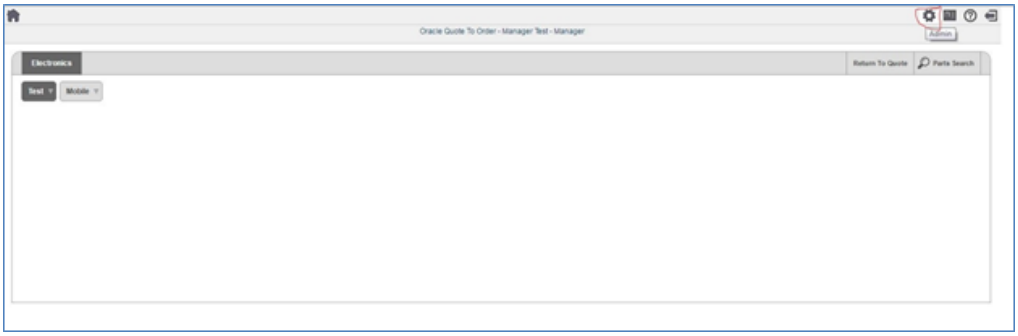

2. Click **Admin**.

   The Administration platform page appears.
   The following image displays the Adminstration platform page:




3. Select **Interface Catalog** from **Integration Platform**.
4. Select **InterfaceType** as REST and select the Interface name where the transactions are present. The following image shows the Interface catalog:




5. Double click on the Interface Name that you selected in the previous step.

The JSON response opens in the new window. The following image displays the JSON response page:

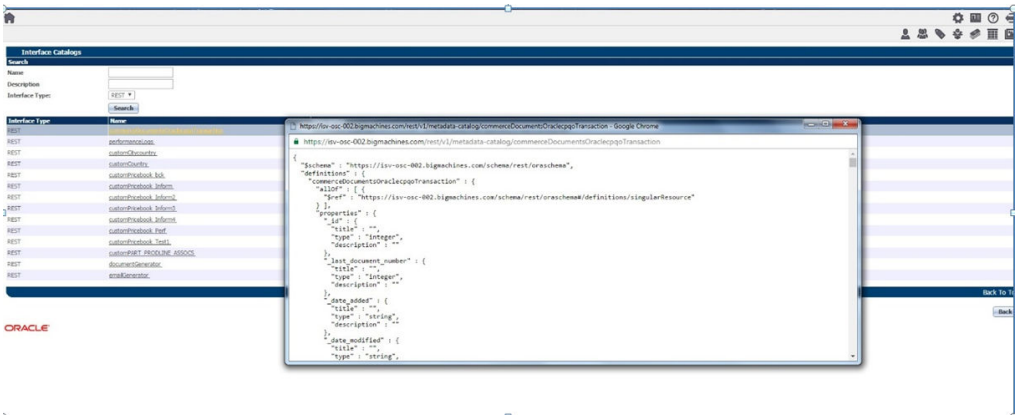

6. Search for the `"rel" : "child"` keyword in the JSON page. The following image displays the JSON response page:

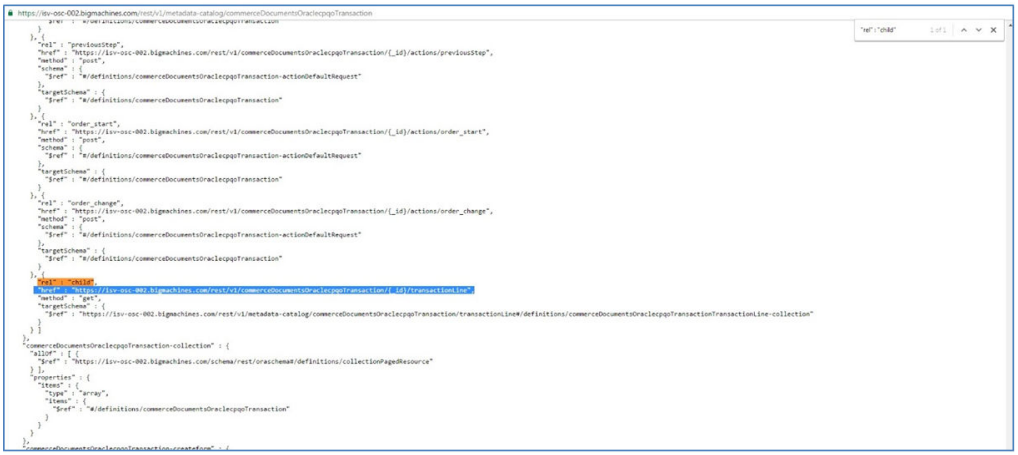

7. Find the **Transaction Schema Name** and **Transaction Line Item Schema Name** by using the href value.
   - The name that is present between `/rest/v1/` and `/{_id}` is the **transactionSchemaName**.
   - The name which is present after `/{_id/}`is the **transactionLineItemSchemaName**.

   Then, **commerceDocumentsOraclecpqoTransaction** is the value for **Transaction Schema Name** connection attribute and **transactionLine** is the value for **Transaction Line Item Schema Name** connection attribute.

CHAPTER 4

Frequently Asked Questions and Answers

This chapter includes the following topic:

- Frequently Asked Questions and Answers, 32

Frequently Asked Questions and Answers

1. What are the object operations supported by Quote module of BigMachines?

   Quote module supports the following object operations:

   - Insert :Inserts a new transaction id and adds transaction line item to transaction id.
   - Update: Updates the transactions and adds line Item to a transaction
   - Delete: Deletes the line item from a transaction.
   - Query: Queries the details of multiple lines with the quote.
2. What are the different types of attachments supported by the quote module?

   Quote module supports the following attachments:

   Export_Attachment: The file is available in a `port/field` in base64.

   Import_Attachment: You can provide file in a `port/field` in base64 format.
3. How to set up a delete task operation?

   To setup a **delete** task operation for Quote module, you must provide **TransactionId** and **Transaction_LineItem** in target tab.

   The delete task operation is based on Transaction_LineItemsNo and TransactionId. If you provide the transaction_LineItemsNo and transactionID the information, the data is deleted.
4. How to execute insert operation in Commerce Module?

   When you create a quote an entry is made in a new file the path mentioned in connection parameters. The file contains following fields:

   - ExternalTransactionId
   - ExternalLineItemId
   - TransactionId

- QuoteId
- LineItemId

5. Why do you need to generate custom Client-Stub for BigMachine Data integration?

   Client Stub Jar is a WSDL based jar. You can customizes the WSDL for internal purpose. It is recommended to regenerate the client-stub, to fetch the metadata from the appropriate endpoint.

6. How to configure control file path in the connection attribute?

   The control file path generates metadata files. Plugin folder contains all the metadata files the control path generates. If you want to disable cords, you can use the plugin folder.

7. Why do you need the config file that Data integration Task generates?

   The config file controls the metadata. For example, If you define 1000 fields in the WSDL definition and if you want to display 100 fields, you can set the displaystatus field to false.Displaystatus field will display 100 fields.

8. How do you make manual changes to WSDL?

   You can use the following code sample to make manaul changes to WSDL:

   ```
   In DataTables.wsdl,
   add the <xsd:any maxOccurs="unbounded"/> statement after
   ```

   ```
   In Parts.wsdl,
   define the dataType for the below elemet @ line no 356
   <xsd:element maxOccurs="1" minOccurs="0" name="last_integration_time"
   nillable="true" type="xsd:dateTime"/>


   In configure.wsdl,
   Define the following complex element:
   <xsd:complexType name="ConfigureAttributeType">
   <xsd:all>
   <xsd:element maxOccurs="1" minOccurs="1"  name="value" nillable="true"
   type="xsd:string"/>
   </xsd:all>
   <xsd:attribute name="_variableName" type="xsd:string"/>
   <xsd:attribute name="type" type="xsd:string"/>
   </xsd:complexType>
   <xsd:complexType name="ConfigureAttributesType">
   <xsd:sequence>
   <xsd:element maxOccurs="unbounded" minOccurs="0" name="attribute" nillable="true"
   type="bmxsd:ConfigureAttributeType"/>
   </xsd:sequence>
   </xsd:complexType>
   ```

   Call this element in all the below complex elements:

   - Configure
   - Price
   - Spare
   - Bom

9. Does QuoteV2 and QuoteV2LineItem support the Object data type?

   No. BigMachines Connector does not support the Object data type in the column fields for QuoteV2 and QuoteV2LineItem.

INDEX

B

BigMachines
  connection properties 13

C

Cloud Application Integration community
  URL 6
Cloud Developer community
  URL 6
connections
  BigMachines 13

D

Data Integration community
  URL 6

I

Informatica Global Customer Support
  contact information 7
Informatica Intelligent Cloud Services
  web site 6

L

Linux
  configuring proxy settings 17

M

maintenance outages 7

P

proxy settings
  configuring on Linux 17
  configuring on Windows 15

S

status
  Informatica Intelligent Cloud Services 7
system status 7

T

trust site
  description 7

U

upgrade notifications 7

W

web site 6
Windows
  configuring proxy settings 15