Informatica® Cloud Data Integration

Coupa Connector

Informatica Cloud Data Integration Coupa Connector
October 2025

© Copyright Informatica LLC 2015, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-05-12

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Coupa Connector 6

Coupa objects 6

Supported Objects: When Coupa Connector Is Used as Source 7

Coupa Targets 11

Enabling Coupa Connector 11

Chapter 2: Coupa Connections 12

Coupa connection properties 12

Creating a Coupa Connection 13

Chapter 3: Synchronization Tasks with Coupa Connector 14

Coupa Source Properties 14

- Data Filters 14
- Defining the Filterable Fields 16

Coupa Connector Target Properties 18

Coupa Connector Synchronization Example 18

Custom Objects and Custom Fields in Coupa 20

Handling Multiple Records in Coupa 21

Chapter 4: Mappings and tasks for Coupa 24

Coupa sources in mappings 24

Chapter 5: Troubleshooting Coupa Connector 26

Troubleshooting Synchronization Task 26

Increasing the Secure Agent memory 26

Index 28

Preface

Use *Coupa Connector* to learn how to read from or write to Coupa by using Cloud Data Integration. Learn to create a Coupa connection and run synchronization tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Coupa Connector

You can use Coupa Connector to connect to Coupa from Data Integration. Use Coupa Connector to read data from Coupa or other applications and transform the data using Coupa Connector. You can also write to Coupa, transform the data, and integrate data with other applications, databases, and flat files.

Coupa objects

You can use Coupa objects as sources and targets in synchronization tasks, mappings, and mapping tasks. You can also read records from or write records to custom objects in Coupa.

- Support the following operators for filters when you retrieve feeds from Coupa:
  - Equals
  - Not Equals
  - Less Than
  - Less than or Equals
  - Greater Than
  - Greater Than or Equals
  - Starts With
  - Ends With
  - Contains
- Support querying on any column that is supported on Coupa objects by using the following operators:
  - Contains
  - Starts with
  - Ends with
  - Greater than
  - Less than
  - Greater than equals to
  - Less than equals to
- Support the AND conjunction between filters.

Supported Objects: When Coupa Connector Is Used as Source

The objects available in Coupa Connector at source level are taken from the XSD file provided by the Coupa API. You can use a Coupa object as a single source in a synchronization task.

The following table lists the Coupa objects that you can use in a synchronization or a mapping task:

Objects	Read	Data Preview	Lookup
Suppliers	Yes	Yes	Yes
invoice_headers_invoice_header	Yes	Yes	Yes
attachments_attachment	Yes	Yes	Yes
contract_content_groups_content_group	Yes	Yes	Yes
contract_contract_terms_contract_term	Yes	Yes	Yes
contract_contract_terms_contract_term	Yes	Yes	Yes
invoice_lines_invoice_line_account_allocations_account_allocation	Yes	Yes	Yes
invoice_lines_invoice_line_contract_content_groups_content_group	Yes	Yes	Yes
invoice_lines_invoice_line_contract_contract_terms_contract_term	Yes	Yes	Yes
invoice_lines_invoice_line_tax_lines_tax_line	Yes	Yes	Yes
payments_payment	Yes	Yes	Yes
tax_lines_tax_line	Yes	Yes	Yes
inventory_transactions_inventory_transaction	Yes	Yes	Yes
account_allocations_account_allocation	Yes	Yes	Yes
asset_tags_asset_tag	Yes	Yes	Yes
attachments_attachment	Yes	Yes	Yes

Objects	Read	Data Preview	Lookup
order_line_account_allocations_account_allocation	Yes	Yes	Yes
order_line_asset_tags_asset_tag	Yes	Yes	Yes
order_line_attachments_attachment	Yes	Yes	Yes
order_line_contract_content_groups_content_group	Yes	Yes	Yes
order_line_contract_contract_terms_contract_term	Yes	Yes	Yes
currencies_currency	Yes	Yes	Yes
approvals_approval	Yes	Yes	Yes
users_user	Yes	Yes	Yes
account_groups_account_group	Yes	Yes	Yes
approval_groups_approval_group	Yes	Yes	Yes
content_groups_content_group	Yes	Yes	Yes
roles_role	Yes	Yes	Yes
requisition_line_requisition_lines_requisition_line	Yes	Yes	Yes
account_allocation_account_allocations_account_allocation	Yes	Yes	Yes
asset_tag_asset_tags_asset_tag	Yes	Yes	Yes
requisition_line_attachments_attachment	Yes	Yes	Yes
content_group_contract_content_groups_content_group	Yes	Yes	Yes
contract_term_contract_contract_terms_contract_term	Yes	Yes	Yes
addresses_address	Yes	Yes	Yes

Objects	Read	Data Preview	Lookup
order_headers_order_header	Yes	Yes	Yes
order_header_attachments_attachment	Yes	Yes	Yes
order_lines_order_line	Yes	Yes	Yes
order_lines_order_line_account_allocations_account_allocation	Yes	Yes	Yes
order_lines_order_line_asset_tags_asset_tag	Yes	Yes	Yes
order_lines_order_line_attachments_attachment	Yes	Yes	Yes
order_lines_order_line_contract_content_groups_content_group	Yes	Yes	Yes
order_lines_order_line_contract_contract_terms_contract_term	Yes	Yes	Yes
requisition_headers_requisition_header	Yes	Yes	Yes
requisition_header_approvals_approval	Yes	Yes	Yes
requisition_header_attachments_attachment	Yes	Yes	Yes
requisition_lines_requisition_line	Yes	Yes	Yes
req_lines_requisition_line_account_allocations_account_allocation	Yes	Yes	Yes
req_lines_requisition_line_contract_content_groups_content_group	Yes	Yes	Yes
req_lines_requisition_line_contract_contract_terms_contract_term	Yes	Yes	Yes
lookup_values_lookup_value	Yes	Yes	Yes
receipts_receipt	Yes	Yes	Yes

Objects	Read	Data Preview	Lookup
inventory_transaction_account_allocations_account_allocation	Yes	Yes	Yes
inventory_transaction_asset_tags_asset_tag	Yes	Yes	Yes
inventory_transaction_attachments_attachment	Yes	Yes	Yes
inv_tra_cur_int_his_records_current_integration_history_record	Yes	Yes	Yes
inv_tra_cur_int_his_rec_cur_int_his_rec_int_run_int_err_int_error	Yes	Yes	Yes
_cur_int_his_rec_cur_int_his_rec_int_run_int_err_int_err_res_res	Yes	Yes	Yes
inv_tra_cur_int_his_rec_cur_int_history_record_responses_response	Yes	Yes	Yes
inv_transaction_order_line_account_allocations_account_allocation	Yes	Yes	Yes
inventory_transaction_order_line_asset_tags_asset_tag	Yes	Yes	Yes
inventory_transaction_order_line_attachments_attachment	Yes	Yes	Yes
inv_transaction_order_line_contract_content_groups_content_group	Yes	Yes	Yes

Note: The objects, which support filterable fields, support lookup operation. To learn more about the filterable fields, see the Coupa documentation.

Coupa Targets

The following table displays the details of some of the objects at target level supported by Coupa Connector:

Objects	DSS Source	DSS Target	Query	Insert	Update	Upsert	Delete	Data Preview
Invoice	NA	Yes	NA	NA	Yes	NA	NA	NA
Suppliers	NA	Yes	NA	Yes	Yes	NA	NA	NA
Users	NA	Yes	NA	Yes	Yes	NA	NA	NA
Account	NA	Yes	NA	Yes	Yes	NA	NA	NA
Lookup Values	NA	Yes	NA	Yes	Yes	NA	NA	NA
Departments	NA	Yes	NA	Yes	Yes	NA	NA	NA
Exchange Rates	NA	Yes	NA	Yes	Yes	NA	NA	NA

Enabling Coupa Connector

To enable Coupa Connector, contact Informatica support or Informatica representative. It usually takes 15 minutes for the connector to download to Secure Agent, after it is enabled.

CHAPTER 2

Coupa Connections

Create a Coupa connection to securely read data from or write data to Coupa. You can use Coupa connections to specify sources and targets in synchronization tasks and mappings.

You create a Coupa connection on the Connections page. The connection becomes available to the entire organization. Use the Coupa connection in the Synchronization Task wizard when you create a synchronization task or a mapping.

Coupa connection properties

When you set up a Coupa connection, configure the connection properties.

Important: Coupa Connector is deprecated and has been moved to maintenance mode. Informatica intends to drop support in a future release. Informatica recommends that you use Coupa V2 Connector to access Coupa.

The following table describes the Coupa connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Runtime Environment	The name of the runtime environment where you want to run the tasks. You can specify a Secure Agent, Hosted Agent, or serverless runtime environment for a mapping.
Domain Name	Coupa domain name.
Coupa API Key	Coupa unique API key.

Property	Description
UTC Time Zone	Coupa UTC time zone. Enter the timezone in the date and time fields. The time zone is appended to the filter values for the date and time fields.
Enable Logging	Enables logging for the task. When you enable logging, you can view the session log for the log details.

Creating a Coupa Connection

To use Coupa Connector in a synchronization task, you must create a connection in Data Integration.

Before creating a Coupa connection in Data Integration, you need to enable Coupa Connector to use their API to access data.

You can configure a connection on the Connections page or in a wizard as you configure a task.

1. On the **Connections** page, click **New Connection** to create a connection.

   The **New Connection** page appears.

2. Configure the following connection properties on the New Connection page:

Connection Property	Description
Connection Name	Name of the connection.
Secure Agent	Secure Agent where you have installed the Coupa Connector.
Domain Name	Coupa Domain Name. For example, `https://servicemaster-test.coupahost.com`.
Coupa API Key	Coupa unique API key.
UTC Time Zone	Coupa UTC Time Zone (This time zone is appended with the filter values for the fields of data type date and time.)
Enable Logging	Check the box to enable logging.

3. Click **Save** to save the connection.

   You should test the connection before you save the connection details. You can click **Test Connection** to verify if the connection is successful.

CHAPTER 3

Synchronization Tasks with Coupa Connector

This chapter includes the following topics:

- Coupa Source Properties, 14
- Coupa Connector Target Properties, 18
- Coupa Connector Synchronization Example, 18
- Custom Objects and Custom Fields in Coupa, 20
- Handling Multiple Records in Coupa, 21

Coupa Source Properties

You can use a Coupa object as a source in a synchronization task.

When you configure a synchronization task to use a Coupa source, you can configure the source properties on the **Source** page of the Synchronization Task wizard.

The following table describes the Coupa source properties:

Property	Description
Connection	Name of the source connection.
Source Type	Source type. Select Single Object or Parameter.
Object	Name of the source object.

Data Filters

You can use data filters to fetch specific data of a particular object. The synchronization task processes the data based on the filter field assigned to the object.


Perform the following steps to use data filters:

1. In a synchronization task, select **Data Filters** tab.

   the **Data Filters** tab appears.

2. Click **New**.

   The **Data Filter** dialog box appears.

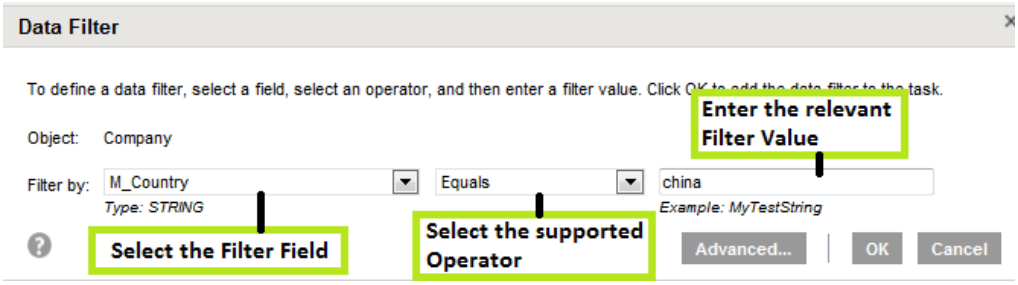

3. Specify the following details.

Field Type	Description
Object	Select object for which you want to assign filter fields.
Filter By	Select the Filter Field. **Note:** Coupa Connector does not support **$LastRunTime**, **IsNull** and **IsnotNull** filter variables.
Operator	Select the corresponding operator.
Filter Value	Enter the filter value.

4. Click **OK**.

Advanced Filter Update

You can use data filters to fetch specific data of a particular object. The synchronization task processes the data based on the filter field assigned to the object.

Perform the following steps to use data filters:

1. In a synchronization task, select **Data Filters** tab.

   The **Data Filters** tab appears.

2. Click **New**.

   The **Data Filter** dialog box appears.

3. Select the required filter field.
4. Click **Advanced**.

   The **Advanced Data Filter** dialog box appears.

5. Provide a **Filter Expression**.



For Coupa Connector, you must follow the syntax format to enter the filter expression. For example, `Paid=6634682&invoice-date[gt_or_eq] = 2013-07-09T00:33:11-05.00`

6. Click **OK**.

Defining the Filterable Fields

You can use the `coupa.ini` file to define the filterable fields. The filter fields supported by SDK may differ in names from the Coupa API but the functionality of the filter fields remains the same. So you must provide the filter field names as per Coupa API.

This `coupa.ini` file is present in the Informatica Secure Agent Plugin folder. The sample directories are:

- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \plugins\<plugin ID>`
- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \rdtm\javalib\<plugin ID>`

Note: If you make change in one `coupa.ini` file, you must make the change in the other `coupa.ini` file.

The following `coupa.ini` file displays name of the filter fields as per the SDK standard and its Coupa API equivalent.

For details, see Coupa Arguments.



All the filters fields are mentioned in this file. If the export field is set to false, it exports data which is not exported earlier.

To edit the `coupa.ini` file, use the following syntax:

```
Field name=Coupa field name
```

Where,

Field name: ICS field name.

Coupa field name: The field associated with Coupa system.

See Coupa Argument for more details.

Note: The `coupa.ini` file must always contain the field name `apiendpointname`. You must not remove this field name from the file.

Coupa Connector Target Properties

When you use Coupa target objects, you can select a standard object as target. You can configure Coupa target properties on the Target page of the Synchronization Task wizard.

The following table describes the Coupa target properties:

Property	Description
Connection	Name of the target connection.
Object	Name of the target object.

When you configure a synchronization task to use Coupa targets, you can configure advanced target properties. Advanced target properties appear on the Schedule page of the Synchronization Task wizard.

The following table shows the Coupa advanced target properties:


Advanced Target Property	Description
Ignore Empty Payload File	Select the property if you do not want to save an empty payload file.
Error Payload Directory	The directory where you want to generate the file for a failed payload.

Coupa Connector Synchronization Example

Perform the following steps to create a synchronization task to read data from Coupa:


1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Tasks**, and click **Create**.

   The **Definition** tab appears.
   The following image shows the **Definition** tab:

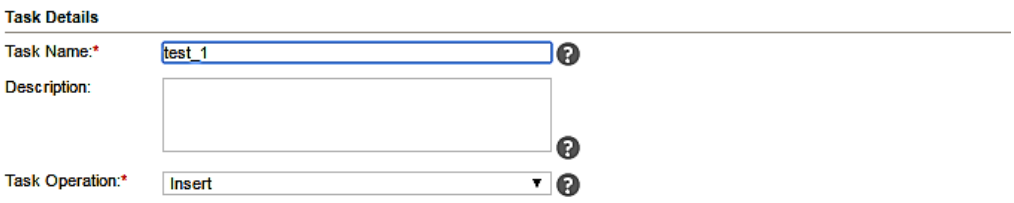


3. Specify the **Task Name**, **Description** and select **Insert** as the **Task Operation**.
4. Click **Next**.

The **Source** tab appears.

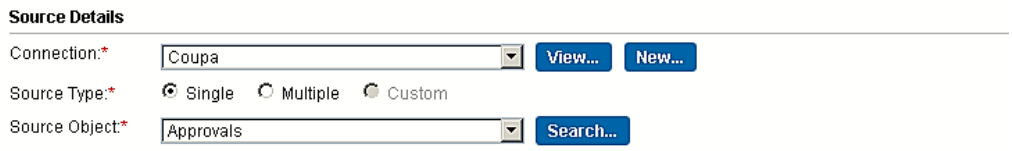

5. Select the source **Connection**, **Source Type** and **Source Object** to be used for the task.
6. Click **Next**.


   The **Target** tab appears.



7. Select the target **Connection** and **Target Object** required for the task.
8. Click **Next**.

   The **Data Filters** tab appears.
9. In **Data Filters** tab, Process all rows is chosen by default. Assign filters to the synchronization task.
10. Click **Next**.

    The **Field Mapping** tab appears.
11. In **Field Mapping** tab, map source fields to target fields accordingly.

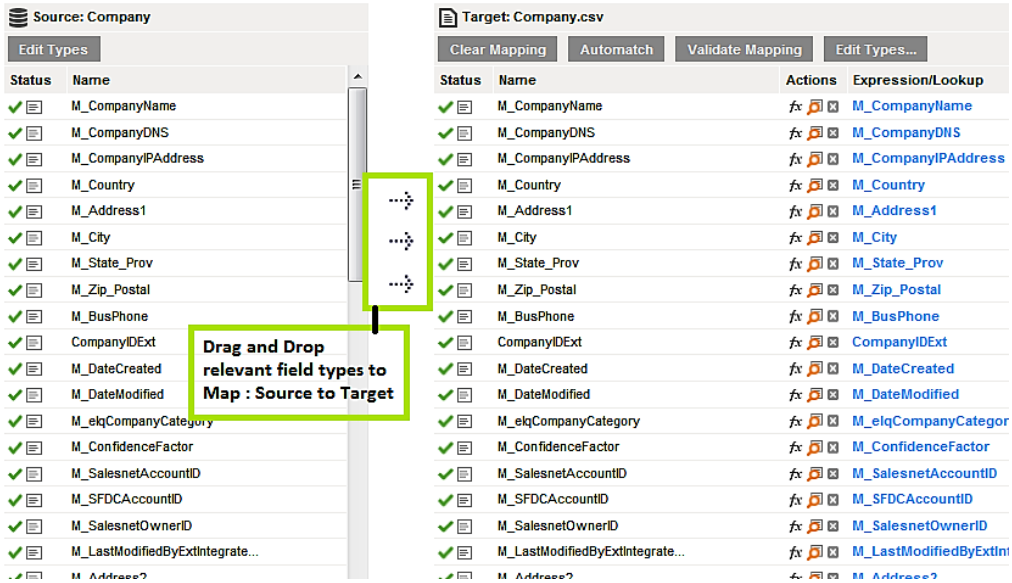

12. Click **Next**.

    The **Schedule** tab appears.
13. In **Schedule** tab, you can schedule the task as per the requirement and save.
14. Click **Save** and then **Finish**.
15. From the **Explore** page, select the task, and click **Actions** > **Run**.

    In Monitor, you can monitor the status of the logs after you run the task.

Custom Objects and Custom Fields in Coupa

You can use `read.xsd` and `coupa.ini` files in Coupa Connector package directory to add a custom object and field details. The sample directories are:

- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \plugins\<plugin ID>`
- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \rdtm\javalib\<plugin ID>`

Following image displays an example of `read.xsd` file. In the following figure, account is an object and the data enclosed in the following brackets represent defined custom fields.

read.xsd

```
<xs:schema attributeFormDefault='unqualified' elementFormDefault='qualified' xmlns:xs='http://www.w3.org/2001/XMLSchema'>
    <xs:complexType name="account">
    <xs:all>
        <xs:element name="id" type="xs:integer" minOccurs="0"/>
        <xs:element name="created-at" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="updated-at" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="name" type="xs:string" minOccurs="0"/>
        <xs:element name="code" type="xs:string" minOccurs="0"/>
        <xs:element name="active" type="xs:boolean" minOccurs="0"/>
        <xs:element name="segment-1" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-2" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-3" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-4" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-5" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-6" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-7" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-8" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-9" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-10" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-11" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-12" type="xs:string" minOccurs="0"/>
        <xs:element name="segment-13" type="xs:string" minOccurs="0"/>
```

After you add a custom object to `.xsd` file, you must add the object to `.ini` file. Restart the Secure Agent after you add the custom object details in the `.ini` file. When you add the custom object details in the `.ini` file you must mention the following details:

- endpointname. Fetch the API end point name from https://coupadocs.atlassian.net/wiki/display/integrate/Summary+Objects . When you visit the link, navigate to the respective object summary. You can see a message at the end of the page. For example, `The URL to access receipt is: https://<instance>/api/receipts`. In this example, receipt is the API end point name.
- Field in the Data Integration page and corresponding field in API. Visit https://coupadocs.atlassian.net/wiki/display/integrate/Summary+Objects to find the corresponding field in Coupa API. For example, if you want to find the corresponding query field for receipt, you must visit the Receipt Summary Object in Coupa API page. When you click GET you can see a table which lists the element and the type of the element.
- Custom Field. In the `.xsd` file, see the corresponding object field definition. When you spot the defined field, add the details of the new field in this section.

You can add additional fields.

You must always restart the Secure Agent when you make changes to the `.ini` file.


Handling Multiple Records in Coupa

The XML file helps you to update multiple records at a time. The XML file can be used for insert and update operation.

Following are the request payload files.

Payload File	Supported Operation
User_Insert,xml	Insert
User_Update.xml	Update

The following figure shows a sample of the User_Insert.csv source file that contains the details of the location of payload file (in this case, User_Insert.xml):

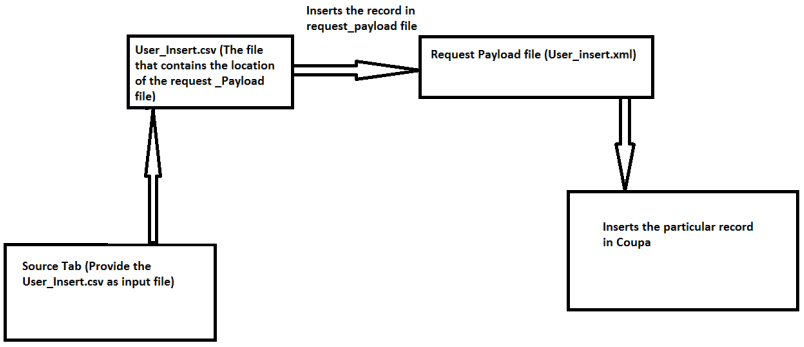

Users_insert.csv

	A	B	C	D	E	F	G
1	Request_Payload_File	Id	Status	Exported			
2	C:\a_IOD\Files\Coupa\Source\Users_Insert.xml						
3							
4							
5							
6							
7							
8							
9							

Users_update.csv

	A	B	C	D	E
1	Request_Payload_Path	Id	Status	Exported	
2	E:\a_IOD\Files\Coupa\Source\Users_Update.xml				
3					
4					
5					

In the request payload file field, you can mention the path where the request payload XML file resides.

Name of the fields	Description
Request_Payload_Path	This is the path where the request_Payload file resides.
ID	Mention ID of the associated record which you want to update.
Status	Mention the status as submitted if you want to update the record. For Example, if you want to update an invoice as submitted, provide the ID of invoice in the ID field and mention the status as submitted in status field.
Exported	To update the record as exported, mention the ID of the record and mark exported as true. For example, if you extract information of an invoice, the synchronization task does not extract the already fetched records next time.

```
<?xml version="1.0" encoding="UTF-8"?>
<root>
<user>
  <active>true</active>
  <login>infa_qa209@informatica.com</login>
  <email>infa_qa209@informatica.com</email>
  <purchasing-user>true</purchasing-user>
  <expense-user>false</expense-user>
  <firstname>abc12</firstname>
  <lastname>xyz12</lastname>
  <authentication-method>coupa_credentials</authentication-method>
  <default-currency>
    <code>USD</code>
  </default-currency>
  <user-cf1>testing</user-cf1>
    <role>
        <name>user</name>
    </role>
</user>
<user>
</root>
```

If you want to update existing record, you can edit the update payload file. You can use the update payload file to update multiple records at a time in Coupa.

Users_Insert.xml | Users_Insert1.xml | CoupaPlugin.xml | read.xsd | Users_update.csv | Users_Update.xml

```
<?xml version="1.0" encoding="UTF-8"?>
  <user>
    <id type="integer">3306</id>
    <created-at type="datetime">2014-09-24T03:54:17-05:00</created-at>
    <updated-at type="datetime">2014-09-24T03:54:17-05:00</updated-at>
    <login>rshenoy@informatica1223.com</login>
    <email>rshenoy@informatica1223.com</email>
    <purchasing-user type="boolean">true</purchasing-user>
    <expense-user type="boolean">false</expense-user>
    <employee-number nil="true"></employee-number>
    <phone-work nil="true"></phone-work>
    <phone-mobile nil="true"></phone-mobile>
    <firstname>Raksha32</firstname>
    <lastname>Shenoy32</lastname>
    <fullname>Raksha Shenoy</fullname>
    <api-user type="boolean">false</api-user>
    <active type="boolean">true</active>
    <salesforce-id nil="true"></salesforce-id>
    <account-security-type type="integer">0</account-security-type>
    <authentication-method type="symbol">coupa_credentials</authentication-method>
    <sso-identifier nil="true"></sso-identifier>
    <default-locale nil="true"></default-locale>
    <default-account nil="true"></default-account>
    <contact-phone></contact-phone>
    <roles type="array">
      <role>
```

You can generate the Request_Payload file by using Informatica XML Target Connector. For more details on XML Target Connector, see XML Target Connector User Guide.

CHAPTER 4

Mappings and tasks for Coupa

This chapter includes the following topic:

- Coupa sources in mappings, 24

Coupa sources in mappings

To read data from Coupa, configure a Coupa object as the Source transformation in a mapping.

Specify the name and description of the Coupa source. Configure the source, query options, and advanced properties for the source object.

The following table describes the source properties that you can configure for a Coupa source:

Property	Description
Connection	Name of the Coupa source connection. You can select an existing connection or create a new connection. You can also click **New Parameter** to define a parameter for the source connection.
Source Type	Type of the source object. Select Single Object, Multiple Objects, or Parameter.
Object	Name of the Coupa source object based on the source type selected. Select the source object for a single source. When you select the multiple source option, you can add source objects and configure a relationship between them.

The following table describes the query options that you can configure for a Coupa source:

Property	Description
Filter	Filter value in a read operation. Click **Configure** to add conditions to filter records and reduce the number of rows that the Secure Agent reads from the source. Specify one of the following filter conditions: - Not parameterized. Use a basic filter to specify the object, field, operator, and value to select specific records. - Completely parameterized. Use a parameter to represent the field mapping. - Advanced. Use an advanced filter to define a more complex filter condition on an object. Default is **Not parameterized**.
Sort	Not applicable for Coupa Connector.

The following table describes the advanced source properties that you can configure in a source transformation:

Property	Description
Source Filter	Filter value for the source data.
Sorted Ports	Ports used to sort source data.
Maximum Page Size	The maximum number of records to read from a Coupa source page. Default is 50.
Tracing Level	Sets the amount of detail that appears in the log file. Select one of the following options: - Terse - Normal - Verbose initialization - Verbose data Default is Normal.

CHAPTER 5

Troubleshooting Coupa Connector

You can refer to this section to understand how to troubleshoot various issues in Coupa Connector.

The log and exception messages thrown during the configuration are captured in the log files. The log files are saved in specific location. For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\logs`. For troubleshooting purpose, always set the Enable Logging connection property to true. But for normal task execution, set this field as false as it may affect the task performance.

Troubleshooting Synchronization Task

When you create a synchronization task, the NULL error message appears if a connector with invalid configuration is selected. The NULL error message files are saved in specific location.


For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\logs`. The log and exception details of a failed synchronization task are captured under the Session Log. You require special permission privileges to run the application in debug mode.

Increasing the Secure Agent memory

To increase performance and avoid runtime environment memory issues, perform the following steps:


1. In Administrator, select **Runtime Environments**.
2. Select the Secure Agent for which you want to increase memory from the list of available Secure Agents.
3. In the upper-right corner, click **Edit**.
4. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
5. Edit **JVMOption1** as **-Xms4056m** and **JVMOption2** as **-Xmx4056m**.

The following image shows the **Details** page:

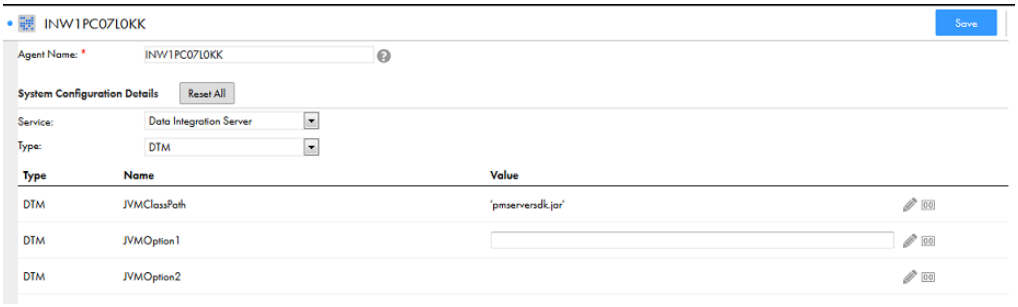

6. In the **System Configuration Details** section, select the **Type** as **TomCatJRE**
7. Edit **INFA_memory** as **-Xms256m -Xmx512m**.

   The following image shows the **Agent Details** page:

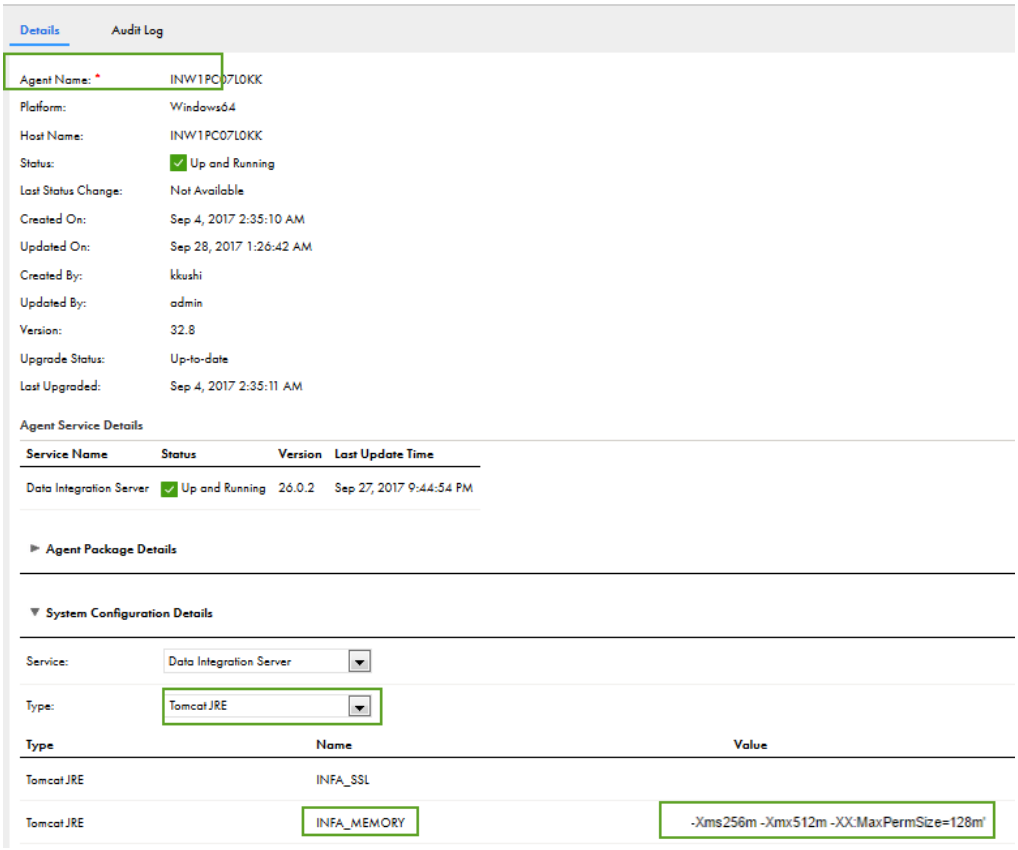

   Note: The minimum and maximum values for the Java heap size are given as an example. Specify the size according to your requirements.

8. Restart the Secure Agent.

INDEX

A

advanced target properties 18

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Coupa 12
Coupa
  connection properties 12

D

Data Integration community
  URL 4

E

error file directory 18
Error Payload Directory 18

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

M

maintenance outages 5
mapping
  Coupa sources 24
mapping tasks
  overview 24

S

Secure Agent
  increasing memory 26
source connection 14
Source properties 14
status
  Informatica Intelligent Cloud Services 5
success file directory 18
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4