Informatica®

Informatica® Cloud Data Integration

Coupa V2 Connector

Informatica Cloud Data Integration Coupa V2 Connector
October 2025

© Copyright Informatica LLC 2018, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-20

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- Informatica Intelligent Cloud Services web site 5
- Informatica Intelligent Cloud Services Communities 5
- Informatica Intelligent Cloud Services Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- Informatica Intelligent Cloud Services Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: Introduction to Coupa V2 Connector 7

Coupa V2 Connector assets 7

Chapter 2: Coupa V2 Connections 8

Connect to Coupa V2 8

- Before you begin 8
- Connection details 8
- Advanced settings 10

Coupa V2 Custom Fields 10

Proxy server settings 12

Chapter 3: Coupa V2 Operations 14

Coupa V2 Source Operations 14

- Configuring a Request Using Request Message Editor 18
- Field Mapping in a Source Transformation 19

Coupa V2 Target Operations 20

- File Preparation for Target Transformation 28
- Field Mapping in a Target Transformation 28

Chapter 4: Coupa V2 Mappings and Mapping Configuration Tasks 29

Coupa V2 Source Transformation in Mappings 29

- Source Transformation Properties 29
- Advanced Source Properties 30
- Source Transformation Mapping Example 30

Coupa V2 Target Transformation in Mappings 33

- Target Transformation Properties 33
- Advanced Target Properties 33
- Input settings properties 34
- Target Transformation Mapping Example 34

Coupa V2 Midstream Transformation in Mappings. 36
Advanced Midstream Properties. 37
Increasing Secure Agent Memory. 37
Rules and guidelines for Coupa V2 mappings. 37

Appendix A: Coupa V2 Data Type Reference. 38

Coupa V2 Data Type Reference Overview. 38
Coupa V2 and Transformation Data Types. 38

Index. 40

Preface

Use *Coupa V2 Connector* to learn how to read from or write to Coupa by using Cloud Data Integration. Learn to create a Coupa V2 connection, develop and run mappings and mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Coupa V2 Connector

You can use Coupa V2 Connector to connect to Coupa from Data Integration. Use Coupa V2 Connector to read data from or write data to Coupa. You can use Coupa objects as sources and targets in mappings and mappings tasks.

When you run a task or mapping, the Secure Agent uses the Coupa API to perform the specified operation and reads data from or writes data to Coupa.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

Coupa V2 Connector assets

When you use Coupa V2 Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

CHAPTER 2

Coupa V2 Connections

Create a Coupa V2 connection to connect to Coupa and read data from or write data to Coupa. You can use Coupa V2 connections in mappings and mappings tasks.

Connect to Coupa V2

Let's configure the Coupa V2 connection properties to connect to Coupa.

Before you begin

Before you get started, configure OAuth authentication for your Coupa account. Use client secret authentication to register on the Coupa Success Portal and get your client details.

Log in to Coupa Cloud and get the following details:

- Identifier
- Secret
- Scope

When you create a connection, specify the identifier as client ID, secret as client secret, and the scopes in the connection properties.

Connection details

The following table describes the basic connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.

Property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment. Hosted Agent doesn't apply to mappings in advanced mode. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Authentication	Select Coupa V2.
Base Url	Base URL to connect to Coupa API. Specify the base URL in the following format: `https://{instance_name}.coupahost.com/` For example, https://companyname.coupahost.com/
Client ID	The Coupa client ID required to generate a valid access token. Specify the Coupa identifier as the client ID.
Client Secret	The Coupa client secret required to generate a valid access token. Specify the Coupa secret as the client secret.
Scope	The scope used to authorize access to Coupa. Enter the scope defined for the user in Coupa. To enter multiple scopes, separate each scope with a space.

Advanced settings

The following table describes the advanced connection properties:

Property	Description

Custom Field Config	Specify custom fields for Coupa objects.
	Use the following format, where FieldName is the value of the custom field name in Coupa, FieldType is the type of custom field, and IsAPIGlobalNamespace determines whether a custom field appears under the root tag or custom-field tag when you read from or write to Coupa:
	`Object1=FieldName1,FieldType,DataType, IsAPIGlobalNamespace;\`
	`FieldName2,FieldType,DataType, IsAPIGlobalNamespace;\`
	`FieldName3,FieldType,DataType,IsAPIGlobalNamespace`
	`Object2=FieldName1,FieldType,DataType, IsAPIGlobalNamespace;\`
	`FieldName2,FieldType,DataType, IsAPIGlobalNamespace`
	`Object3=FieldName1,FieldType,DataType,IsAPIGlobalNamespace;\`
	`FieldName2,FieldType,DataType,IsAPIGlobalNamespace;\`
	`FieldName3,FieldType,DataType,IsAPIGlobalNamespace`
	You can use only simple custom fields. For example:
	`user-summary=custom_field1,Simple,String,true;\`
	`custom_field2,Simple,String, false`
	`requisition-header=requisition_cf1,Simple,String,true;\`
	`requisition_cf2,Simple,Integer,false;\`
	`requisition_cf3,Simple,Integer`
	`user=user_customfield1,Simple,String,false;\`
	`user_customfield_2,Simple,String,true`
	For more information about the custom objects that you can use and how to configure the custom fields, see "Coupa V2 Custom Fields" on page 10.

Coupa V2 Custom Fields

To read data from or insert data to custom fields in Coupa, you must configure the **Custom Field Config** property when you create a Coupa V2 connection.

You need to specify the field name, the field type, and the IsAPIGlobalNamespace for a custom object.

You can specify custom fields for different objects, separated by a line break. When you specify multiple custom fields for a particular object, separate the custom fields with an empty new line. Enter ;\ at the end of the line except for the last entry.

Note: If a field name contains an underscore, the Secure Agent replaces the underscore with a hyphen.

Custom object names

Enter the object name based on the Coupa metadata file and the field name that is generated by Coupa.

The following table lists the object names that you can specify in the connection based on the Coupa metadata file:

Coupa Resource Name	Coupa Sub Resources	Object Name
Expense Reports	Items	expense-report
		item
Advance Ship Notices	Headers	asn-header-summary
	Lines	asn-line-summary
Suppliers	Supplier Sites	supplier
		supplier-site
Items	Supplier Items	item
		supplier-item
Invoices	Lines	invoice-header
		invoice-line-summary
Purchase Orders	Lines	order-header
		order-line-summary
Requisitions	Items	requisition-header
		item
Receipts	NA	inventory-transaction
Commodities	NA	commodity-summary
Department	NA	department
Contracts	NA	contract
Address	NA	address
Lookup Values	NA	lookup-value
Asset Tag	NA	asset-tag-summary
Warehouse	NA	warehouse-summary
Forms	NA	form-summary
Punchout Sites	NA	punchout-site-summary
User	NA	user

Custom field types and data types

The following table lists the various custom fields and data types that you can use:

Coupa Field Type	Data Type
Check Box	Boolean
Date	Date/Time
Drop Down (Single Select)	String
Number	Integer
Radio Group	String
Text Field	String

IsAPIGlobalNamespace field

The **IsAPIGlobalNamespace** field controls the organization of custom fields in Coupa and manages the data hierarchy. You need to set the value of **IsAPIGlobalNamespace** to true or false in the connection properties based on the corresponding value in Coupa. This property determines whether custom fields appear under the root tag or the custom-field tag in the data structure when reading or writing data.

If the custom field does not have the API global namespace property enabled in Coupa, set **IsAPIGlobalNamespace** to false in the connection properties.

The data structure follows this pattern based on the **IsAPIGlobalNamespace** value:

- True. The custom field appears under the root tag.
- False. The custom field appears under the custom-field tag.
- If you do not specify a value, true is considered as the default.

When you configure a mapping to read from or write data to Coupa, you can view the custom fields categorized on the **Field Mapping** tab according to these values.

Proxy server settings

If your organization uses an outgoing proxy server to connect to the Internet, the Secure Agent connects to Informatica Intelligent Cloud Services through the proxy server.

You can configure the Secure Agent to use the proxy server on Windows and Linux. You can use only an unauthenticated proxy server. The proxy settings applies to connections used in mappings and in mappings in advanced mode.

To configure the proxy settings for the Secure Agent, use one of the following methods:

- Configure the Secure Agent through the Secure Agent Manager on Windows or shell command on Linux.

  For instructions, see "Configure the proxy settings on Windows" or "Configure the proxy settings on Linux" in *Getting Started* in the Data Integration help.
- Configure the JVM options for the DTM in the Secure Agent properties. For instructions, see the Proxy server settings Knowledge article.

To configure proxy settings for the serverless runtime environment, see "Using a proxy server" in *Runtime Environments* in the Administrator help.

CHAPTER 3

Coupa V2 Operations

Coupa exposes the web service API that the Secure Agent uses to perform integration tasks through the REST protocol.

When you create a mapping, you can associate a Coupa V2 connection and an operation. The Secure Agent connects to the web service to access, transform, or write data. The request and response are REST messages. The REST request and response messages contain hierarchical data, where the data follows a JSON schema. If you want to write data to a relational target, the Secure Agent converts the hierarchical data fetched from Coupa to relational data.

Coupa V2 Source Operations

Create a Source transformation in the Mapping Task wizard to read data from Coupa.

When you select a Coupa V2 connection for a Source transformation in a mapping to read data from Coupa, you can select an operation from the list of operations.

The following table lists the supported Coupa source operations and the corresponding API resource path:

Operation	API Resource Path
GET_Accounts_favorites	/api/accounts/favorites
GET_Accounts_index	/api/accounts
GET_Accounts_recent	/api/accounts/recent
GET_Accounts_show	/api/accounts/:id
GET_AccountTypes_action	/api/account_types(/:action(/:id))
GET_AccountTypes_index	/api/account_types
GET_AccountTypes_show	/api/account_types/:id
GET_AccountValidationRules_index	/api/account_validation_rules
GET_AccountValidationRules_show	/api/account_validation_rules/:id
GET_Addresses_index	/api/addresses

Operation	API Resource Path
GET_Addresses_show	/api/addresses/:id
GET_AdvanceShipNotices_index	/api/asn/headers
GET_AdvanceShipNotices_show	/api/asn/headers/:id
GET_Approvals_index	api/approvals
GET_Approvals_show	/api/approvals/:id
GET_BudgetLineAdjustment_index	/api/budget_lines/:budget_line_id/budget_line_adjustments
GET_BudgetLineAdjustment_show	/api/budget_lines/:budget_line_id/ budget_line_adjustments/:id
GET_BudgetLines_index	/api/budget_lines
GET_BudgetLines_show	/api/budget_lines/:id
GET_ContentGroups_index	/api/business_groups
GET_ContentGroups_show	/api/business_groups/:id
GET_Contracts_index	/api/contracts
GET_Contracts_retrieveLegalAgreement	/api/contracts/:id/retrieve_legal_agreement
GET_Contracts_show	/api/contracts/:id
GET_ContractTerms_index	/api/contracts/:contract_id/contract_terms
GET_ContractTerms_show	/api/contracts/:contract_id/contract_terms/:id
GET_Currencies_index	/api/currencies
GET_Currencies_show	/api/currencies/:id
GET_Departments_index	/api/departments
GET_Departments_show	/api/departments/:id
GET_ExchangeRates_index	/api/exchange_rates
GET_ExchangeRates_show	/api/exchange_rates/:id
GET_ExpenseArtifacts_ExpenseLines_index	/api/expense_lines/:expense_line_id/expense_artifacts
GET_ExpenseArtifacts_ExpenseLines_show	/api/expense_lines/:expense_line_id/expense_artifacts/:id
GET_ExpenseArtifacts_ExpenseReports_index	/api/expense_reports/:expense_report_id/ expense_lines/:expense_line_id/expense_artifacts
GET_ExpenseArtifacts_ExpenseReports_show	/api/expense_reports/:expense_report_id/ expense_lines/:expense_line_id/expense_artifacts/:id

Operation	API Resource Path
GET_ExpenseArtifacts_index	/api/expense_lines/expense_artifacts
GET_ExpenseArtifacts_show	/api/expense_lines/expense_artifacts/:id
GET_ExpenseLines_classify	/api/expense_lines/classify
GET_ExpenseLines_ExpenseReports_index	/api/expense_reports/:expense_report_id/expense_lines
GET_ExpenseLines_ExpenseReports_show	/api/expense_reports/:expense_report_id/expense_lines/:id
GET_ExpenseLines_index	/api/expense_lines
GET_ExpenseLines_mobileForm	/api/expense_lines/mobile_form
GET_ExpenseLines_show	/api/expense_lines/:id
GET_ExpenseReports_index	/api/expense_reports
GET_ExpenseReports_show	/api/expense_reports/:id
GET_IntegrationHistoryRecord_index	/api/integration_history_records
GET_IntegrationHistoryRecord_show	/api/integration_history_records/:id
GET_IntegrationRuns_index	/api/integration_runs
GET_IntegrationRuns_show	/api/integration_runs/:id
GET_Integrations_action	/api/integrations(/:action(/:id))
GET_Integrations_index	/api/integrations
GET_Integrations_show	/api/integrations/:id
GET_InventoryTransactions_index	/api/inventory_transactions
GET_InventoryTransactions_show	/api/inventory_transactions/:id
GET_Invoices_index	/api/invoices
GET_Invoices_show	/api/invoices/:id
GET_Invoices_submitForApproval	/api/invoices/new/submit_for_approval
GET_Items_index	/api/items
GET_Items_show	/api/items/:id
GET_LookupValues_index	/api/lookup_values
GET_LookupValues_show	/api/lookup_values/:id
GET_OrderPad_index	/api/order_pads

Operation	API Resource Path
GET_OrderPAd_show	/api/order_pads/:id
GET_OrderPadLines_index	/api/order_pads/:order_pad_id/order_pad_lines
GET_OrderPadLines_show	/api/order_pads/:order_pad_id/order_pad_lines/:id
GET_PaymentTerms_action	/api/payment_terms(/:action(/:id))
GET_PaymentTerms_index	/api/payment_terms
GET_PaymentTerms_show	/api/payment_terms/:id
GET_PurchaseOrderLines_index	/api/purchase_order_lines
GET_PurchaseOrderLines_show	/api/purchase_order_lines/:id
GET_PurchaseOrders_index	/api/purchase_orders
GET_PurchaseOrders_show	/api/purchase_orders/:id
GET_RemitToAddresses_Invoices_index	/api/invoices/:invoice_id/remit_to_addresses
GET_RemitToAddresses_Invoices_show	/api/invoices/:invoice_id/remit_to_addresses/:id
GET_RemitToAddresses_Suppliers_index	/api/suppliers/:supplier_id/addresses
GET_RemitToAddresses_Suppliers_show	/api/suppliers/:supplier_id/addresses/:id
GET_Requisitions_createAsCart	/api/requisitions/new/create_as_cart
GET_Requisitions_index	/api/requisitions
GET_Requisitions_show	/api/requisitions/:id
GET_Requisitions_submitForApproval	/api/requisitions/new/submit_for_approval //not sure
GET_ShippingTerms_action	/api/shipping_terms(/:action(/:id))
GET_ShippingTerms_index	/api/shipping_terms
GET_ShippingTerms_show	/api/shipping_terms/:id
GET_SupplierInformation_index	/api/supplier_information
GET_SupplierInformation_show	/api/supplier_information/:id
GET_SupplierItems_index	/api/supplier_items
GET_SupplierItems_Items_index	/api/items/:item_id/supplier_items
GET_SupplierItems_Items_show	/api/items/:item_id/supplier_items/:id
GET_SupplierItems_search	/api/supplier_items/search

Operation	API Resource Path
GET_SupplierItems_show	/api/supplier_items/:id
GET_Suppliers_index	/api/suppliers
GET_Suppliers_show	/api/suppliers/:id
GET_SupplierSites_index	/api/suppliers/:supplier_id/supplier_site
GET_SupplierSites_show	/api/suppliers/:supplier_id/supplier_sites/:id
GET_TaxRegistration_index	/api/tax_registrations
GET_TaxRegistration_show	/api/tax_registrations/:id
GET_User_index	/api/users
GET_User_show	/api/users/:id
GET_UserGroups_index	/api/user_groups
GET_UserGroups_show	/api/user_groups/:id

After you specify the connection, specify the operation on the **Source** tab of the Source transformation.

Select the operation you require, configure the request message in JSON from the sample template provided, and configure the advanced properties for the operation.

If you want to write to a relational target, define a relational structure for the source data by mapping the input fields in hierarchical format to the output fields in relational format. When you run the mapping, the Secure Agent retrieves data for the specified operation from Coupa.

Configuring a Request Using Request Message Editor

When you create a Source transformation, configure an JSON request message for the operation that you want to perform in Coupa.

Use the Request Message Editor to create a request message. The request message is in JSON format and contains request parameters exposed by Coupa API for a specific operation. You can use the default request message for the operation and then customize the request message to specify the data that you want to include.


To customize your request, copy the request message from the sample template to the Request Message Editor pane where you can edit the JSON message and add the attributes for the request. Remove unnecessary and empty tags from the request message to avoid operation failure. You can hide the optional elements to see the mandatory elements required for the request message.

For example, you want to perform an operation GET_Integrations_show using Coupa V2 Connector to display integrations in Coupa.

The following JSON sample shows the filters used for the GET_Integrations_show operation:

```
{
  "id" : ""
}
```

The following image shows the validated request message in a GET_Integrations_show operation in the Mapping Designer:

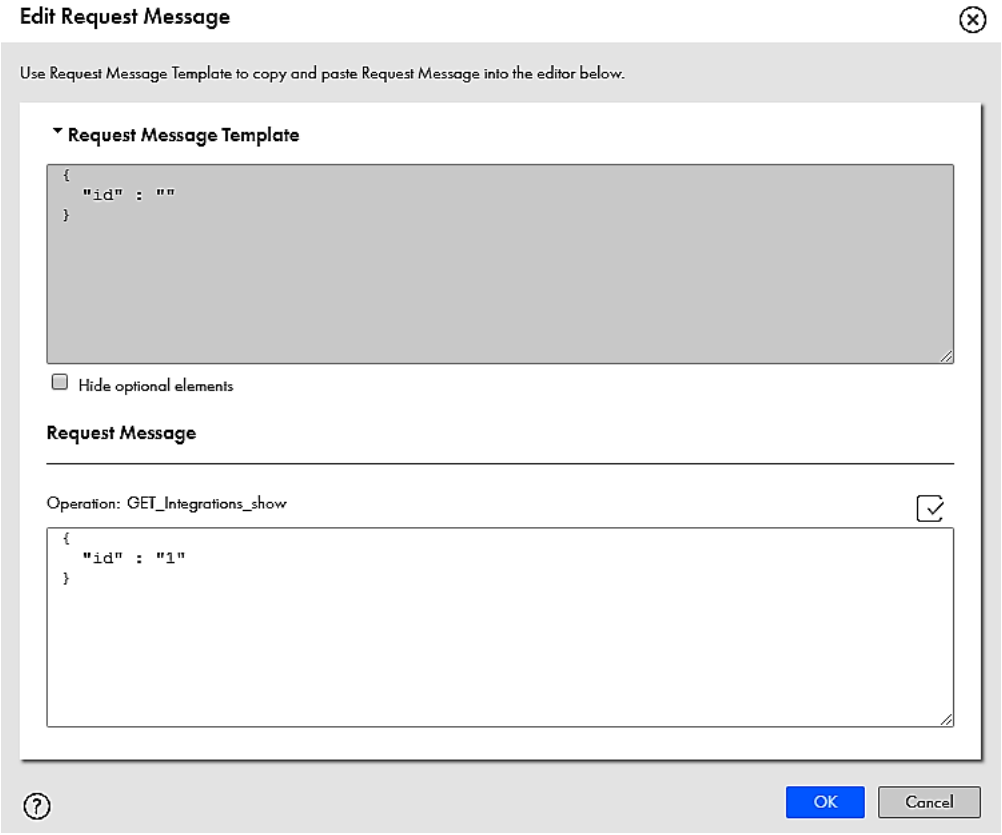

The request message format in Coupa V2 Connector follows the service request definition in Coupa. Ensure that you use well-formed JSON formatting in the request message. You can verify if the JSON request is valid to ensure that the JSON matches the structure expected by the operation.

Field Mapping in a Source Transformation


The response message format follows the service response definition in Coupa. You can map response fields from a hierarchical to a relational structure of output groups and fields.

After you configure an operation for a source and specify the request message, create the relational format from the hierarchical data to include groups and fields that you want in the output.

Select the elements in the response structure that you want to include as output fields. The Secure Agent converts the JSON response in the hierarchical structure to relational groups at run time.

The output groups along with the primary and foreign keys are generated. You can pause on the output field to view the XPath expression, which indicates which field the output field is mapped to in the response structure of the hierarchy tree.

The following image shows an example of response structure generated from the request JSON for the GET_Integrations_show operation and the corresponding relational output fields for the response:

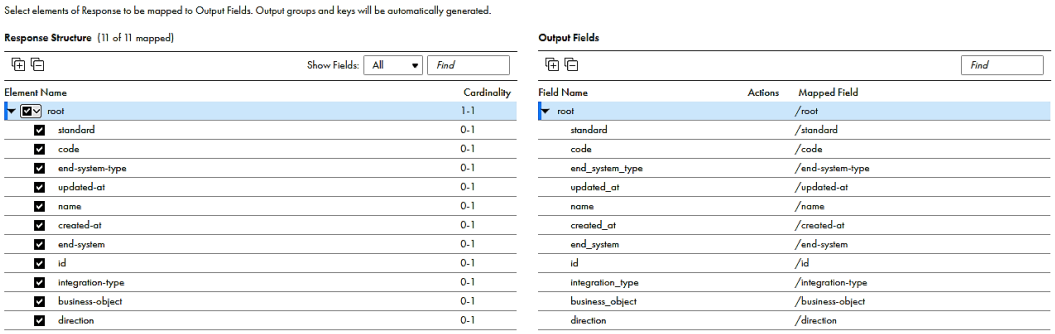
Select elements of Response to be mapped to Output Fields. Output groups and keys will be automatically generated.

Response Structure (11 of 11 mapped)

Show Fields: All Find

Element Name	Cardinality
root	1-1
standard	0-1
code	0-1
end-system-type	0-1
updated-at	0-1
name	0-1
created-at	0-1
end-system	0-1
id	0-1
integration-type	0-1
business-object	0-1
direction	0-1

Output Fields

Find

Field Name	Actions	Mapped Field
root		/root
standard		/standard
code		/code
end_system_type		/end-system-type
updated_at		/updated-at
name		/name
created_at		/created-at
end_system		/end-system
id		/id
integration_type		/integration-type
business_object		/business-object
direction		/direction

You can edit the data type, precision, and scale for the groups and fields after mapping the fields.

Coupa V2 Target Operations

Create a Target transformation in the Mapping Task wizard to write data to Coupa. When you select a Coupa V2 connection for a Target transformation in a mapping, you can select an operation from the list of operations. When you want to write data that is in relational format to Coupa, the Secure Agent converts the relational data to a hierarchical format before writing to Coupa.

The following table lists the supported Coupa target operations and the corresponding API resource path:

Operation	API Resource Path
PATCH_Accounts_update	/api/accounts/:id
PATCH_AccountTypes_action	/api/account_types(/:action(/:id))
PATCH_AccountTypes_update	/api/account_types/:id
PATCH_AccountValidationRules_update	/api/account_validation_rules/:id
PATCH_Addresses_update	/api/addresses/:id
PATCH_AdvanceShipNotices_update	/api/asn/headers/:id
PATCH_Approvals_approve	/api/approvals/:id/approve
PATCH_Approvals_hold	/api/approvals/:id/hold
PATCH_Approvals_reject	/api/approvals/:id/reject
PATCH_Approvals_update	/api/approvals/:id
PATCH_BudgetLineAdjustment_update	/api/budget_lines/:budget_line_id/budget_line_adjustments/:id
PATCH_BudgetLines_update	/api/budget_lines/:id

Operation	API Resource Path
PATCH_ContentGroups_update	/api/business_groups/:id
PATCH_Contracts_update	/api/contracts/:id
PATCH_ContractTerms_update	/api/contracts/:contract_id/contract_terms/:id
PATCH_Currencies_update	/api/currencies/:id
PATCH_Departments_update	/api/departments/:id
PATCH_ExchangeRates_update	/api/exchange_rates/:id
PATCH_ExpenseArtifacts_ExpenseLines_update	/api/expense_lines/:expense_line_id/expense_artifacts/:id
PATCH_ExpenseArtifacts_ExpenseReports_update	/api/expense_reports/:expense_report_id/expense_lines/:expense_line_id/expense_artifacts/:id
PATCH_ExpenseArtifacts_update	/api/expense_lines/expense_artifacts/:id
PATCH_ExpenseLines_ExpenseReports_update	/api/expense_reports/:expense_report_id/expense_lines/:id
PATCH_ExpenseLines_update	/api/expense_lines/:id
PATCH_ExpenseReports_update	/api/expense_reports/:id
PATCH_IntegrationHistoryRecord_update	/api/integration_history_records/:id
PATCH_IntegrationRuns_update	/api/integration_runs/:id
PATCH_Integrations_action	/api/integrations(/:action(/:id))
PATCH_Integrations_update	/api/integrations/:id
PATCH_InventoryTransactions_update	/api/inventory_transactions/:id
PATCH_Invoices_update	/api/invoices/:id
PATCH_Items_update	/api/items/:id
PATCH_LookupValues_update	/api/lookup_values/:id
PATCH_OrderPad_update	/api/order_pads/:id
PATCH_OrderPadLines_update	/api/order_pads/:order_pad_id/order_pad_lines/:id
PATCH_PaymentTerms_action	/api/payment_terms(/:action(/:id))
PATCH_PaymentTerms_update	/api/payment_terms/:id
PATCH_PurchaseOrderLines_update	/api/purchase_order_lines/:id
PATCH_PurchaseOrders_update	/api/purchase_orders/:id

Operation	API Resource Path
PATCH_RemitToAddresses_Invoices_update	/api/invoices/:invoice_id/remit_to_addresses/:id
PATCH_RemitToAddresses_Suppliers_update	/api/suppliers/:supplier_id/addresses/:id
PATCH_Requisitions_update	/api/requisitions/:id
PATCH_ShippingTerms_action	/api/shipping_terms(/:action(/:id))
PATCH_ShippingTerms_update	/api/shipping_terms/:id
PATCH_SupplierItems_Items_update	/api/items/:item_id/supplier_items/:id
PATCH_SupplierItems_update	/api/supplier_items/:id
PATCH_Suppliers_update	/api/suppliers/:id
PATCH_SupplierSites_update	/api/suppliers/:supplier_id/supplier_sites/:id
PATCH_TaxRegistration_update	/api/tax_registrations/:id
PATCH_User_update	/api/users/:id
PATCH_UserGroups_update	/api/user_groups/:id
POST_ExchangeRates_create	/api/exchange_rates
POST_ExpenseArtifacts_ExpenseLines_create	/api/expense_lines/:expense_line_id/ expense_artifacts
POST_ExpenseArtifacts_ExpenseReports_create	/api/expense_reports/:expense_report_id/ expense_lines/:expense_line_id/expense_artifacts
POST_LookupValues_create	/api/lookup_values
POST_Accounts_create	/api/accounts
POST_AccountTypes_action	/api/account_types(/:action(/:id))
POST_AccountTypes_copy	/api/account_types/:id/copy
POST_AccountTypes_create	/api/account_types
POST_AccountValidationRules_create	/api/account_validation_rules
POST_Addresses_create	/api/addresses
POST_AdvanceShipNotices_create	/api/asn/headers
POST_Approvals_create	/api/approvals
POST_BudgetLine_create	/api/budget_lines
POST_BudgetLineAdjustment_create	/api/budget_lines/:budget_line_id/ budget_line_adjustments

Operation	API Resource Path
POST_ContentGroups_create	/api/business_groups
POST_Contracts_create	/api/contracts
POST_Contracts_legalAgreement	/api/contracts/:id/legal_agreement
POST_ContractTerms_create	/api/contracts/:contract_id/contract_terms
POST_Currencies_create	/api/currencies
POST_Departments_create	/api/departments
POST_ExpenseLines_classify	/api/expense_lines/classify
POST_ExpenseLines_create	/api/expense_lines
POST_ExpenseLines_ExpenseReports_create	/api/expense_reports/:expense_report_id/expense_lines
POST_ExpenseReports_create	/api/expense_reports
POST_IntegrationHistoryRecord_acknowledge	/api/integration_history_records/acknowledge
POST_IntegrationHistoryRecord_create	/api/integration_history_records
POST_IntegrationHistoryRecord_createAlert	/api/integration_history_records/create_alert
POST_IntegrationHistoryRecord_createAlertAndMarkExported	/api/integration_history_records/create_alert_and_mark_exported
POST_IntegrationHistoryRecord_markExported	/api/integration_history_records/mark_exported
POST_IntegrationRuns_create	/api/integration_runs
POST_Integrations_action	/api/integrations(/:action(/:id))
POST_Integrations_create	/api/integrations
POST_InventoryTransactions_create	/api/inventory_transactions
POST_Invoices_submitForApproval	/api/invoices/new/submit_for_approval
POST_Items_create	/api/items
POST_OrderPad_create	/api/order_pads
POST_OrderPadLines_create	/api/order_pads/:order_pad_id/order_pad_lines
POST_PaymentTerms_action	/api/payment_terms(/:action(/:id))
POST_PaymentTerms_create	/api/payment_terms
POST_PurchaseOrderLines_create	/api/purchase_order_lines

Operation	API Resource Path
POST_PurchaseOrders_create	/api/purchase_orders
POST_RemitToAddresses_Invoices_create	/api/invoices/:invoice_id/remit_to_addresses
POST_RemitToAddresses_Suppliers_create	/api/suppliers/:supplier_id/addresses
POST_Requisitions_create	/api/requisitions
POST_Requisitions_createAsCart	/api/requisitions/new/create_as_cart
POST_Requisitions_newsubmitForApproval	/api/requisitions/new/submit_for_approval
POST_Requisitions_submitForApproval	/api/requisitions/submit_for_approval
POST_ShippingTerms_action	/api/shipping_terms(/:action(/:id))
POST_ShippingTerms_create	/api/shipping_terms
POST_SupplierInformation_create	/api/supplier_information
POST_SupplierItems_create	/api/supplier_items
POST_SupplierItems_Items_create	/api/items/:item_id/supplier_items
POST_Suppliers_create	/api/suppliers
POST_Suppliers_createSupplierUserPreferences	/api/suppliers/create_supplier_user_preferences
POST_Suppliers_syncSupplierUserLocale	/api/suppliers/sync_supplier_user_locale
POST_SupplierSites_create	/api/suppliers/:supplier_id/supplier_site
POST_TaxRegistration_create	/api/tax_registrations
POST_User_create	/api/users
POST_UserGroups_create	/api/user_groups
PUT_Accounts_update	/api/accounts/:id
PUT_AccountTypes_update	/api/account_types/:id
PUT_AccountValidationRules_update	/api/account_validation_rules/:id
PUT_Addresses_update	/api/addresses/:id
PUT_AdvanceShipNotices_receive	/api/asn/headers/receive
PUT_AdvanceShipNotices_receiveByID	/api/asn/headers/:id/receive
PUT_AdvanceShipNotices_update	/api/asn/headers/:id
PUT_AdvanceShipNotices_void	/api/asn/headers/void

Operation	API Resource Path
PUT_AdvanceShipNotices_voidByID	/api/asn/headers/:id/void
PUT_Approvals_approve	/api/approvals/:id/approve
PUT_Approvals_hold	/api/approvals/:id/hold
PUT_Approvals_reject	/api/approvals/:id/reject
PUT_Approvals_update	/api/approvals/:id
PUT_ASNLines_receive	/api/asn/lines/receive
PUT_ASNLines_receiveByID	/api/asn/lines/:id/receive
PUT_ASNLines_void	/api/asn/lines/void
PUT_ASNLines_voidByID	/api/asn/lines/:id/void
PUT_BudgetLineAdjustment_update	/api/budget_lines/:budget_line_id/budget_line_adjustments/:id
PUT_BudgetLines_adjust	/api/budget_lines/:id/adjust
PUT_BudgetLines_update	/api/budget_lines/:id
PUT_ContentGroups_update	/api/business_groups/:id
PUT_Contracts_addApprover	/api/contracts/:id/add_approver
PUT_Contracts_legalAgreement	/api/contracts/:id/legal_agreement
PUT_Contracts_removeApproval	/api/contracts/:id/remove_approval
PUT_Contracts_update	/api/contracts/:id
PUT_ContractTerms_update	/api/contracts/:contract_id/contract_terms/:id
PUT_Currencies_update	/api/currencies/:id
PUT_Departments_update	/api/departments/:id
PUT_ExchangeRates_update	/api/exchange_rates/:id
PUT_ExpenseArtifacts_updateWithocrRresponse	/api/expense_lines/expense_artifacts/:id/update_with_ocr_response
PUT_ExpenseArtifacts_ExpenseLines_update	/api/expense_lines/:expense_line_id/expense_artifacts/:id
PUT_ExpenseArtifacts_ExpenseReports_update	/api/expense_reports/:expense_report_id/expense_lines/:expense_line_id/expense_artifacts/:id
PUT_ExpenseArtifacts_update	/api/expense_lines/expense_artifacts/:id

Operation	API Resource Path
PUT_ExpenseLines_ExpenseReports_update	/api/expense_reports/:expense_report_id/expense_lines/:id
PUT_ExpenseLines_update	/api/expense_lines/:id
PUT_ExpenseReports_addApprover	/api/expense_reports/:id/add_approver
PUT_ExpenseReports_removeApproval	/api/expense_reports/:id/remove_approval
PUT_ExpenseReports_submit	/api/expense_reports/:id/submit
PUT_ExpenseReports_update	/api/expense_reports/:id
PUT_IntegrationHistoryRecord_update	/api/integration_history_records/:id
PUT_IntegrationRuns_fail	/api/integration_runs/:id/fail
PUT_IntegrationRuns_pause	/api/integration_runs/:id/pause
PUT_IntegrationRuns_pending	/api/integration_runs/:id/pending
PUT_IntegrationRuns_run	/api/integration_runs/:id/run
PUT_IntegrationRuns_success	/api/integration_runs/:id/success
PUT_IntegrationRuns_update	/api/integration_runs/:id
PUT_Integrations_update	/api/integrations/:id
PUT_InventoryTransactions_update	/api/inventory_transactions/:id
PUT_InventoryTransactions_void	/api/inventory_transactions/:id/void
PUT_Invoices_addApprover	/api/invoices/:id/add_approver
PUT_Invoices_bypassApprovals	/api/invoices/:id/bypass_approvals
PUT_Invoices_bypassCurrentApproval	/api/invoices/:id/bypass_current_approval
PUT_Invoices_dispute	/api/invoices/:id/dispute
PUT_Invoices_flipToAdvanceShipnotice	/api/invoices/:id/flip_to_advance_ship_notice
PUT_Invoices_removeApproval	/api/invoices/:id/remove_approval
PUT_Invoices_restartApproval	/api/invoices/:id/restart_approvals
PUT_Invoices_revalidateTolerances	/api/invoices/:id/revalidate_tolerances
PUT_Invoices_submit	/api/invoices/:id/submit
PUT_Invoices_update	/api/invoices/:id
PUT_Invoices_updatelineAccounts	/api/invoices/:id/update_line_accounts

Operation	API Resource Path
PUT_Invoices_void	/api/invoices/:id/void
PUT_Invoices_withdrawDispute	/api/invoices/:id/withdraw_dispute
PUT_Items_update	/api/items/:id
PUT_LookupValues_update	/api/lookup_values/:id
PUT_OrderPad_update	/api/order_pads/:id
PUT_OrderPadLines_update	/api/order_pads/:order_pad_id/order_pad_lines/:id
PUT_PaymentTerms_update	/api/payment_terms/:id
PUT_PurchaseOrderLines_update	/api/purchase_order_lines/:id
PUT_PurchaseOrders_cancel	/api/purchase_orders/:id/cancel
PUT_PurchaseOrders_close	/api/purchase_orders/:id/close
PUT_PurchaseOrders_ignoreWindowAndIssue	/api/purchase_orders/:id/ignore_window_and_issue
PUT_PurchaseOrders_issue	/api/purchase_orders/:id/issue
PUT_PurchaseOrders_issueWithoutSend	/api/purchase_orders/:id/issue_without_send
PUT_PurchaseOrders_releaseFromBuyerHold	/api/purchase_orders/:id/release_from_buyer_hold
PUT_PurchaseOrders_update	/api/purchase_orders/:id
PUT_RemitToAddresses_Invoices_update	/api/invoices/:invoice_id/remit_to_addresses/:id
PUT_RemitToAddresses_Suppliers_update	/api/suppliers/:supplier_id/addresses/:id
PUT_Requisitions_addApprover	/api/requisitions/:id/add_approver
PUT_Requisitions_removeApproval	/api/requisitions/:id/remove_approval
PUT_Requisitions_update	/api/requisitions/:id
PUT_ShippingTerms_update	/api/shipping_terms/:id
PUT_SupplierItems_Items_update	/api/items/:item_id/supplier_items/:id
PUT_SupplierItems_update	/api/supplier_items/:id
PUT_Suppliers_update	/api/suppliers/:id
PUT_SupplierSites_update	/api/suppliers/:supplier_id/supplier_sites/:id
PUT_TaxRegistration_update	/api/tax_registrations/:id
PUT_User_avatar	/api/users/:id/avatar

Operation	API Resource Path
PUT_User_update	/api/users/:id
PUT_UserGroups_update	/api/user_groups/:id

When you configure a Coupa target, you can select **Operations** on the **Target** tab to display the list of operations. The Secure Agent creates target fields based on the request message structure of the operation you select on the **Target** tab.

After you write data to Coupa, the Secure Agent includes all the incoming fields from the source, by default. You can exclude the incoming fields, if required. You can add multiple input sources to write data to Coupa target object and define the primary and foreign key relationships between the input sources before you run the mapping. Each input source appears as separate group in the **Field Mapping** tab in the target transformation. You can define key relationships on the **Field Mapping** tab.

File Preparation for Target Transformation

To write data to Coupa, the source file must include the container with the processing options and the wrapper referential elements to perform the specified operation in Coupa.

For information about the required business process parameters and the wrapper elements, see the request elements for the specified operation in the Coupa web service directory. You need to prepare a file to include the wrapper elements along with the data that you want to write to Coupa. You can add the processing options in an Expression transformation later when you write the data to Coupa.

When you run the mapping, the Secure Agent writes data to a configured target .csv file. Later, use this file as a source from which you write data to Coupa.


Field Mapping in a Target Transformation

You can map fields that are in a relational structure to the hierarchical structure used by a Coupa target.

On the **Field Mapping** tab for the Target transformation, the fields in the **Target Fields** appear in hierarchical format. The target fields are determined by the request message structure of the operation you select for the Target transformation.

Each source object displays as a group in the **Input Fields** area. You can select fields in the **Input Fields** area to map the fields to the request. If the input fields include multiple input groups, map the groups to the corresponding nodes in the request. Be sure to map all of the fields that you require in the request.

The following image shows an example of mapped input fields from the source file with the Coupa target to update data using PUT_UserGroups_update operation:

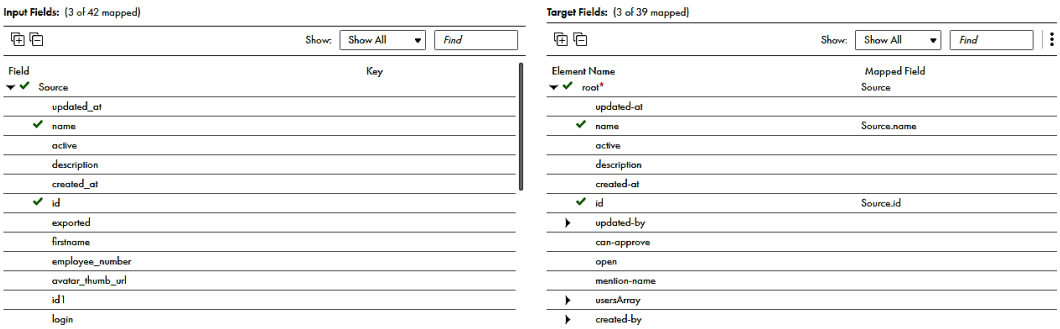

CHAPTER 4

Coupa V2 Mappings and Mapping Configuration Tasks

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source or target to represent the object.

In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

Coupa V2 Source Transformation in Mappings

When you configure a Source transformation, select the Coupa V2 connection and choose an operation to represent a Coupa source. You can parameterize a Coupa V2 connection.

When you select a Coupa V2 connection for a source, you can select an operation from the list of operations. You can use the request message template to configure the request message in a JSON format. You can parameterize the input values in the request message. Configure the advanced properties to set the tracing level and the cache size for the web service response.

You can view the response structure in the field mapping. When you map the elements from the response structure to the output fields, the Secure Agent creates the output groups, along with the primary and foreign keys for the field names. When you deploy the mapping in a mapping task and run the task, the Secure Agent reads the data from Coupa.

Source Transformation Properties

You can use one or more source transformations in a mapping. Use a Joiner transformation to join data from two sources.

When you select a source, the **Properties** panel displays the following information:

General

Configure the name and a description for the source.

Source

Select the connection and the operation, and configure the request options and advanced source properties.

Field Mapping

Map elements of the response structure with the output fields.

Fields

Edit the metadata source field metadata that you want to use in the mapping.

Advanced Source Properties

In a mapping, you can configure a source to represent a Coupa source. For Coupa V2 connections used in Mapping Configuration tasks, you can configure advanced properties on the **Source** page of the Mapping Configuration Task wizard.

The following table describes the advanced properties that you can configure in a source:


Property	Description
Tracing Level	Amount of detail that appears in the log. Use the following tracing levels: - Terse - Normal - Verbose Initialization - Verbose Default is normal.
Cache Size for Web Service Response (KB)	Memory available for the web service response. If the web service response contains many rows or columns, you might want to increase the cache size. Default is 100 KB.

Source Transformation Mapping Example


You are an inventory data administrator and you want to extract details for all the inventory transactions from Coupa to a flat file using Coupa V2 connection.

To read data from Coupa and write to a flat file using Coupa V2 connection, perform the following tasks:

1. Create a Coupa V2 connection.
   The following image shows the configured Coupa V2 connection:

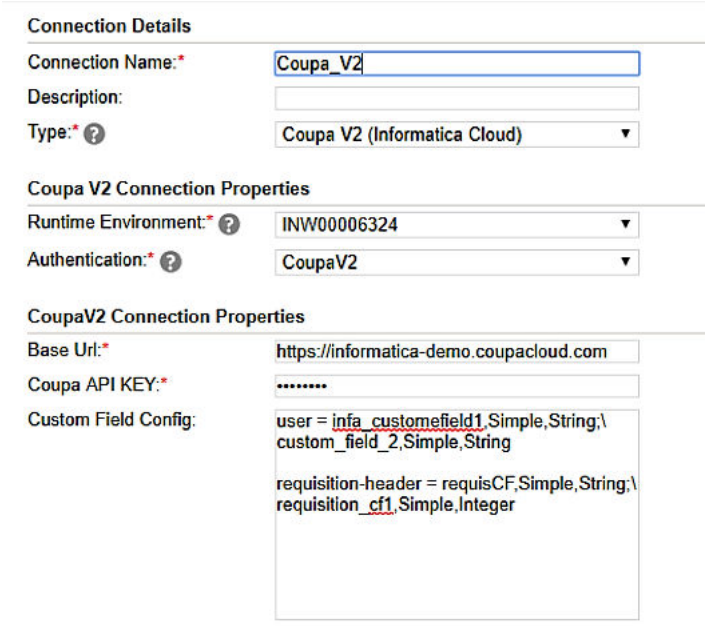


2. Create a flat file connection to write data to the flat file.
3. Create a Coupa V2 mapping.
4. Add a Source transformation. Specify a name and description in the general properties.
5. On the **Source** tab, perform the following steps:
   a. In the **Connection** field, select the configured Coupa V2 connection to connect to the Coupa instance.
   b. In the **Operation** field, select GET_InventoryTransactions_show as the operation.
   The following image shows the GET_InventoryTransactions_show operation:

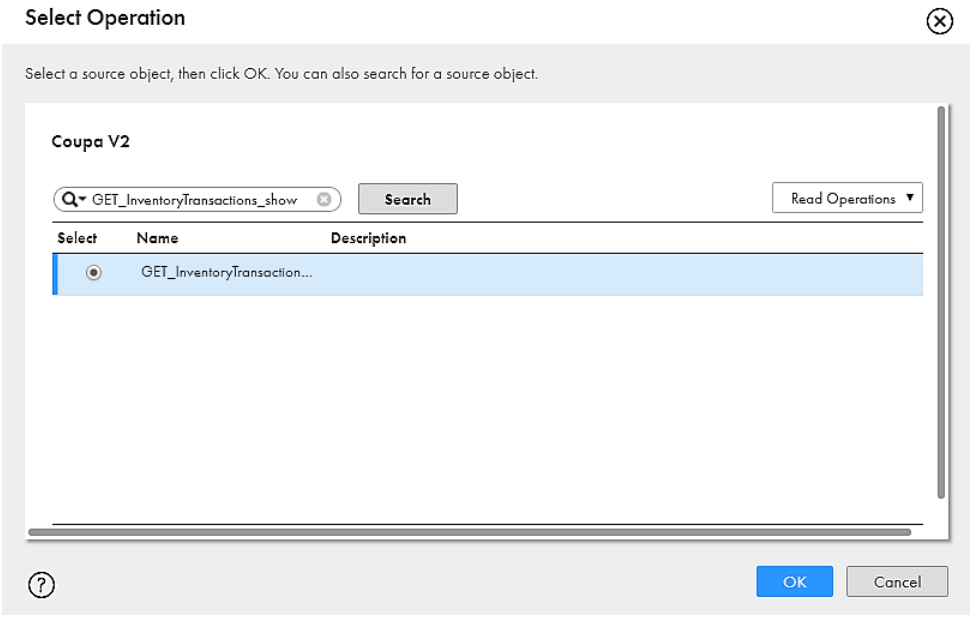

   c. In the **Request Options** section, configure the request message in the following JSON format, specify the attributes in the message, and validate the message:


```
{
  "Id" : "",
  }
```

   The request message specifies the criteria to include inventory transactions of all the commodities. You can hide the optional elements to see the mandatory elements required for the request message. You must have the Web Services Admin (Professional) or Can Administer (Standard) user role to use the user parameter.
   d. In the **Advanced Properties** section, set the tracing level to Normal, and use the default cache size of 1024.
6. On the **Field Mapping** tab, select the elements, such as commodity, supplier-order-number, receiving-warehouse, item, quantity, and order-header-number in the response structure that you want to map to the output fields.
   The following image shows the response structure on the left pane in a hierarchical format and the output groups on the right pane in a relational format:

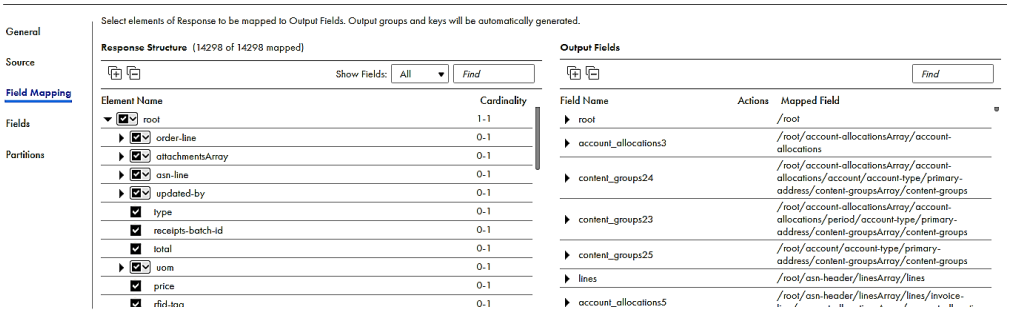


The Secure Agent creates multiple output groups which results in multiple relational output files. Primary and foreign keys are auto-generated.

7. Add multiple Target transformations. Specify name and description in the general properties.
8. Select a flat file connection for the target transformations.
9. Draw links to connect the multiple output groups to a corresponding target transformation.
   The following image shows the **Select Output Group** dialog box where you select the output group to write to each target:

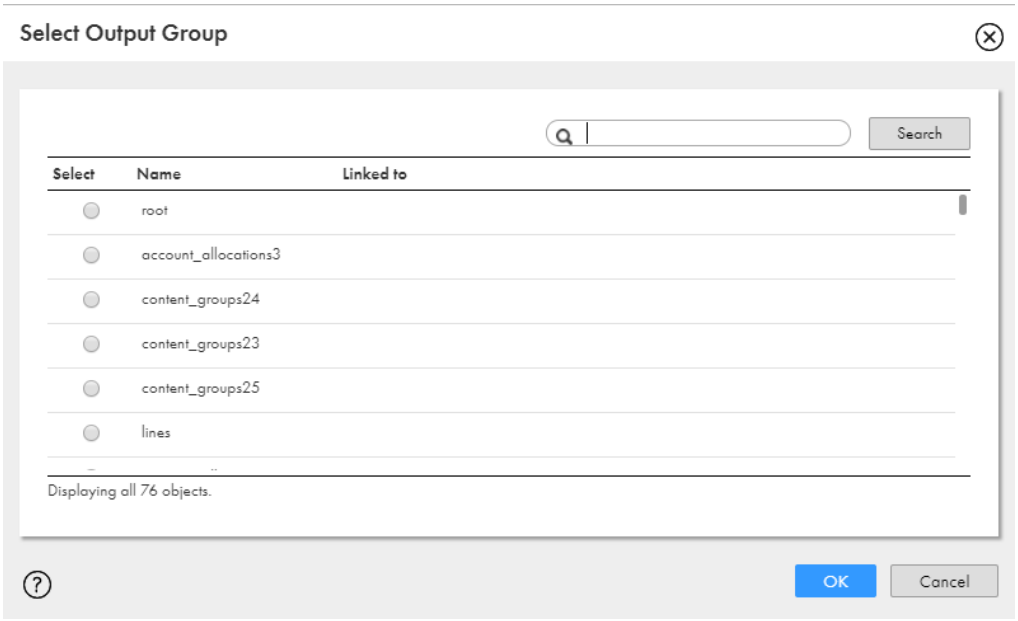

10. On the **Field Mapping** tab, select the automatic field map option.

11. Save and run the mapping.
    The following image shows the Coupa V2 mapping:

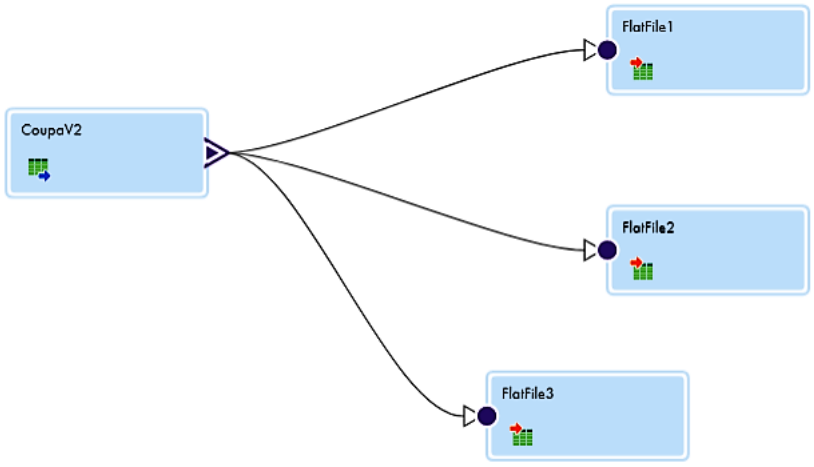

Coupa V2 Target Transformation in Mappings

When you select a Coupa V2 connection for a target, you can select an operation from the list of operations.

You can add multiple input groups into the Coupa V2 target and define the primary and foreign key relationships between the multiple input groups before the mapping.

Target Transformation Properties

You can configure target properties, such as target details and advanced properties, based on the connection type you select. Configure target transformation properties on the **Target** tab of the Properties panel.

When you select a target, the **Properties** panel displays the following areas and information:

- **General**. Defines the transformation name and a description.
- **Incoming Fields**. Includes the field rules that define the data written to the target. Allows a preview of target fields.
- **Target**. Defines the target connection, operation, and advanced options.
- **Target Fields**. Not applicable for Web Service targets.
- **Field Mapping**. Defines the field mappings from the upstream transformation to the target.

Advanced Target Properties

In a mapping, you can configure a target to represent a Coupa V2 target. For Coupa V2 target connections used in mapping tasks, you can configure advanced properties in the Targets page of the Mapping Task wizard.

The following table describes the advanced properties that you can configure in a Target transformation:

Property	Description
Cache Size for Web Service Request (KB)	Memory available for the web service request. If the web service request contains many rows or columns, you might want to increase the cache size. Default is 100 KB.
Transaction Commit Control	Control to commit or roll back transactions based on the set of rows that pass through the transformation. Use the transaction commit control if you have a large amount of data and you want to control how it is processed.

Input settings properties

You can enable **Sorted Input** under **Input Settings**. Sorted Input indicates that input data is presorted. Default is disabled.

Enable sorted input for better performance.


Note: When **Sorted Input** is enabled and the input is not sorted, the Secure Agent does not process input and the mapping fails.

Target Transformation Mapping Example

You are an operation administrator and you want to create an user group in Coupa using Coupa V2 connection.


To create an user group in Coupa from a flat file using Coupa V2 connection, perform the following tasks:

1. Create a flat file connection to read data from the flat file.
2. Create a Coupa V2 connection to write data to Coupa.
   The following image shows the configured Coupa V2 connection:

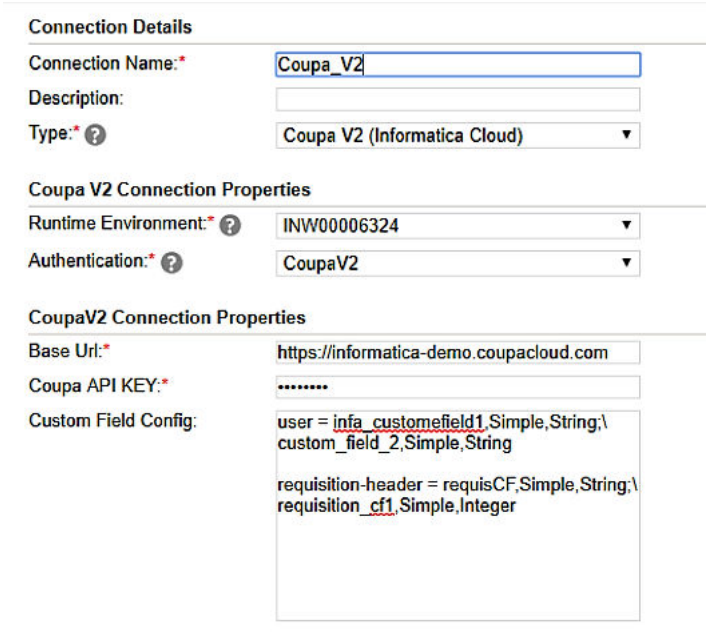


3. Create a Coupa V2 mapping.

4. Add a Source transformation to include the flat file object that contains the user group information. Add the flat file connection.
5. Add a Target transformation to write the user group information to Coupa using POST_UserGroups_create operation. Perform the following tasks on the **Target** tab:
   a. In the **Connection** field, select the Coupa V2 connection to connect to Coupa.
   b. In the **Operation** field, select POST_UserGroups_create as the operation.
   The following image shows the POST_UserGroups_create in the list of write operations:

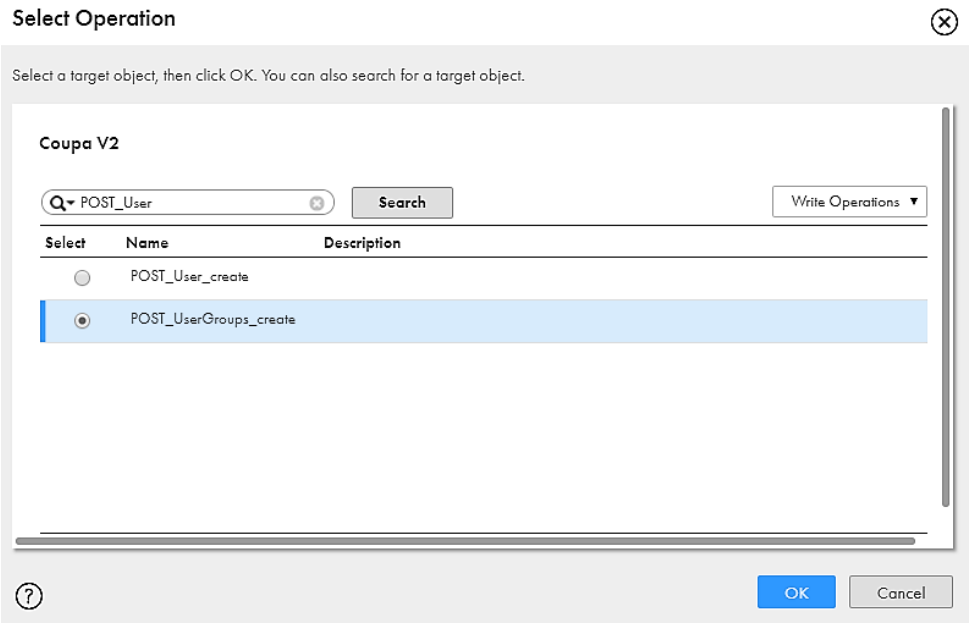

   c. In the **Advanced Properties** section, set the cache size and the transaction commit interval.
6. On the **Field Mapping** tab, select the input elements to map to the target fields.
   The following image shows all the mapped fields between the input file and the Coupa V2 target:

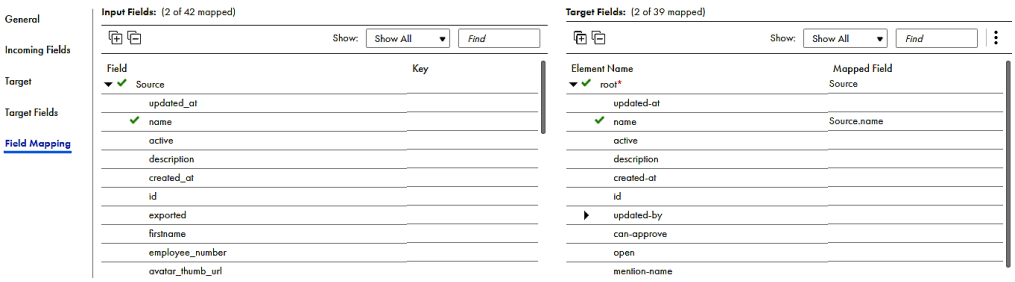

7. When you save and run the mapping in a mapping task, the Secure Agent creates the user group in Coupa.
   The following image shows the Coupa V2 mapping:



Coupa V2 Midstream Transformation in Mappings

Before you configure a midstream transformation, you must create a business service from the **Configure** tab. You must select a Coupa V2 connection and an operation when you create a business service.

When you configure the midstream transformation, select the business service and the operation on the **Web Service** tab.

A Web Services transformation connects to the web service application as a web service client to access, transform, or deliver data. Use the Web Services transformation in the Mapping Designer to construct a web service request and to parse the web service response.


You can map the incoming fields from source file to elements in request structure on the **Request Mapping** tab.

You can view the response structure on the **Response Mapping** tab. When you map the elements from the response structure to the output fields, the Secure Agent creates the output groups, along with the primary and foreign keys for the field names.

Fault Group

The Fault group is used to capture the rows where an error occurs in a mapping for a particular web service.

The following image shows a Web Service with response structure and output fields on the Response Mapping tab. You will see the fault group displayed in the output fields.

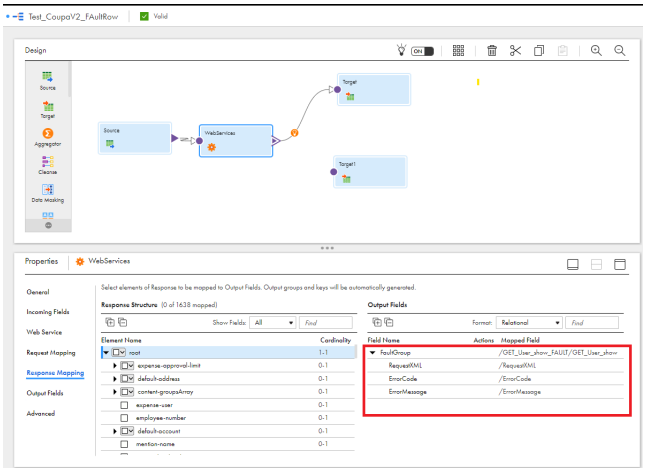

The response structure displays the fault output group by default. The fault group contains the request XML, error code, and error message. The fault group is displayed for the new business services. To map the fault group for the business services created in the previous version of connector, create new business services and import them again.

Advanced Midstream Properties

The following table describes the advanced properties that you can configure for a midstream transformation:

Property	Description
Cache Size for Web Service Request (KB)	Memory available for the web service request. If the request is more than 100 KB, you can increase the cache size. Default is 100 KB.
Cache Size for Web Service Response (KB)	Memory available for the web service response. If the web service response contains many rows or columns, you might want to increase the cache size. Default is 100 KB.
Allow Input Flush	Not applicable.
Transaction Commit Control	Not applicable.

Increasing Secure Agent Memory

If you use GET_User_index_MultiTarget, GET_Invoices _show, or GET_Suppliers_show operation to read data from Coupa, perform the following steps:

1. In Administrator, select **Runtime Environments**.
2. Select the Secure Agent for which you want to increase memory from the list of available Secure Agents.
3. In the upper-right corner, click **Edit**.
4. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
5. Edit **JVMOption1** as '**-Xmx1024m**'.
6. In the **System Configuration Details** section, select the **Type** as **Tomcat JRE**
7. Edit **INFA_MEMORY** as '**-Xms256m -Xmx1024m -XX:MaxMetaspaceSize=128m**'.

   Note: The minimum and maximum values for the Java heap size are given as an example. Specify the size according to your requirements.
8. Restart the Secure Agent.

Rules and guidelines for Coupa V2 mappings

Consider the following rules and guidelines for Coupa V2 mappings:

- If you perform PATCH operation on a Coupa resource, the mapping task fails.
- When you specify multiple custom fields for a particular object, you must separate the custom fields with a new line.
- If a mapping or mapping task fails, the error messages are logged in the session log file located at: `<Secure Agent installation directory>/apps/Data_Integration_Server/logs`.

APPENDIX A

Coupa V2 Data Type Reference

This appendix includes the following topics:

- Coupa V2 Data Type Reference Overview, 38
- Coupa V2 and Transformation Data Types, 38

Coupa V2 Data Type Reference Overview

Data Integration uses the following data types in mappings and mapping tasks with Coupa:

Coupa native data types

Coupa data types appear in the parameters in the Coupa V2 operations and you cannot change these data types.

Transformation data types

Set of data types that appear in the remaining transformations. They are internal data types based on ANSI SQL-92 generic data types, which Data Integration uses to move data across platforms. Transformation data types appear in all remaining transformations in a mapping, or mapping task.

When Data Integration reads or writes Coupa data, it converts the native data types to the comparable transformation data types before transforming the data.

Coupa V2 and Transformation Data Types

The following table lists the Coupa data types that Data Integration supports and the corresponding transformation data types:

Coupa Data Type	Transformation Data Type	Description
BOOLEAN	integer	Logical Boolean (true/false).
DATETIME	string	1 to 65536 characters. In Coupa, string data type handles date/time values.
DATE	string	1 to 65536 characters. In Coupa, string data type handles date/time values.

Coupa Data Type	Transformation Data Type	Description
DECIMAL	double	-2,147,483,648 to 2,147,483,647 Precision 12, scale 0
FLOAT	double	-2,147,483,648 to 2,147,483,647 Precision 12, scale 0
INTEGER	double	-2,147,483,648 to 2,147,483,647 Precision 12, scale 0
STRING	string	1 to 65536 characters.

INDEX

B

business service 36

C

Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5
Coupa
  data types 38
Coupa Connector
  custom attributes 10
Coupa operations
  source operations 14
  target operations 20
Coupa V2
  supported transformations 7
  connector tasks 7
Coupa V2 Connector
  custom fields 10
  overview 7
Coupa V2 operations
  overview 14

D

Data Integration community
  URL 5
data types
  Coupa 38

F

field mapping
  cardinality 19
  foreign key 19
  primary key 19
  Target transformation 28
  XPath expression 19

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Cloud Services
  web site 5
Input Settings Properties 34

M

maintenance outages 6
mapping example
  Source transformation 30
  Target transformation 34
midstream transformation
  advanced properties 37
  request mapping 36
  response mapping 36
  web service 36

S

Secure Agent
  increasing memory 37
source
  field mapping 19
  request message 18
source transformation
  advanced properties 30
  mappings 29
  properties 29
status
  Informatica Intelligent Cloud Services 6
system status 6

T

target transformation
  advance properties 33
  mappings 33
  properties 33
trust site
  description 6

U

upgrade notifications 6

W

web site 5