Informatica®

Informatica® Cloud Data Integration

Google Ads Connector

Informatica Cloud Data Integration Google Ads Connector
October 2025

© Copyright Informatica LLC 2021, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-03

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Google Ads Connector 6

Google Ads Connector assets 6

Administration of Google Ads Connector 11

Chapter 2: Google Ads connections 12

Google Ads connection properties 12

Chapter 3: Mappings and mapping tasks with Google Ads Connector 14

Google Ads sources in mappings 14

- Data filters 15

Chapter 4: Data type reference 17

Google Ads and transformation data types 17

Index 18

Preface

Use *Google Ads Connector* to learn how to read from Google Ads by using Cloud Data Integration. Learn to create a connection, develop mappings, and run mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Google Ads Connector

You can use Google Ads Connector to connect to Google Ads from Data Integration. Use Google Ads Connector to read data from Google Ads.

You can use a Google Ads object as a source in mappings and mapping tasks.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

When you run a task or mapping, the Secure Agent uses the JAVA client libraries of the Google Ads APIs to integrate with Google Ads and read the data.

Note: This connector is developed by Informatica partners, third-party system integrators, or customers. You can look up the Product Availability Matrix or Informatica Marketplace for more information.

Google Ads Connector assets

Create assets to integrate data using Google Ads Connector.

When you use Google Ads Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

Google Ads Connector supports the following Google Ads reports:

- Accessible_bidding_strategy
- Account_budget
- Account_budget_proposal
- Account_link
- Ad
- Ad_group
- Ad_group_ad
- Ad_Group_Ad_Asset_Combination_View

- Ad_group_ad_asset_view
- Ad_group_ad_label
- Ad_group_asset
- Ad_Group_Asset_Set
- Ad_group_audience_view
- Ad_group_bid_modifier
- Ad_group_criterion
- Ad_Group_Criterion_Customizer
- Ad_group_criterion_label
- Ad_group_criterion_simulation
- Ad_Group_Customizer
- Ad_group_extension_setting
- Ad_group_feed
- Ad_group_label
- Ad_group_simulation
- Ad_parameter
- Ad_schedule_view
- Age_range_view
- Android_Privacy_Shared_Key_Google_Ad_Group
- Android_Privacy_Shared_Key_Google_Campaign
- Android_Privacy_Shared_Key_Google_Network_Type
- Asset
- Asset_field_type_view
- Asset_Group
- Asset_Group_Asset
- Asset_Group_Listing_Group_Filter
- Asset_Group_Product_Group_View
- Asset_Group_Signal
- Asset_Group_Top_Combination_View
- Asset_Set
- Asset_Set_Asset
- Asset_Set_Type_View
- Audience
- Batch_Job
- Bidding_Data_Exclusion
- Bidding_Seasonality_Adjustment
- Bidding_strategy
- Bidding_strategy_simulation
- Billing_setup

- Call_view
- Campaign
- Campaign_Aggregate_Asset_View
- Campaign_asset
- Campaign_Asset_Set
- Campaign_audience_view
- Campaign_Audience_View
- Campaign_bid_modifier
- Campaign_budget
- Campaign_Conversion_Goal
- Campaign_criterion
- Campaign_Customizer
- Campaign_draft
- Campaign_extension_setting
- Campaign_feed
- Campaign_Group
- Campaign_label
- Campaign_Lifecycle_Goal
- Campaign_Search_Term_Insight
- Campaign_shared_set
- Campaign_simulation
- Carrier_constant
- Change_event
- Change_status
- Channel_Aggregate_Asset_View
- Click_view
- Combined_audience
- Conversion_action
- Conversion_custom_variable
- Conversion_Goal_Campaign_Config
- Conversion_Value_Rule
- Conversion_Value_Rule_Set
- Currency_constant
- Custom_audience
- Custom_Conversion_Goal
- Custom_interest
- Customer
- Customer_asset
- Customer_Asset_Set

- Customer_client
- Customer_client_link
- Customer_Conversion_Goal
- Customer_Customizer
- Customer_extension_setting
- Customer_feed
- Customer_label
- Customer_Lifecycle_Goal
- Customer_manager_link
- Customer_negative_criterion
- Customer_Search_Term_Insight
- Customer_user_access
- Customer_user_access_invitation
- Customizer_Attribute
- Detail_placement_view
- Detailed_demographic
- Display_keyword_view
- Distance_view
- Domain_category
- Dynamic_search_ads_search_term_view
- Expanded_landing_page_view
- Experiment
- Experiment_Arm
- Extension_feed_item
- Feed
- Feed_item
- Feed_item_set
- Feed_item_set_link
- Feed_item_target
- Feed_mapping
- Feed_placeholder_view
- Gender_view
- Geo_target_constant
- Geographic_view
- Group_placement_view
- Hotel_group_view
- Hotel_performance_view
- Hotel_Reconciliation
- Income_range_view

- Keyword_plan_ad_group
- Keyword_plan_ad_group_keyword
- Keyword_plan_campaign
- Keyword_Plan_Campaign
- Keyword_plan_campaign_keyword
- Keyword_theme_constant
- Keyword_view
- Label
- Landing_page_view
- Language_constant
- Lead_Form_Submission_Data
- Life_event
- Local_Services_Employee
- Local_Services_Lead
- Local_Services_Lead_Conversation
- Local_Services_Verification_Artifact
- Location_view
- Managed_placement_view
- Media_file
- Mobile_app_category_constant
- Mobile_device_constant
- Offline_Conversion_Upload_Client_Summary
- Offline_Conversion_Upload_Conversion_Action_Summary
- Offline_user_data_job
- Operating_system_version_constant
- Paid_organic_search_term_view
- Parental_status_view
- Per_Store_View
- Product_Category_Constant
- Product_group_view
- Product_Link
- Product_Link_Invitation
- Qualifying_Question
- Recommendation
- Recommendation_Subscription
- Remarketing_action
- Search_term_view
- Shared_criterion
- Shared_set

- Shopping_performance_view
- Shopping_Product
- Smart_campaign_search_term_view
- Smart_campaign_setting
- Third_party_app_analytics_link
- Topic_constant
- Topic_view
- Travel_Activity_Group_View
- Travel_Activity_Performance_View
- User_interest
- User_list
- User_List_Customer_Type
- User_location_view
- Video
- Webpage_view

Administration of Google Ads Connector

Before you use Google Ads Connector, you must complete the following prerequisite tasks:

1. Ensure you have a Google Ads client account associated with a Google Ads manager account to access Google Ads.
2. Create the OAuth 2.0 client ID, client secret, refresh token, Google Ads developer token, and login customer ID values for the Google Ads account. You will need to enter these details when you create a Google Ads connection in Data Integration.
   For more information about generating the OAuth 2.0 client ID, client secret, refresh token, Google Ads developer token, and login customer ID, see the Google Ads documentation.
3. Ensure that you have enabled the **Google Ads API** for your project. Google Ads Connector uses the Google APIs to integrate with Google Ads.

CHAPTER 2

Google Ads connections

Create an Google Ads connection to access Google Ads data from Data Integration. You can create a connection on the Connections page or when you create a task. After you create a connection, it becomes available to all users who have access to the organization.

You can use Google Ads connections in mappings and mapping tasks.

Google Ads connection properties

When you create a Google Ads connection, you must configure the connection properties.

The following table describes the Google Ads connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	Name of the runtime environment where you want to run the tasks.
Client ID	Required. The OAuth 2.0 client ID from Google Developer Console.
Client Secret	Required. The OAuth 2.0 client secret from Google Developer Console.

Property	Description
Refresh Token	Required. The OAuth 2.0 refresh token received after you exchange the authorization code for Google Ads.
Developer Token	Required. The developer token from the Google Ads manager account.
Account Customer ID	Required. Unique login customer ID to access the Google Ads account through a manager account.
Include Attributes	Enables the selection of attribute resource fields. Selected by default.
Include Metrics	Enables the selection of metric resource fields. Selected by default.
Include Segments	Enables the selection of segment resource fields. Not selected by default.

CHAPTER 3

Mappings and mapping tasks with Google Ads Connector

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source to represent a Google Ads report.

Describe the flow of data from the source and target along with the required transformations before the Secure Agent reads data from the Google Ads source. In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality. Use the Mapping Task wizard to create a mapping task and select the mapping that you configured. The mapping task processes data based on the data flow logic you define in the mapping. Run the mapping task to read data from a Google Ads source.

Google Ads sources in mappings

To read data from Google Ads, configure a Google Ads object as the Source transformation in a mapping or mapping task.

Specify the name and description of the Google Ads source. Configure the source, query options, and advanced properties for the source object.

The following table describes the source properties that you can configure for a Google Ads source:

Property	Description
Connection	Name of the Google Ads source connection.
Source Type	Type of the Google Ads source objects available. You can read data from a single Google Ads source object or parameterize the object.
Object	Name of the Google Ads source object based on the selected source type.
Filter	Configure a simple filter or an advanced filter to filter rows from the source based on a filter condition. You can improve efficiency by filtering early in the data flow. A simple filter includes a field name, operator, and value. Use an advanced filter to define a more complex filter condition, which can include multiple conditions using the AND or OR logical operators.

The following table describes the advanced properties that you can configure for a Google Ads source:

Property	Description
Customer ID	Required. Specifies the Google Ads client customer ID associated with the Google Ads manager account.

OrderByClause	Comma-separated list of field names for a Google Ads object and the order in which the data appear in the field mapping.
	To specify the order of rows for a field from a Google Ads object, specify the following format:
	`"<objname>.<field_name1>=<ASC or DESC>,<objname>.<field_name2>=<ASC or DESC>"`
	The following example shows the OrderByClause that you can use to group the data in the ad_group object:
	`"ad_group.name=DESC,ad_Group.id=ASC"`

Limit	Species the number of rows to read from a Google Ads source object.

You can set the tracing level in the advanced properties session to determine the amount of details that logs contain.

The following table describes the tracing levels that you can configure:

Property	Description
Terse	The Secure Agent logs initialization information, error messages, and notification of rejected data.
Normal	The Secure Agent logs initialization and status information, errors encountered, and skipped rows due to transformation row errors. Summarizes session results, but not at the level of individual rows.
Verbose Initialization	In addition to normal tracing, the Secure Agent logs additional initialization details, names of index and data files used, and detailed transformation statistics.
Verbose Data	In addition to verbose initialization tracing, the Secure Agent logs each row that passes into the mapping. Also notes where the Secure Agent truncates string data to fit the precision of a column and provides detailed transformation statistics. When you configure the tracing level to verbose data, the Secure Agent writes row data for all rows in a block when it processes a transformation.

Data filters

You can create simple or advanced data filters. You can also create a set of data filters for each object included in a mapping task. Each set of data filters act independently of the other sets.

Simple data filters

You can create one or more simple data filters. When you create multiple simple data filters, the associated task creates an AND operator between the filters and loads rows that apply to all simple data filters.

You can use the `other_resource_filter` field for an object to specify a filter condition on a field of another Google Ads object. You can specify multiple filter conditions for an object using the `other_resource_filter` field.

For example, you can create a data filter for the `ad_group` object and use the `other_resource_filter` field to specify a filter condition on a field of the `campaign` object.


To specify a value for the `other_resource_filter` field, use the following format:

```
<objectName>.<fieldName>|=|<value>
```

```
<objectName>.<fieldName>|BETWEEN|<value>
```

```
<objectName>.<fieldName>|IS NULL
```

The following image shows how you can create a data filter using the `other_resource_filter` field for a Google Ads object:

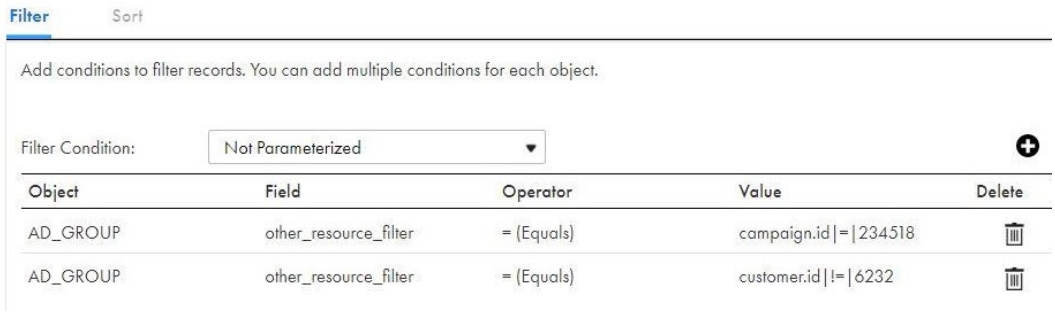

Advanced data filters

You can create an advanced data filter to create complex expressions that use AND, OR, or nested conditions. The expression that you enter becomes the WHERE clause in the Google Ads Query Language (GAQL) query used to retrieve records from the source.

Use the following format to define a filter field in an advanced data filter:

```
SELECT <objectName>.<fieldName1>, <objectName>.<fieldName2> FROM <objectName> WHERE
<conditional expression>
```

To specify an advanced data filter on a field of the ad_group object, see the following example to filter data from the ad_group object using a GAQL query:

```
SELECT ad_group.campaign, ad_group.name FROM ad_group WHERE ad_group.id = 50
```

CHAPTER 4

Data type reference

Data Integration uses the following data types in mappings and mapping tasks with Google Ads:

Google Ads native data types

Google Ads data types appear in the **Fields** tab for Source and Target transformations when you choose to edit metadata for the fields.

Transformation data types

Set of data types that appear in the transformations. They are internal data types based on ANSI SQL-92 generic data types, which the Secure Agent uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data. When Data Integration writes to a target, it converts the transformation data types to the comparable native data types..

Google Ads and transformation data types

The following table describes the data types that Data Integration supports for Google Ads sources and targets:

Google Ads Data Type	Transformation Data Type	Range and Description for the Transformation Data Type
String	String	1 to 104,857,600 characters

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Google Ads 12

D

data filters 15
Data Integration community
  URL 4

G

Google Ads
  connection properties 12
Google Ads connections
  overview 12
Google Ads connector
  supported task and object types 6
Google Ads Connector
  administration 11
  overview 6
Google Ads data types
  mapping to transformation data types 17
  overview 17

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

M

maintenance outages 5
mapping
  Google Ads sources 14
mapping tasks
  overview 14

S

status
  Informatica Intelligent Cloud Services 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4