Informatica® Cloud Data Integration

Klaviyo Connector

Informatica Cloud Data Integration Klaviyo Connector
October 2026

© Copyright Informatica LLC 2023, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-20

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- IDMC web site 4
- IDMC Communities 4
- IDMC Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- IDMC Trust Center 5
- IDMC Pulse Dashboard 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Klaviyo Connector 6

Klaviyo Connector assets 6

Chapter 2: Connections for Klaviyo 7

Prepare for authentication 7

- OAuth 2.0 authorization code 7
- API key 7

Connect to Klaviyo 8

- Before you begin 8
- Connection details 8
- Authentication types 8

Chapter 3: Klaviyo operations 11

Klaviyo objects and operations 11

Klaviyo source operations 16

- Configuring a request using Request Message Editor 17
- Field mapping in a Source transformation 18

Chapter 4: Mappings with Klaviyo 19

Klaviyo Source transformation in mappings 19

- Source transformation properties 19
- Advanced source properties 20

Chapter 5: Data type reference 21

Klaviyo and transformation data types 21

Index 22

Preface

Use Klaviyo Connector to learn how to read from Klaviyo by using Cloud Data Integration. Learn to create a Klaviyo connection, run mappings and tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Klaviyo Connector

Klaviyo Connector uses the Klaviyo REST API to read hierarchical data from objects such as profiles, events, lists, and campaigns.

Create a Klaviyo connection to read customer and marketing data from Klaviyo. You can use the Klaviyo connection in mappings and mapping tasks.

When you run a mapping or task that uses a Klaviyo connection, Data Integration reads the data from Klaviyo based on the workflow and connection configuration.

Klaviyo Connector assets

Create assets in Data Integration to integrate data using Klaviyo Connector.

When you use Klaviyo Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

CHAPTER 2

Connections for Klaviyo

Use a Klaviyo connection to perform read operations on Klaviyo objects.

Create a Klaviyo connection on the Connections page. You can then use the Klaviyo connection to specify sources in mappings and mapping tasks.

Prepare for authentication

You can configure the OAuth 2.0 authorization code or API key authentication types to access Klaviyo.

Before you configure the connection properties, you need to keep the authentication details handy based on the authentication type that you want to use.

OAuth 2.0 authorization code

To connect to Klaviyo using the OAuth 2.0 authorization code, you need the API revision, authorization URL, access token URL, client ID, client secret, authorization code parameters, access token parameters, and scope.

Before you configure the connection, create a public OAuth app in Klaviyo and register the following Informatica redirect URI:

`https://<Informatica cloud hosting facility for your organization>/ma/proxy/oauthcallback`

Klaviyo uses the Proof Key for Code Exchange (PKCE) flow, which requires specific parameters for every authorization request. Generate a unique `code_challenge` and `code_verifier` to pass to the authorization code and access token parameters.

For more information about how to create a public OAuth app and set up the PKCE flow, see Create a public OAuth app and Make API calls using OAuth in the Klaviyo documentation.

API key

To connect to Klaviyo using API key authentication, you need a unique API key that Klaviyo Connector uses to authenticate the API calls made to the Klaviyo endpoint.

When you create the private API key in Klaviyo, grant read access to the Lists scope. You need the Lists scope to establish the connection.

For more information about how to generate and use an API key, see Authentication API Requests in the Klaviyo documentation.

Connect to Klaviyo

Let's configure the Klaviyo connection properties to connect to Klaviyo.

Before you begin

Before you get started, you'll need to get the relevant configuration details from your Klaviyo account based on the authentication type that you want to configure.

Check out "Prepare for authentication" on page 7 to learn more about the authentication prerequisites.

Connection details

When you create a Klaviyo connection, configure the connection properties.

The following table describes the basic connection properties:

Connection property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select the credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. You can specify a Secure Agent or a Hosted Agent.

Authentication types

You can configure the OAuth 2.0 authorization code or API key authentication types to access Klaviyo.

Select the required authentication type, and then configure the authentication-specific parameters.

OAuth 2.0 authorization code authentication

OAuth 2.0 authentication requires the OAuth 2.0 protocol with the Authorization Code grant type to connect to Klaviyo. Authorization code allows authorized access to Klaviyo without the need to share or store your login credentials. This is the default authentication type.

Klaviyo uses the PKCE flow, which requires a unique `code_challenge` and `code_verifier` for every authorization request.

The following table describes the connection properties for OAuth 2.0 authorization code authentication:

Property	Description
API Revision Date	The date-based version of the Klaviyo API you want to connect to. Select the revision date to send in the request message header. The default value is the latest stable version.
Authorization URL	The Klaviyo server endpoint that authorizes the user request. The authorization URL is `https://www.klaviyo.com/oauth/authorize`

Authorization Code Parameters	Additional parameters to use with the authorization URL.
	You can add multiple parameters, separated by commas, in the following JSON format:
	`[{"Name":"<parameter name>","Value":"<parameter value>"}, {"Name":"<parameter name>","Value":"<parameter value>"}]`
	To securely exchange the authorization code when you connect to Klaviyo, you must define the `code_challenge` parameter. To specify the hash algorithm that you used to transform the code verifier, you can define the `code_challenge_method` parameter.
	For example:
	`[{"Name":"code_challenge","Value":"<parameter value>"}, {"Name":"code_challenge_method","Value":"<parameter value>"}]`

Access Token URL	The Klaviyo access token URL that exchanges the authorization code for an access token. The access token URL is `https://a.klaviyo.com/oauth/token`

Access Token Parameters	Additional parameters to use with the access token URL.
	You can add multiple parameters, separated by commas, in the following JSON format:
	`[{"Name":"<parameter name>","Value":"<parameter value>"}, {"Name":"<parameter name>","Value":"<parameter value>"}]`
	To securely exchange the authorization code when you connect to Klaviyo, define the `code_verifier` parameter. For example:
	`[{"Name":"code_verifier","Value":"<parameter value>"}]`

Client ID	The client identifier issued to the client during the application registration process.
Client Secret	The client secret key issued during the Klaviyo application registration process.

Property	Description
Scope	The scope of the access request. To establish a connection to Klaviyo, you must specify the `lists:read` scope at a minimum. To add multiple scopes, separate each scope with a space. For example: `accounts:read campaigns:read lists:read`
Access Token	The access token granted by Klaviyo to access data. Enter an externally generated access token, or click **Generate Token** to populate the access token.

API key authentication

API key authentication requires a unique API key to connect to the Klaviyo endpoint.

The following table describes the connection properties for API key authentication:

Property	Description
API Revision Date	The date-based version of the Klaviyo API you want to connect to. Select the revision date to send in the request message header. The default value is the latest stable revision date.
API Key	The unique private API key that Klaviyo Connector uses to authenticate API calls made to the Klaviyo endpoint.

CHAPTER 3

Klaviyo operations

Klaviyo exposes the web service API that the Secure Agent uses to perform integration tasks through the REST protocol.

When you create a mapping, select a Klaviyo connection and an operation in the Source transformation. Each operation corresponds to a GET endpoint in the Klaviyo REST API. The Secure Agent uses the connection to call that endpoint and read data from Klaviyo. The request and response messages contain hierarchical data in JSON format.

Klaviyo objects and operations

The following table lists the GET operations you can use for Klaviyo objects:

Klaviyo Object	Relative Path to the Object
Accounts	/api/accounts
	/api/accounts/{id}
Campaign Messages	/api/campaign-messages/{id}
	/api/campaign-messages/{id}/campaign
	/api/campaign-messages/{id}/template
	/api/campaign-messages/{id}/relationships/campaign
	/api/campaign-messages/{id}/relationships/template
Campaign Recipient Estimations	/api/campaign-recipient-estimations/{id}
Campaigns	/api/campaigns
	/api/campaigns/{id}
	/api/campaigns/{id}/campaign-messages
	/api/campaigns/{id}/tags
	/api/campaigns/{id}/relationships/campaign-messages

Klaviyo Object	Relative Path to the Object
	/api/campaigns/{id}/relationships/tags
Catalog Categories	/api/catalog-categories
	/api/catalog-categories/{id}
	/api/catalog-categories/{id}/items
	/api/catalog-categories/{id}/relationships/items
Catalog Category Bulk Create Jobs	/api/catalog-category-bulk-create-jobs
Catalog Category Bulk Delete Jobs	/api/catalog-category-bulk-delete-jobs
Catalog Category Bulk Update Jobs	/api/catalog-category-bulk-update-jobs
Catalog Item Bulk Create Jobs	/api/catalog-item-bulk-create-jobs
Catalog Item Bulk Delete Jobs	/api/catalog-item-bulk-delete-jobs
Catalog Item Bulk Update Jobs	/api/catalog-item-bulk-update-jobs
Catalog Items	/api/catalog-items
	/api/catalog-items/{id}
	/api/catalog-items/{id}/categories
	/api/catalog-items/{id}/variants
	/api/catalog-items/{id}/relationships/categories
	/api/catalog-items/{id}/relationships/variants
Catalog Variant Bulk Create Jobs	/api/catalog-variant-bulk-create-jobs
Catalog Variant Bulk Delete Jobs	/api/catalog-variant-bulk-delete-jobs
Catalog Variant Bulk Update Jobs	/api/catalog-variant-bulk-update-jobs
Catalog Variants	/api/catalog-variants
	/api/catalog-variants/{id}
Coupon Code Bulk Create Jobs	/api/coupon-code-bulk-create-jobs
Coupon Codes	/api/coupon-codes
	/api/coupon-codes/{id}
	/api/coupon-codes/{id}/coupon
	/api/coupon-codes/{id}/relationships/coupon

Klaviyo Object	Relative Path to the Object
Coupons	/api/coupons
	/api/coupons/{id}
	/api/coupons/{id}/coupon-codes
	/api/coupons/{id}/relationships/coupon-codes
Custom Metrics	/api/custom-metrics
	/api/custom-metrics/{id}
	/api/custom-metrics/{id}/metrics
	/api/custom-metrics/{id}/relationships/metrics
Data Sources	/api/data-sources
	/api/data-sources/{id}
Events	/api/events
	/api/events/{id}
	/api/events/{id}/metric
	/api/events/{id}/profile
	/api/events/{id}/relationships/metric
	/api/events/{id}/relationships/profile
Flow Actions	/api/flow-actions/{id}
	/api/flow-actions/{id}/flow
	/api/flow-actions/{id}/flow-messages
	/api/flow-actions/{id}/relationships/flow
	/api/flow-actions/{id}/relationships/flow-messages
Flow Messages	/api/flow-messages/{id}
	/api/flow-messages/{id}/flow-action
	/api/flow-messages/{id}/template
	/api/flow-messages/{id}/relationships/flow-action
	/api/flow-messages/{id}/relationships/template
Flows	/api/flows

Klaviyo Object	Relative Path to the Object
	/api/flows/{id}
	/api/flows/{id}/flow-actions
	/api/flows/{id}/tags
	/api/flows/{id}/relationships/flow-actions
	/api/flows/{id}/relationships/tags
Form Versions	/api/form-versions/{id}
	/api/form-versions/{id}/form
	/api/form-versions/{id}/relationships/form
Forms	/api/forms
	/api/forms/{id}/form-versions
	/api/forms/{id}/relationships/form-versions
Images	/api/images
	/api/images/{id}
Lists	/api/lists
	/api/lists/{id}
	/api/lists/{id}/flow-triggers
	/api/lists/{id}/profiles
	/api/lists/{id}/tags
	/api/lists/{id}/relationships/flow-triggers
	/api/lists/{id}/relationships/profiles
	/api/lists/{id}/relationships/tags
Mapped Metrics	/api/mapped-metrics
	/api/mapped-metrics/{id}
	/api/mapped-metrics/{id}/custom-metric
	/api/mapped-metrics/{id}/metric
	/api/mapped-metrics/{id}/relationships/custom-metric
	/api/mapped-metrics/{id}/relationships/metric

Klaviyo Object	Relative Path to the Object
Metric Properties	/api/metric-properties/{id}
	/api/metric-properties/{id}/metric
	/api/metric-properties/{id}/relationships/metric
Metrics	/api/metrics
	/api/metrics/{id}
	/api/metrics/{id}/flow-triggers
	/api/metrics/{id}/metric-properties
	/api/metrics/{id}/relationships/flow-triggers
	/api/metrics/{id}/relationships/metric-properties
Profile Bulk Import Jobs	/api/profile-bulk-import-jobs
Profile Suppression Bulk Create Jobs	/api/profile-suppression-bulk-create-jobs
Profile Suppression Bulk Delete Jobs	/api/profile-suppression-bulk-delete-jobs
Profiles	/api/profiles
	/api/profiles/{id}
	/api/profiles/{id}/conversation
	/api/profiles/{id}/lists
	/api/profiles/{id}/segments
	/api/profiles/{id}/relationships/conversation
	/api/profiles/{id}/relationships/lists
	/api/profiles/{id}/relationships/segments
Segments	/api/segments
	/api/segments/{id}
	/api/segments/{id}/flow-triggers
	/api/segments/{id}/profiles
	/api/segments/{id}/tags
	/api/segments/{id}/relationships/flow-triggers
	/api/segments/{id}/relationships/profiles

Klaviyo Object	Relative Path to the Object
	/api/segments/{id}/relationships/tags
Tag Groups	/api/tag-groups
	/api/tag-groups/{id}
	/api/tag-groups/{id}/tags
	/api/tag-groups/{id}/relationships/tags
Tags	/api/tags
	/api/tags/{id}
	/api/tags/{id}/tag-group
	/api/tags/{id}/relationships/campaigns
	/api/tags/{id}/relationships/flows
	/api/tags/{id}/relationships/lists
	/api/tags/{id}/relationships/segments
	/api/tags/{id}/relationships/tag-group
Template Universal Content	/api/template-universal-content
	/api/template-universal-content/{id}
Templates	/api/templates
	/api/templates/{id}
Tracking Settings	/api/tracking-settings
	/api/tracking-settings/{id}
Web Feeds	/api/web-feeds
	/api/web-feeds/{id}

Klaviyo source operations

Create a Source transformation in the Mapping Task wizard to read data from Klaviyo.

To configure the Source operation, perform the following steps:

1. In the Source transformation, select a Klaviyo connection.
2. On the **Source** tab, select an operation from the list of operations.

3. Configure the request message for the operation. Copy the request message from the sample template, and edit the JSON based on your use case.

Configuring a request using Request Message Editor

When you create a Source transformation, configure a JSON request message for the operation that you want to perform in Klaviyo.


Use the **Request Message Editor** to create a request message. The request message uses the JSON format and contains request parameters exposed by the Klaviyo REST API for a specific operation. You can use the default request message for the operation, and then customize it to specify the data that you want to include.

To customize your request, copy the request message from the sample template to the **Request Message Editor** pane where you can edit the JSON message and add the attributes for the request. Remove unnecessary and empty tags from the request message to avoid operation failure. You can hide the optional elements to see the required elements for the request message.

For example, to retrieve a specific profile with the `get_profiles` operation, use the `filter` parameter. The following sample request message shows the filter parameter:

```
{
  "filter": "equals(email,'testuser06@example.com')"
}
```

The following image shows the request message template and a request message configured to filter profiles in the Mapping Designer:

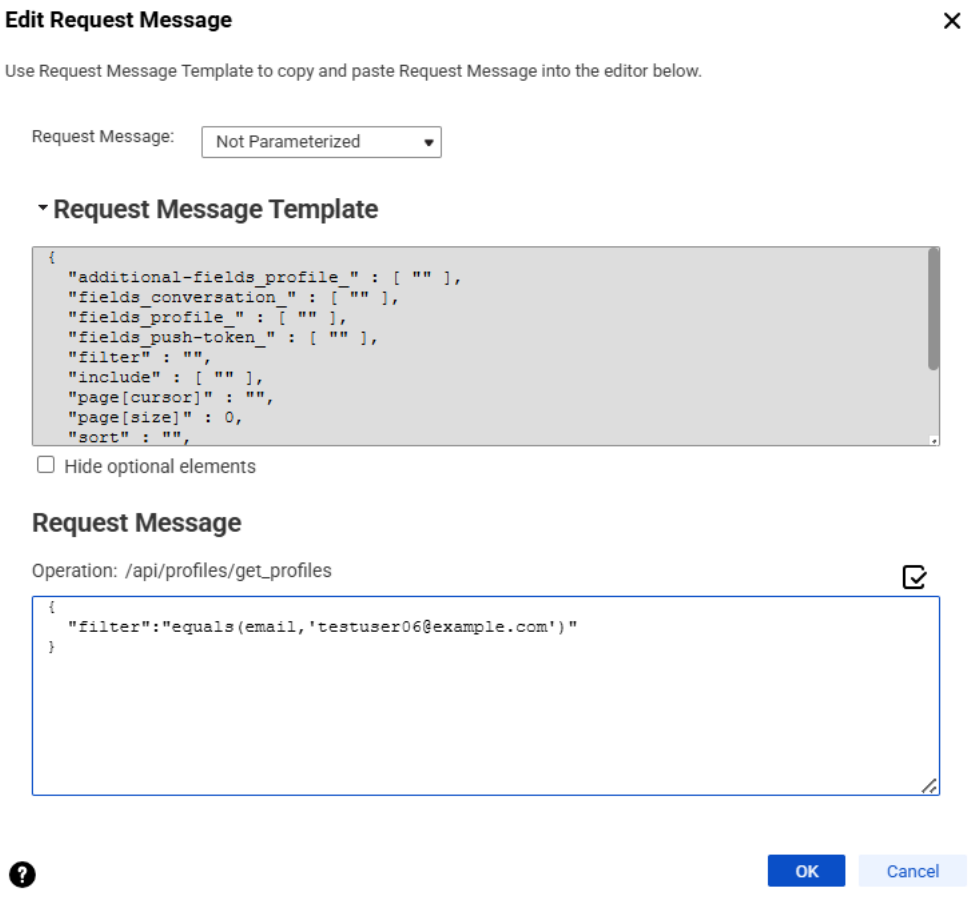

To retrieve profiles created after a specific date and sort them in an ascending order by creation date, combine the `filter` and `sort` parameters. The following sample request message shows these parameters::

```
{
  "filter" : "greater-than(created,2026-01-01T00:00:00Z)",
  "sort" : "created"
}
```

The request message format in Klaviyo Connector follows the service request definition in Klaviyo. Use well-formed JSON in the request message, and include the parameters that you need for your use case.


Field mapping in a Source transformation

The response message format follows the service response definition in Klaviyo. You can map response fields from a hierarchical to a relational structure of output groups and fields.

After you configure an operation for a source and specify the request message, create the relational format from the hierarchical data to include groups and fields that you want in the output.

Select the elements in the response structure that you want to include as output fields. The Secure Agent converts the JSON response in the hierarchical structure to relational groups at run time.

The following image shows an example hierarchical response structure generated for the `get_profiles` operation, and the corresponding relational output fields for the response:

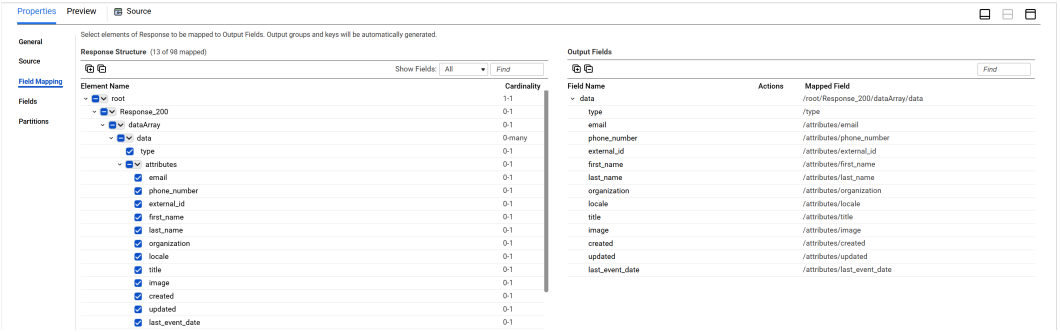

You can edit the data type, precision, and scale for the groups and fields after mapping the fields.

For more information about field mapping, see *Transformations* in the Data Integration documentation.

CHAPTER 4

Mappings with Klaviyo

When you create a mapping, you define the source to represent a Klaviyo object. Use the Mapping Designer in Data Integration to add the Source transformation in the mapping canvas and configure the Klaviyo source properties.

Klaviyo Source transformation in mappings

When you configure a Source transformation, select a Klaviyo connection and choose an operation to represent a Klaviyo source.

Use the request message template to configure the request message in JSON format.

You can view the response structure in the field mapping. When you map elements from the response structure to the output fields, the Secure Agent creates the output groups, along with primary and foreign keys for the fields. When you deploy the mapping in a mapping task and run the task, the Secure Agent reads the data from Klaviyo.

Source transformation properties

You can use one or more Source transformations in a mapping.

When you select a source, the **Properties** panel displays the following tabs:

- **General**. Configure the name and description for the source.
- **Source**. Select the connection and the operation, configure the request message in the request options, and configure the advanced source properties.
- **Field Mapping**. Map elements with the response structure to the output fields.
- **Fields**. Edit the metadata of the source fields that you want to use in the mapping.

Advanced source properties

In a mapping, you can configure a Source transformation to represent a Klaviyo source. If you use the Klaviyo connection in a mapping task, you can also configure advanced properties on the **Source** page of the Mapping Task wizard.

Property	Description
Tracing Level	Amount of detail that appears in the log. Use the following tracing levels: - Terse - Normal - Verbose Initialization - Verbose data Default is normal.

CHAPTER 5

Data type reference

Data Integration uses the following data types in mappings and mapping tasks with Klaviyo:

Klaviyo native data types: Klaviyo data types that appear in the fields tab for Source transformations when you choose to edit metadata for the fields.

Transformation data types: Set of data types that appear in the remaining transformations. They are internal data types based on ANSI SQL92 generic data types, which Informatica Cloud uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When the Secure Agent reads source data, it converts the native data types to the comparable transformation data types before transforming the data.

Klaviyo and transformation data types

The following table describes the Klaviyo data types that Data Integration supports and the corresponding transformation data types:

Klaviyo Native Data Type	Transformation Data Type	Range and Description
Array	Binary	1 to 65,535 characters
Binary	Binary	1 to 65,535 bytes
Boolean	String	1 to 65,535 characters
Decimal	Decimal	Precision 1 to 31, scale 0 to 10
Integer	Integer	-2,147,483,648 to 2,147,483,647
Object	String	1 to 65,535 characters
String	String	1 to 65,535 characters
Timestamp	Date/Time	Jan 1, 0001 00:00:00 to Dec 31, 9999 23:59:59

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Klaviyo 8

D

Data Integration community
  URL 4
data types
  mapping to transformation data types 21

F

field mapping
  cardinality 18
  foreign key 18
  primary key 18
  XPath expression 18

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Data Management Cloud
  web site 4

K

Klaviyo
  connection properties 8
  Operations Overview 11
Klaviyo connection 8
Klaviyo connections
  overview 7
Klaviyo Connector
  assets 6
Klaviyo Connector *(continued)*
  overview 6
Klaviyo data types
  overview 21

M

maintenance outages 5
mapping tasks
  overview 19

S

source
  field mapping 18
  read operations 16
  request message 17
source transformation
  advanced properties 20
  mappings 19
  properties 19
status
  IDMC 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4