Informatica® Cloud Data Integration

...

Microsoft SharePoint Connector

Informatica Cloud Data Integration Microsoft SharePoint Connector
...
October 2025

© Copyright Informatica LLC 2017, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-03

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- Informatica Intelligent Cloud Services web site 5
- Informatica Intelligent Cloud Services Communities 5
- Informatica Intelligent Cloud Services Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- Informatica Intelligent Cloud Services Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: Introduction to Microsoft SharePoint Connector 7

Microsoft SharePoint Connector Overview 7

Microsoft SharePoint Supported Objects and Task Operations 8

Chapter 2: Microsoft SharePoint Connections 9

Microsoft SharePoint Connections Overview 9

Microsoft SharePoint connection properties 9

Chapter 3: Synchronization Tasks with Microsoft SharePoint Connector 11

Microsoft SharePoint Sources in Synchronization Task 11

Microsoft SharePoint Targets in Synchronization Task 12

Data Filters 12

Synchronization Task Example 13

Chapter 4: Mappings and Mapping Tasks with Microsoft SharePoint Connector 16

Microsoft SharePoint Sources in Mappings 16

Microsoft SharePoint Targets in Mappings 16

Chapter 5: Troubleshooting 18

Troubleshooting Overview 18

Troubleshooting Synchronization Task 18

Increasing the secure agent memory 19

Read Data with HTML Tags 20

Modifying Field Precision 21

Chapter 6: Frequently Asked Questions and Answers 23

Frequently Asked Questions and Answers 23

Index **27**

Preface

Use *Microsoft SharePoint Connector* to learn how to read from or write to Microsoft SharePoint by using Cloud Data Integration. Learn to create a connection, develop and run synchronization tasks, mappings, and mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Microsoft SharePoint Connector

This chapter includes the following topics:

- Microsoft SharePoint Connector Overview, 7
- Microsoft SharePoint Supported Objects and Task Operations, 8

Microsoft SharePoint Connector Overview

You can use Microsoft SharePoint Connector to connect to Microsoft SharePoint from Data Integration.

Use Microsoft SharePoint Connector to read data from or write data to Microsoft SharePoint. You can use Microsoft SharePoint objects as sources and targets in synchronization tasks, mappings, and mapping tasks.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

When you run a task or mapping, the Secure Agent uses the Microsoft SharePoint API to perform the specified operation and reads data from or writes data to Microsoft SharePoint.

Microsoft SharePoint Connector supports only the default port. You cannot use any other port except the default port.

Note: Microsoft SharePoint Connector supports only Windows operating system.

Microsoft SharePoint Supported Objects and Task Operations

The following table lists the Microsoft SharePoint objects and task operations that you can include in Data Integration tasks:

Objects	Read	Write	Query	Insert	Update	Upsert	Delete	Data Preview	Lookup
List	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Document Library	Yes	Yes	Yes	Yes	NA	NA	Yes	Yes	Yes

To upsert data using a secondary key, you must map the source key field to the target secondary key field that you intend to use. If you specify the **Secondary Key for Upsert** field in the advanced target property, you must not map the target ID field in the **Field Mapping**.

To insert data using a secondary key, you must ensure that the secondary key field does not contain null values.

You must specify the ID to delete data from the list object. You must specify the ID, name, and the path to delete data from the document library object.

Note: You need to create custom objects using list or document libraries in Microsoft SharePoint application. Use Microsoft SharePoint Connector to download attachments from the custom list object in Microsoft SharePoint. The document library object supports attachments up to 10 MB.

When you download an attachment and if another file exists with the same name, the Secure Agent overwrites the existing file in the target folder. Field Length for any object should not exceed 65 characters.

CHAPTER 2

Microsoft SharePoint Connections

This chapter includes the following topics:

- Microsoft SharePoint Connections Overview, 9
- Microsoft SharePoint connection properties, 9

Microsoft SharePoint Connections Overview

Create a Microsoft SharePoint connection to connect to Microsoft SharePoint and read data from or write data to Microsoft SharePoint. You can use Microsoft SharePoint connections in synchronization tasks, mappings, and mapping tasks.

Microsoft SharePoint connection properties

When you create a Microsoft SharePoint connection, you must configure the connection properties.

The following table describes the Microsoft SharePoint connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.

Property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	Name of the runtime environment where you want to run tasks. Select a Secure Agent or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Username	Enter the Microsoft SharePoint account username.
Password	Enter the Microsoft SharePoint account password.
SharePoint URL	Enter the URI for the data source exposed via OData protocol layer. All requests are extensions of this URI. For example, `https://infasharepoint.abcd.com/ Site/_vti_bin/Data.svc`
UTC Offset	Select the UTC time offset to be appended with datetime field. The default value is UTC. When you use the $LastRuntime variable in a data filter, use the time zone to offset the $LastRuntime variable.
Attachment File Path	Optional. Specify the folder path where you want to download and attach the file to Microsoft SharePoint.
Batch Size	Defines the number of rows to be fetched from Microsoft SharePoint server.
Enable Logging	Select the checkbox to enable logging.

CHAPTER 3

Synchronization Tasks with Microsoft SharePoint Connector

This chapter includes the following topics:

- Microsoft SharePoint Sources in Synchronization Task , 11
- Microsoft SharePoint Targets in Synchronization Task , 12
- Data Filters, 12
- Synchronization Task Example, 13

Microsoft SharePoint Sources in Synchronization Task

You can configure the Microsoft SharePoint source properties on the **Source** page of the Synchronization Task wizard.
The following table describes the Microsoft SharePoint source properties:

Property	Description
Connection	Name of the Microsoft SharePoint source connection.
Source Type	Type of the Microsoft SharePoint source object available.
Source Object	Name of the source object.
Display technical names instead of labels	Displays technical names instead of business names.
Display source fields in alphabetical order	Displays source fields in alphabetical order. By default, fields appear in the order returned by the source system.

Microsoft SharePoint Targets in Synchronization Task

You can configure the Microsoft SharePoint target properties on the **Target** page of the Synchronization Task wizard.
The following table describes the Microsoft SharePoint target properties:

Property	Description
Connection	Name of the Microsoft SharePoint target connection.
Target Type	Type of the Microsoft SharePoint target object available.
Target Object	Name of the target object.
Display source fields in alphabetical order	Displays target fields in alphabetical order. By default, fields appear in the order returned by the target system.

The following table describes the Microsoft SharePoint advanced target properties:

Property	Description
Secondary Key for Upsert	Specify the name of the secondary key field. You must enter the same name of the **Secondary Key for Upsert** field that you specified in the Microsoft SharePoint application.
Success File Directory	This attribute is not applicable for Microsoft SharePoint Connector.
Error File Directory	This attribute is not applicable for Microsoft SharePoint Connector.

Data Filters

You can create simple data filters. You can also create a set of data filters for each object included in a synchronization task.

The following table provides information on the various available filters:

Objects	Filters	Operators	Allowed Values
List, Document Libraries	ContentTypeID	Equals,NotEquals, Startswith	Any String
	Title		
	Modified	Equals, NotEquals, LessThan,LessThanEquals, GreaterThan, GreaterThanEquals	Any DateTime
	Created		Any DateTime
	CreatedById		Any Integer

Objects	Filters	Operators	Allowed Values
	ModifiedById		Any Integer
	ContentType	Equals, Not Equals	Any String
	Version	Equals, NotEquals, LessThan,LessThanEquals, GreaterThan, GreaterThanEquals	Any Integer
	Path	Equals,NotEquals, Startswith	Any String
	ID	Equals, NotEquals, LessThan,LessThanEquals, GreaterThan, GreaterThanEquals	Any Integer
Document Libraries	IsCurrentVersion	Equals	0/1
	Name	Equals,NotEquals, Startswith	Any String

Note:

- You can create custom fields or columns in the Microsoft SharePoint application and assign it in a synchronization task.
- In boolean data type, zero is considered as false. One and others values are considered as true.
- The above mentioned fields are the default filter fields or columns for Microsoft SharePoint list and document libraries.
- You can use $LastRunTime and $LastRunDate variables in a data filter.

Synchronization Task Example

You can create a synchronization task to read data from a Microsoft SharePoint source and write data to the Microsoft SharePoint target.

- You need to create a Microsoft SharePoint connection before you configure the synchronization task.
- You can upload attachments to the doc library only when you are using the Sharepoint 2013 version.
- When you upgrade from Sharepoint 2013 and run an existing mapping, you need to refresh the existing mapping and the fields for the task to run successfully.
- Ensure that the Microsoft Sharepoint document library path from where you want to read or write data does not contain special characters. When you import the objects, the data preview fails to display the objects.

1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Task**, and click **Create**.

   The **Definition** tab appears.

3. Configure the following fields on the **Definition** tab:

Field	Description
Task Name	Name of the synchronization task.
Description	Description of the synchronization task. Maximum length is 255 characters.
Task Operation	Select the task operation that you want to perform.

4. Click **Next**.

   The **Source** tab appears.

5. Specify the source **Connection** and **Source Object** to be used for the task.
6. Click **Next**.

   The **Target** tab appears.

7. Select the target **Connection** and **Target Object** required for the task.
8. Click **Next**.

   The **Data Filters** tab appears.

9. Select the filter object, filter field, and filter operator to create a data filter on the **Data Filters** page.
10. Click **Next**.

    The **Field Mapping** tab appears.

11. Click **Automatch** on the **Field Mapping** tab to map source fields to target fields accordingly.

    When you insert data in the document library object, you must specify the Name, Body, BodyLength, and ContentType fields.

    - When you select Source connection as Salesforce or any database and Target connection as Microsoft SharePoint, in the field mapping: Edit Body function and then add DEC_BASE64 expression to map the body. You need to ensure that “BodyLength” is mapped.
    - When you select Source connection as Microsoft SharePoint and Target connection as Salesforce or any database, in the field mapping: Edit Body function and then add ENC_BASE64 expression to map the body. You need to ensure that “BodyLength” is mapped.
    - To add or edit expression in Field Mapping, click fx.

    Note:

    - If you exceed the maximum path length of 2048 characters for POST and GET requests in the **Field Mapping** tab, the following error message appears:

      ```
      Read operation failed
      ```

    - You can upload attachments to the doc library only when you are using the Sharepoint 2013 and 2016 versions.
    - When you upgrade from Sharepoint 2013 version and run an existing mapping, if the mapping fails then refresh the mappings and run the mapping again.

12. Click **Validate Mapping** to validate the mapping.
13. Click **Next**.

    The **Schedule** tab appears where you can schedule the task for each requirement and save.

14. Configure the advanced source properties on the **Schedule** tab.

15. Click **Save** > **Finish**.
16. Select the synchronization task from the **Explore** page and click **Actions** > **Run**.

    In the **Monitor**, you can monitor the status of the logs after you run the task.

CHAPTER 4

Mappings and Mapping Tasks with Microsoft SharePoint Connector

Use the Data Integration Mapping Designer to create a mapping.In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

Microsoft SharePoint Sources in Mappings

To read data from a Microsoft SharePoint source, configure a Microsoft SharePoint object as the Source transformation in a mapping.

Specify the name and description of the Microsoft SharePoint source. Configure the source properties for the source object.

The following table describes the Microsoft SharePoint source properties:

Property	Description
Connection	Microsoft SharePoint source connection.
Source Type	Type of the Microsoft SharePoint source object available.
Object	Name of the source object for the mapping.
Filter	Configure a filter to remove rows at the source.

Microsoft SharePoint Targets in Mappings

To write data from a Microsoft SharePoint target, configure a Microsoft SharePoint object as the Target transformation in a mapping.

Specify the name and description of the Microsoft SharePoint target. You can configure the target and advanced properties for the target object.

The following table describes the Microsoft SharePoint target properties:

Property	Description
Connection	Name of the Microsoft SharePoint target connection.
Target Type	Type of the Microsoft SharePoint target object available.
Object	Name of the target object.
Operation	Select the target operation.

The following table describes the Microsoft SharePoint advanced target properties:

Property	Description
Secondary Key for Upsert	Specify the name of the secondary key field. You must enter the same name of the **Secondary Key for Upsert** field that you specified in the Microsoft SharePoint application.
Success File Directory	This attribute is not applicable for Microsoft SharePoint Connector.
Error File Directory	This attribute is not applicable for Microsoft SharePoint Connector.

CHAPTER 5

Troubleshooting

This chapter includes the following topics:

- Troubleshooting Overview, 18
- Troubleshooting Synchronization Task, 18
- Increasing the secure agent memory, 19
- Read Data with HTML Tags, 20
- Modifying Field Precision, 21

Troubleshooting Overview

Use the following sections to troubleshoot errors in Microsoft SharePoint Connector.

Troubleshooting Synchronization Task

When you create a synchronization task that contains an invalid configuration, the Secure Agent displays a NULL error message. The NULL error message files are saved in a specific location. For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\<latest version of connector>\ICS\main\tomcat\log`.

The session log captures the log and exception details of a failed synchronization task. You require special permission to run the application in debug mode.

If you exceed the maximum path length of 2048 characters for POST and GET requests in the field mapping, the following error message appears:

```
Read operation failed
```


For more information about the maximum path length limitation for POST and GET requests, see https://support.microsoft.com/en-us/help/208427/maximum-url-length-is-2-083-characters-in-internet-explorer

Increasing the secure agent memory

To increase performance and avoid runtime environment memory issues, perform the following steps:


1. In Administrator, select **Runtime Environments**.
2. Select the Secure Agent for which you want to increase memory from the list of available Secure Agents.
3. In the upper-right corner, click **Edit**.
4. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
5. Edit **JVMOption1** as **-Xms4056m** and **JVMOption2** as **-Xmx4056m**.

   The following image shows the **Details** page:

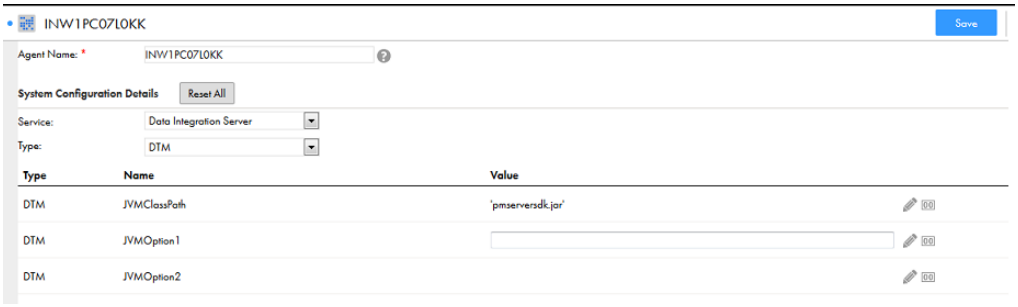

6. In the **System Configuration Details** section, select the **Type** as **TomCatJRE**
7. Edit **INFA_memory** as **-Xms256m -Xmx512m**.

The following image shows the **Agent Details** page:

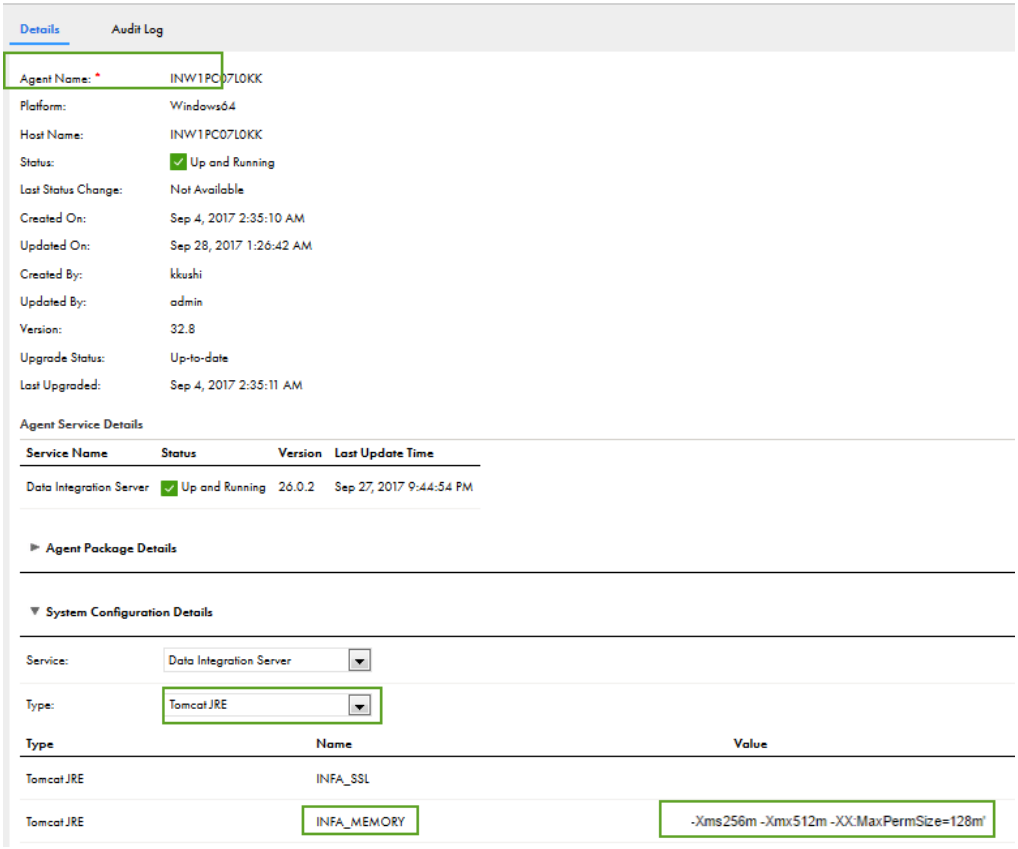

Note: The minimum and maximum values for the Java heap size are given as an example. Specify the size according to your requirements.

8. Restart the Secure Agent.

Read Data with HTML Tags

When you read data containing HTML tags from the source, the agent reads the data as plain text. If you want to read data with HTML tags, set the `preserveSPHTMLcontent` property to true in the `pmrdtm.cfg` and `tomcat.cfg` files.

To set the value of the `preserveSPHTMLcontent` property, perform the following steps:

1. In Administrator, select **Runtime Environments**.

   The **Runtime Environments** page appears.
2. Select the Secure Agent for which you want to set the `preserveSPHTMLcontent` property.
3. In the upper-right corner, click **Edit**.
4. Select the **Service** as **Data Integration Server** in the **Custom Configuration Details** section.
5. Select the **Type** as **DTM** in the **Custom Configuration Details** section.
6. Add `preserveSPHTMLcontent` in the **Name** field.

7. Set the **Value** as **true**.
8. Click the add icon to add another custom configuration property.
9. Select the **Service** as **Data Integration Server** of the newly added custom configuration property.
10. Select the **Type** as **Tomcat**.
11. Add `preserveSPHTMLcontent` in the **Name** field.
12. Set the **Value** as **true**.

    The following image shows the **Custom Configuration Details** section.



13. Click **OK**.
14. Restart the Secure Agent.

Modifying Field Precision

The Microsoft SharePoint string fields have a default field length of 255 characters. To increase the default value, you need to edit `SharePointColumns.properties` file.

Modify the `SharePointColumns.properties` file in the following locations:

- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \plugins\<plugin ID>`
- `<Secure Agent installation directory>\downloads\<latest connector zip package>\package \rdtm\javalib\<plugin ID>`

Note: It is suggested to modify connection parameters at one file location and then copy the modified file to other location. The syntax for entering the columns or fields precision in the properties file is as follows:

```
<ObjectName.Column/Field Name=Column/Field Size >
```

For example, `CTSList.SkillsetDescription=1024`

The following figure is a reference `SharePointColumns.properties` file.

```
#Object Name=LIST
[FIELDLENGTH]
CTSList.TechSkills=512
CTSList.Experience=25
CTSList.SkillsetDescription=1024
CTSList.CreatedById=300
CTSList.DescAboutPrj=2040
#Object Name=LIBRARY
[FIELDLENGTH]
CTSDOCLibrary.Name=100
CTSDOCLibrary.Title=512
CTSDOCLibrary.ProjectDesc=1024
CTSDOCLibrary.Resources=64
CTSDOCLibrary.ProjectCost=32
```

Note: After you modify the `SharePointColumns.properties` file, you must restart the Secure Agent and then refresh the corresponding synchronization task.

CHAPTER 6

Frequently Asked Questions and Answers

This chapter includes the following topic:

- Frequently Asked Questions and Answers, 23

Frequently Asked Questions and Answers

The following section lists out the frequently asked questions and answers:

Which versions are currently supported by Microsoft SharePoint?

Answer:

Microsoft SharePoint currently supports version 2010, 2013, 2016 and 2019.

What set up should be performed on Microsoft SharePoint to work with Data Integration and Secure Agent?

Answer:

- You do not require any set up on the Microsoft Sharepoint.
- You must access Microsoft Sharepoint Odata REST URL.

Note: For relevant documentation for Microsoft Sharepoint 2013, see `http://msdn.microsoft.com/en-us/library/office/fp142380(v=office.15).aspx`


- The Odata REST URL needs to be accessible from the machine where the Secure Agent is installed.

Does Microsoft SharePoint require Windows authentication?

Answer:

- The connector uses HTTP based authentication from the connection screen by default.
- It supports Windows based authentication directly.


- You can start the service by using configured user account of Microsoft SharePoint Windows.

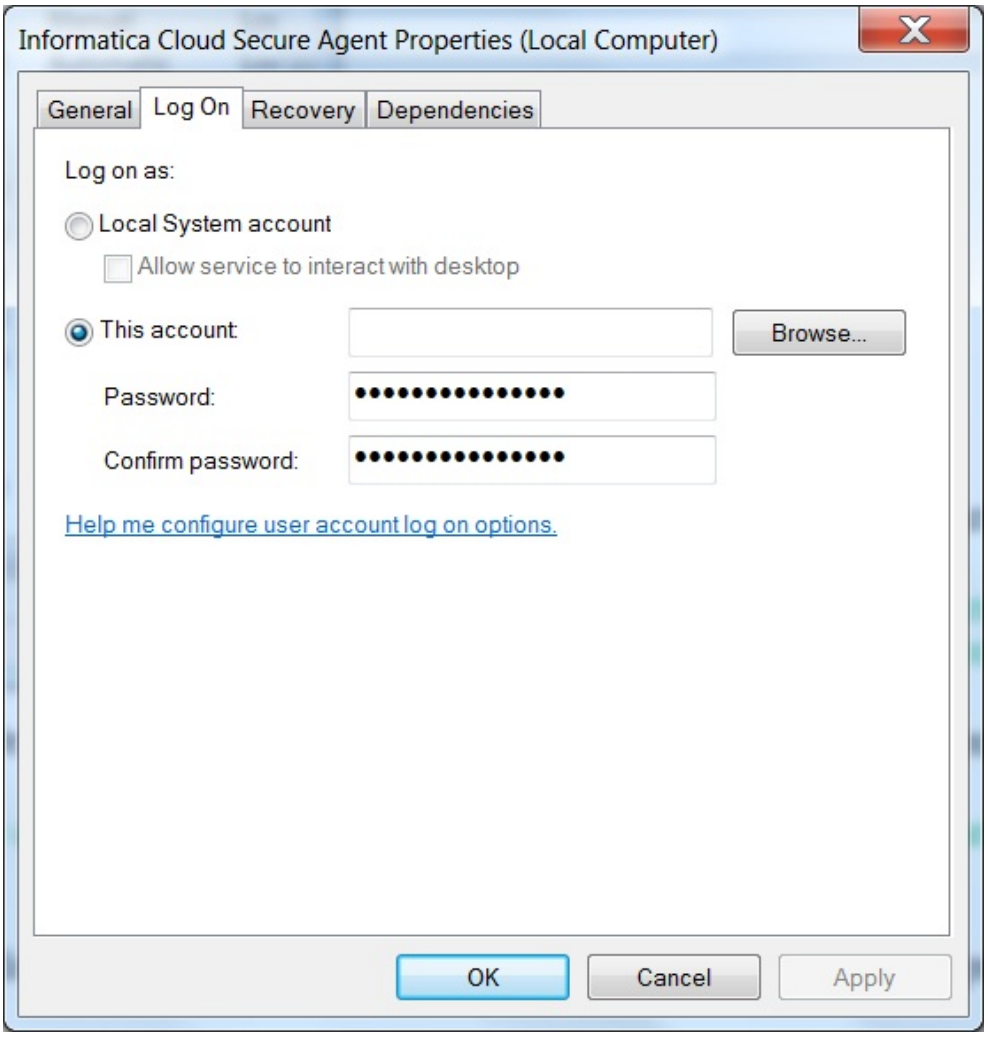


If the Microsoft SharePoint server is configured to use Windows authentication and User identity in Active Directory Domain Services (AD DS), then you must start the Secure Agent with Windows/AD user account. The same account which has relevant access to Microsoft SharePoint server.

Perform the following steps to restart the agent:

1. Select **Services** program.
2. In **Services**, search for **Informatica Cloud Secure Agent**.




3. Right click Informatica Cloud Secure Agent and select **Properties**.

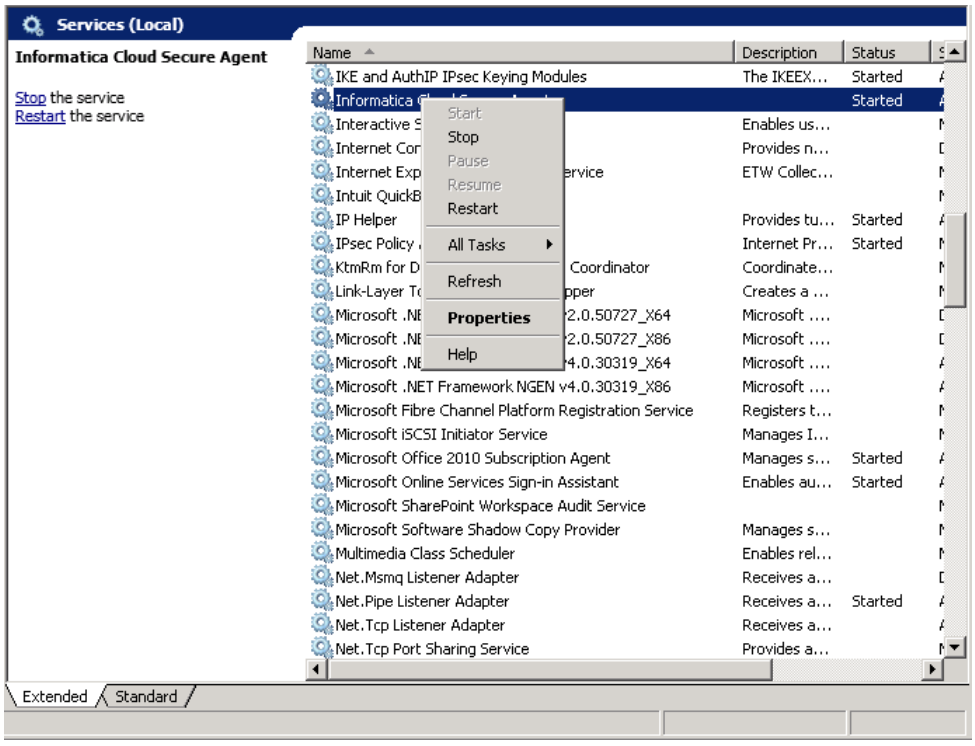

Informatica Cloud Secure Agent Properties page appears.

4. Select **Log On** tab.
5. Select **This account**.

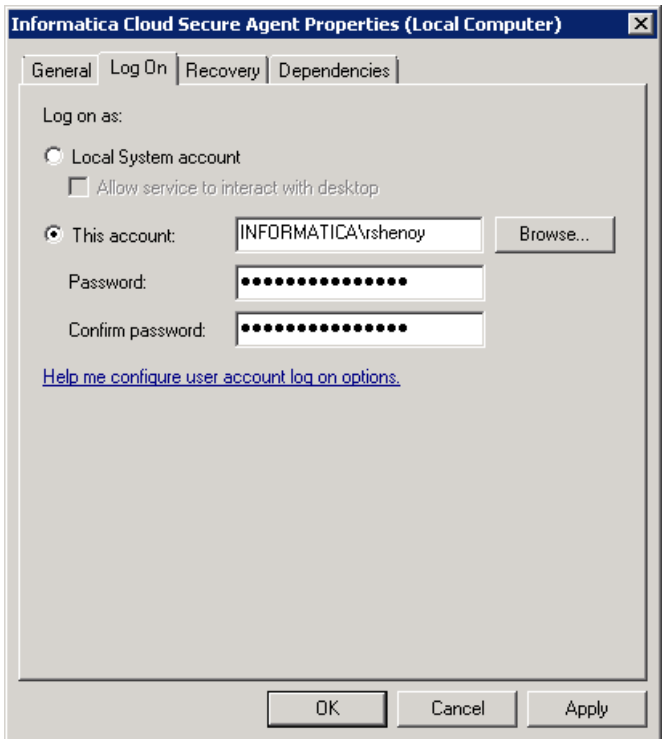

6. Specify account name and **Password** as show in the previous figure.
7. Click **OK**.

   Note: In case of Windows authentication, the username and password entered as connection parameters, have no impact on the authentication of connection. As these parameters are mandatory, you can enter dummy values.

Which fields are supported for mapping?

Answer:

- The mapping fields are not listed as Microsoft SharePoint fields are dynamic and customizable.
- All fields such as standard or custom, exposed by the Microsoft SharePoint Odata REST URI are supported for mapping.

INDEX

C

Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5
connections
  Microsoft SharePoint 9

D

data filters 12
Data Integration community
  URL 5

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Cloud Services
  web site 5

M

maintenance outages 6
Microsoft SharePoint
  connection properties 9
  supported objects and task operations 8
Microsoft SharePoint connections
  overview 9
Microsoft SharePoint Connector
  overview 7
Microsoft SharePoint source
  Synchronization task 11
Microsoft SharePoint sources
  mapping 16
Microsoft SharePoint target
  Synchronization task 12
Microsoft SharePoint targets
  mapping 16

R

read data with HTML tags 20

S

Secure Agent
  increasing memory 19
status
  Informatica Intelligent Cloud Services 6
Synchronization task
  example 13
system status 6

T

troubleshooting
  overview 18
  Synchronization task 18
trust site
  description 6

U

upgrade notifications 6

W

web site 5