Informatica®

Informatica® Cloud Data Integration

Microsoft SharePoint Online Connector

Informatica Cloud Data Integration Microsoft SharePoint Online Connector
October 2025

© Copyright Informatica LLC 2017, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-26

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Microsoft SharePoint Online Connector 6

Microsoft SharePoint Online Connector assets 6

- Rules and guidelines for Microsoft SharePoint Online objects and operations 7

Rules and guidelines for Microsoft SharePoint Online Connector 9

Chapter 2: Microsoft SharePoint Online connections 10

Prepare for authentication 10

- Access Control Service 10
- Microsoft Entra ID 13

Connect to Microsoft SharePoint Online 16

- Before you begin 16
- Connection details 16
- Microsoft SharePoint Online authentication types 17

Chapter 3: Synchronization tasks with Microsoft SharePoint Online Connector 20

Microsoft SharePoint Online sources in synchronization tasks 20

Microsoft SharePoint Online targets in synchronization tasks 21

Synchronization task example 21

Chapter 4: Mappings and mapping tasks with Microsoft SharePoint Online Connector 24

Microsoft SharePoint Online sources in mappings 24

Microsoft SharePoint Online targets in mappings 25

Chapter 5: Troubleshooting 26

Troubleshooting a Synchronization task 26

Increasing the Secure Agent memory 26

Index 28

Preface

Use *Microsoft SharePoint Online Connector* to learn how to read from or write to Microsoft SharePoint Online by using Cloud Data Integration. Learn to create a connection, develop and run synchronization tasks, mappings, and mapping tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Microsoft SharePoint Online Connector

You can use Microsoft SharePoint Online Connector to connect to Microsoft SharePoint Online from Data Integration.

Use Microsoft SharePoint Online Connector to read data from or write data to Microsoft SharePoint Online. You can use Microsoft SharePoint Online objects as sources and targets in synchronization tasks, mappings, and mapping tasks.

When you run a task or mapping, the Secure Agent uses the Microsoft SharePoint Online API to perform the specified operation and reads data from or writes data to Microsoft SharePoint Online.

Note: Microsoft SharePoint Online Connector supports Windows and Linux operating systems.

Microsoft SharePoint Online Connector assets

The following table lists the Microsoft SharePoint Online objects and task operations that you can include in Data Integration tasks:

Objects	Read	Insert	Update	Upsert	Delete	Data Preview	Lookup
List	Yes	Yes	Yes	NA	Yes	Yes	NA
Document Library	Yes	Yes	NA	NA	Yes	Yes	NA

You can update the **Title** and custom fields in the list object. Based on the **ID** specified, you can update the **Title** and custom fields in the list object. You must specify the **ID** if you want to delete data from the list object and **ServerRelativeUrl** path if you want to delete data from the document library object.

If the list object is empty, the data preview tab does not display the metadata of the custom fields. To solve this issue, you must add a dummy row in the list object.

The custom fields of the list object supports the following data types:

- Single line of text. For example, `File name`.

- Multiple lines of text. For example,

```
File name 1
File name 2
File name 3
```

- Number. For example, `1001`.
- Choice. For example, `Choice 1`.
- Currency. For example, `50001.23`.
- Date and Time. For example, `2015-01-13T11:01:48`, `2013-03-12T12:01:38Z`, or `3/12/2013`.

  Note: Microsoft SharePoint Online Connector does not certify the update operation when the column is of Date and Time data type.
- Yes/No. For example, `TRUE or FALSE`.
- Person or Group. For example, `1`.

You need to create custom objects using List or Document Libraries in Microsoft SharePoint Online application. You can use Microsoft SharePoint Online Connector to download attachments from the custom list and Document Library object in Microsoft SharePoint Online. The List object supports attachments up to 185 MB and Document Library object supports attachments up to 171 MB. The field length for an object must not exceed 255 characters.

When you download an attachment and if another file exists with the same name, the Secure Agent overwrites the existing file in the target folder. When you attach a file and if another file exists with the same name, an error occurs. You must provide different file name to attach a file in the **Attachment_File_Path** folder.

Rules and guidelines for Microsoft SharePoint Online objects and operations

You must follow certain rules and guidelines when you use specific Microsoft SharePoint Online objects and operations:

Server path for target operations

Use the following rules and guidelines when you specify a path for a target operation:

- To perform a delete operation, you must add **/** at the beginning of the server relative path.
  For example, `/new folder/new_folder2/sharepoint.txt`
- To perform a delete or insert operation in the subsite Microsoft SharePoint Online account, you must provide the complete path of subsite URL.
  For example, `/sites/new folder/new_folder2/sharepoint.txt`
- To perform an insert operation in the document library object, you must not add **/** at the beginning of the server relative path. For example, `folder_1/new folder/new_folder2/sharepoint.txt`

List object

Use the following rules and guidelines when you use the list object to perform an **Insert** operation:

Creating a list item

To create a list item, specify the **Title** and enter **FALSE** as the value of the **Attachments** field. The **ServerRedirectedEmbedUrl** and **Id** fields are not required.

For example, enter **SharePointOnline** as **Title** and **Attachments** as **FALSE** in the fields.

Creating a list item with an attachment

To create a list item and attach a file, specify the **Title** and enter **TRUE** as the value of the **Attachments** field. Enter the file name that you want to attach in the **ServerRedirectedEmbedUrl** field.

For example, enter **SharePointOnline** as **Title**, **Attachments** as **TRUE**, and `filename.ext` in the **ServerRedirectedEmbedUrl** fields.

Attaching a file to the existing list item

To attach a file to the existing list item, specify the **Title** and enter **TRUE** as the value of the **Attachments** field. Enter the file name that you want to attach in the **ServerRedirectedEmbedUrl** field and the list Id of the list item in the **ID** field.

For example, enter **SharePointOnline** as **Title**, **Attachments** as **TRUE** and `filename.ext` in the **ServerRedirectedEmbedUrl** fields. Enter <integer value> in the **ID** field.

Note: If you use an Expression transformation to set the value for the **Attachments** field to FALSE or TRUE, specify a String field type and pass the 'FALSE' or 'TRUE' values within single quotes.

Document library object

Use the following rules and guidelines when you use the document library object:

Note: A dummy file must be present in the document library object to perform the insert operation.

Creating a folder

To create a folder in the document library object, enter the folder path where you want to create the folder in the **ServerRelativeUrl** field and specify the folder name in the **Title** field. The **Name** field is not required.

For example, enter the folder path in **/Folder/Folder1** format in the **ServerRelativeUrl** field and the folder name in the **Title** field.

Attaching file to the existing folder

To attach a file to the existing folder in the document library object, enter the file name in the **Name** field and the folder path where you want to attach the file in the **ServerRelativeUrl** field. The **Title** field is not required.

For example, enter the file name in the `file.ext` format in the **Name** field and the folder path in the **/Folder/Folder1** format in the **ServerRelativeUrl** field.

Creating a folder with an attachment

To create a folder and attach a file in the document library object, enter the file name in the **Name** field and the folder path where you want to create the new folder and attach the file inside the new folder in the **ServerRelativeUrl** field. Enter the folder name in the **Title** field.

For example, enter the file name in the `file.ext` format in the **Name** field and the folder path in the **/Folder/Folder1** format in the **ServerRelativeUrl** field. Enter the folder name in the **Title** field.

The new folders created are available under the folder path that you specify in the **ServerRelativeUrl** column and the attachments are available inside the new folder. You can only attach one file at a time to an existing folder.

Rules and guidelines for Microsoft SharePoint Online Connector

Consider the following rules and guidelines when you use Microsoft SharePoint Online Connector:

- If the list object does not contain any record, the custom fields do not appear in the list object.
- The name of the custom field label that appears in the **Fields** tab does not match the name in the Microsoft SharePoint Online application.
- When you select a source connection and refresh the fields in the **Fields** tab, the Secure Agent does not refresh the fields.
- When you read files using Microsoft SharePoint Online Connector, all folders are read till one level at the target end.

CHAPTER 2

Microsoft SharePoint Online connections

Create a Microsoft SharePoint Online connection to connect to Microsoft SharePoint Online.

You can also connect to a subsite in Microsoft SharePoint Online if you have organized data and set up subsite accounts in the Microsoft SharePoint Online application.

Prepare for authentication

You can configure Access Control Service and Microsoft Entra ID authentication types to access Microsoft SharePoint Online. Consider using Microsoft Entra ID authentication to connect more securely to Microsoft SharePoint Online.

Before you configure the connection properties, you need to keep the authentication details handy based on the authentication type that you want to use.

Access Control Service

In Microsoft SharePoint Online, you can register applications in Access Control Service for app-only access, and the administrator can restrict site access through the SharePoint admin center.

Generate the client ID and client secret

The Microsoft SharePoint Online client ID and client secret are required to generate a valid access token.


1. Log in to the Microsoft SharePoint Online account.
2. Enter the following site or subsite URL:

   Site: `https://<sitename.com>/_layouts/15/appregnew.aspx`

   Subsite: `https://<sitename.com>/<subsitedomain>/_layouts/15/appregnew.aspx`

   The **App Information** page appears.
3. Click **Generate** next to the **Client Id** field.

The value of the client ID is displayed in the **Client Id** field. The following image shows the **App Information** page where you can generate the values of the client ID and client secret:

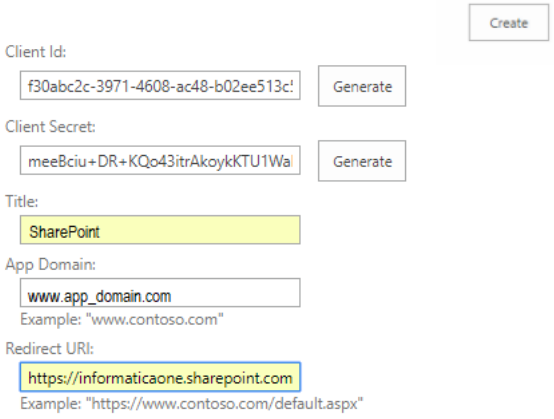

4. Click **Generate** next to the **Client Secret** field.

   The value of the client secret is displayed in the **Client Secret** field.
5. Enter an appropriate title for the App in the **Title** field.
6. Enter an app domain name in the **App Domain** field.

   For example, `www.google.com`
7. Enter a URL in the **Redirect URL** field.

   For example, `https://localhost/`. You need to enter the same redirect URL in the connection property.
8. Click **Create**.

   The page redirects to the Microsoft SharePoint Online page and the following message appears:

   ```
   The app identifier has been successfully created.
   ```

   The values of the client ID, client secret, title, and redirect URL are displayed.

Generate the bearer realm

A bearer realm is a unique ID provided for each user. Generate the bearer realm to obtain the authorization code.

1. Open the PostMan application.
2. Enter the following site or subsite URL in the PostMan application:

   Site: `https://<sitename.com>/_layouts/15/appregnew.aspx`

   Subsite: `https://<sitename.com>/<subsitedomain>/_layouts/15/appregnew.aspx`

   The following image shows the **BearerToken** page where you can generate the value of the bearer realm:



3. Select the **GET** method.
4. On the **Headers** tab, enter **Authorization** in the **Key** field and **Bearer** in the **Value** field.
5. Click **Send**.

6. Select the **Headers** tab in the **Response** header.

   The bearer realm value appears in the **WWW-Authenticate** section.
   For example:

   ```
   Bearer realm="77baf95d-f3e0-42b-aa08-9b798b8c177b"
   ```

Generate the authorization code

Generate the authorization code to gain access to the Microsoft SharePoint Online site or subsite, and generate a valid refresh token.

1. Enter the following site or subsite URL in the Google Chrome browser:


   Site: `https://<site.sharepoint.com>/_layouts/15/OAuthAuthorize.aspx?client_id=<client_GUID>&scope=<app_permissions_list>&response_type=code&redirect_uri=<redirect_uri>`
   For example, `https://icloudconnectivitydev.sharepoint.com/_layouts/15/oauthauthorize.aspx?client_id=ecea5b1b-80e4-4f3e-a269-48b85c1797a8&scope=AllSites.Manage&response_type=code&redirect_uri=https%3A%2F%2Flocalhost%2F`

   Subsite: `https://<site.sharepoint.com>/<subsitedomain>/_layouts/15/OAuthAuthorize.aspx?client_id=<client_GUID>&scope=<app_permissions_list>&response_type=code&redirect_uri=<redirect_uri>`
   For example, `//informaticaone.sharepoint.com/sites/TEST/_layouts/15/oauthauthorize.aspx?client_id=ecea5b1b-80e4-4f3e-a269-48b85c1797a8&scope=AllSites.Manage&response_type=code&redirect_uri=https%3A%2F%2Flocalhost%2F`

2. Click **Trust it** to grant the application read access to the Microsoft SharePoint Online site or subsite after the page redirects to the redirect URL page that you specify in the connection property.

   The redirect URL page includes the authorization code as a query string in the following format:

   `https://<redirect_url>/?code=<authcode>`
   The following image shows the authorization code in the URI:

   Note: The authorization code generated is valid only for five minutes.


Generate the refresh token

You need a refresh token to perform the POST and GET methods in the PostMan application. After you generate a refresh token, it remains valid for six months.

1. Enter the following URL in the PostMan application:

   `https://accounts.accesscontrol.windows.net/<bearer_realm>/tokens/OAuth/2`

   The following image shows the **Normal** tab in the PostMan application where you can configure the properties to generate the refresh token:

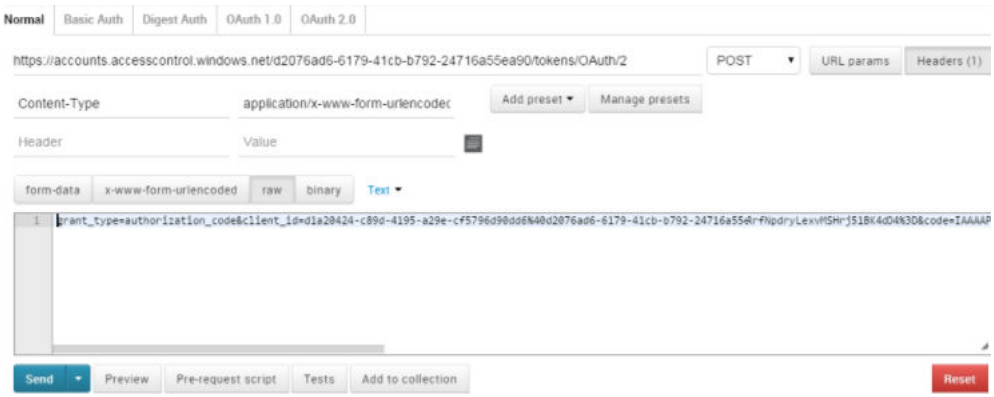


2. Select the **POST** method.
3. On the **Header** tab, enter **Content-Type** in the **Key Name** field and **application/x-www-form-urlencoded** in the **Value** field.
4. On the **Body** tab, enter the XML request in the following format:

   ```
   grant_type=authorization_code &client_id=<client_id>@<bearer_realm>
   &client_secret=<client_secret> &code=<auth_code> &redirect_uri=<redirect_url> &resource=<
   audience principal ID >/<site_host>@<bearer_realm>
   ```

5. Click **Send**.

   The refresh token is generated on the **Response** tab.

   The following image shows the **Response** tab where the refresh token is generated:

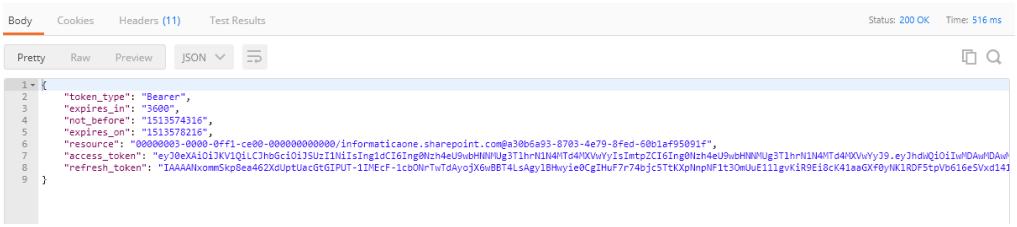

Microsoft Entra ID

You can use Microsoft Entra ID to securely access and manage Microsoft SharePoint Online data.

Register the Azure application with Azure Active Directory

To establish a connection with Microsoft SharePoint Online from Data Integration, you need to provide the Microsoft SharePoint Online client ID and client secret in the connection properties.


You can get the client ID and client secret by registering your application in Azure Active Directory (AAD) through the Microsoft Identity platform.

1. Log in to portal.azure.com using your Microsoft SharePoint Online credentials.
2. Go to **App Registrations** in the Azure Services section.
3. Click **New Registration**.
4. Specify a display name for your application and supported account type, enter the redirect URI and then click **Register**.

   Ensure that you select either the Single tenant or Multitenant account type. You can't use the personal Microsoft account type.

   A client ID is generated. Ensure that you copy the client ID and keep it handy to use when you generate an authorization code and configure a Microsoft SharePoint connection.
5. Click **Add a Certificate or Secret**.
6. Click **New client secret**, and then add the description and the expiry time.

   A client secret value is generated. Ensure that you copy the client secret from the Value column and keep it handy to use when you generate an authorization code and configure a Microsoft SharePoint connection.

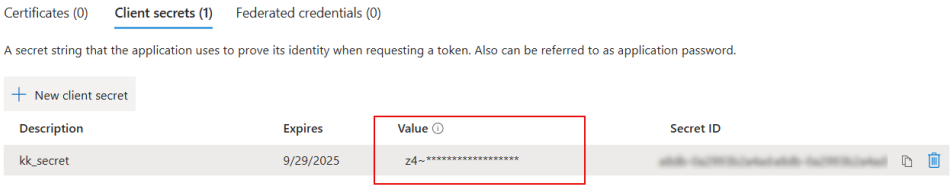

7. Now, click **API permissions** in the left pane.
8. Click **Add a permission**.
9. Click **SharePoint**, and then click **Delegated permission** on the Request API permissions page.
10. Select the permissions that the client application must have on behalf of the signed-in user.

    The following list outlines the permissions and the levels of access each permission provides:

    - **AllSites.FullControl**. Full Control access.
    - **AllSites.Manage**. Read and write access.
    - **AllSites.Read**. Read access.
    - **AllSites.Write**. Write access.

    Consider selecting the AllSites.Manage permission to ensure appropriate access to Microsoft SharePoint Online.
11. Click **Add Permissions**.

Generate the authorization code

To generate an authorization code, select the GET method with the necessary query parameters, and retrieve the code from the redirect URL after you authenticate to the SharePoint Online application.

1. Open the PostMan application.
2. In Postman, enter one of the following URLs based on your account type:
   - For a single tenant account, enter the following URL: `https://login.microsoftonline.com/<Single_Tenant_Id_value>/oauth2/v2.0/authorize`

- For a multi-tenant account, enter the following URL: `https://login.microsoftonline.com/organizations/oauth2/v2.0/authorize`

Replace <Single_Tenant_Id_value> with the tenant ID found in the overview section of your registered application if you are working with a single tenant account. For multi-tenant accounts, use the organizations endpoint.

3. Select the **GET** method.
4. On the **Params** tab, enter the name and value.

   To authenticate and verify access permissions, enter the following query parameters:

   ```
   client_id=<client_id> &response_type=code &redirect_uri=<redirect_URI>
   &scope=<sharepoint_url>/<delegated permission> offline_access
   &client_secret=<client_secret_value>
   ```

   The scope query contains delegated permissions for your Azure application. If you selected **AllSites.Manage** as the delegated permission when you registered the Azure application with Azure Active Directory, specify the permission in the scope query parameter as shown in the following example:

   ```
   client_id=<client_id> &response_type=code &redirect_uri=<redirect_URI>
   &scope=<sharepoint_url>/AllSites.Manage offline_access
   &client_secret=<client_secret_value>
   ```

5. Copy the URL and paste it in the browser.
6. Enter the SharePoint Online log in credentials.
7. Verify and click **Accept** on the consent screen.

   The redirect URL page includes the authorization code as a query string in the following format:

   ```
   https://<redirect_url>/?code=<authcode>
   ```

   Ensure that you copy the authorization code and keep it handy to use when you generate a refresh token.

Generate the refresh token

Generate the refresh token in the PostMan application.

1. In the PostMan application, enter one of the following URLs based on your account type:
   - For a single tenant account, enter the following URL: `https://login.microsoftonline.com/<Single_Tenant_Id_value>/oauth2/v2.0/token`
   - For a multi-tenant account, enter the following URL: `https://login.microsoftonline.com/organizations/oauth2/v2.0/token`

   Replace <Single_Tenant_Id_value> with the tenant ID found in the overview section of your registered application if you are working with a single tenant account. For multi-tenant accounts, use the organizations endpoint.
2. Select the **POST** method.
3. On the **Header** tab, enter **Content-Type** in the **Key Name** field and **application/x-www-form-urlencoded** in the **Value** field.
4. On the **Body** tab, enter the XML request in the following format:

   ```
   grant_type=authorization_code &client_id=<client_id>&client_secret=<client_secret_value>
   &code=<auth_code> &redirect_uri=<redirect_url>
   ```

   You need to enter the client ID and client secret that you generated when you registered the Azure application with Azure Active Directory.

5. Click **Send**.

   The refresh token is generated on the **Response** tab.

   Ensure that you copy the refresh token and keep it handy to use when you configure a Microsoft SharePoint Online connection.

Connect to Microsoft SharePoint Online

Let's configure the Microsoft SharePoint Online connection properties to connect to Microsoft SharePoint Online.

Before you begin

Before you get started, you'll need to get information from your Microsoft SharePoint Online account based on the authentication type that you want to configure.

To configure Access Control Service authentication, generate the client ID, client secret, bearer realm, authorization code, and refresh code from you Microsoft SharePoint Online account.

To configure Microsoft Entra ID authentication, get the client ID, client secret, and refresh token from your Microsoft SharePoint Online account.

Check out "Prepare for authentication" on page 10 to learn more about these tasks.

Connection details

The following table describes the basic connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.

Property	Description
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.

Microsoft SharePoint Online authentication types

You can configure Access Control Service and Microsoft Entra ID authentication types to access Microsoft SharePoint Online.

Select the required connection type and then configure the authentication-specific parameters.

Access Control Service

You can use the Access Control Service authentication to access the SharePoint API.

The following table describes the basic connection properties for Access Control Service authentication:

Property	Description
Client_Id	The client identifier issued during the application registration process. You can get the client ID by registering your application in Azure Active Directory (AAD) through the Microsoft Identity platform.
Client_Secret	The client secret issued during the application registration process. You can get the client secret by registering your application in Azure Active Directory (AAD) through the Microsoft Identity platform.
Refresh_Token	Refresh token of Microsoft SharePoint Online.
Redirect_URL	URL where you want to redirect from the Microsoft SharePoint Online account.
URL	URL to the Microsoft SharePoint Online account.
Attachment_File_Path	Directory on the Secure Agent machine where you want to download or attach files to Microsoft SharePoint Online.

The following table describes the advanced connection properties for Access Control Service authentication:

Property	Description
Subsite_URL	URL of the Microsoft SharePoint Online account within the Microsoft SharePoint site. Enter the subsite URL if you have organized data and set up subsite accounts in the Microsoft SharePoint Online application. For more information about sites and subsites in Microsoft SharePoint Online account, see Create sites and subsites. If you do not enter a subsite URL, the Microsoft SharePoint Online Connector reads files from the URL that you specify in the **URL** property.

Microsoft Entra ID

You can use the Microsoft Entra ID authentication to access Microsoft SharePoint resources securely.

The following table describes the basic connection properties for Microsoft Entra ID authentication:

Property	Description
Account types	The tenant that you want to use to access the application. Select from the following options: - Single tenant. Select if your target audience is inside your organization. - Multi tenant. Select if your target audience includes businesses or educational customers and requires multi-tenancy support. - Default is None.
Single tenant id	Required only when you select the Single tenant account type. The unique ID of the organization to manage and control access to resources, applications, devices, and services.
Client_Id	The client identifier issued during the application registration process. You can get the client ID by registering your application in Azure Active Directory (AAD) through the Microsoft Identity platform.
Client_Secret	The client secret issued during the application registration process. You can get the client secret by registering your application in Azure Active Directory (AAD) through the Microsoft Identity platform.
Refresh_Token	Refresh token of Microsoft SharePoint Online.
Redirect_URL	Does not apply to Mirosoft Entra ID authentication.
URL	URL to the Microsoft SharePoint Online account.
Attachment_File_Path	Directory on the Secure Agent machine where you want to download or attach files to Microsoft SharePoint Online.

The following table describes the advanced connection properties for Microsoft Entra ID authentication:

Property	Description
Subsite_URL	URL of the Microsoft SharePoint Online account within the Microsoft SharePoint site. Enter the subsite URL if you have organized data and set up subsite accounts in the Microsoft SharePoint Online application. For more information about sites and subsites in Microsoft SharePoint Online account, see Create sites and subsites. If you do not enter a subsite URL, the Microsoft SharePoint Online Connector reads files from the URL that you specify in the **URL** property.

CHAPTER 3

Synchronization tasks with Microsoft SharePoint Online Connector

Use a Synchronization task to synchronize data between a source and target.

You can configure a synchronization task using the Synchronization Task wizard.

When you create a task, you can associate it with a schedule to run it at specified times or on regular intervals. Or, you can run it manually. You can monitor tasks that are currently running in the activity monitor and view logs about completed tasks in the activity log.

Microsoft SharePoint Online sources in synchronization tasks

You can configure the Microsoft SharePoint Online source properties on the **Source** page of the Synchronization Task wizard.

The following table describes the Microsoft SharePoint Online source properties:

Property	Description
Connection	Name of the Microsoft SharePoint Online source connection.
Source Type	Type of the Microsoft SharePoint Online source object available.
Source Object	Name of the source object.
Display technical names instead of labels	Displays technical names instead of business names.
Display source fields in alphabetical order	Displays source fields in alphabetical order. By default, fields appear in the order returned by the source system.

The following table describes the Microsoft SharePoint Online advanced source properties:

Property	Description
Indirect File Path	The file path of the folder that you want to download. For more information, see the Download files Knowledge Base article.
Preserve Directory Structure	Determines whether you want to retain the folder structure as that of Sharepoint Online when you download the files. If you select this option, the folder structure is retained when the Secure Agent downloads the files from SharePoint Online. If you do not want to retain the folder structure of the file, do not select this option. Default is not selected.

Microsoft SharePoint Online targets in synchronization tasks

You can configure the Microsoft SharePoint Online target properties on the **Target** page of the Synchronization Task wizard.

The following table describes the Microsoft SharePoint Online target properties:

Property	Description
Connection	Name of the Microsoft SharePoint Online target connection.
Target Object	Name of the Microsoft SharePoint Online target object.
Child Object	This attribute is not applicable for Microsoft SharePoint Online Connector.
Display target fields in alphabetical order	Displays target fields in alphabetical order. By default, fields appear in the order returned by the target system.

Synchronization task example

You can create a synchronization task to read data from a Microsoft SharePoint Online source and write data to the Microsoft SharePoint Online target.

When you configure a synchronization task, you cannot use a data filter to filter records from Microsoft SharePoint Online.

Before you configure a synchronization task, you need to create a Microsoft SharePoint Online connection.

Perform the following task to create a synchronization task:

1. In Data Integration, click **New** > **Tasks**.
2. Select **Synchronization Task**, and click **Create**.

   The **Definition** tab appears.

3. Configure the following fields on the **Definition** tab:

Field	Description
Task Name	Name of the synchronization task.
Description	Description of the synchronization task. Maximum length is 255 characters.
Task Operation	Select the task operation that you want to perform.

4. Click **Next**.

   The **Source** tab appears.

5. Configure the following fields on the **Source** tab:

Field	Description
Connection	Select a Microsoft SharePoint Online source connection.
Source Type	Select the source type. By default, **Single** is selected.
Source Object	Select the required object from the list.
Display technical names instead of labels	Displays technical names instead of business names.
Display source fields in alphabetical order	Displays source fields in alphabetical order. By default, fields appear in the order returned by the source system.

6. Click **Next**.

   The **Target** tab appears.

7. Configure the following fields on the **Target** tab:

Field	Description
Connection	Select a Microsoft SharePoint Online target connection.
Target Object	Select the target object.
Display target fields in alphabetical order	Displays target fields in alphabetical order. By default, fields appear in the order returned by the target system.

8. Click **Next**.

   The **Data Filters** tab appears.

   Note: You cannot apply filters to the Microsoft SharePoint Online data in a synchronization task.

9. Click **Next**.

   The **Field Mapping** tab appears.

10. Click **Automatch** on the **Field Mapping** tab to map source fields to target fields accordingly.

11. Click **Validate Mapping** to validate the mapping.
12. Click **Next**.

    The **Schedule** tab appears where you can schedule the task for each requirement and save.
13. Configure the advanced source properties on the **Schedule** tab.
14. Click **Save** > **Finish**.
15. Select the synchronization task from the **Explore** page and click **Actions** > **Run**.

    In **Monitor**, you can monitor the status of the logs after you run the task.

To see an example on how to load data to SharePoint Online from a flat file, see the Uploading files Knowledge Base article.

CHAPTER 4

Mappings and mapping tasks with Microsoft SharePoint Online Connector

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you configure a source or target to represent the object.

Microsoft SharePoint Online sources in mappings

To read data from Microsoft SharePoint Online, configure a Microsoft SharePoint Online object as the Source transformation in a mapping.

Specify the name and description of the Microsoft SharePoint Online source. The following table describes the properties that you can configure for a Microsoft SharePoint Online source:

Property	Description
Connection	Name of the active source connection.
Source Type	Type of the Microsoft SharePoint Online source object.
Object	Name of the source object for the mapping.
Filter	This property doesn't apply for the Source transformation.
Sort	This property doesn't apply for the Source transformation.

The following table describes the Microsoft SharePoint Online advanced source properties:

Property	Description
Indirect File Path	The file path of the folder that you want to download from Microsoft SharePoint Online. For more information, see the Download files Knowledge Base article.
Preserve Directory Structure	Determines whether you want to retain the folder structure as that of Sharepoint Online when you download the files. If you select this option, the folder structure is retained when the Secure Agent downloads the files from SharePoint Online. If you do not want to retain the folder structure of the file, do not select this option. Default is not selected.

Note: When you configure a read operation to download attachments from the SharePoint Online source object, you cannot exceed the maximum limit of 200 attachments for each source object. The average size of the folder that contains all the attachments cannot exceed 5 GB.

Microsoft SharePoint Online targets in mappings

To write data to Microsoft SharePoint Online, configure a Microsoft SharePoint Online object as the Target transformation in a mapping.

Specify the name and description of the Microsoft SharePoint Online target. The following table describes the properties that you can configure for a Microsoft SharePoint Online target:

Property	Description
Connection	Name of the Microsoft SharePoint Online target connection.
Target Type	Type of the Microsoft SharePoint Online target object.
Object	Name of the Microsoft SharePoint Online target object.
Operation	Select the target operation.

For information about uploading files from a flat file to SharePoint Online, see the Uploading files Knowledge Base article.

CHAPTER 5

Troubleshooting

Use the following sections to troubleshoot errors in Microsoft SharePoint Online Connector.

Troubleshooting a Synchronization task

When you create a synchronization task that contains an invalid configuration, the Secure Agent displays a NULL error message. The NULL error message files are saved in a specific location.

For example, `<Secure Agent installation directory>\apps\Data_Integration_Server\<latest version of connector>\ICS\main\tomcat\log`

The session log captures the log and exception details of a failed synchronization task. You require special permission to run the application in debug mode.

Increasing the Secure Agent memory

To increase performance and avoid runtime environment memory issues, perform the following steps:

1. In Administrator, select **Runtime Environments**.
2. Select the Secure Agent for which you want to increase memory from the list of available Secure Agents.
3. In the upper-right corner, click **Edit**.
4. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Service.
5. Edit **JVMOption1** as **-Xms4056m** and **JVMOption2** as **-Xmx4056m**.


   The following image shows the **Details** page:



6. In the **System Configuration Details** section, select the **Type** as **TomCatJRE**

7. Edit **INFA_memory** as **-Xms256m -Xmx512m**.

   The following image shows the **Agent Details** page:

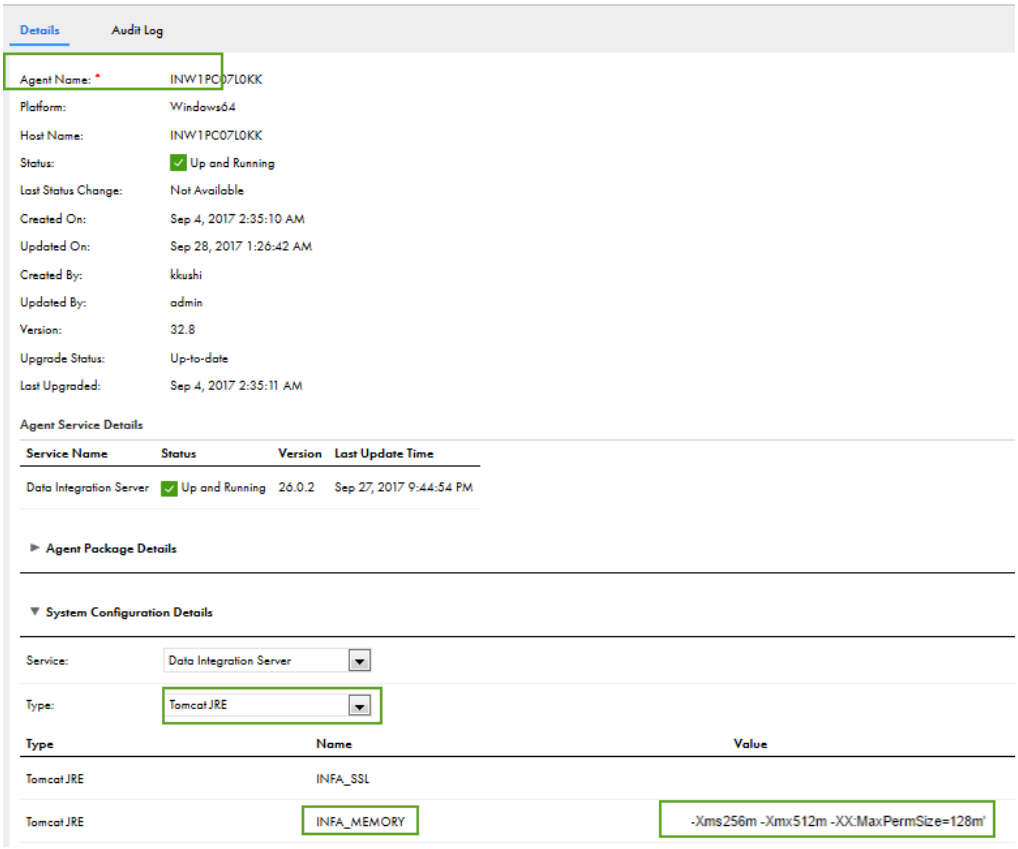

   Note: The minimum and maximum values for the Java heap size are given as an example. Specify the size according to your requirements.

8. Restart the Secure Agent.

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4

D

Data Integration community
  URL 4

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

M

maintenance outages 5
Microsoft SharePoint Online
  sources properties 20, 24
  targets properties 21, 25
  supported task and object types 6
  Synchronization task 20
  targets properties 21, 25
Microsoft SharePoint Online Connector
  overview 6
Microsoft SharePoint Online sources
  Synchronization task 20, 24
Microsoft SharePoint Online targets
  Synchronization task 21, 25

R

rules and guidelines
  Microsoft SharePoint Online objects 7

S

Secure Agent
  increasing memory 26
status
  Informatica Intelligent Cloud Services 5
Synchronization task
  example 21
  troubleshooting 26
system status 5

T

troubleshooting
  overview 26
trust site
  description 5

U

upgrade notifications 5

W

web site 4