Informatica® Cloud Data Integration

SurveyMonkey Connector

Informatica Cloud Data Integration SurveyMonkey Connector
October 2026

© Copyright Informatica LLC 2022, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-16

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- IDMC web site 4
- IDMC Communities 4
- IDMC Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- IDMC Trust Center 5
- IDMC Pulse Dashboard 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to SurveyMonkey Connector 6

SurveyMonkey Connector assets 6

Chapter 2: SurveyMonkey connections 7

SurveyMonkey connection properties 7

Chapter 3: SurveyMonkey operations 9

SurveyMonkey objects and operations 9

SurveyMonkey source operations 11

- Configuring a request using Request Message Editor 12
- Field mapping in a Source transformation 13

Chapter 4: Mappings with SurveyMonkey 14

SurveyMonkey Source transformation in mappings 14

- Source transformation properties 14
- Advanced source properties 15

Chapter 5: Data type reference 16

SurveyMonkey and transformation data types 16

Index 18

Preface

Use SurveyMonkey Connector to learn how to read from SurveyMonkey by using Cloud Data Integration. Learn to create a SurveyMonkey connection, develop and run mappings, mapping tasks, and data transfer tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to SurveyMonkey Connector

Use SurveyMonkey Connector to read data from SurveyMonkey.

The connector uses the SurveyMonkey API to read data from objects such as surveys, survey questions, survey responses, collectors, and contacts.

Create a SurveyMonkey connection to read survey and response data from SurveyMonkey. You can use the SurveyMonkey connection in mappings and mapping tasks.

When you run a mapping or task that uses a SurveyMonkey connection, Data Integration reads the data from SurveyMonkey based on the workflow and connection configuration.

SurveyMonkey Connector assets

Create assets in Data Integration to integrate data using SurveyMonkey Connector.

When you use SurveyMonkey Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

CHAPTER 2

SurveyMonkey connections

Use a SurveyMonkey connection to perform read operations on SurveyMonkey objects.

Create a SurveyMonkey connection on the **Connections** page. You can then use the SurveyMonkey connection when you create the mappings and mapping tasks.

SurveyMonkey connection properties

When you create a SurveyMonkey connection, configure the connection properties.

The following table describes the SurveyMonkey connection properties:

Connection property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select the credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. Select a Secure Agent, Hosted Agent, or elastic runtime environment. For more information about runtime environments, see *Runtime Environments* in the Administrator help.

Connection property	Description
Access URL	Host address of the SurveyMonkey API for the region that hosts your account. Enter the host URL for your account region: - US: https://api.surveymonkey.com - EU: https://api.eu.surveymonkey.com - Canada: https://api.surveymonkey.ca The default is the US.
Authentication Type	The authentication method to access SurveyMonkey resources. The connection uses OAuth 2.0 Authorization Code authentication.
Client ID	The client identifier issued to the client during the application registration process.
Client Secret	The client secret key issued to the client during the application registration process.
Access Token	The access token granted by SurveyMonkey to access data. Enter the populated access token, or click **Generate Token** to populate the access token. **Note:** The access token granted by SurveyMonkey does not expire.

Advanced settings

The following table describes the advanced connection properties:

Connection property	Description
Scope	The scope of the access request. Leave the field empty to grant all the scopes configured for your SurveyMonkey application. To narrow access to a specific subset of permissions, enter the scopes separated by a space. For example, `surveys_read responses_read`
Access Token Parameters	Additional parameters to use with the access token request. Enter the parameters as `key=value` pairs, and separate the pairs with an ampersand. For example, `param1=value1&param2=value2`
Authorization Code Parameters	Additional parameters to use with the authorization code request. Enter the parameters as `key=value` pairs, and separate the pairs with an ampersand. For example, `param1=value1&param2=value2`

CHAPTER 3

SurveyMonkey operations

SurveyMonkey exposes the SurveyMonkey REST API that the Secure Agent uses to perform integration tasks through the REST protocol.

When you create a mapping, select a SurveyMonkey connection and an operation in the Source transformation. Each operation corresponds to a GET endpoint in the SurveyMonkey REST API. The Secure Agent uses the connection to call that endpoint and read data from SurveyMonkey. The request and response messages contain hierarchical data in JSON format.

SurveyMonkey objects and operations

The following table lists the GET operations you can use for SurveyMonkey objects:

SurveyMonkey Object	Relative Path to the Object
API Errors	/errors
	/errors/{error_id}
Benchmark Bundles	/benchmark_bundles
	/benchmark_bundles/{bundle_id}
	/benchmark_bundles/{bundle_id}/analyze
Collector Messages	/collectors/{collector_id}/messages
	/collectors/{collector_id}/messages/{message_id}
Collector Recipients	/collectors/{collector_id}/messages/{message_id}/recipients
	/collectors/{collector_id}/recipients
	/collectors/{collector_id}/recipients/{recipient_id}
Collectors	/collectors/{collector_id}
	/collectors/{collector_id}/stats
	/surveys/{survey_id}/collectors

SurveyMonkey Object	Relative Path to the Object
Contact Fields	/contact_fields
	/contact_fields/{contact_field_id}
Contact Lists	/contact_lists
	/contact_lists/{contact_list_id}
	/contact_lists/{contact_list_id}/contacts
	/contact_lists/{contact_list_id}/contacts/bulk
Contacts	/contacts
	/contacts/bulk
	/contacts/{contact_id}
Groups	/groups
	/groups/{group_id}
	/groups/{group_id}/members
	/groups/{group_id}/members/{member_id}
Question Bank	/question_bank/questions
Responses	/collectors/{collector_id}/responses
	/collectors/{collector_id}/responses/bulk
	/collectors/{collector_id}/responses/{response_id}
	/surveys/{survey_id}/responses
	/surveys/{survey_id}/responses/bulk
	/surveys/{survey_id}/responses/{response_id}
Roles	/roles
Rollups and Trends	/surveys/{survey_id}/rollups
	/surveys/{survey_id}/trends
	/surveys/{survey_id}/pages/{page_id}/rollups
	/surveys/{survey_id}/pages/{page_id}/trends
	/surveys/{survey_id}/pages/{page_id}/questions/{question_id}/rollups
	/surveys/{survey_id}/pages/{page_id}/questions/{question_id}/trends

SurveyMonkey Object	Relative Path to the Object
Survey Categories	/survey_categories
Survey Folders	/survey_folders
Survey Languages	/survey_languages
Survey Pages	/surveys/{survey_id}/pages
	/surveys/{survey_id}/pages/{page_id}
Survey Questions	/surveys/{survey_id}/pages/{page_id}/questions
	/surveys/{survey_id}/pages/{page_id}/questions/{question_id}
Survey Templates	/survey_templates
Surveys	/surveys
	/surveys/{survey_id}
	/surveys/{survey_id}/details
Users	/users/me
Webhooks	/webhooks
	/webhooks/{webhook_id}
Workgroups	/workgroups
	/workgroups/{workgroup_id}
	/workgroups/{workgroup_id}/members
	/workgroups/{workgroup_id}/members/{member_id}
	/workgroups/{workgroup_id}/shares

SurveyMonkey source operations

Create a Source transformation in the Mapping Task wizard to read data from SurveyMonkey.

To configure the Source operation, perform the following steps:

1. In the Source transformation, select a SurveyMonkey connection.
2. On the **Source** tab, select an operation from the list of operations.
3. Configure the request message for the operation. Copy the request message from the sample template, and edit the JSON based on your use case.

Configuring a request using Request Message Editor

When you create a Source transformation, configure a JSON request message for the operation that you want to perform in SurveyMonkey.


Use the **Request Message Editor** to create a request message. The request message uses the JSON format and contains request parameters exposed by SurveyMonkey API for a specific operation. You can use the default request message for the operation, and then customize it to specify the data that you want to include.

To customize your request, copy the request message from the sample template to the **Request Message Editor** pane where you can edit the JSON message and add the attributes for the request. Remove unnecessary and empty tags from the request message to avoid operation failure. You can hide the optional elements to see only the required elements for the request message.

For example, to search surveys by title and sort the results with the `getSurveys` operation, you can configure the parameters as shown in the following request message:

```
{
  "title": "Customer Satisfaction",
  "sort_by": "date_modified",
  "sort_order": "DESC",
  "per_page": 50
}
```

The following image shows the request message template and a request message configured to search and sort surveys in the Mapping Designer:

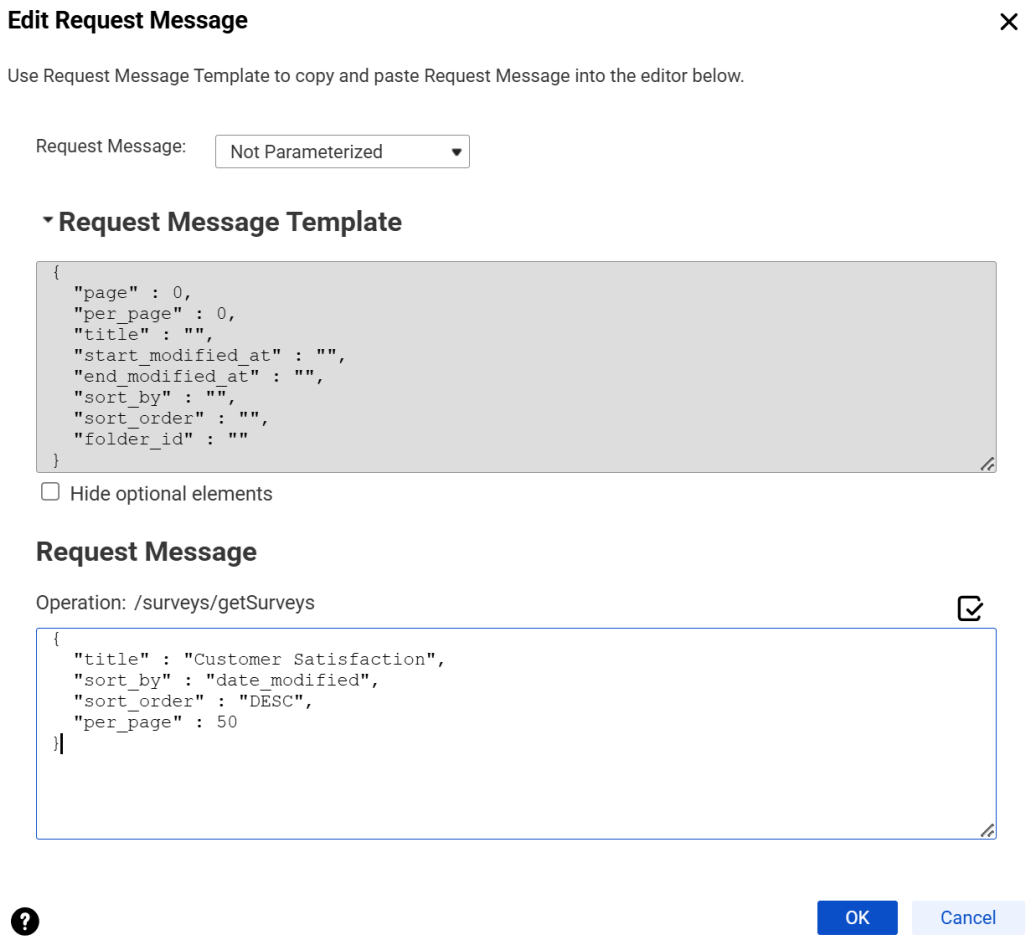

To retrieve surveys that were modified within a date range, specify the `start_modified_at` and `end_modified_at` parameters for the `getSurveys` operation. Use the ISO 8601 format for the date-time values. For example, to retrieve surveys that were modified in September 2026, specify the dates, as shown in the following sample:

```
{
  "start_modified_at": "2026-09-01T00:00:00",
  "end_modified_at": "2026-09-30T23:59:59"
}
```

Note: The start date is exclusive. The operation returns only surveys that were modified after the `start_modified_at` value.

The request message format in SurveyMonkey Connector follows the service request definition in SurveyMonkey. Use well-formed JSON in the request message, and include the parameters that you need for your use case.


Field mapping in a Source transformation

The response message format follows the service response definition in SurveyMonkey. You can map response fields from a hierarchical to a relational structure of output groups and fields.

After you configure an operation for a source and specify the request message, create the relational format from the hierarchical data to include groups and fields that you want in the output.

Select the elements in the response structure that you want to include as output fields. The Secure Agent converts the JSON response in the hierarchical structure to relational groups at run time.

The following image shows an example hierarchical response structure generated for the `getSurveys` operation, and the corresponding relational output fields for the response:

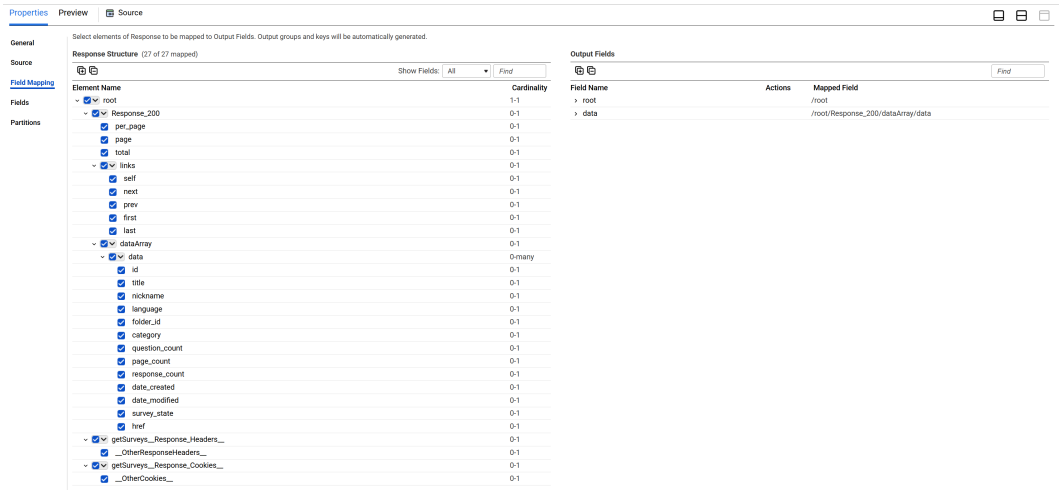

You can edit the data type, precision, and scale for the groups and fields after mapping the fields.

For more information about field mapping, see *Transformations* in the Data Integration documentation.

CHAPTER 4

Mappings with SurveyMonkey

When you create a mapping, you define the source to represent a SurveyMonkey object. Use the Mapping Designer in Data Integration to add the Source transformation in the mapping canvas and configure the SurveyMonkey source properties.

SurveyMonkey Source transformation in mappings

When you configure a Source transformation, select a SurveyMonkey connection and choose an operation to represent a SurveyMonkey source.

Use the request message template to configure the request message in JSON format.

You can view the response structure in the field mapping. When you map elements from the response structure to the output fields, the Secure Agent creates the output groups, along with primary and foreign keys for the fields. When you deploy the mapping in a mapping task and run the task, the Secure Agent reads the data from SurveyMonkey.

Source transformation properties

You can use one or more Source transformations in a mapping.

When you select a source, the **Properties** panel displays the following tabs:

- **General**. Configure the name and description for the source.
- **Source**. Select the connection and the operation, configure the request message in the request options, and configure the advanced source properties.
- **Field Mapping**. Map elements with the response structure to the output fields.
- **Fields**. Edit the metadata of the source fields that you want to use in the mapping.

Advanced source properties

In a mapping, you can configure a Source transformation to represent a SurveyMonkey source. If you use the SurveyMonkey connection in a mapping task, you can also configure advanced properties on the **Source** page of the Mapping Task wizard.

Property	Description
Tracing Level	Amount of detail that appears in the log. Use the following tracing levels: - Terse - Normal - Verbose Initialization - Verbose data Default is normal.

CHAPTER 5

Data type reference

Data Integration uses the following data types in mappings and mapping tasks with SurveyMonkey:

SurveyMonkey native data types

SurveyMonkey data types that appear in the Source transformation when you choose to edit metadata for the fields.

Transformation data types

Set of data types that appear in the transformations. They are internal data types based on ANSI SQL-92 generic data types, which the Secure Agent uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data.

SurveyMonkey and transformation data types

The following table lists the SurveyMonkey data types that Data Integration supports and the corresponding transformation data types:

SurveyMonkey Data Type	Transformation Data Type	Description
Array	Binary	1 to 104,857,600 bytes
BigInt	Bigint	Precision 19, scale 0
Binary	Binary	1 to 104,857,600 bytes
Boolean	Varchar	1 to 104,857,600 characters
Decimal	Decimal	Precision 31, scale 10
Double	Double	Precision 15, scale 0
Integer	Integer	Precision 10, scale 0
Long	Bigint	Precision 19, scale 0
Number	Decimal	Precision 31, scale 10

SurveyMonkey Data Type	Transformation Data Type	Description
Object	Varchar	1 to 104,857,600 characters
String	Varchar	1 to 104,857,600 characters
Timestamp	Date/Time	Precision 29, scale 9

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  SurveyMonkey 7

D

Data Integration community
  URL 4
data type reference
  overview 16

F

field mapping
  cardinality 13
  foreign key 13
  primary key 13
  XPath expression 13

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Data Management Cloud
  web site 4

K

Klaviyo
  Operations Overview 9

M

maintenance outages 5
mapping
  mapping task 14

S

source
  field mapping 13
  read operations 11
  request message 12
source transformation
  advanced properties 15
  mappings 14
  properties 14
status
  IDMC 5
SurveyMonkey
  assets 6
  connection properties 7
SurveyMonkey and transformation
  data types 16
SurveyMonkey connections
  overview 7
SurveyMonkey Connector
  overview 6
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4