Informatica

Informatica® Cloud Data Integration

.

Web Service Consumer Connector

Informatica Cloud Data Integration Web Service Consumer Connector

.

October 2025

© Copyright Informatica LLC 2019, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-06

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- Informatica Intelligent Cloud Services web site 4
- Informatica Intelligent Cloud Services Communities 4
- Informatica Intelligent Cloud Services Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- Informatica Intelligent Cloud Services Trust Center 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Web Service Consumer Connector 6

Web Service Consumer Connector assets 6

WSDL Encoding 6

Configure a secure connection with the serverless runtime environment 7

Configure proxy settings 7

- Configure proxy server settings on Windows 8
- Configure proxy server settings on Linux 9

Reading and writing unicode characters 9

Chapter 2: Connections for Web Service Consumer 10

Web Service Consumer connection properties 10

Creating a Web Service Consumer connection 11

Chapter 3: Mapping and Mapping Tasks with Web Service Consumer Connector 13

Web Service Consumer midstream transformation in mappings 13

- Advance midstream properties 13
- Midstream transformation mapping example 14

Rules and guidelines for Web Service Consumer mappings 18

Chapter 4: Troubleshooting 19

Troubleshooting Web Service Consumer Connector 19

Index 20

Preface

Use *Web Service Consumer Connector* to learn how to read from or write to a web Service that supports SOAP API. Learn to create a connection, develop mappings, and run mapping tasks using Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Web Service Consumer Connector

Use Web Service Consumer Connector to connect to web service applications that support SOAP API. You can use Web Service Consumer Connector in a Web Services transformation.

You can use Web Service Consumer Connector midstream in a mapping to pass a single or multiple requests to a web service application and process the response data. You can also pass data obtained from multiple transformations in the mapping pipeline and process the data.

When you use Web Service Consumer Connector midstream in a mapping, you first create a business service for the operation that you want to perform in the web service application. You then associate the business service in a Web Services transformation midstream in a mapping to read from or write data to the web service application.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

Web Service Consumer Connector assets

Create assets in Data Integration to integrate data using Web Service Consumer Connector.

When you use Web Service Consumer Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

WSDL Encoding

WSDL files include information about how to encode SOAP request and response messages. Encoding determines the format of the SOAP message body.

You can create a business service for Web Service Consumer using the following encoding styles:

- RPC/Literal

- Document/Literal

Configure a secure connection with the serverless runtime environment

You can use the serverless runtime environment with Web Services Consumer Connector to connect to Web Service Consumer service.

Before you use a serverless runtime environment with Web Services Consumer Connector, complete the following prerequisite tasks to add the WSDL file to the serverless runtime location:

1. Create the following structure for the serverless agent configuration in AWS or Azure: `<Supplementary file location>/serverless_agent_config`
2. Add the WSDL files in the Amazon S3 bucket or Azure container in the following location in your AWS or Azure account: `<Supplementary file location>/serverless_agent_config/ wsconsumer`
3. Copy the following code snippet to a text editor:

```
version: 1
agent:
  dataIntegrationServer:
    autoDeploy:
      wsconsumer:
        wsdls:
          - fileCopy:
              sourcePath: wsconsumer/<WSDL_filename>.wsdl
          - fileCopy:
              sourcePath: wsconsumer/<WSDL_filename>.wsdl
```

4. Ensure that the syntax and indentations are valid, and then save the file as `serverlessUserAgentConfig.yml` in the following AWS or Azure location: `<Supplementary file location>/serverless_agent_config`
   When the .yml file runs, the WSDL files are copied from the AWS or Azure location to the serverless agent directory.
5. In the Web Services Consumer connection properties, specify the following WSDL path in the serverless agent directory in the **URL** field:
   `/data2/home/cldagnt/SystemAgent/serverless/ configurations/wsconsumer/ <WSDL_filename>.wsdl`

   Note: If you added the WSDL file in the EC2 location, pass the EC2 path in the WSDL URL field.

Configure proxy settings

If your organization uses an outgoing proxy server to connect to the internet, the Secure Agent connects to Informatica Intelligent Cloud Services through the proxy server.

You can configure the Secure Agent to use the proxy server on Windows and Linux.

1. Configure the Secure Agent through the Secure Agent Manager on Windows or shell command on Linux.
2. Configure the JVM options for the DTM in the Secure Agent properties so that the agent can use the proxy server at run time.

Contact your network administrator for the correct proxy settings.

Note: You can configure an unauthenticated or authenticated proxy server through the JVM options of the Secure Agent. However, you cannot use NTLM authenticated proxy servers. In addition, you cannot use authenticated proxy servers when you configure NTLM authentication in a connection.

Configure proxy server settings on Windows

When you configure the proxy server on a Windows machine, configure the Secure Agent both through the Secure Agent Manager and the JVM options in the DTM.

Configure proxy server settings through the Secure Agent Manager

Use the Secure Agent Manager to configure the Secure Agent to use the proxy server on Windows.

1. In the Secure Agent Manager, click **Proxy**.
2. To enter proxy server settings, click **Use a proxy server**.
3. Configure the following fields:

Field	Description
Proxy Host	Required. Host name of the outgoing proxy server that the Secure Agent uses.
Proxy Port	Required. Port number of the outgoing proxy server.
User Name	Required. User name to connect to the outgoing proxy server.
Password	Required. Password to connect to the outgoing proxy server.

4. Click **OK**.
   The Secure Agent Manager restarts the Secure Agent to apply the settings.

Configure proxy server settings through the JVM options

Configure the JVM options for the DTM in the Secure Agent properties to use the proxy server at run time.

1. Log in to Informatica Intelligent Cloud Services.
2. Open Administrator, and select **Runtime Environments**.
3. Select the Secure Agent for which you want to configure a proxy server.
4. On the upper-right corner of the page, click **Edit**.
5. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Server.
6. Add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:

```
JVMOption1= -Dhttps.proxyHost=<proxy_server_hostname>

JVMOption2= -Dhttps.proxyPort=<proxy_server_portnumber>

JVMOption3= -Dhttps.proxyUser=<user name>

JVMOption4= -Dhttps.proxyPassword=<password>
```

7. Click **Save**.
   The Data Integration Server restarts to apply the settings.

Configure proxy server settings on Linux

Configure the Secure Agent to use the proxy server on a Linux machine using both the shell command and the JVM options in the DTM.

Configure proxy server settings through the shell command

Use the shell command to configure proxy server settings for the Secure Agent on a Linux machine.

1. Navigate to the following directory:
   `<Secure Agent installation directory>/apps/agentcore/`
2. Run the following command:
   `./consoleAgentManager.sh configureProxy <proxy host> <proxy port> <user name> <password>`
3. Restart the Secure Agent.

Configure proxy server settings through the JVM options

Configure the JVM options of the DTM in the Secure Agent properties to use the proxy server at run time.

1. Log in to Informatica Intelligent Cloud Services.
2. Open Administrator, and select **Runtime Environments**.
3. Select the Secure Agent for which you want to configure the proxy server.
4. On the upper-right corner of the page, click **Edit**.
5. In the **System Configuration Details** section, select the **Type** as **DTM** for the Data Integration Server.
6. Add the following parameters in any **JVMOption** field and specify appropriate values for each parameter:
   `JVMOption1= -Dhttps.proxyHost= <proxy_server_hostname>`

   `JVMOption2= -Dhttps.proxyPort=<proxy_server_portnumber>`

   `JVMOption3= -Dhttps.proxyUser=<user name>`

   `JVMOption4= -Dhttps.proxyPassword=<password>`
7. Click **Save**.
   The Data Integration Server restarts to apply the settings.

Reading and writing unicode characters

The Secure Agent reads and writes Unicode data using the UTF-8 code page. The Secure Agent requires that the code page environment variable is set to UTF-8.

Before you run a task to read or write unicode characters, you must set the environmental variable on the Secure Agent machine.

1. Perform one of the following tasks based on the operating system of the Secure Agent machine:
   - For Windows, create an environmental variable INFA_CODEPAGENAME under System Variables, and then set it to UTF-8.
   - For Linux 64, set the environmental variable LC_ALL to en_US.utf8. To set the environmental variable, run the following command from Linux 64: setenv LC_ALL en_US.utf8
2. Restart the Secure Agent after you set the environmental variable.

For information about reading or writing Unicode characters in Data Integration, see https://kb.informatica.com/solution/23/Pages/58/498064.aspx?myk=infa_codepagename%20utf-8

CHAPTER 2

Connections for Web Service Consumer

Create a Web Service Consumer connection to make calls to a web service application. Web Service Consumer Connector supports SOAP version 1.1 and 1.2. You can create a Web Service Consumer connection on the **Connections** page. Use the Web Service Consumer connection to read data from or write data to Web Service Consumer.

Web Service Consumer connection properties

When you configure a Web Service Consumer connection, you must configure the connection properties.

The following table describes the Web Service Consumer connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.

Property	Description
Runtime Environment	The name of the runtime environment where you want to run the tasks. Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment. For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help.
Authentication	You can configure the connection to use the following types of authentication: **Username Token** Use the user name token and the password to authenticate the web services. **Other Authentication** Use the WSDL URL and endpoint URL to authenticate the web services. **NTLM Authentication** Use NTLM V2 authentication to authenticate the web services.
WSDL URL	The URL provided by the web service.
Endpoint URL	Endpoint URL for the web service. The WSDL file specifies this URL in the location element.
Username	Applicable if you use Username Token or NTLM authentication. User name to authenticate the web service.
Password	Applicable if you use Username Token or NTLM authentication. Password to authenticate the web service.
DOMAIN NAME	Applicable if you use NTLM authentication. Name of the domain that authenticates the accounts.
Encrypt Password	Applicable if you use Username Token authentication. Enables the PasswordDigest property which combines the password with a nonce and a time stamp. The mapping task applies a SHA hash on the password, encodes it in base64 encoding, and uses the encoded password in the SOAP header.
Must Understand	Applicable if you use Username Token authentication. Specifies whether to process a header entry or not.
HTTP Username	User name to access the web service.
HTTP Password	Password to access the web service.

Creating a Web Service Consumer connection

Connect to a web service using Web Services Description Language (WSDL) and an endpoint URL. You can also enable security for the web service.

1. In Administrator, open the **Connections** page and click **Add Connection**.
2. In the **Select Connector** tab, select **WSConsumer** as the connector and click **Next**.

Note: If the WSConsumer connection is not in the list of connections, in Administrator, open the **Add-On Connectors** page to install the connector for your organization.

3. In the **Connection Form** tab, enter the connection properties.
4. Select the runtime environment for the web service connection.
5. For **Authentication**, select one of the following options:
   - Select **Username Token** to enter the user name and the password to authenticate the web service. You can choose to encrypt the password by sending a digest that is derived from the password in the security token.
   - Select **Other Authentication** to enter the WSDL URL and endpoint URL to access the web service. If the web service is a private web service, enter the HTTP user name and password.
   - Select **NTLM Authentication** to enter the user name, password, and domain name to access the web service.
6. Enter the authentication connection properties. The properties that appear depend on the authentication that you selected.
7. Save the connection.

   Note: You can't test the connection to verify if the connection is successful as the **Test** option is disabled.

CHAPTER 3

Mapping and Mapping Tasks with Web Service Consumer Connector

Create a mapping to read or write data to the web service application. When you create a mapping, you can configure midstream transformation to transform data from a web service. The Secure Agent connects to the web service application to access, transform, or deliver data.

In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

Web Service Consumer midstream transformation in mappings

After you have defined the business service, you can configure the Web Services transformation in a mapping to access or transform data from a web service. The requirements and available options depend on whether you are connecting the Web Services transformation to one source object or to more than one source object.

Advance midstream properties

The following table describes the properties available for the Web Services transformation from the Advanced tab:

Property	Description
Cache Size for Web Service Request (KB)	Memory available for the web service request. Default is 100 KB. If the request is more than 100 KB, you can increase the cache size.
Cache Size for Web Service Response (KB)	Memory available for the web service response. If the web service response contains many rows or columns, you might want to increase the cache size. Default is 100 KB. Maximum is 99999 KB.

Property	Description
Allow Input Flush	The mapping task creates XML when it has all of the data for a group. When enabled, the mapping task flushes the XML after it receives all of the data for the root value. When not enabled, the mapping task stores the XML in memory and creates the XML after it receives data for all the groups. **Note:** You cannot select the option to allow input flush if you are connecting to multiple source objects.
Transaction Commit Control	Control to commit or roll back transactions based on the set of rows that pass through the transformation. Enter an IIF function to specify the conditions to determine whether the mapping task commits, rolls back, or makes no transaction changes to the row. Use the transaction commit control if you have a large amount of data and you want to control how it is processed. **Note:** You cannot configure a transaction commit control if you are connecting to multiple source objects.

Midstream transformation mapping example

The following example demonstrates how to use the Web Service Consumer midstream transformation to interact with NetSuite to get product availability details.


You can review this example to learn how to configure a Web Service Consumer midstream transformation to structure a SOAP request and response using the NetSuite operation, getItemAvailability. The midstream transformation passes the item ID in the request. The web service then returns information on the latest item availability in a SOAP response.

First, to connect to the web service, create a WSConsumer connection. You add a WSDL that describes the request and response web service messages and configures the necessary security.

Second, define a business service using the WSConsumer connection. Use the connection to define a business service and access the getItemAvailability operation:

Third, create a mapping that uses the Web Service transformation. The example mapping includes the following configuration options:


1. The source is a simple .csv file that includes four fields with the login details and an item ID:

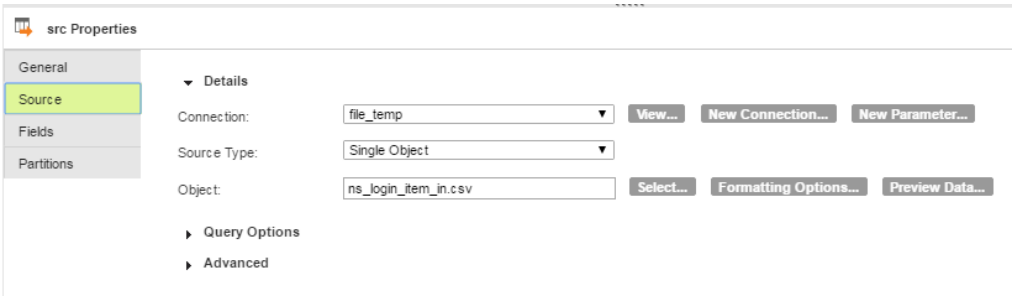


2. On the Web Service tab, select the business service and operation previously defined:




3. After you add a Web Services transformation, you can connect the source and see four incoming fields. You can filter your view of the incoming fields to show all fields, mapped fields, unmapped fields, or keys:

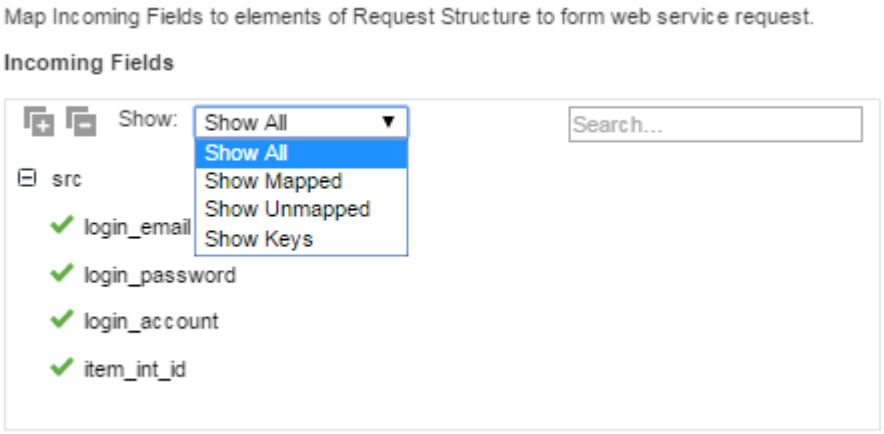

4. In the Request Mapping, the incoming fields are mapped to the SOAP message. The Envelope contains the credentials and the Body contains the item ID, as shown in the following image. You drag incoming fields onto items in the request structure to create the mapping:

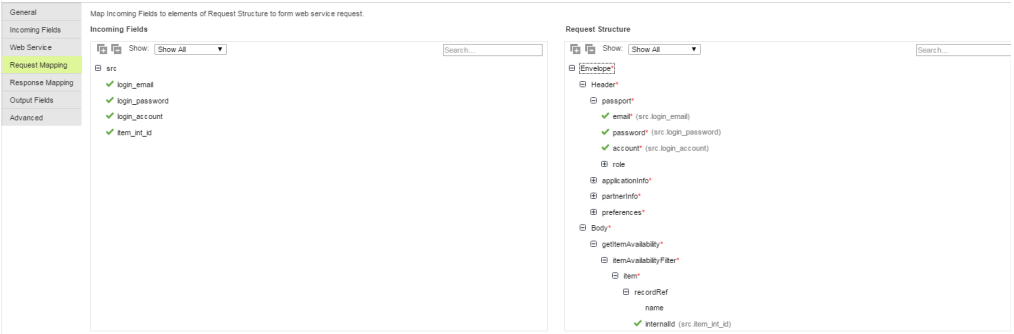


5. On the Response Mapping tab, you map the SOAP message to the output fields you want to use. You can choose Relational or Denormalized format for output fields. This example uses Relational format:

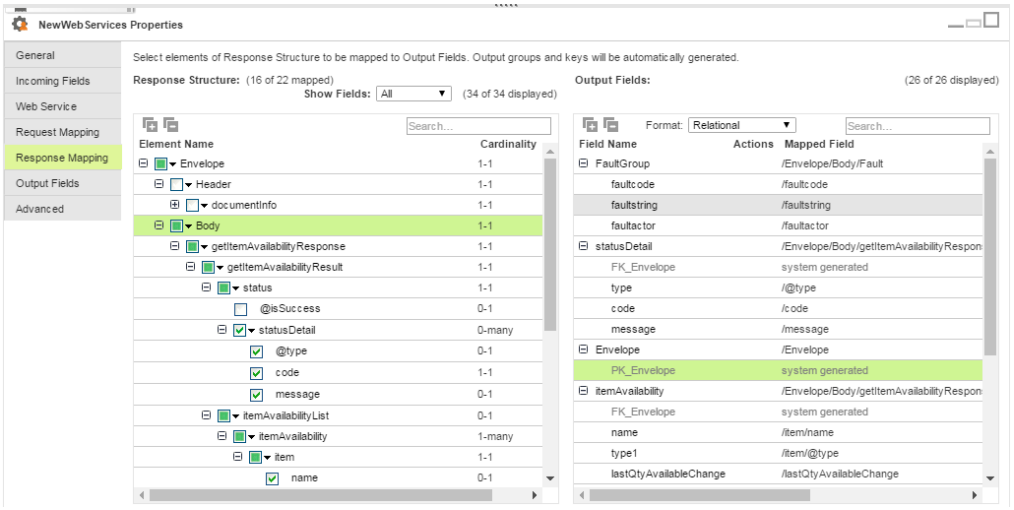


The system generates these output field groups automatically:

- FaultGroup, if it is supported by the connection type you are using.
- Envelope, which contains the documentinfo, if you select elements of response to be mapped to output fields.
- One group for each element you have mapped where the cardinality is greater than one.


The example above has three groups. In the response, you can choose to map or unmap objects and fields by selecting a node in the hierarchy and choosing an option to map (or unmap), as shown in this image. Click the down arrow to display the mapping options for a specific node:

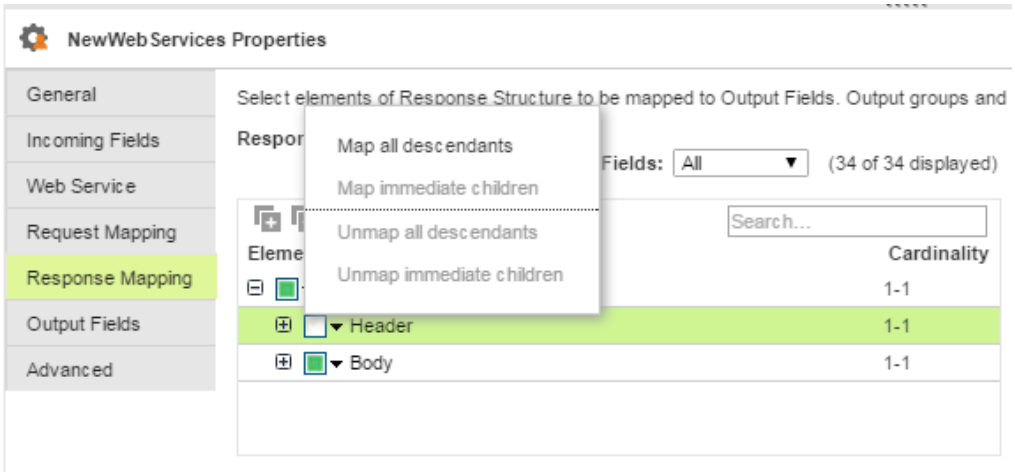



6. On the Output Fields tab, you can see each group. If needed, you can edit the type, precision, and scale of the fields:

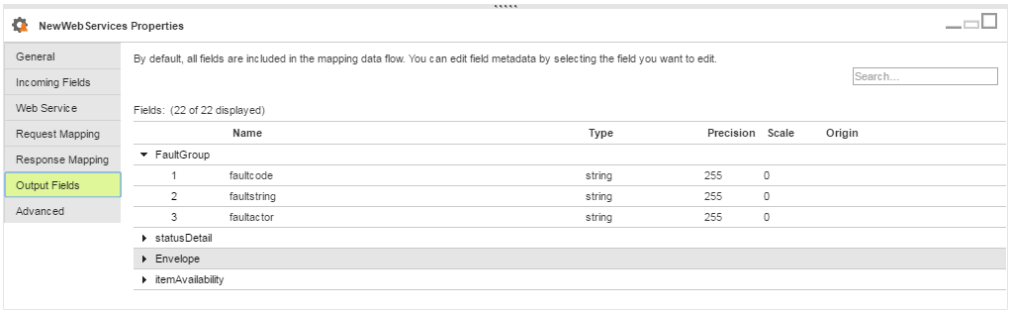

7. The mapping includes three targets: one for the status, one for the availability, and one for the FaultGroup data:

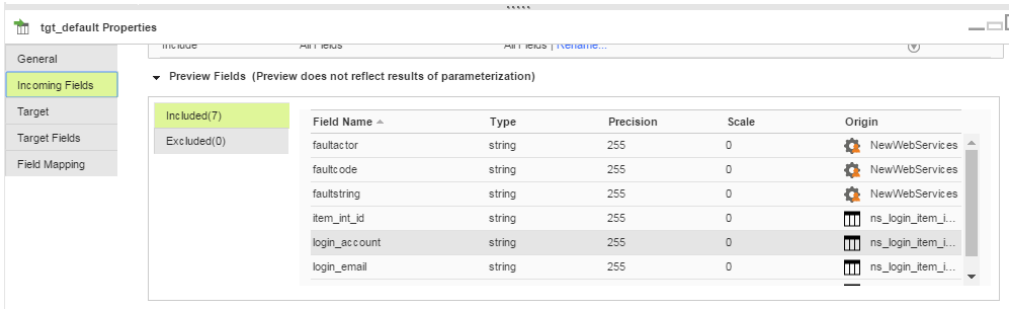

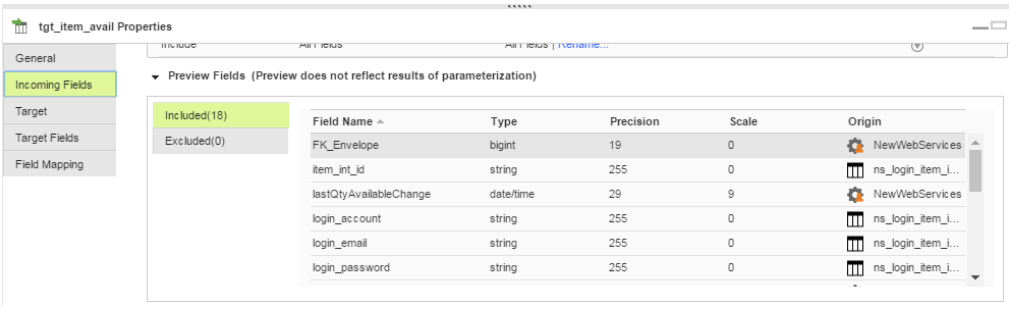

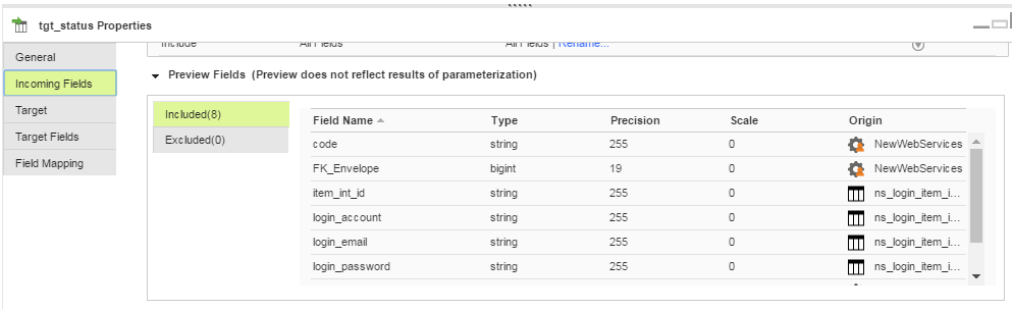

When the mapping runs, it returns the item availability and status code. If it cannot successfully run, it creates a record in the default target that contains the fault information.

Rules and guidelines for Web Service Consumer mappings

Consider the following rules and guidelines for Web Service Consumer mappings:

- Web Service Consumer Connector does not support i18N characters with SOAP 1.1.
- You cannot extract header details from a response message.
- You cannot extract value from a fault response for the following fields:
  - Detail
  - Role
- When you use the Username Token authentication in a Web Service Consumer connection, the header entry must be empty.
- When you extract subcode values in a fault response for multiple levels in an existing mapping , you must re-select the operation of web service consumer in the mapping.

  Note: You can extract only five level of subcode values.

CHAPTER 4

Troubleshooting

Use the following section to troubleshoot errors in Web Service Consumer Connector.

Troubleshooting Web Service Consumer Connector

The performance of a mapping task might be slow due to the following reasons:

- The Internet connection is slow.
- Endpoint server request is in wait state and the server is processing the request slowly.

The mapping creation might fail due to the following reasons:

- You do not have the permissions to create the WSDL folder or file.
- WSDL is not available in the provided path.
- Endpoint URL is not valid.
- The endpoint is not up and running, because of which there can be an issue with loading the WSDL. Use your web browser to verify if the WSDL URL is valid.

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Web Service Consumer 10
  Web Service Consumer connection 11

D

Data Integration community
  URL 4
document/literal 6

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

M

maintenance outages 5

O

Overview 10

R

RPC/Literal
  SOAP encoding style 6

S

SOAP
  encoding in Web Services 6
SOAP body
  use attribute 6
status
  Informatica Intelligent Cloud Services 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5
use attribute
  SOAP body 6

W

Web Service Consumer
  connection properties 10
Web Service Consumer Connection 10
Web Services Consumer Connector 7
Web Services Consumer Connector Overview 6
web site 4