Informatica® Cloud Data Integration

Xero Connector

Informatica Cloud Data Integration Xero Connector
October 2025

© Copyright Informatica LLC 2022, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-16

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Documentation 4
- IDMC web site 4
- IDMC Communities 4
- IDMC Marketplace 4
- Data Integration connector documentation 5
- Informatica Knowledge Base 5
- IDMC Trust Center 5
- IDMC Pulse Dashboard 5
- Informatica Global Customer Support 5

Chapter 1: Introduction to Xero Connector 6

Xero Connector assets 6

Chapter 2: Connections for Xero 7

Prepare for authentication 7

- OAuth 2.0 authorization code 7
- OAuth 2.0 client credentials 7

Connect to Xero 8

- Before you begin 8
- Xero connection details 8
- Authentication types 9

Chapter 3: Xero operations 11

Xero objects and operations 11

Xero source operations 21

- Configuring a request using Request Message Editor 21
- Field mapping in a Source transformation 23

Chapter 4: Mappings with Xero 25

Xero Source transformation in mappings 25

- Source transformation properties 25
- Advanced source properties 26

Chapter 5: Data type reference 27

Xero and transformation data types 27

Index 28

Preface

Use Xero Connector to learn how to read from Xero by using Cloud Data Integration. Learn to create a Xero connection, develop and run mappings, mapping tasks, and data transfer tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to Xero Connector

Use Xero Connector to securely read data from Xero.

Xero Connector uses the Xero REST API to read hierarchical data from objects such as assets, payrolls, and projects.

Create a Xero connection to read financial and accounting data from Xero. You can use the Xero connection in mappings and mapping tasks.

When you run a mapping or task that uses a Xero connection, Data Integration reads the data from Xero based on the workflow and connection configuration.

Xero Connector assets

Create assets in Data Integration to integrate data using Xero Connector.

When you use Xero Connector, you can include the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

CHAPTER 2

Connections for Xero

Use a Xero connection to perform read operations on Xero objects.

Create a Xero connection to securely read data from Xero. You can then use the Xero connection to specify sources in mappings and mapping tasks.

Prepare for authentication

You can configure OAuth 2.0 authorization code or OAuth 2.0 client credentials authentication to access Xero.

Before you configure the connection properties, you need to keep the authentication details handy based on the authentication type that you want to use.

OAuth 2.0 authorization code

To connect to Xero using the OAuth 2.0 authorization code, you need the authorization URL, access token URL, client ID, client secret, scope, and access token.

To get the authorization details, you need to create an OAuth2 app in the Xero Developer portal, select the Auth Code grant type, and register the following Informatica redirect URI:

`https://<Informatica cloud hosting facility for your organization>/ma/proxy/oauthcallback`

After you create the app, go to the Configuration tab to find the credentials for the connection. Copy the client ID and generate a client secret.

If the access token expires and the response returns the 401 error code, the Informatica redirect URI, which is outside the customer firewall, tries to connect to the endpoint and retrieve a new access token.

For more information about how to create an OAuth2 app and get the authorization details, see The standard authorization code flow in the Xero documentation.

OAuth 2.0 client credentials

To connect to Xero using OAuth 2.0 client credentials authentication, you need the access token URL, client ID, client secret, scope, and access token.

To get the authorization details, create a custom connection app in the Xero Developer portal. When you configure the app, select the scopes for the objects that you want to access, and then generate a client secret.

For more information about how to create a custom connection app and get the authorization details, see Custom Connections and Client Credentials in the Xero documentation.

Connect to Xero

Let's configure the Xero connection properties to connect to Xero.

Before you begin

Before you get started, you'll need to get the relevant configuration details from your Xero account based on the authentication type that you want to configure.

Check out "Prepare for authentication" on page 7 to learn more about the authentication prerequisites.

Xero connection details

When you create a Xero connection, configure the connection properties.

The following table describes the Xero connection properties:

Connection property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Use Secret Vault	Stores sensitive credentials for this connection in the secrets manager that is configured for your organization. This property appears only if secrets manager is set up for your organization. When you enable the secret vault in the connection, you can select the credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured. **Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option. For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help.
Runtime Environment	The name of the runtime environment where you want to run tasks. Specify a Secure Agent, Hosted Agent, or elastic runtime environment. For more information about runtime environments, see *Runtime Environments* in the Administrator help.

Authentication types

You can configure the OAuth 2.0 authorization code or OAuth 2.0 client credentials authentication types to access Xero.

Select the required authentication type, and then configure the authentication-specific parameters.

OAuth 2.0 authorization code authentication

Configure authentication properties in the Xero connection to use OAuth 2.0 authorization code authentication.

The following table describes the connection properties for OAuth 2.0 authorization code authentication:

Property	Description
Authorization URL	The authorization server endpoint from where you retrieve the authorization code. The authorization URL is `https://login.xero.com/identity/connect/authorize`
Access Token URL	The Xero access token URL required to exchange the authorization code for an access token. The access token URL is `https://identity.xero.com/connect/token`
Client ID	The client identifier issued to the client during the application registration process.
Client Secret	The client secret key issued to the client during the application registration process.
Scope	The scope of the access request. To add multiple scopes, separate each scope with a space. For example: `accounting.budgets.read accounting.settings.read accounting.contacts.read`
Access Token	The access token granted by Xero to access data. Click **Generate Token** to populate the access token. **Note:** Do not manually enter the access token. If you manually enter the access token, the connection fails when the access token expires.

OAuth 2.0 client credentials authentication

Configure authentication properties in the Xero connection to use OAuth 2.0 client credentials authentication.

The following table describes the connection properties for OAuth 2.0 client credentials authentication:

Property	Description
Access Token URL	The Xero access token URL required to exchange the client credentials for an access token. The access token URL is `https://identity.xero.com/connect/token`
Client ID	The client identifier issued to the client during the application registration process.
Client Secret	The client secret key issued to the client during the application registration process.
Scope	The scope of the access request. To add multiple scopes, separate each scope with a space. For example: `accounting.budgets.read accounting.settings.read accounting.contacts.read`
Access Token	The access token granted by Xero to access data. Click **Generate Token** to populate the access token. **Note:** Do not manually enter the access token. If you manually enter the access token, the connection fails when the access token expires.

CHAPTER 3

Xero operations

Xero exposes the web service APIs that the Secure Agent uses to perform integration tasks through the REST protocol.

When you create a mapping, select a Xero connection and an operation in the Source transformation. Each operation corresponds to a GET endpoint in the Xero APIs. The Secure Agent uses the connection to call that endpoint and read data from Xero. The request and response messages contain hierarchical data in JSON format.

Xero objects and operations

Xero objects are grouped by API. Each table lists the supported GET operations for objects in that API.

Objects like Payroll, Projects, Assets, and Files require the matching Xero subscription and OAuth scopes.

For Payroll objects, Xero returns data only for a tenant in the following regions: UK, NZ, or AU.

Accounting

The following table lists the GET operations that you can use for Accounting API objects:

Xero Object	Relative Path to the Object
Accounts	/api.xro/2.0/Accounts
	/api.xro/2.0/Accounts/{AccountID}
	/api.xro/2.0/Accounts/{AccountID}/Attachments
	/api.xro/2.0/Accounts/{AccountID}/Attachments/{AttachmentID}
	/api.xro/2.0/Accounts/{AccountID}/Attachments/{FileName}
Bank Transactions	/api.xro/2.0/BankTransactions
	/api.xro/2.0/BankTransactions/{BankTransactionID}
	/api.xro/2.0/BankTransactions/{BankTransactionID}/Attachments
	/api.xro/2.0/BankTransactions/{BankTransactionID}/History

Xero Object	Relative Path to the Object
	/api.xro/2.0/BankTransactions/{BankTransactionID}/Attachments/{AttachmentID}
	/api.xro/2.0/BankTransactions/{BankTransactionID}/Attachments/{FileName}
Bank Transfers	/api.xro/2.0/BankTransfers
	/api.xro/2.0/BankTransfers/{BankTransferID}
	/api.xro/2.0/BankTransfers/{BankTransferID}/Attachments
	/api.xro/2.0/BankTransfers/{BankTransferID}/History
	/api.xro/2.0/BankTransfers/{BankTransferID}/Attachments/{AttachmentID}
	/api.xro/2.0/BankTransfers/{BankTransferID}/Attachments/{FileName}
Batch Payments	/api.xro/2.0/BatchPayments
	/api.xro/2.0/BatchPayments/{BatchPaymentID}
	/api.xro/2.0/BatchPayments/{BatchPaymentID}/History
Branding Themes	/api.xro/2.0/BrandingThemes
	/api.xro/2.0/BrandingThemes/{BrandingThemeID}
Budgets	/api.xro/2.0/Budgets
	/api.xro/2.0/Budgets/{BudgetID}
Contact Groups	/api.xro/2.0/ContactGroups
	/api.xro/2.0/ContactGroups/{ContactGroupID}
Contacts	/api.xro/2.0/Contacts
	/api.xro/2.0/Contacts/{ContactID}
	/api.xro/2.0/Contacts/{ContactNumber}
	/api.xro/2.0/Contacts/{ContactID}/Attachments
	/api.xro/2.0/Contacts/{ContactID}/CISSettings
	/api.xro/2.0/Contacts/{ContactID}/History
	/api.xro/2.0/Contacts/{ContactID}/Attachments/{AttachmentID}
	/api.xro/2.0/Contacts/{ContactID}/Attachments/{FileName}
Credit Notes	/api.xro/2.0/CreditNotes

Xero Object	Relative Path to the Object
	/api.xro/2.0/CreditNotes/{CreditNoteID}
	/api.xro/2.0/CreditNotes/{CreditNoteID}/Attachments
	/api.xro/2.0/CreditNotes/{CreditNoteID}/History
	/api.xro/2.0/CreditNotes/{CreditNoteID}/pdf
	/api.xro/2.0/CreditNotes/{CreditNoteID}/Attachments/{AttachmentID}
	/api.xro/2.0/CreditNotes/{CreditNoteID}/Attachments/{FileName}
Currencies	/api.xro/2.0/Currencies
Invoice Reminders	/api.xro/2.0/InvoiceReminders/Settings
Invoices	/api.xro/2.0/Invoices
	/api.xro/2.0/Invoices/{InvoiceID}
	/api.xro/2.0/Invoices/{InvoiceID}/Attachments
	/api.xro/2.0/Invoices/{InvoiceID}/History
	/api.xro/2.0/Invoices/{InvoiceID}/OnlineInvoice
	/api.xro/2.0/Invoices/{InvoiceID}/pdf
	/api.xro/2.0/Invoices/{InvoiceID}/Attachments/{AttachmentID}
	/api.xro/2.0/Invoices/{InvoiceID}/Attachments/{FileName}
Items	/api.xro/2.0/Items
	/api.xro/2.0/Items/{ItemID}
	/api.xro/2.0/Items/{ItemID}/History
Journals	/api.xro/2.0/Journals
	/api.xro/2.0/Journals/{JournalID}
	/api.xro/2.0/Journals/{JournalNumber}
Linked Transactions	/api.xro/2.0/LinkedTransactions
	/api.xro/2.0/LinkedTransactions/{LinkedTransactionID}
Manual Journals	/api.xro/2.0/ManualJournals
	/api.xro/2.0/ManualJournals/{ManualJournalID}
	/api.xro/2.0/ManualJournals/{ManualJournalID}/Attachments

Xero Object	Relative Path to the Object
	/api.xro/2.0/ManualJournals/{ManualJournalID}/History
	/api.xro/2.0/ManualJournals/{ManualJournalID}/Attachments/{AttachmentID}
	/api.xro/2.0/ManualJournals/{ManualJournalID}/Attachments/{FileName}
Organisation	/api.xro/2.0/Organisation
	/api.xro/2.0/Organisation/Actions
	/api.xro/2.0/Organisation/{OrganisationID}/CISSettings
Overpayments	/api.xro/2.0/Overpayments
	/api.xro/2.0/Overpayments/{OverpaymentID}
	/api.xro/2.0/Overpayments/{OverpaymentID}/History
Payments	/api.xro/2.0/Payments
	/api.xro/2.0/Payments/{PaymentID}
	/api.xro/2.0/Payments/{PaymentID}/History
Prepayments	/api.xro/2.0/Prepayments
	/api.xro/2.0/Prepayments/{PrepaymentID}
	/api.xro/2.0/Prepayments/{PrepaymentID}/History
Purchase Orders	/api.xro/2.0/PurchaseOrders
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderNumber}
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}/Attachments
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}/History
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}/pdf
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}/Attachments/{AttachmentID}
	/api.xro/2.0/PurchaseOrders/{PurchaseOrderID}/Attachments/{FileName}
Quotes	/api.xro/2.0/Quotes
	/api.xro/2.0/Quotes/{QuoteID}
	/api.xro/2.0/Quotes/{QuoteID}/Attachments

Xero Object	Relative Path to the Object
	/api.xro/2.0/Quotes/{QuoteID}/History
	/api.xro/2.0/Quotes/{QuoteID}/pdf
	/api.xro/2.0/Quotes/{QuoteID}/Attachments/{AttachmentID}
	/api.xro/2.0/Quotes/{QuoteID}/Attachments/{FileName}
Repeating Invoices	/api.xro/2.0/RepeatingInvoices
	/api.xro/2.0/RepeatingInvoices/{RepeatingInvoiceID}
	/api.xro/2.0/RepeatingInvoices/{RepeatingInvoiceID}/Attachments
	/api.xro/2.0/RepeatingInvoices/{RepeatingInvoiceID}/History
	/api.xro/2.0/RepeatingInvoices/{RepeatingInvoiceID}/Attachments/{AttachmentID}
	/api.xro/2.0/RepeatingInvoices/{RepeatingInvoiceID}/Attachments/{FileName}
Reports	/api.xro/2.0/Reports
	/api.xro/2.0/Reports/{ReportID}
Tax Rates	/api.xro/2.0/TaxRates
	/api.xro/2.0/TaxRates/{TaxType}
Tracking Categories	/api.xro/2.0/TrackingCategories
	/api.xro/2.0/TrackingCategories/{TrackingCategoryID}
Users	/api.xro/2.0/Users
	/api.xro/2.0/Users/{UserID}
Report: 1099 (Ten Ninety Nine)	/api.xro/2.0/Reports/TenNinetyNine
Report: Aged Payables By Contact	/api.xro/2.0/Reports/AgedPayablesByContact
Report: Aged Receivables By Contact	/api.xro/2.0/Reports/AgedReceivablesByContact
Report: Balance Sheet	/api.xro/2.0/Reports/BalanceSheet
Report: Bank Summary	/api.xro/2.0/Reports/BankSummary
Report: Budget Summary	/api.xro/2.0/Reports/BudgetSummary
Report: Executive Summary	/api.xro/2.0/Reports/ExecutiveSummary

Xero Object	Relative Path to the Object
Report: Profit And Loss	/api.xro/2.0/Reports/ProfitAndLoss
Report: Trial Balance	/api.xro/2.0/Reports/TrialBalance

Payroll UK

The following table lists the GET operations that you can use for the Payroll API with UK-specific Xero organizations:

Xero Object	Relative Path to the Object
Benefits	/payroll.xro/2.0/uk/Benefits
	/payroll.xro/2.0/uk/Benefits/{id}
Deductions	/payroll.xro/2.0/uk/Deductions
	/payroll.xro/2.0/uk/Deductions/{deductionId}
Earnings Orders	/payroll.xro/2.0/uk/EarningsOrders
	/payroll.xro/2.0/uk/EarningsOrders/{id}
Earnings Rates	/payroll.xro/2.0/uk/EarningsRates
	/payroll.xro/2.0/uk/EarningsRates/{EarningsRateID}
Employee Leave	/payroll.xro/2.0/uk/Employees/{EmployeeID}/Leave
	/payroll.xro/2.0/uk/Employees/{EmployeeID}/Leave/{LeaveID}
Employee Leave Balances	/payroll.xro/2.0/uk/Employees/{EmployeeID}/LeaveBalances
Employee Leave Periods	/payroll.xro/2.0/uk/Employees/{EmployeeID}/LeavePeriods
Employee Leave Types	/payroll.xro/2.0/uk/Employees/{EmployeeID}/LeaveTypes
Employee Pay Templates	/payroll.xro/2.0/uk/Employees/{EmployeeID}/PayTemplates
Employee Payment Methods	/payroll.xro/2.0/uk/Employees/{EmployeeID}/PaymentMethods
Employee Salary And Wages	/payroll.xro/2.0/uk/Employees/{EmployeeID}/SalaryAndWages
	/payroll.xro/2.0/uk/Employees/{EmployeeID}/SalaryAndWages/{SalaryAndWagesID}
Employee Statutory Leave Balance	/payroll.xro/2.0/uk/Employees/{EmployeeID}/StatutoryLeaveBalance
Employee Tax	/payroll.xro/2.0/uk/Employees/{EmployeeID}/Tax
Employee UK Opening Balances	/payroll.xro/2.0/uk/Employees/{EmployeeID}/ukopeningbalances

Xero Object	Relative Path to the Object
Employees	/payroll.xro/2.0/uk/Employees
	/payroll.xro/2.0/uk/Employees/{EmployeeID}
Leave Types	/payroll.xro/2.0/uk/LeaveTypes
	/payroll.xro/2.0/uk/LeaveTypes/{LeaveTypeID}
Pay Run Calendars	/payroll.xro/2.0/uk/PayRunCalendars
	/payroll.xro/2.0/uk/PayRunCalendars/{PayRunCalendarID}
Pay Runs	/payroll.xro/2.0/uk/PayRuns
	/payroll.xro/2.0/uk/PayRuns/{PayRunID}
Payslips	/payroll.xro/2.0/uk/Payslips
	/payroll.xro/2.0/uk/Payslips/{PayslipID}
Reimbursements	/payroll.xro/2.0/uk/Reimbursements
	/payroll.xro/2.0/uk/Reimbursements/{ReimbursementID}
Settings	/payroll.xro/2.0/uk/Settings
Statutory Leave Summary	/payroll.xro/2.0/uk/StatutoryLeaves/Summary/{EmployeeID}
Statutory Sick Leave	/payroll.xro/2.0/uk/StatutoryLeaves/Sick/{StatutorySickLeaveID}
Timesheets	/payroll.xro/2.0/uk/Timesheets
	/payroll.xro/2.0/uk/Timesheets/{TimesheetID}
Tracking Categories	/payroll.xro/2.0/uk/Settings/trackingCategories

Payroll NZ

The following table lists the GET operations that you can use for the Payroll API with NZ-specific Xero organizations:

Xero Object	Relative Path to the Object
Deductions	/payroll.xro/2.0/nz/Deductions
	/payroll.xro/2.0/nz/Deductions/{deductionId}
Earnings Rates	/payroll.xro/2.0/nz/EarningsRates
	/payroll.xro/2.0/nz/EarningsRates/{EarningsRateID}
Employee Leave	/payroll.xro/2.0/nz/Employees/{EmployeeID}/Leave

Xero Object	Relative Path to the Object
Employee Leave Balances	/payroll.xro/2.0/nz/Employees/{EmployeeID}/LeaveBalances
Employee Leave Periods	/payroll.xro/2.0/nz/Employees/{EmployeeID}/LeavePeriods
Employee Leave Types	/payroll.xro/2.0/nz/Employees/{EmployeeID}/LeaveTypes
Employee Opening Balances	/payroll.xro/2.0/nz/Employees/{EmployeeID}/OpeningBalances
Employee Pay Templates	/payroll.xro/2.0/nz/Employees/{EmployeeID}/PayTemplates
Employee Payment Methods	/payroll.xro/2.0/nz/Employees/{EmployeeID}/PaymentMethods
Employee Salary And Wages	/payroll.xro/2.0/nz/Employees/{EmployeeID}/SalaryAndWages
	/payroll.xro/2.0/nz/Employees/{EmployeeID}/SalaryAndWages/{SalaryAndWagesID}
Employee Tax	/payroll.xro/2.0/nz/Employees/{EmployeeID}/Tax
Employee Working Patterns	/payroll.xro/2.0/nz/Employees/{EmployeeID}/Working-Patterns
	/payroll.xro/2.0/nz/Employees/{EmployeeID}/Working-Patterns/{EmployeeWorkingPatternID}
Employees	/payroll.xro/2.0/nz/Employees
	/payroll.xro/2.0/nz/Employees/{EmployeeID}
Leave Types	/payroll.xro/2.0/nz/LeaveTypes
	/payroll.xro/2.0/nz/LeaveTypes/{LeaveTypeID}
Pay Run Calendars	/payroll.xro/2.0/nz/PayRunCalendars
	/payroll.xro/2.0/nz/PayRunCalendars/{PayrollCalendarID}
Pay Runs	/payroll.xro/2.0/nz/PayRuns
	/payroll.xro/2.0/nz/PayRuns/{PayRunID}
Pay Slips	/payroll.xro/2.0/nz/PaySlips
	/payroll.xro/2.0/nz/PaySlips/{PaySlipID}
Reimbursements	/payroll.xro/2.0/nz/Reimbursements
	/payroll.xro/2.0/nz/Reimbursements/{ReimbursementID}
Settings	/payroll.xro/2.0/nz/Settings
Statutory Deductions	/payroll.xro/2.0/nz/StatutoryDeductions
	/payroll.xro/2.0/nz/StatutoryDeductions/{id}

Xero Object	Relative Path to the Object
Superannuations	/payroll.xro/2.0/nz/Superannuations
	/payroll.xro/2.0/nz/Superannuations/{SuperannuationID}
Timesheets	/payroll.xro/2.0/nz/Timesheets
	/payroll.xro/2.0/nz/Timesheets/{TimesheetID}
Tracking Categories	/payroll.xro/2.0/nz/Settings/TrackingCategories

Payroll AU (v1)

The following table lists the GET operations that you can use for the Payroll API with AU-specific Xero organizations:

Xero Object	Relative Path to the Object
Employees	/payroll.xro/1.0/Employees
	/payroll.xro/1.0/Employees/{EmployeeID}
Leave Applications	/payroll.xro/1.0/LeaveApplications
	/payroll.xro/1.0/LeaveApplications/v2
	/payroll.xro/1.0/LeaveApplications/{LeaveApplicationID}
Pay Items	/payroll.xro/1.0/PayItems
Pay Runs	/payroll.xro/1.0/PayRuns
	/payroll.xro/1.0/PayRuns/{PayRunID}
Payroll Calendars	/payroll.xro/1.0/PayrollCalendars
	/payroll.xro/1.0/PayrollCalendars/{PayrollCalendarID}
Payslip	/payroll.xro/1.0/Payslip/{PayslipID}
Settings	/payroll.xro/1.0/Settings
Superfund Products	/payroll.xro/1.0/SuperfundProducts
Superfunds	/payroll.xro/1.0/Superfunds
	/payroll.xro/1.0/Superfunds/{SuperFundID}
Timesheets	/payroll.xro/1.0/Timesheets
	/payroll.xro/1.0/Timesheets/{TimesheetID}

Payroll AU (v2)

The following table lists the GET operations that you can use for the Payroll API with AU-specific Xero organizations:

Xero Object	Relative Path to the Object
Timesheets	/payroll.xro/2.0/au/Timesheets
	/payroll.xro/2.0/au/Timesheets/{TimesheetID}

Files

The following table lists the GET operations that you can use for Files API objects:

Xero Object	Relative Path to the Object
Associations	/files.xro/1.0/Associations/Count
	/files.xro/1.0/Associations/{ObjectId}
Files	/files.xro/1.0/Files
	/files.xro/1.0/Files/{FileId}
	/files.xro/1.0/Files/{FileId}/Associations
	/files.xro/1.0/Files/{FileId}/Content
Folders	/files.xro/1.0/Folders
	/files.xro/1.0/Folders/{FolderId}
Inbox	/files.xro/1.0/Inbox

Assets

The following table lists the GET operations that you can use for Assets API objects:

Xero Object	Relative Path to the Object
Asset Settings	/assets.xro/1.0/Settings
Asset Types	/assets.xro/1.0/AssetTypes
Assets	/assets.xro/1.0/Assets
	/assets.xro/1.0/Assets/{id}

Projects

The following table lists the GET operations that you can use for Projects API objects:

Xero Object	Relative Path to the Object
Project Tasks	/projects.xro/2.0/Projects/{projectId}/Tasks
	/projects.xro/2.0/Projects/{projectId}/Tasks/{taskId}
Project Time Entries	/projects.xro/2.0/Projects/{projectId}/Time
	/projects.xro/2.0/Projects/{projectId}/Time/{timeEntryId}
Projects	/projects.xro/2.0/Projects
	/projects.xro/2.0/Projects/{projectId}
Projects Users	/projects.xro/2.0/ProjectsUsers

Identity

The following table lists the GET operation that you can use for Identity API object:

Xero Object	Relative Path to the Object
Connections	/Connections

Xero source operations

Create a Source transformation in the Mapping Task wizard to read data from Xero.

To configure the Source operation, perform the following steps:

1. In the Source transformation, select a Xero connection.
2. On the **Source** tab, select an operation from the list of operations.
3. Configure the request message for the operation. Copy the request message from the sample template, and edit the JSON based on your use case.

Configuring a request using Request Message Editor


When you create a Source transformation, configure a JSON request message for the operation that you want to perform in Xero.

Use the **Request Message Editor** to create a request message. The request message uses the JSON format and contains request parameters exposed by Xero APIs for a specific operation. You can use the default request message for the operation, and then customize it to specify the data that you want to include.

To customize your request, copy the request message from the sample template to the **Request Message Editor** pane where you can edit the JSON message and add the attributes for the request. Remove

unnecessary and empty tags from the request message to avoid operation failure. You can hide the optional elements to see only the required elements.

Every Xero operation requires the `Xero-Tenant-Id` parameter, as shown in the following image:

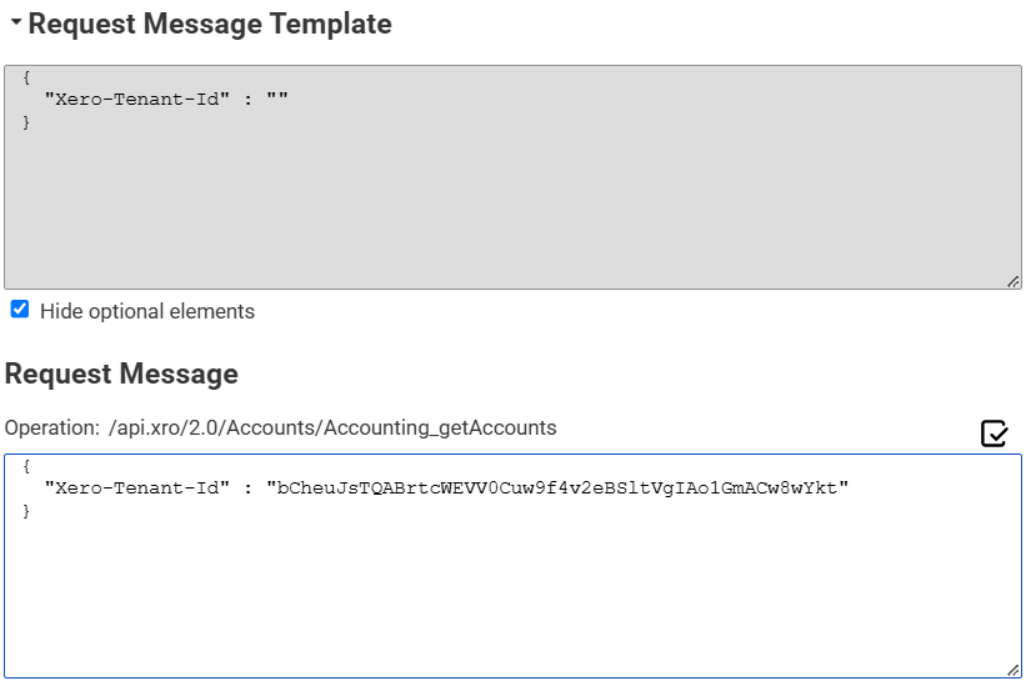

To retrieve accounts, use the `getAccounts` operation and add the `where` and `order` query parameters to return only active bank accounts sorted by name. The following sample request message shows these parameters:

```
{
  "Xero-Tenant-Id" : "8fc87e03-8401-4024-bbac-798790a98425",
  "If-Modified-Since" : "",
  "where" : "Status==\"ACTIVE\" AND Type==\"BANK\"",
  "order" : "Name ASC"
}
```

To retrieve invoices that have specific statuses, use the getInvoices operation and specify the `Xero-Tenant-Id`, `Statuses`, and `summaryOnly` parameters in the request message. The following sample request message shows these parameters:

```
{
  "Xero-Tenant-Id" : "cd13c0ac-db47-4b44-ab1f-9970127655c9",
  "Statuses" : [ "AUTHORISED", "PAID" ],
  "summaryOnly" : "True"
}
```

The following image shows the request message template and a request message configured to filter invoices by status in the Mapping Designer:

Request Message Template

```
{
  "Xero-Tenant-Id" : "",
  "If-Modified-Since" : "",
  "where" : "",
  "order" : "",
  "IDs" : [ "" ],
  "InvoiceNumbers" : [ "" ],
  "ContactIDs" : [ "" ],
  "Statuses" : [ "" ],
  "page" : 0,
```

☐ Hide optional elements

Request Message

Operation: /api.xro/2.0/Invoices/Accounting_getInvoices

```
{
  "Xero-Tenant-Id" : "cd13c0ac-db47-4b44-ab1f-9970127655c9",
  "Statuses" : [ "AUTHORISED", "PAID" ],
  "summaryOnly" : "True"
}
```

Note: When you pass array parameters, such as `Statuses` or `ContactIDs`, pass them as comma-separated strings. For example: `[ "AUTHORISED", "PAID"]`

The request message format in Xero Connector follows the service request definition in Xero. Use well-formed JSON in the request message, and include the parameters that you need for your use case.


Field mapping in a Source transformation

The response message format follows the service response definition in Xero. You can map response fields from a hierarchical to a relational structure of output groups and fields.

After you configure an operation for a source and specify the request message, create the relational format from the hierarchical data to include groups and fields that you want in the output.

Select the elements in the response structure that you want to include as output fields. The Secure Agent converts the JSON response in the hierarchical structure to relational groups at run time.

The following image shows an example hierarchical response structure generated for the `getAccounts` operation, and the corresponding relational output fields for the response:

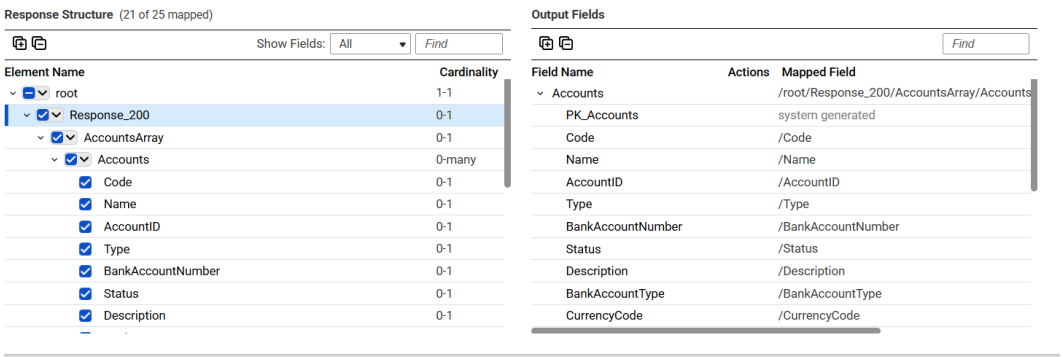

You can edit the data type, precision, and scale for the groups and fields after mapping the fields.

For more information about field mapping, see *Transformations* in the Data Integration documentation.

CHAPTER 4

Mappings with Xero

When you create a mapping, you define the source to represent a Xero object. Use the Mapping Designer in Data Integration to add the Source transformation in the mapping canvas and configure the Xero source properties.

Xero Source transformation in mappings

When you configure a Source transformation, select a Xero connection and choose an operation to represent a Xero source.

Use the request message template to configure the request message in JSON format.

You can view the response structure in the field mapping. When you map elements from the response structure to the output fields, the Secure Agent creates the output groups, along with primary and foreign keys for the fields. When you deploy the mapping in a mapping task and run the task, the Secure Agent reads the data from Xero.

Source transformation properties

You can use one or more Source transformations in a mapping.

When you select a source, the **Properties** panel displays the following tabs:

- **General**. Configure the name and description for the source.
- **Source**. Select the connection and the operation, configure the request message in the request options, and configure the advanced source properties.
- **Field Mapping**. Map elements with the response structure to the output fields.
- **Fields**. Edit the metadata of the source fields that you want to use in the mapping.

Advanced source properties

In a mapping, you can configure a Source transformation to represent a Xero source. If you use the Xero connection in a mapping task, you can also configure advanced properties on the **Source** page of the Mapping Task wizard.

Property	Description
Tracing Level	Amount of detail that appears in the log. Use the following tracing levels: - Terse - Normal - Verbose Initialization - Verbose data Default is normal.

CHAPTER 5

Data type reference

Data Integration uses the following data types in mappings and mapping tasks with Xero.

Xero native data types: Xero data types that appear in the fields tab for Source transformations when you choose to edit metadata for the fields.

Transformation data types: Set of data types that appear in the remaining transformations. They are internal data types based on ANSI SQL92 generic data types, which Informatica Cloud uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When the Secure Agent reads source data, it converts the native data types to the comparable transformation data types before transforming the data.

Xero and transformation data types

The following table describes the Xero data types that Data Integration supports and the corresponding transformation data types:

Xero Native Data Type	Transformation Data Type	Range and Description
Array	Binary	1 to 65,535 characters
Binary	Binary	1 to 65,535 bytes
Boolean	String	1 to 65,535 characters
Decimal	Decimal	Precision 1 to 31, scale 0 to 10
Double	Double	Precision 15
Integer	Integer	-2,147,483,648 to 2,147,483,647
Object	String	1 to 65,535 characters
String	String	1 to 65,535 characters
Timestamp	Date/Time	Jan 1, 0001 00:00:00 to Dec 31, 9999 23:59:59

INDEX

C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  Xero 8

D

Data Integration community
  URL 4
data types
  mapping to transformation data types 27

F

field mapping
  cardinality 23
  foreign key 23
  primary key 23
  XPath expression 23

I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Data Management Cloud
  web site 4

K

Klaviyo
  Operations Overview 11
Klaviyo connection 8

M

maintenance outages 5

S

source
  field mapping 23
  read operations 21
  request message 21
source transformation
  advanced properties 26
  mappings 25
  properties 25
status
  IDMC 5
system status 5

T

trust site
  description 5

U

upgrade notifications 5

W

web site 4

X

Xero
  connection properties 8
Xero Connector
  assets 6
  overview 6
Xero data types
  overview 27