How-To Library

Informatica

Using Workday V2 Connector in a Process to Get Employee Details from Workday

© Copyright Informatica LLC 2016, 2021. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

This article describes how to use Workday V2 Connector to connect to Workday from Informatica Cloud Application Integration and get employee details.

Supported Versions

- Informatica Cloud® Fall 2016

Table of Contents

Overview. 2
Workday V2 Connector. 2
Workday V2 Connector Process. 3
Workday V2 Connector Process Example. 3
Step 1: Create a Workday V2 Connection. 3
Step 2: Create the Variables for the Workday Request. 4
Step 3: Assign the Variables for the Get Workers Operation. 4
Step 4: Configure a Workday Service Call. 6
Step 5: Select the Fields in the Workday Response. 7
Step 6: Run the Process. 8

Overview

This article describes how you can use Workday V2 Connector to connect to Workday from Informatica Cloud Application Integration.

It includes an example that demonstrates the tasks that you must perform to get the employee details from Workday through a service call configured in an Informatica Cloud Application Integration process.

Workday V2 Connector

You can use Workday V2 Connector to connect to Workday from Informatica Cloud Application Integration to read data from or write data to Workday. You can create real-time application integration processes that enable you to interact with the business process.

Workday is an on-demand cloud-based Enterprise Resource Application that includes financial management and human capital management applications. Workday exposes the web service API, which the Secure Agent uses to perform integration tasks through the SOAP protocol.

With Workday V2 connection, you can access all the services and operations supported for the SOAP-based web service version in Workday. When you perform an operation within Informatica Cloud, you can convert the hierarchical data structure for data retrieved from Workday to a relational format before you write to relational tables. You can also convert the relational format to hierarchical format before you write data from relational sources to Workday.

Workday V2 Connector Process

Use the Process Designer in Informatica Cloud Application Integration to read data from and write data to Workday.

Workday V2 Connector is available as a service call in Informatica Cloud Application Integration. When you configure a process, you can use the Workday V2 connection in a service call and specify the parameters and operations that associate with a specific service that you want to make available in the process to read data from or write data to Workday.

Workday V2 Connector Process Example

You want to get employee details from Workday. You need to configure an XML request and then connect to Workday through a service call using the Get Worker Details operation to get the employee details from Workday.

In this example, configure a service call to perform the Get Worker Details operation to read the employee information, such as first name, last name, and date of birth, based on the Workday employee ID.

To read the employee information from a Workday source, perform the following steps:

1. Create a Workday V2 connection in Informatica Cloud Application Integration.
2. Configure the input and output fields required to read worker details from Workday.
3. Assign values to the fields in the process.
4. Configure a Workday service call in the process.
5. Specify the elements required in the response XML.
6. Run the process.

The following image shows the configured process on the Process Editor canvas:



Step 1: Create a Workday V2 Connection

Create a Workday V2 connection in Informatica Cloud Application Integration to connect to Workday. Configure the connection to use the Get Workers operation in Workday. Use the connection in a process to access the employee details.


You can create a Workday V2 connection from the Design Home page in the Process Designer.

1. Select **New** > **Connection**.
2. Select Workday V2 as the **Connection Type**.
3. Enter a name and description for the connection.
4. Enter the run-time environment on which the connection must run.
5. Enter the Workday V2 connection properties.
   The OData Enable option is not applicable for Workday V2 connection.
6. Test the connection.
7. Save and publish the connection.
   You can click the **Published Metadata** tab to view the Workday metadata that the connection accesses in Workday.

Step 2: Create the Variables for the Workday Request

Assign the input fields that you want to pass in a request to Workday and then specify the output fields that you want the Workday service to return.

1. To create a request input field to read worker details from Workday, perform the following steps:
   a. Specify an input field name, `iGetworketsRequest`.
   b. From the list, select **Objects** > **Workday-Get**.
   c. Select **Get_Workers_RequestType**.
2. Specify the worker ID in Workday for which you want to capture the employee details. To add the `iwid` input variable, select **Simple** > **Text** option.
3. Specify the Workday output fields, `oFirstname`, `oLastname`, and `oDateofBirth`, to capture the first name, last name, and date of birth of the employee. To configure the details, select **Simple** > **Text**.
   The following image shows the multiple fields that you need to create:

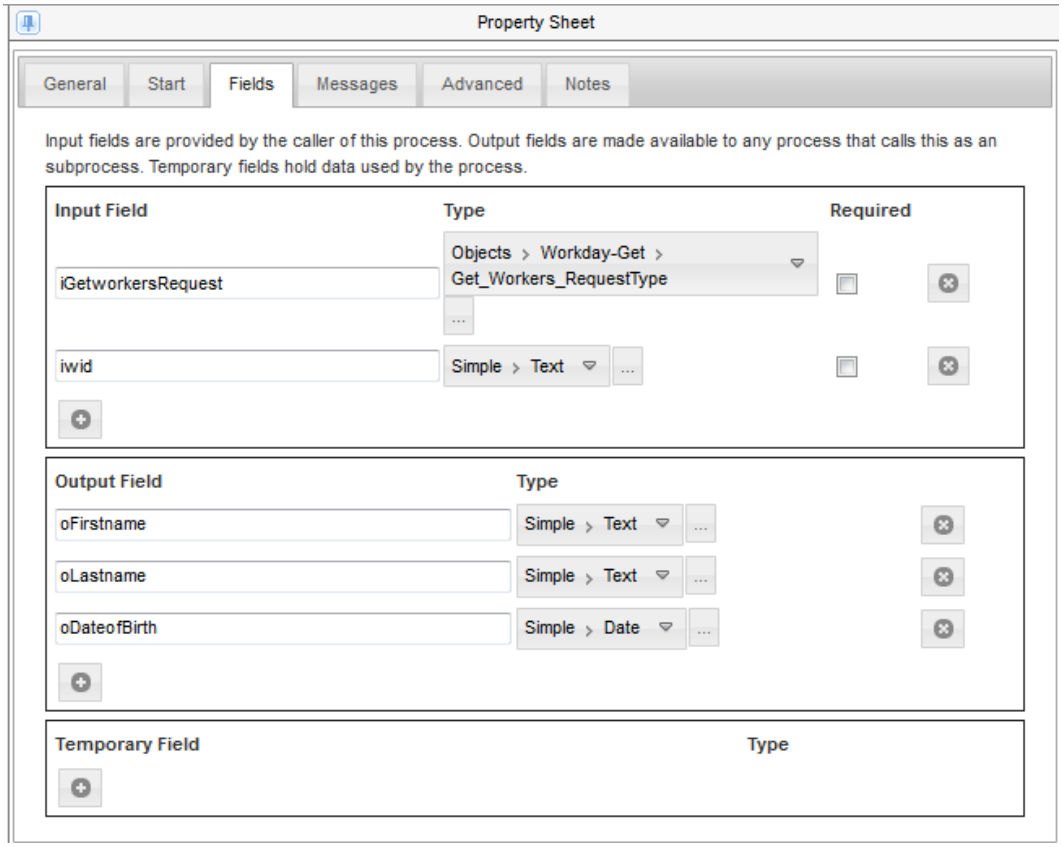


Step 3: Assign the Variables for the Get Workers Operation

After you create the input and output fields, assign values to input and output fields for the Get Workers Request operation. Use the Assignment Step to set the value to the fields.


Configure the Assignment step to add the Workday input variable field iGetworkersRequest.

1. To create an Assignment Step, click a step, and then select **Assignment** from the **Step Type** list in the Property Sheet.

2. Click **Add Field** to assign Name and Source values for the field. Provide name iGetworkersRequest and select **Formula** as the source of the iGetworkersRequest input field.
   The following image shows the assignment of the iGetworkersRequest input field:

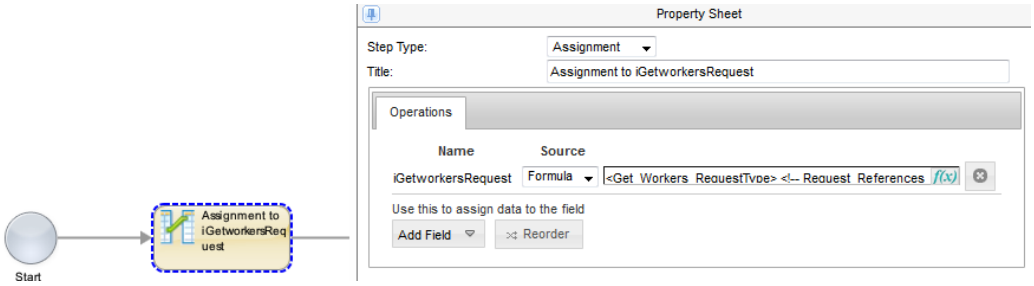


3. In **Formula Editor**, select the iGetworkersRequest in the **XML Object** tab. Filter the request XML to include only the parameters that you require in the request.
4. Specify the input values for the Worker Reference ID Type as WID and the value for the WID to read the employee information from the Workday input variable.
   The following image shows the request XML for the Get Workers operation:

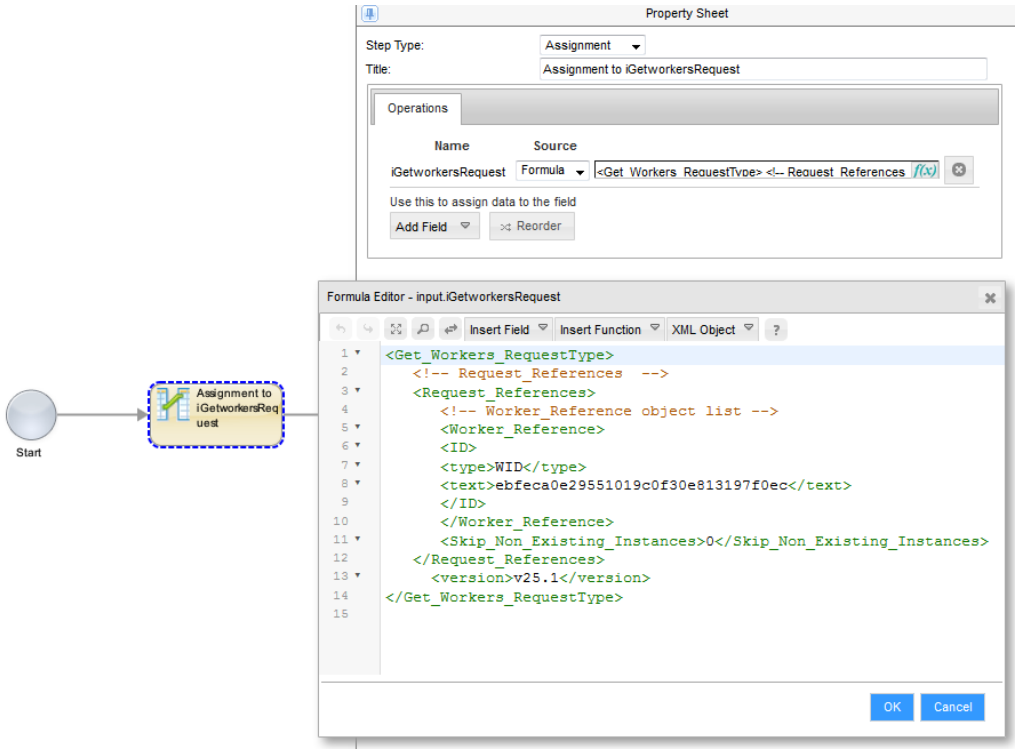

Step 4: Configure a Workday Service Call


Create a Workday service call in the Process Designer to use the Workday V2 connection that accesses the Get Workers operation.

1. Configure the service call in the process to configure the input to the Workday input parameter. The following image shows the service call configuration:

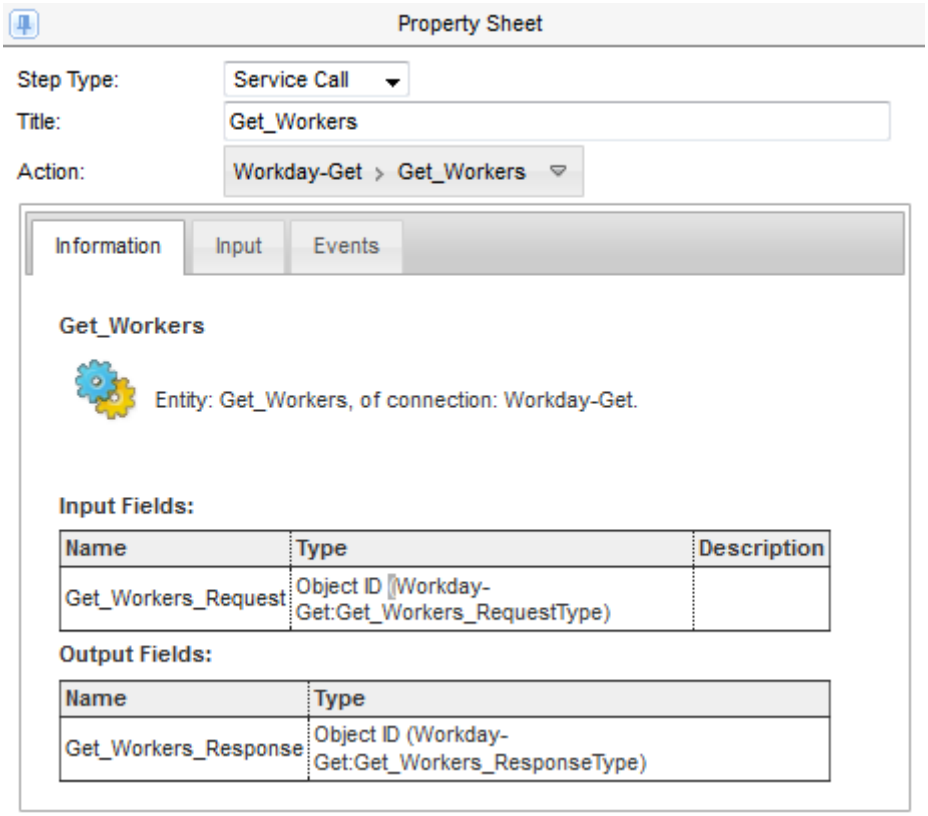

2. Configure the input field in the service call to read from the Workday input variable. Perform the following steps:
   a. Add a Get_Workers input field, `Get_Workers_Request`.

b. On the **Input** tab, select **Field** as the source of the Workday input field value, and then select the iGetWorkersRequest input field.
The following image shows the configuration of the input field in the service call:

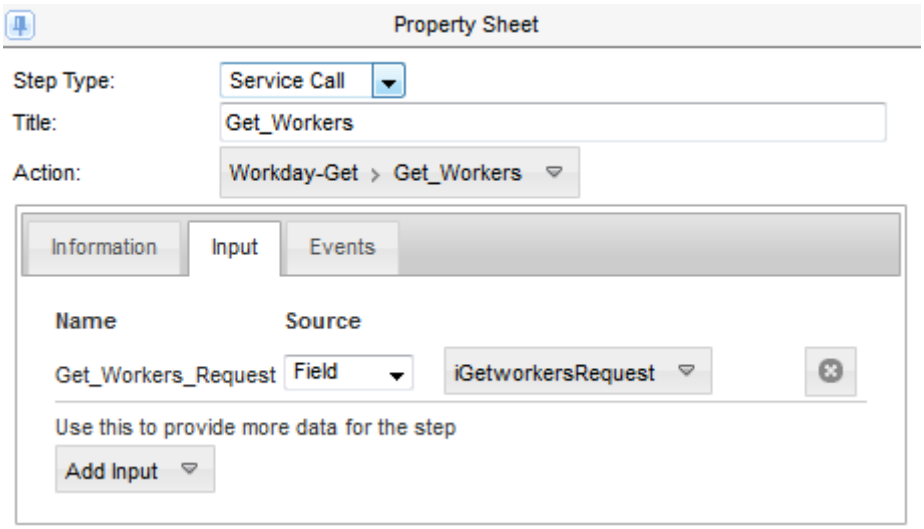


Step 5: Select the Fields in the Workday Response

The configured Get Workers request returns a Workday response. Add fields that you require in the response structure from Workday.

1. Create an Assignment Step.
2. Click **Add Field** to assign the following names and specify Field as the source value for each of the fields.
   - oFirstname
   - oLastname
   - oDateofBirth

3. Select the corresponding paths from where you want to fetch the data from a specific level in the hierarchy tree.
   The following image shows the configured fields in the response and their corresponding paths in the hierarchy:

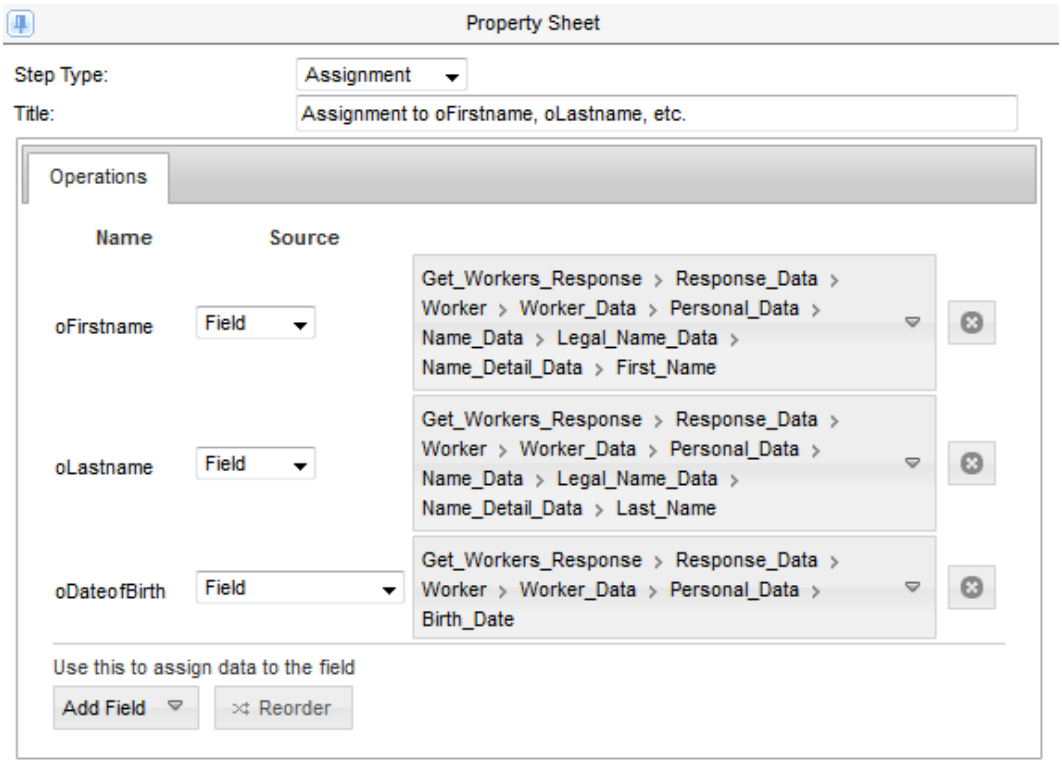

Step 6: Run the Process

After you save the process, the new process appears on the **Processes** tab.

1. Click the **Start** tab in the **Process Properties** dialog box
2. Enable the **Allow anonymous access** option.
3. Select the process in the Design Home page and copy the Service URL.
4. Use the Service URL to run the process.
   The process runs and the Secure Agent gets the employee details.

Author

Dimple Rai

Acknowledgements

Thanks to Nattiya Ravindaran for her help in completing this article.