How-To Library

Informatica

Preparing to Use Microsoft Sharepoint Online Connector

© Copyright Informatica LLC 2017, 2021. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can use Microsoft Sharepoint Online Connector to read data from or write data to Microsoft Sharepoint Online. To use the connector, you must complete certain prerequisite tasks. This article explains the prerequisite tasks that you must complete before you use Microsoft Sharepoint Online Connector.

Supported Versions

- Informatica Cloud® Microsoft Sharepoint Online Connector Spring 2017

Table of Contents

Overview. 2
Step 1: Generate the Client ID and Client Secret. 2
Step 2: Generate the Bearer Realm. 3
Step 3: Generate the Authorization Code. 4
Step 4: Generate the Refresh Token. 5

Overview

Before you use Microsoft Sharepoint Online Connector, you must generate the client ID, client secret, bearer realm, authorization code, and refresh token that are required to establish a Microsoft Sharepoint Online connection.

To generate the client ID and client secret, you must create a Microsoft Sharepoint Online account to access the Microsoft Sharepoint Online application. You must enable the Google PostMan application plug-in to generate the bearer realm, authorization code, and refresh token in the Google PostMan application.

To use Microsoft Sharepoint Online Connector, you must complete the following prerequisite tasks:

1. Generate the client ID and client secret.
2. Generate the bearer realm.
3. Generate the authorization code.
4. Generate the refresh token.

Step 1: Generate the Client ID and Client Secret

The client ID and client secret are required to generate a valid access token.


1. Log in to the Microsoft Sharepoint Online account.
2. Enter the following site or subsite URL:

   Site: `https://<sitename.com>/_layouts/15/appregnew.aspx`

   Subsite: `https://<sitename.com>/<subsitedomain>/_layouts/15/appregnew.aspx`

   The **App Information** page appears.
3. Click **Generate** next to the **Client Id** field.

The value of the client ID is displayed in the **Client Id** field. The following image shows the **App Information** page where you can generate the values of the client ID and client secret:

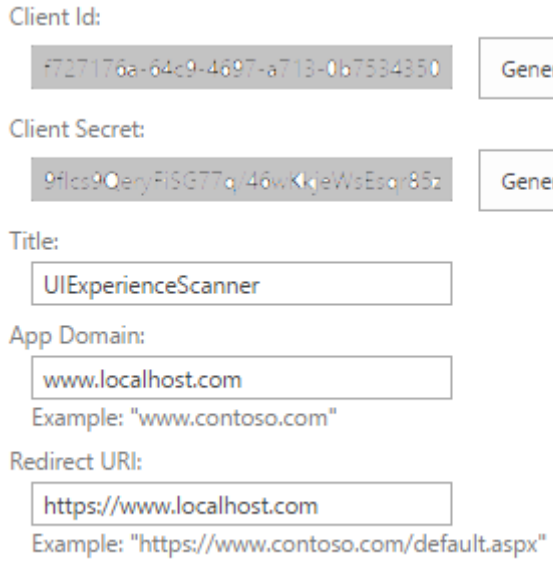

4. Click **Generate** next to the **Client Secret** field.

   The value of the client secret is displayed in the **Client Secret** field.
5. Enter an appropriate title for the App in the **Title** field.
6. Enter the application service host name in the **App Domain** field.
7. In the **Redirect URI** field, enter the endpoint of your application service that receives the authentication code.

   The value must be a complete endpoint URL including the HTTPS protocol. You must enter the same redirect URI in the connection property.
8. Click **Create**.

   The page redirects to the Microsoft Sharepoint Online page and the following message appears:

   ```
   The app identifier has been successfully created.
   ```

   For more information about generating the client ID and client secret, see the following Microsoft documentation: https://docs.microsoft.com/en-us/sharepoint/dev/sp-add-ins/register-sharepoint-add-ins

Step 2: Generate the Bearer Realm

A bearer realm is a unique ID provided for each user. You must generate the bearer realm to get the authorization code.

1. Open the Google PostMan application.
2. Enter the following site or subsite URL in the Google PostMan application:

   Site: `https://<sitename.com>/_layouts/15/appregnew.aspx`

   Subsite: `https://<sitename.com>/<subsitedomain>/_layouts/15/appregnew.aspx`

The following image shows the **BearerToken** page where you can generate the value of the bearer realm:



3. Select the **GET** method.
4. On the **Headers** tab, enter **Authorization** in the **Key** field and **Bearer** in the **Value** field.
5. Click **Send**.
6. Select the **Headers** tab in the **Response** header.

   The bearer realm value appears in the **WWW-Authenticate** section. For example:

   ```
   Bearer realm="77baf95d-f3e0-42b-aa08-9b798b8c177b"
   ```

Step 3: Generate the Authorization Code

You must generate the authorization code to gain access to the current site and to generate a valid refresh token.

1. Enter the following site or subsite URL in the Google Chrome browser:

   Site: `https://<site.sharepoint.com>/_layouts/15/OAuthAuthorize.aspx?client_id=<client_GUID>&scope=<app_permissions_list>&response_type=code&redirect_uri=<redirect_uri>`

   For example, `https://icloudconnectivitydev.sharepoint.com/_layouts/15/oauthauthorize.aspx?client_id=ecea5b1b-80e4-4f3e-a269-48b85c1797a8&scope=Web.Manage&response_type=code&redirect_uri=https%3A%2F%2Flocalhost%2F`

   Subsite: `https://<site.sharepoint.com>/<subsitedomain>/_layouts/15/OAuthAuthorize.aspx?client_id=<client_GUID>&scope=<app_permissions_list>&response_type=code&redirect_uri=<redirect_uri>`


   For example, `//informaticaone.sharepoint.com/sites/TEST/_layouts/15/oauthauthorize.aspx?client_id=ecea5b1b-80e4-4f3e-a269-48b85c1797a8&scope=Web.Manage&response_type=code&redirect_uri=https%3A%2F%2Flocalhost%2F`

2. Click **Trust it** to grant the application read access to the current site after the page redirects to the redirect URL page that you specify in the connection property.

   The redirect URL page includes the authorization code as a query string in the following format:

   `https://<redirect_url>/?code=<authcode>`

   The following image shows the authorization code as a query string in the URI:




Step 4: Generate the Refresh Token

A refresh token is required to perform the POST and GET methods in the Google PostMan application. After you generate a refresh token, it is valid for six months.

1. Enter the following URL in the Google PostMan application: `https://accounts.accesscontrol.windows.net/<bearer_realm>/tokens/OAuth/2`

   The following image shows the **Normal** tab in the Google PostMan application where you can configure the properties to generate the refresh token:

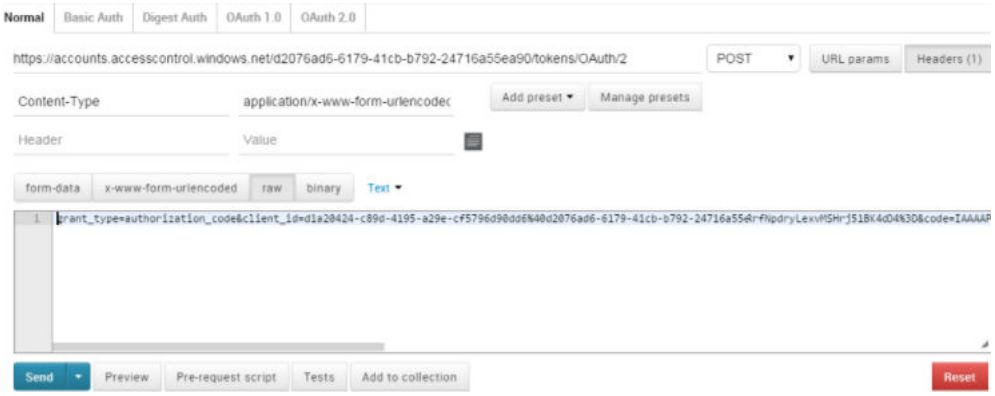


2. Select the **POST** method.
3. On the **Header** tab, enter **Content-Type** in the **Key Name** field and **application/x-www-form-urlencoded** in the **Value** field.
4. On the **Body** tab, enter the xml request in the following format:

   ```
   grant_type=authorization_code &client_id=<client_id>@<bearer_realm>
   &client_secret=<client_secret> &code=<auth_code> &redirect_uri=<redirect_url> &resource=<
   audience principal ID >/<site_host>@<bearer_realm>
   ```

5. Click **Send**.

   The refresh token is generated in the **Response** tab. The following image shows the **Response** tab where the refresh token is generated:

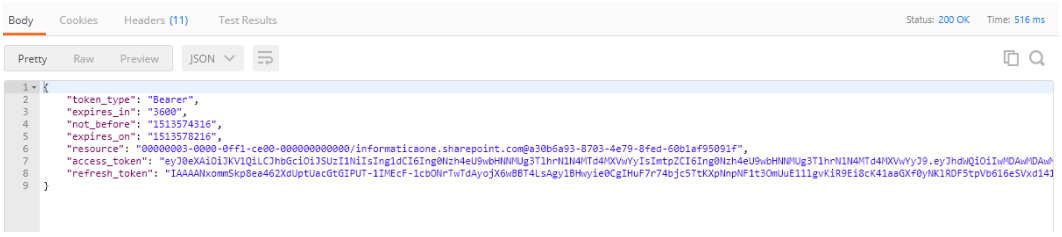

After you complete the prerequisite tasks, you can create a Microsoft Sharepoint Online connection to read data from or write data to the Microsoft Sharepoint Online from Informatica Cloud.

Author

Subhashree Salam

Acknowledgements

The author would like to acknowledge Tajinder Singh and Ranjitha Y M, for their technical assistance with this article.