How-To Library

Informatica

How to Consume ODP-enabled OData Service Using OData Connector

© Copyright Informatica LLC 2022. Informatica, Informatica Cloud, and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

This article describes how to generate an OData service to extract data from ODP-enabled data sources.

Supported Versions

- Informatica Cloud® Data Integration OData Connector

Table of Contents

Overview. 2
Step 1. Create a project. 3
Step 2. Define a data model. 3
Step 3. Generate runtime objects and register the service. 5

Overview

Operational Data Provisioning (ODP) is an SAP NetWeaver based framework that unifies the data transfer between the source and target systems. The ODP installed as a source in the SAP system maintains the Operational Delta Queue (ODQ) that allows delta data extraction from ODP-enabled data sources.

You can generate an OData service to extract ODP data. To do this, you must create and register the service in the SAP Gateway Builder and consume the service in the Informatica Cloud Data Integration.

To create and register the service, perform the following steps in the SAP Gateway Builder:


1. Create a project.
2. Define a data model of the service.
3. Generate runtime objects and register the service.

After you register the service, you can create an OData connection with the registered service. You can then run mappings to consume the service.

Step 1. Create a project

Create a project in the SAP gateway Builder to create a service for data extraction.

1. In the SAP Gateway Builder, choose **Project** > **Create**.

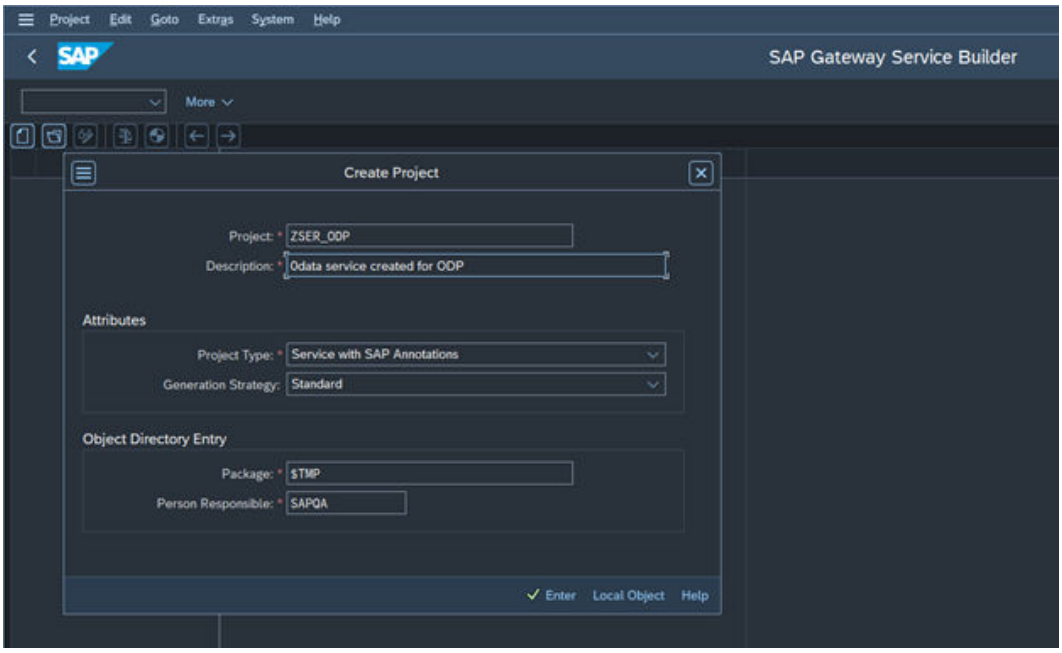


2. Specify the following details:
   a. Project Name. Name of the project.
   b. Description. Description of the project.
   c. Project Type. Type of the project.
   d. Generation Strategy. Type of generation strategy.
   e. Package. Package to store the project.
3. Click **Enter**.

Step 2. Define a data model


Create the data model for the service by redefining the service of the ODP framework.

1. Navigate to the new project.
2. Right-click the Data Model folder, and choose **Redefine** > **ODP Extraction**.

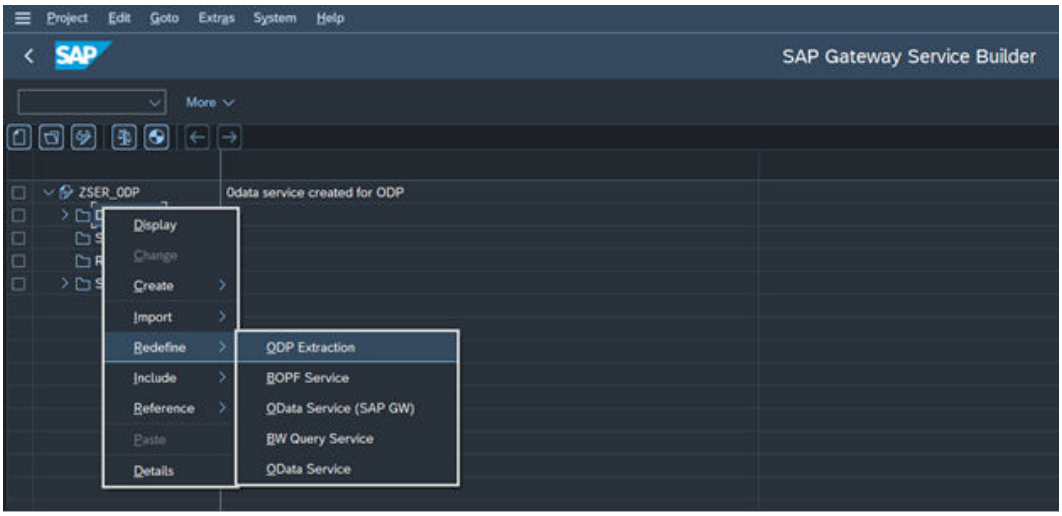


The OData Access for Operational Data Provisioning wizard appears.


3. Specify the following details:
   a. RFC Destination. Select the RFC destination for the system where the ODPs are located, which you want to extract using the service.
   b. ODP Context. Select one of the following ODP providers or contexts:
      a. Data Sources/Extractors
      b. ABAP Core Data Services
      c. SAP NetWeaver Business Warehouse
      d. HANA Information View
   c. ODP Name. Click the **Hierarchy** icon to select the required data source.

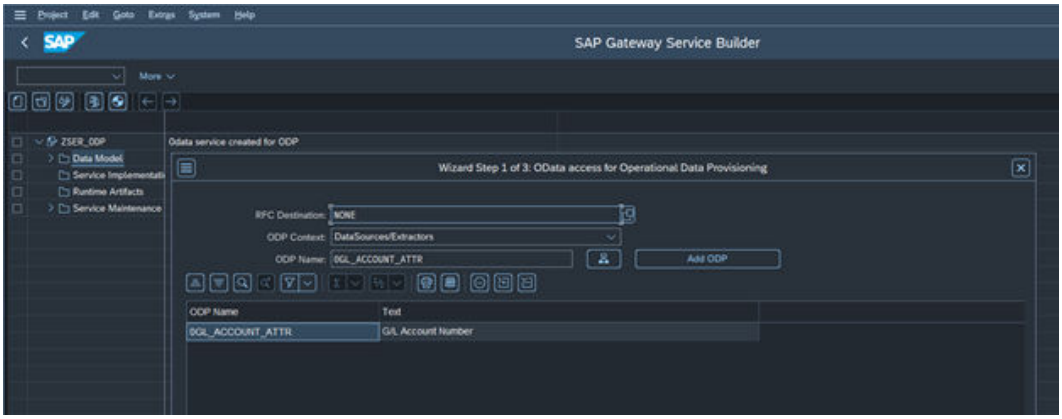

4. Click **Next**.
5. In the Service Registration wizard, update the description in **Model Name** and **Service name** fields, and click **Next**.

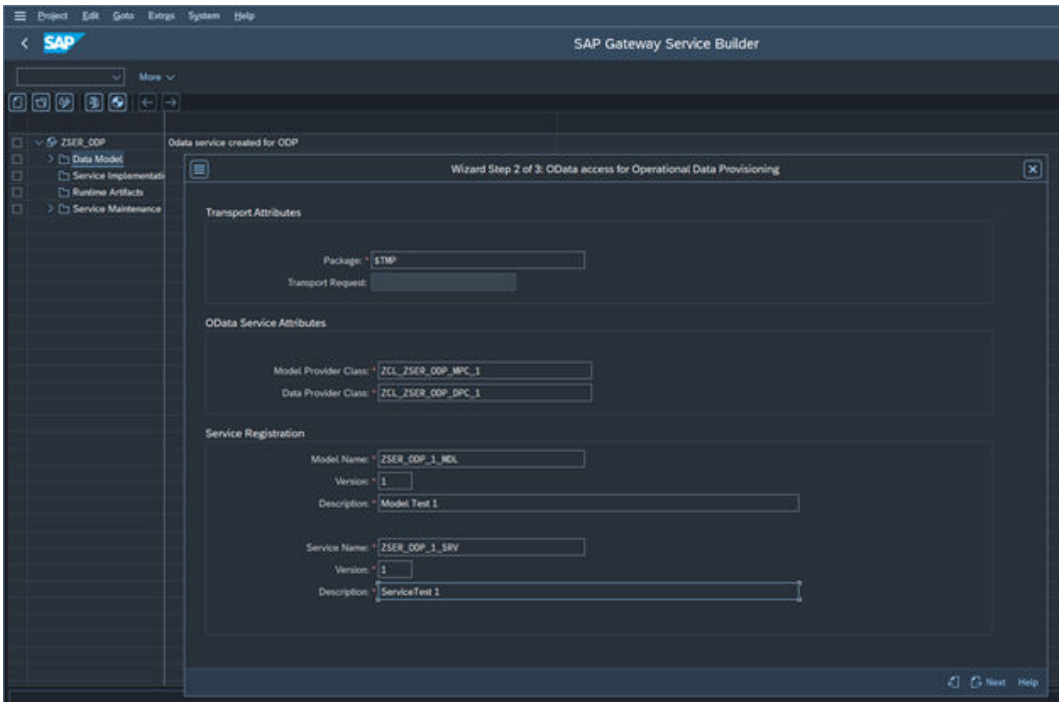

6. Select the required services, and click **Finish**.

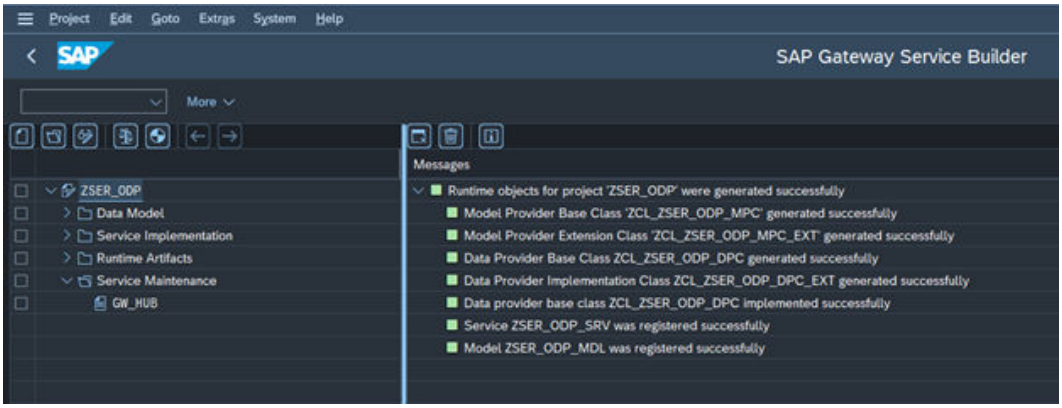

Step 3. Generate runtime objects and register the service

Create the runtime objects and register the service.

1. In the SAP Gateway Builder, right-click the project name, and select **Generate Runtime**.
2. Accept the defaults to generate the runtime objects.
3. Navigate to tcode -/IWFND/MAINT_SERVICE to add and register the service.

Author

Radha Viswanath

Acknowledgements

The author would like to acknowledge Kanika Agarwal for her technical assistance with this article.