How-To Library

Informatica

Prerequisites to create a Microsoft Fabric OneLake connection

© Copyright Informatica LLC 2023, 2024. Informatica, the Informatica logo, and Informatica PowerExchange are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can use Microsoft Fabric OneLake Connector to connect to Microsoft Fabric OneLake from Data Integration. This article explains the prerequisite tasks that you must complete before you create a Microsoft Fabric OneLake connection.

Supported Versions

- Informatica Cloud® Data Integration Microsoft Fabric OneLake Connector

Table of Contents

Overview. 2
Creating a workspace in Power BI. 2
Creating a lakehouse in the workspace. 5
Creating an application in Azure Active Directory. 6
Creating a security group in Azure Active Directory. 9
Enabling the Power BI service admin settings. 10
Adding the Azure Active Directory application to the workspace. 12
Setting the connection properties to create a Microsoft Fabric OneLake connection. 13

Overview

You can use Microsoft Fabric OneLake Connector to connect to Microsoft Fabric OneLake using Azure Active Directory (AAD) service principal-based authentication.

Before you create a Microsoft Fabric OneLake connection, an administrator must complete the following prerequisite tasks:

1. Configure the following prerequisites in Power BI:
   a. Create a workspace.
   b. Create a lakehouse in the workspace. Ensure that you have admin privileges to create the lakehouse.
2. Configure the following prerequisites in the Azure portal:
   a. Create an application in Azure Active Directory and generate client ID, tenant ID, and client secret.
   b. Create a security group in Azure Active Directory and add owners or members to the security group.
3. Enable the Power BI service admin settings to allow the Azure Active Directory application to use the Power BI APIs.
4. Add the Azure Active Directory application to the workspace in Power BI.


For more information about Microsoft Fabric OneLake Connector, see the *Informatica Cloud® Data Integration Microsoft Fabric OneLake Connector User Guide*.

Creating a workspace in Power BI


You must access your Power BI account and create a workspace.

1. Log in to your Power BI account.


2. On the home page, click **Power BI**, and then click **Data Engineering**.

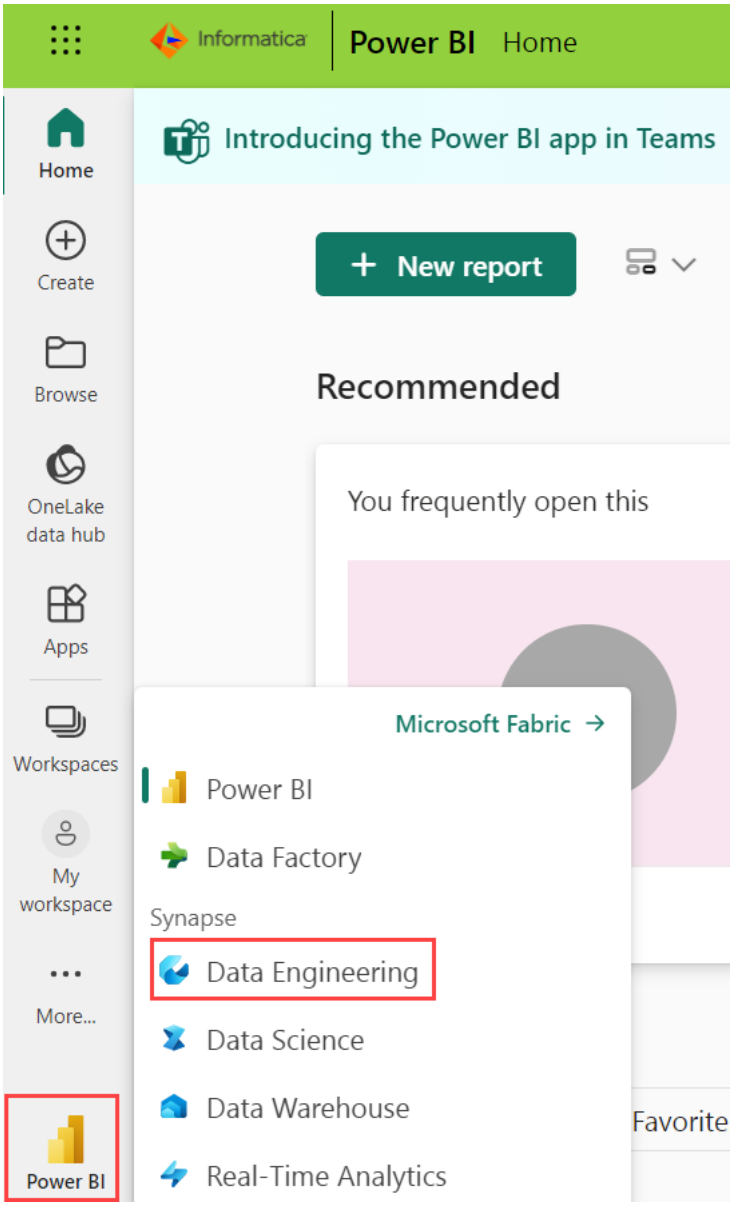

3. Click **Workspaces**, and then click **New workspace** to create a new workspace.

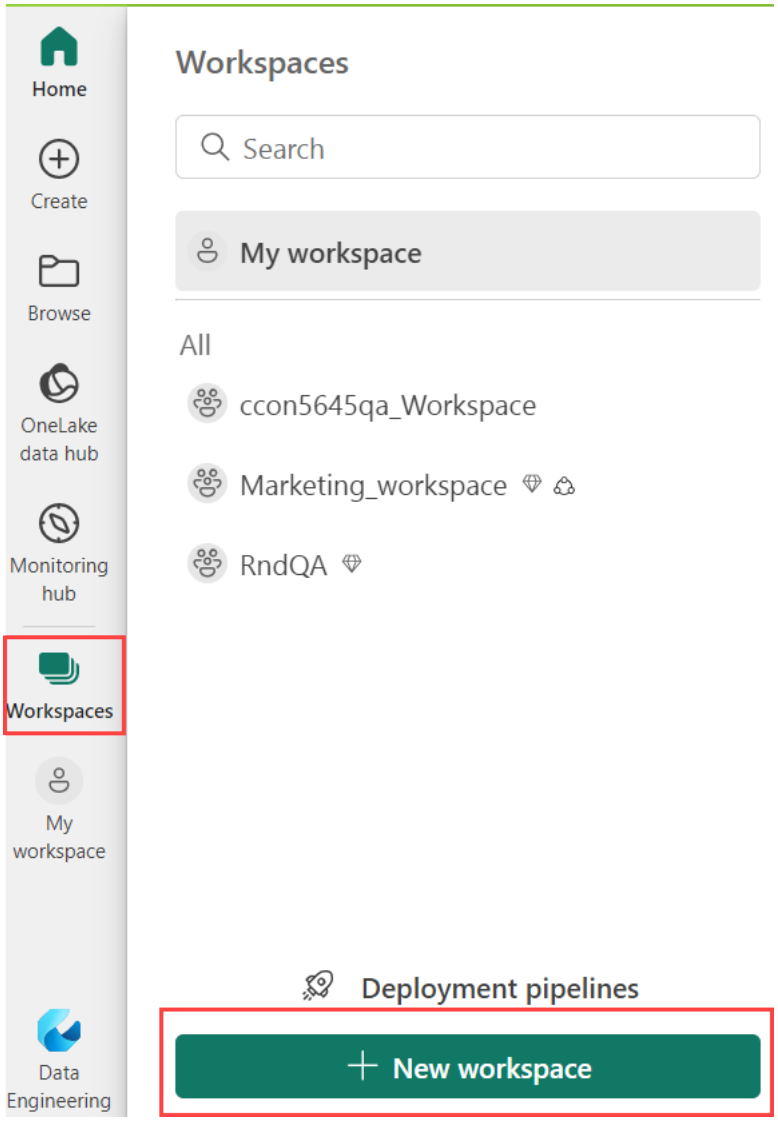
Home
Create
Browse
OneLake data hub
Monitoring hub
Workspaces
My workspace
Data Engineering
Workspaces
Search
My workspace
All
ccon5645qa_Workspace
Marketing_workspace
RndQA
Deployment pipelines
New workspace

4. On the **Create a workspace** page, enter the details for the new workspace.

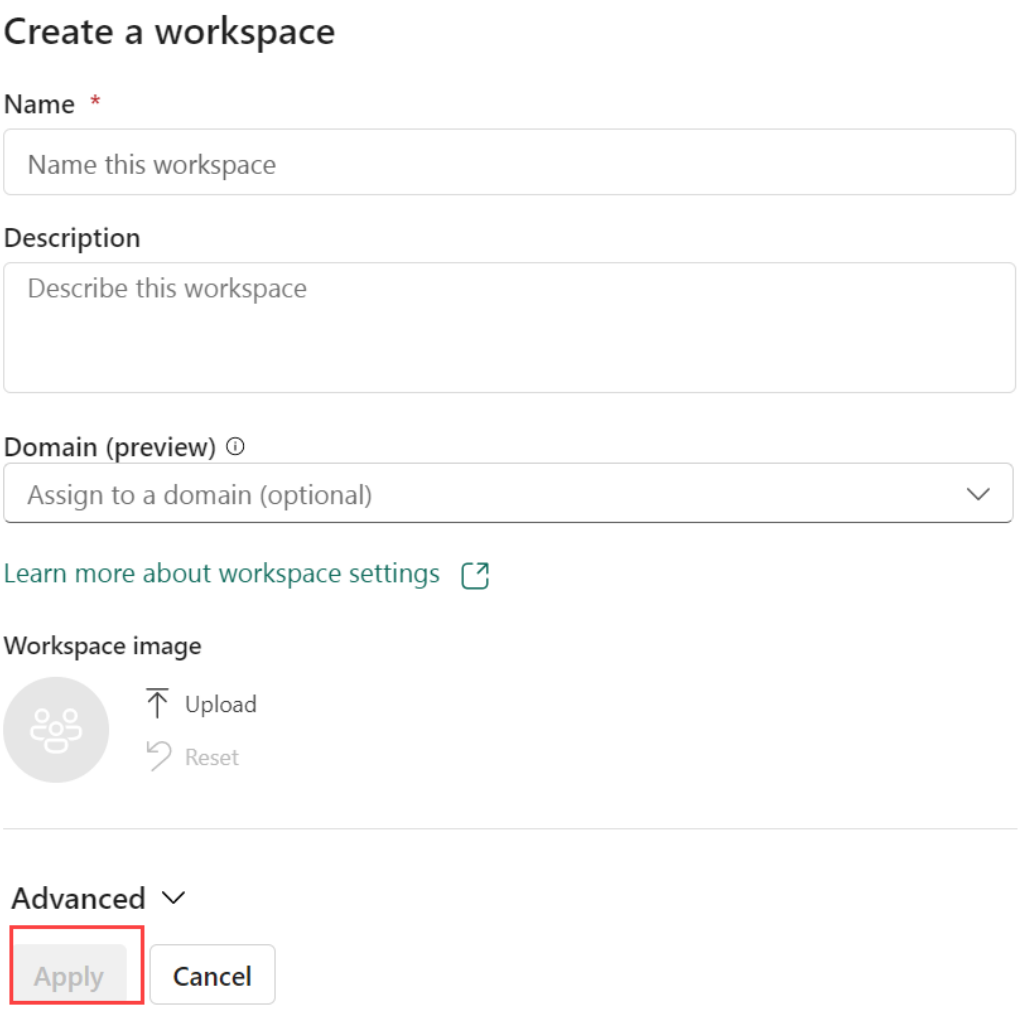


   a. In the **Name** field, enter the workspace name.
   b. In the **Description** field, provide a description for the workspace.
   c. Optionally, assign the workspace to a domain.
   d. Click **Apply**.


Creating a lakehouse in the workspace

After you create your workspace in Power BI, you must create a lakehouse in the workspace.

1. Navigate to the workspace you created.
2. Click **New**, and then click **Lakehouse** to create a new lakehouse.

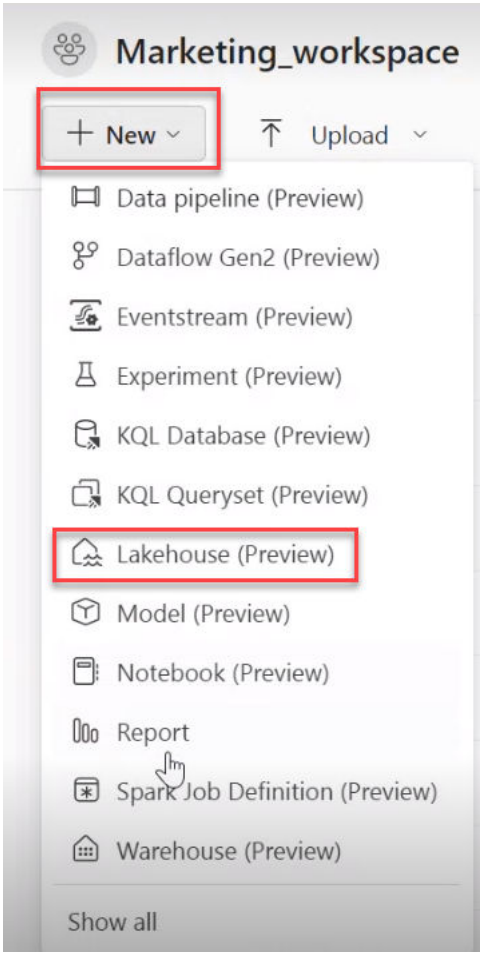

3. Enter a name for the new lakehouse, and then click **Create**.

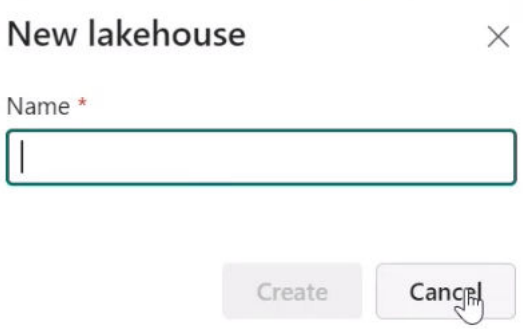


Creating an application in Azure Active Directory


Create an application in Azure Active Directory and generate client ID, tenant ID, and client secret.

1. Log in to the Azure portal.

2. Click **Azure Active Directory**.

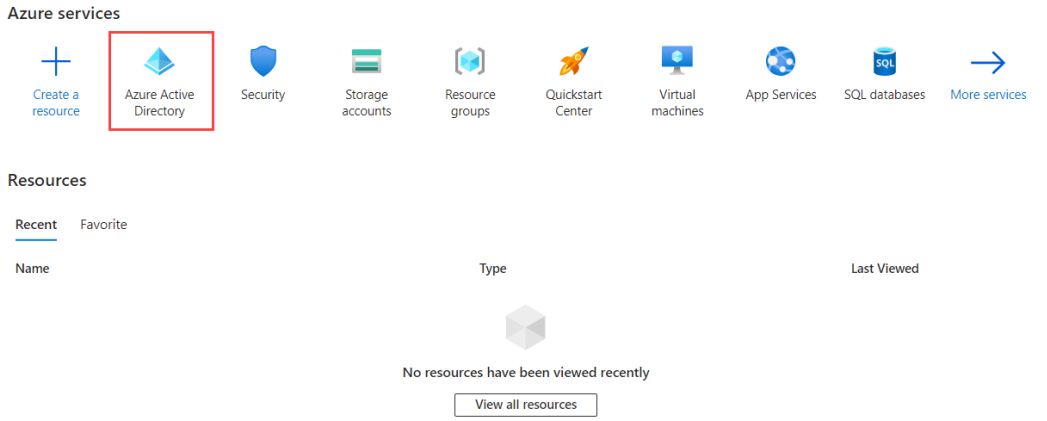


3. In the **Manage** section, click **App registrations**.

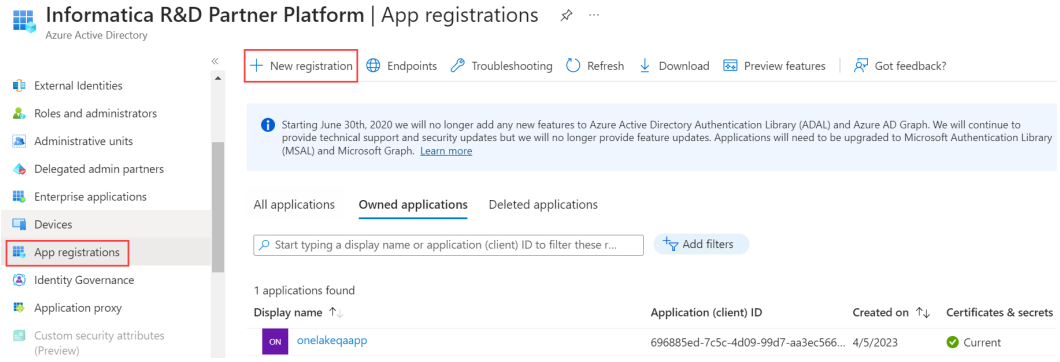


4. Click **New registration** to create a new Azure Active Directory application.

5. On the **Register an application** page, enter the details for the new application.

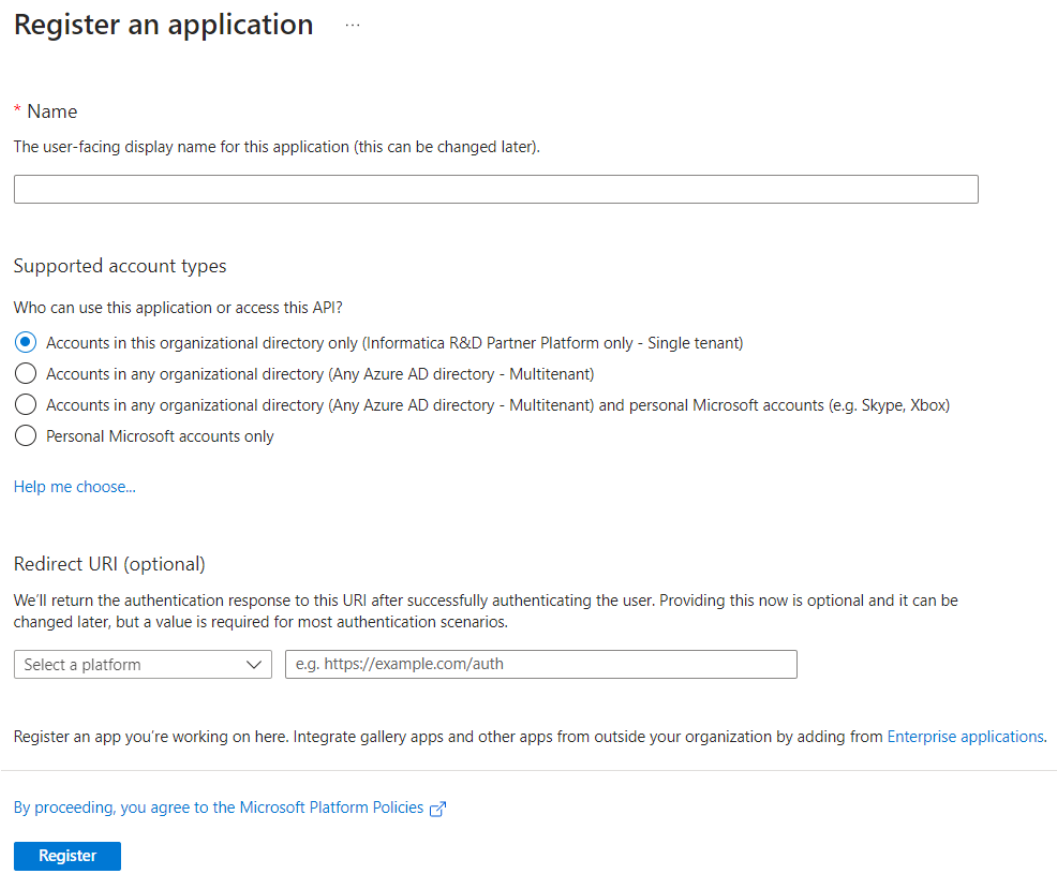


   a. In the **Name** field, enter the application name.
   b. In the **Redirect URI** section, select **Web** as the type of the application and enter the URL of the application.
   c. Click **Register**.

      The details of the newly created Azure Active Directory application page are displayed.

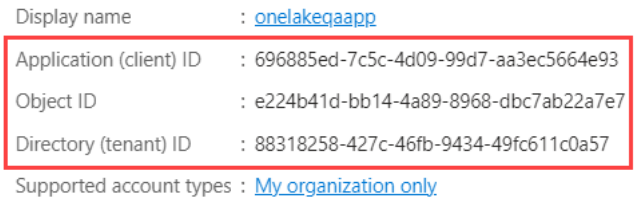

6. In the Manage section, click **Certificates & secrets**.

7. Click **New client secret**.

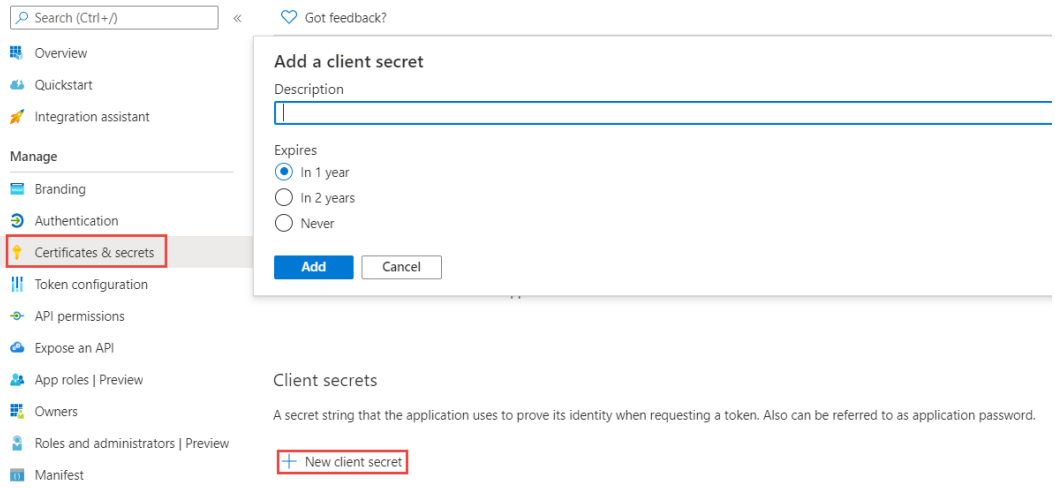

8. In the **Add a client secret** page, perform the following steps:
   a. Enter a name for the client secret in the **Description** field.
   b. In the **Expires** field, you can select the duration of the key as **Never**(Recommended).
   c. Click **Add**.
   d. The value of the key is generated and displayed in the **Value** field.




   Note: You must copy the key value as you cannot retrieve the value once you leave the page. Ensure that the client secret does not contain special characters.

After you register the application, you can continue without assigning any API permissions to the application. If the application is assigned some default permissions, you can remove them.


Creating a security group in Azure Active Directory

Create a security group in Azure Active Directory and add owners or members to the group.


1. Click **Azure Active Directory**.

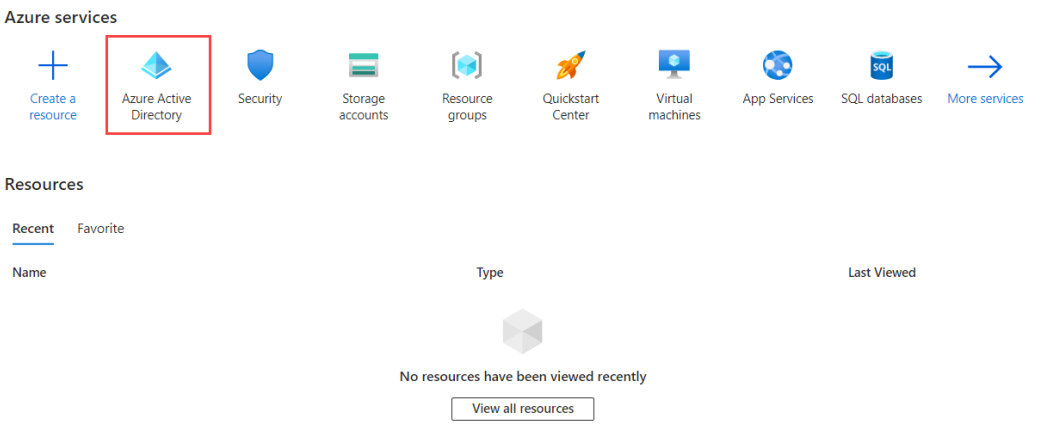

2. In the **Manage** section, click **Groups**.

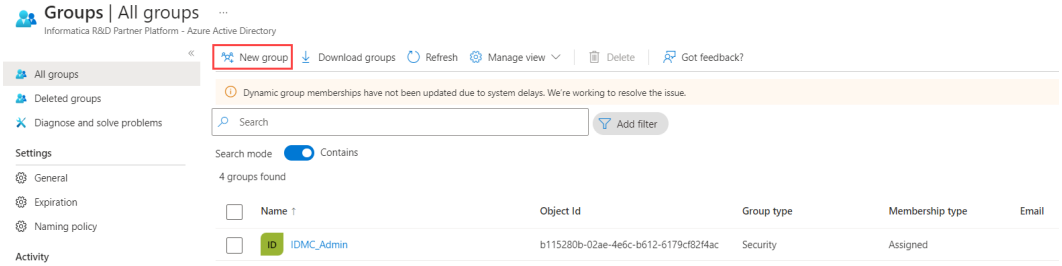

3. Click **New group** to create a new group in Azure Active Directory.
4. On the **New Group** page, enter the details for the new group.

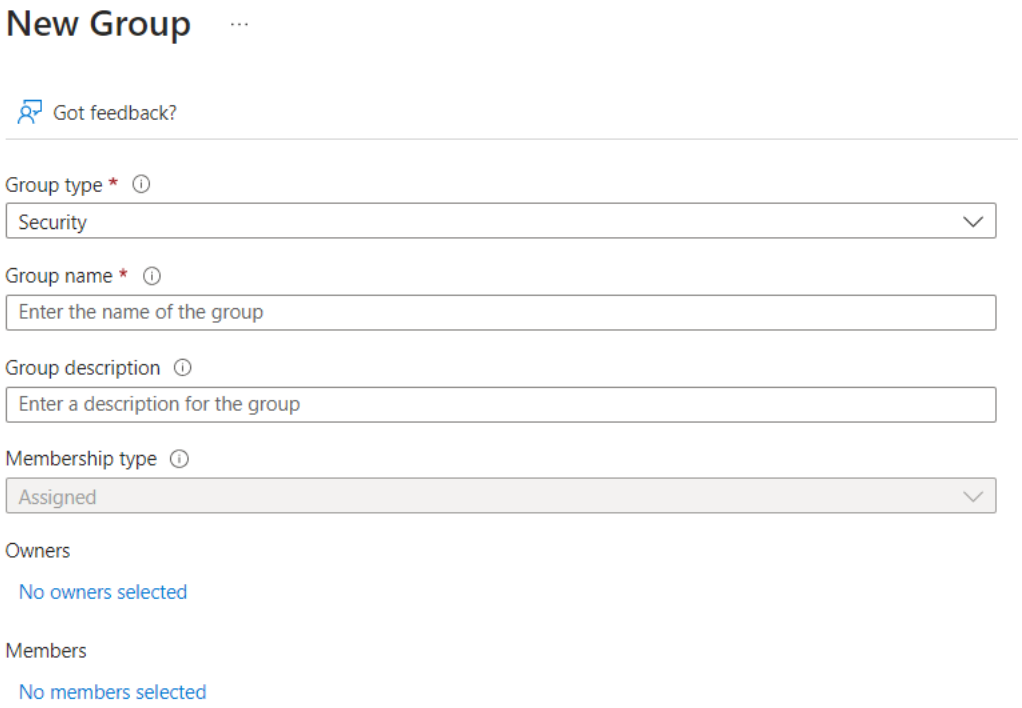


   a. Select a **Group type**.
   b. In the **Group name** field, enter the group name.
   c. In the **Group description** field, add a description to the group.
   d. Select a **Membership type**.
   e. Optionally, you can add members or users to the group. Click the link under **Owners** or **Members** to populate a list of every user or member in your directory. Choose users or members from the list, and then click **Select**.
5. Click **Create**.

Enabling the Power BI service admin settings

Enable the Power BI service admin settings to allow Azure Active Directory application to access the Power BI APIs.


1. Log in to your Power BI account.

2. Navigate to **Tenant settings**, and then click **Developer settings**.

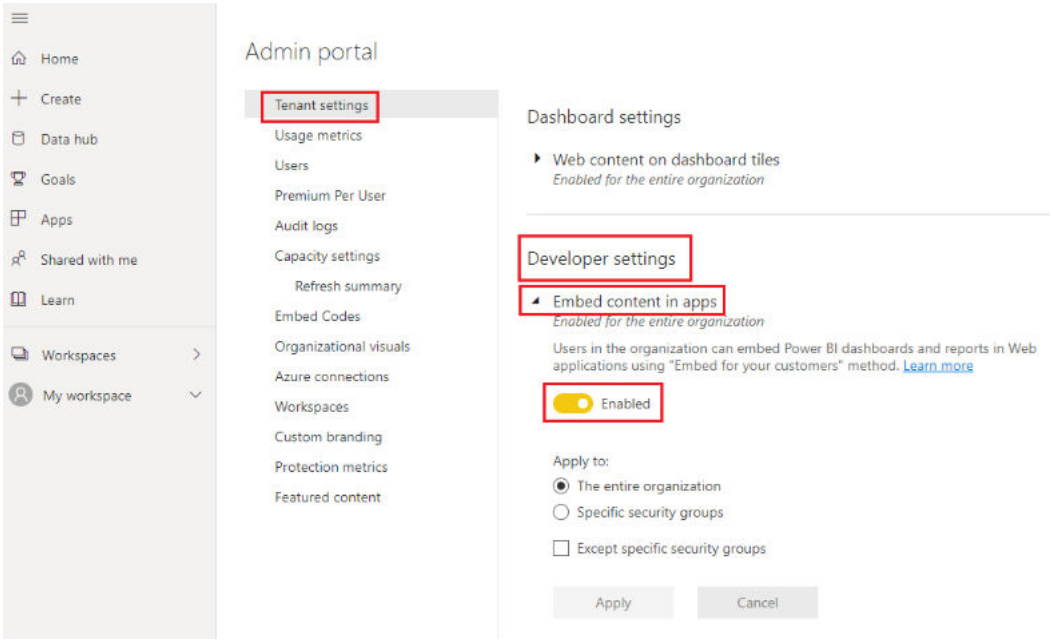

3. Enable **Embed content in apps** for the entire organization or the security group you created in Azure Active Directory, and then click **Apply**.


4. Enable **Allow service principals to use Power BI APIs** for the entire organization or the security group you created in Azure Active Directory, and then click **Apply**.

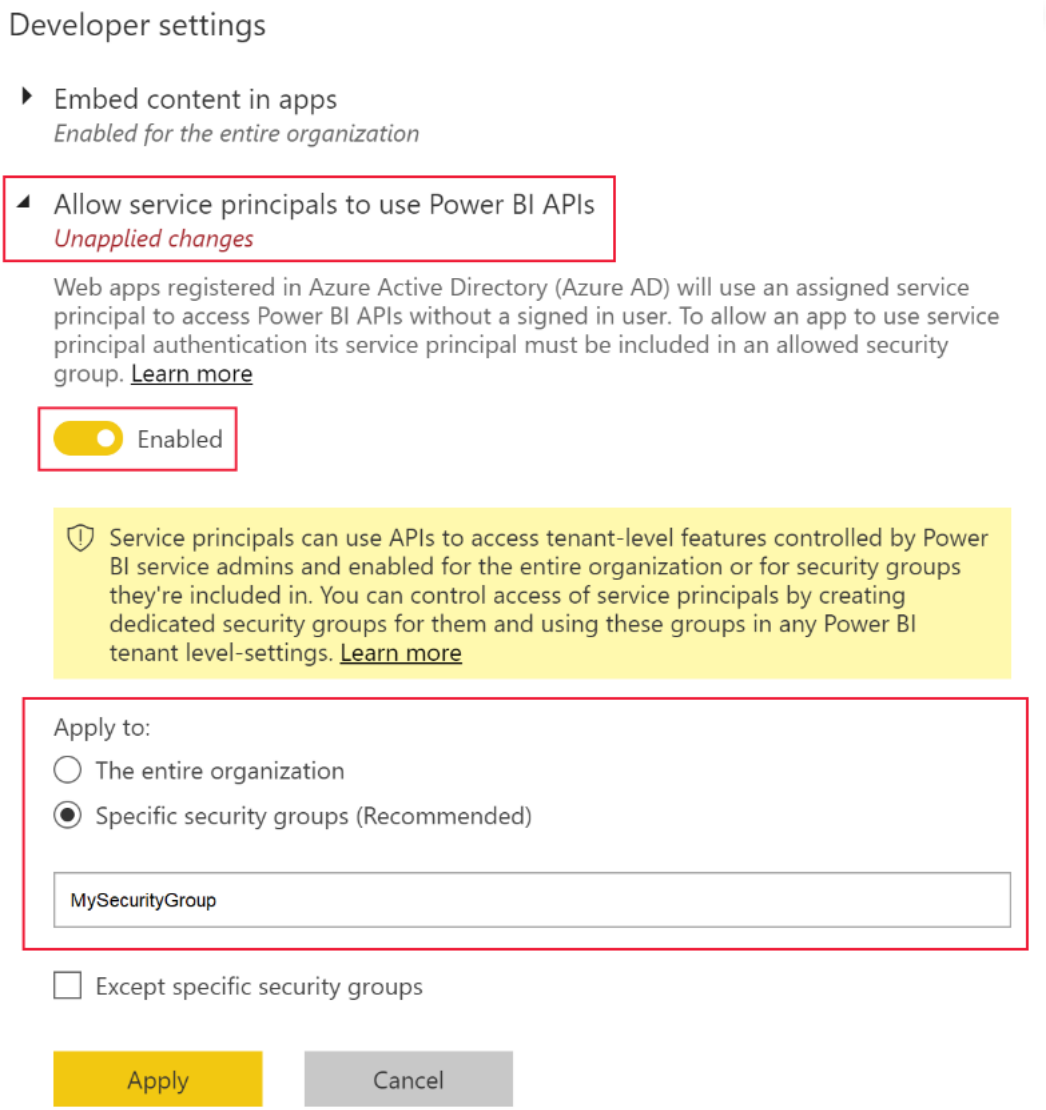


Adding the Azure Active Directory application to the workspace

Add the Azure Active Directory application to the workspace to provide access to your Power BI reports, dashboards, and datasets.

1. Navigate to the workspace that you created.
2. From the **More options** menu, select **Workspace access**.

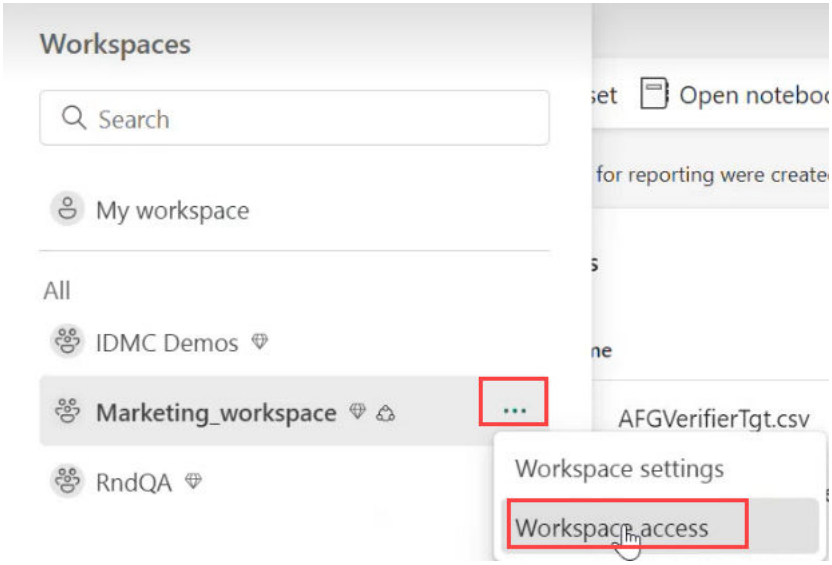

3. In the **Manage access** pane, search for the Azure Active Directory application that you want to add to the workspace.

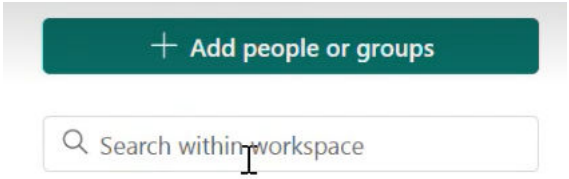

4. In the search results, select the Azure Active Directory application and click **Add people or groups**.
5. Assign an appropriate role to the Azure Active Directory application from the list based on the capabilities you require, with the maximum number of capabilities associated with the admin role and the minimum number of capabilities with the viewer role:
   - Admin
   - Member
   - Contributor
   - Viewer

   Note: The capabilities associated with the viewer role is insufficient to successfully run tasks. You would require at a minimum the contributor role to access Microsoft Fabric OneLake and perform read and write operations.

Setting the connection properties to create a Microsoft Fabric OneLake connection

When you complete all the prerequisite tasks, perform the following steps to create a Microsoft Fabric OneLake connection:

1. Log in to Informatica Intelligent Cloud Services.
2. Click **Administrator**.
3. Click **Connections** > **New Connection**.

4. Configure the following connection properties:

Property	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -, Maximum length is 255 characters.
Description	Description of the connection. Maximum length is 4000 characters.
Type	The Microsoft Fabric OneLake connection type.
Runtime Environment	The name of the runtime environment where you want to run the tasks. Select a Secure Agent.
Workspace Name	Name of the workspace in Microsoft Fabric OneLake.
Lakehouse Path	Path or name of the lakehouse present in the workspace. You can specify the path in one of the following ways: - *root directory (/)* to access the files in the workspace. - *lakehouse name/Files* to access the files present in the lakehouse.
Authentication Type	Authentication type to access Microsoft Fabric OneLake. Service Principal Authentication uses the client ID, client secret, and tenant ID to connect to Microsoft Fabric OneLake.
Client ID	The application ID or client ID of your application registered in the Azure Active Directory.
Client Secret	The client secret of your application registered in the Azure Active Directory.
Tenant ID	The ID of the Azure Active Directory instance in which you created the application.
Microsoft Fabric OneLake Endpoint	The type of Microsoft Fabric OneLake endpoint that you want to connect to. Default is **fabric.microsoft.com**.

5. Click **Test Connection** to validate the connection.
6. Click **Save**.

Author

Radha Viswanath

Acknowledgements

The author would like to acknowledge Riyazuddin Nagori and Akshay Deshpande, for their technical assistance with this article.