How-To Library

Informatica

Preparing to use Salesforce Data Cloud Connector

© Copyright Informatica LLC 2024. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can use Salesforce Data Cloud Connector to write data to Salesforce Data Cloud. To use the connector, you must complete certain prerequisite tasks. This article explains the prerequisite tasks that you must complete before you use Salesforce Data Cloud Connector.

Supported Versions

- Informatica Cloud® Salesforce Data Cloud Connector November 2024

Table of Contents

Overview. 2
Create a connected app. 2

Overview

Before you get started, create a connected app for the Data Cloud Ingestion API in Salesforce Data Cloud with the required scopes.

You need at a minimum the Manage user data via APIs (api) and Manage Data Cloud Ingestion API data (cdp_ingest_api) scopes for Salesforce Data Cloud.

To load data, you also need to create an ingestion API data stream.

For more information, see How to set up ingestion API connector and How to create an ingestion API data stream.

Configure your connected app and get the client ID and client secret to generate the access token to connect to Salesforce Data Cloud from Data Integration.


Create a connected app

Before you get started, create a Salesforce connected app to get the client ID and client secret.


1. Log in to your Salesforce account using your user name and password.

   Ensure that you use the Salesforce Classic mode.


2. Click **Setup**.

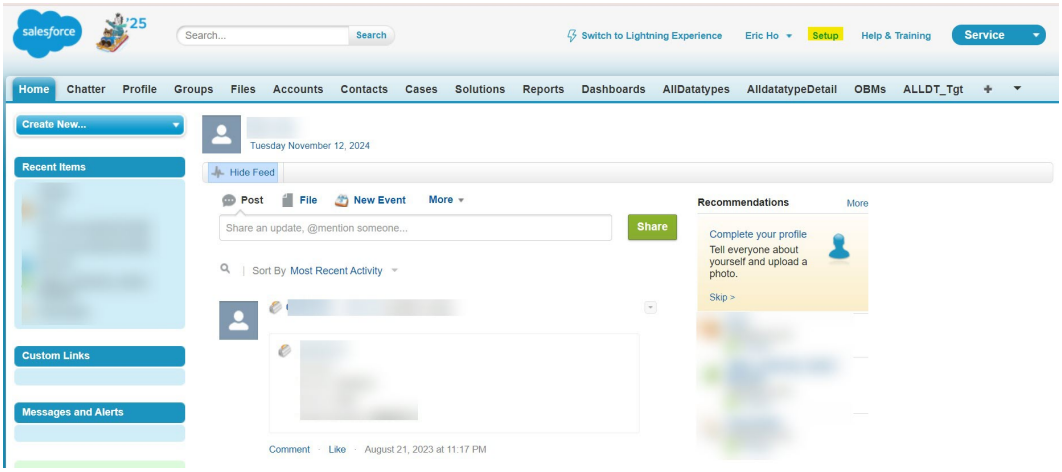


3. On the left pane, Navigate to **Build**>**Create**, and then click **Apps**.

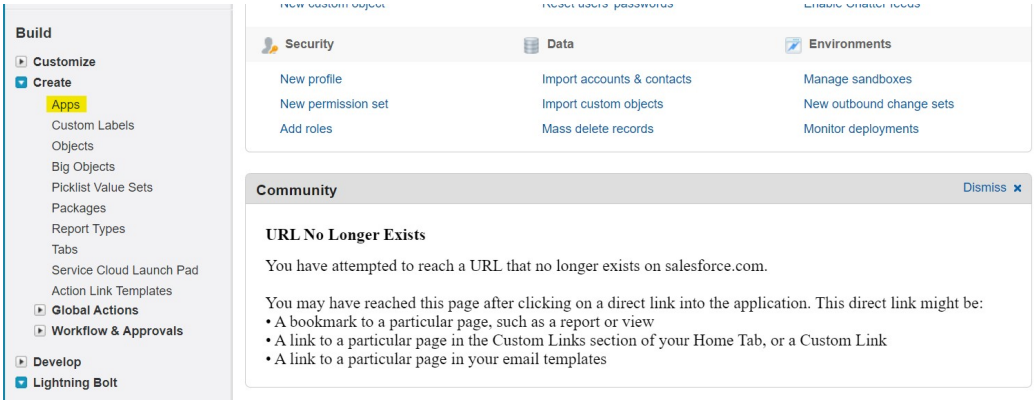

4. Go to connected Apps, and then click **New**.

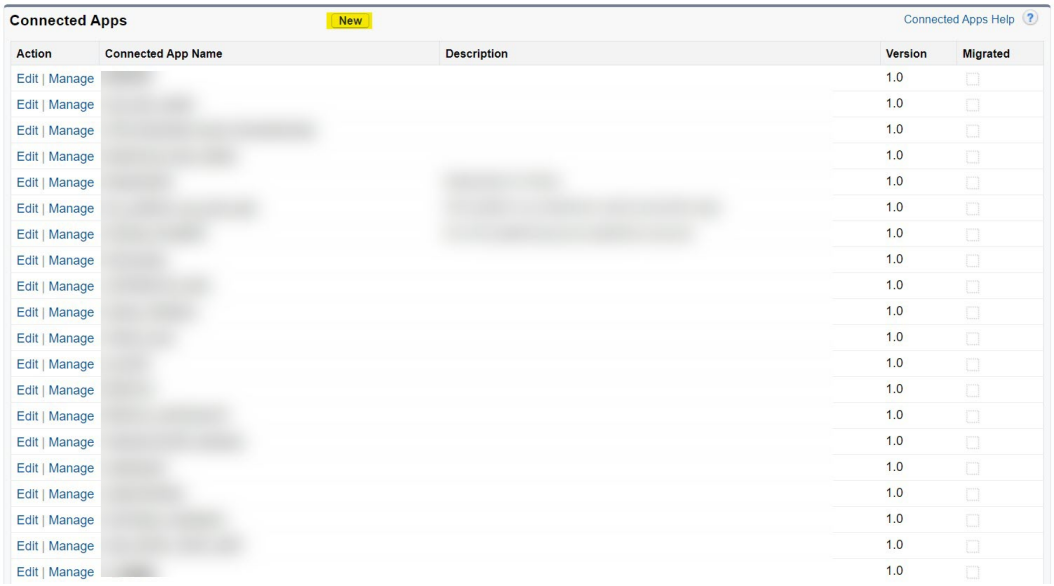

5. Enter the details in the **Connected App Name**, **API Name**, and **Contact Email** fields.
6. Select the **Enable OAuth Settings** option.

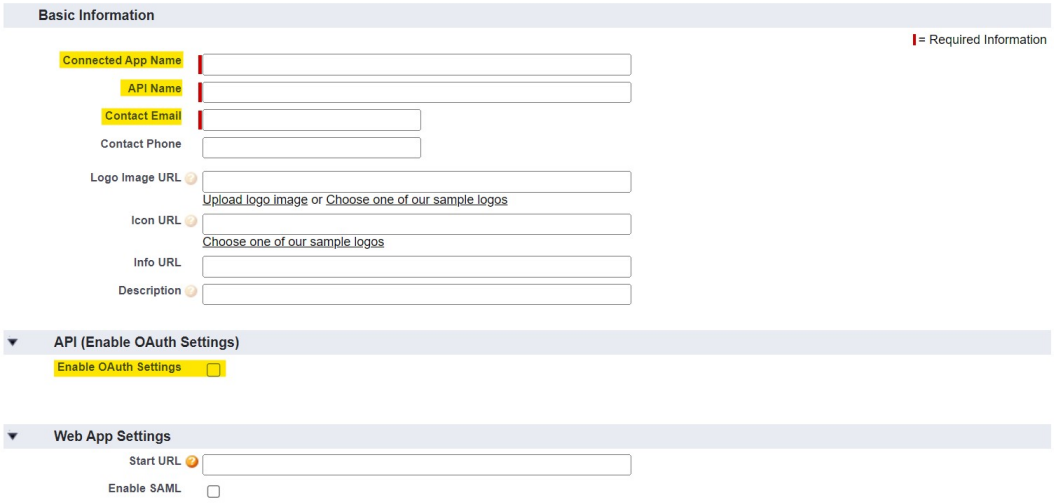

7. Enter the callback URL.


   For example, `https://localhost:8443/salesforce/receivecallback`

8. Add **Manage user data via APIs (api)**, **Manage Data Cloud Ingestion API data (cdp_ingest_api)**, and other required scopes from the available OAuth scopes.

9. Select **Require Secret for Refresh Token Flow**, **Require Secret for Web Server Flow**, and **Enable Client Credentials Flow**.

10. Click **Continue**.

    A client ID and client secret are generated in the **API (Enable OAuth Settings)** section.

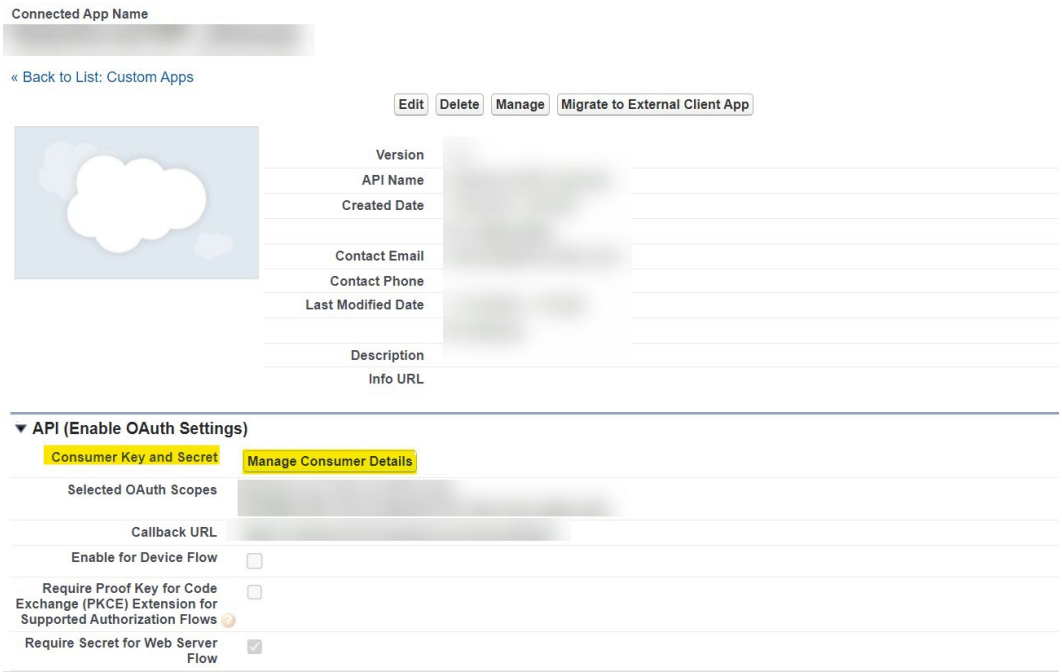

    Ensure that you copy the client ID and client secret and keep it handy to use when you configure a Salesforce Data Cloud connection.

For more information on how to configure a Salesforce Data Cloud connection and use it in a mapping to write data to Salesforce Data Cloud , see the Salesforce Data Cloud Connector documentation.

Author

Ananya Kanungo

Acknowledgements

The author would like to acknowledge Bharath KR and Beethika Biswas for their technical assistance with this article.