Informatica® Application Integration
April 2025

IICS API Version V2 Connector Guide

Informatica Application Integration IICS API Version V2 Connector Guide
April 2025

© Copyright Informatica LLC 1993, 2025

Publication Date: 2025-08-30

Table of Contents

Preface 4

Chapter 1: Introduction to IICS API Version V2 Connector 5

IICS API Version V2 Connector Overview 5

Chapter 2: IICS API Version V2 Connections 6

IICS API Version V2 Connections Overview 6

Basic Connection Properties 6

IICS API Version V2 Connection Properties 7

Chapter 3: IICS API Version V2 Connector Processes 8

Services in IICS API Version V2 Connector 8

- Agent Services 8
- Audit Services 9
- Authentication Services 9
- Connection Services 9
- Data Preview Services 10
- DNB Workflow Services 10
- Field Services 11
- File Record Services 11
- Job Services 12
- Mapping Services 12
- Mapplet Services 13
- Master Template Services 14
- Monitor Services 14
- Org Services 14
- Runtime Environment Services 15
- Salesforce Services 15
- Server Time Service 15
- Task Services 15
- Workflow Services 16

Process with IICS API Version V2 Connector Example 17

Configuring the Get Connection and List Connections services 18

Index 21

Preface

Read the *IICS API Version V2 Connector Guide* to learn how to set up and use connections with the Informatica Intelligent Cloud Services℠ REST API.

This guide assumes that you are familiar with the Informatica Intelligent Cloud Services REST API and how to define service calls using Application Integration.

CHAPTER 1

Introduction to IICS API Version V2 Connector

This chapter includes the following topic:

- IICS API Version V2 Connector Overview, 5

IICS API Version V2 Connector Overview

Application Integration allows you to interact with programs and services that are in the Informatica Cloud®, inside your firewall, or anywhere in the cloud, through an exposed API.

To access an exposed API, you can create a Service Connector in Process Designer. You can then use these Service Connectors to specify the parameters and actions associated with any service that you want to use in a process.

IICS API Version V2 Connector is a Service Connector that allows you to access the parameters and actions associated with Informatica Cloud through the REST API. You can create an IICS API Version V2 connection and configure a service call in a process to access the services exposed by Informatica Cloud.

IICS API Version V2 Connector is already licensed for use by customers. You do not need to buy a license to use it.

CHAPTER 2

IICS API Version V2 Connections

This chapter includes the following topics:

- IICS API Version V2 Connections Overview, 6
- Basic Connection Properties, 6
- IICS API Version V2 Connection Properties, 7

IICS API Version V2 Connections Overview

You can create an IICS API Version V2 connection to create, execute, and monitor a mapping task.

After you create an IICS API Version V2 connection, you can validate and save the connection.

You can then publish the IICS API Version V2 connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic Connection Properties

The following table describes the basic properties available on the **Properties** tab of the connection creation page:

Properties	Description
Name	Required. Unique name for the IICS API Version V2 connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Location	Optional. The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.

Properties	Description
Type	Required. The type of connection that you want to use for the connector or service connector. Select **IICS API Version V2 (Licensed for use)**.
Runtime Environment	Required. The Cloud Server or the Secure Agent machine where the connection must run.
Connection Test	Not supported for IICS API Version V2 Connector.
OData-Enabled	Not supported for IICS API Version V2 Connector.

Along with these basic properties, you must define the properties applicable to the IICS API Version V2 connection type.

IICS API Version V2 Connection Properties

The following table defines the IICS API Version V2 connection properties that you must configure in the **Connection Properties** section:

Property	Description

IcsLoginUrl	Required. The URL to log in to Informatica Intelligent Cloud Services℠.
	Specify the URL in the following format:
	`https://<podname>.informaticacloud.com/ma`
	For example, enter the following URL:
	`https://dm-us.informaticacloud.com/ma`

Username	Required. The user name to log in to the Informatica Intelligent Cloud Services URL. The user name is typically an email address.
Password	Required. The password associated with the user name.

CHAPTER 3

IICS API Version V2 Connector Processes

This chapter includes the following topics:

- Services in IICS API Version V2 Connector, 8
- Process with IICS API Version V2 Connector Example, 17
- Configuring the Get Connection and List Connections services, 18

Services in IICS API Version V2 Connector

IICS API Version V2 Connector uses the REST API to access the programs and activities in Informatica Cloud through these services to perform various tasks.

Activities that you can perform in Informatica Cloud are listed as services that you can configure in a Service step in a process. To configure a service, you need to identify and pass the input fields required for the service. You can also use the service output to perform other steps in the process.

Important: When you create a process, you must use the Login service as the first step after the Start milestone and Logout or Logout All as the last step before the End milestone.

Agent Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the Secure Agent details. For each Secure Agent, you can view the agent details such as name, ID, and host name.

The following table describes the agent services:

Service Name	Select service to ...
Get Agent	Get the details of an Secure Agent based on the agent ID that you specify.
List Agents	Get a list of all the Secure Agents in the organization.

Audit Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the audit log.

Select the Get Audit Log service to view the audit log, which tracks user operations such as login, create, update, and delete operations.

You can view the following input and output fields:

Input Fields

- Batch ID to use to retrieve the details of a specific batch of the audit log entries.
- Batch size to retrieve the details of the audit log entries.

Output Fields

AuditLogResults process object. The process object contains log details such as ID, user name, object name, and entry time.

Authentication Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform authentication tasks.

The following table describes the authentication services:

Service Name	Select service to ...
Login	Login to Informatica Cloud using the username and password specified in the IICS API Version V2 connection.
Logout	Log out of Informatica Cloud.
Logout All	Log out of an organization and end all the REST API sessions for the user in the request.

Important: In a process, you must use the Login service as the first step after the Start milestone and Logout or Logout All as the last step before the End milestone.

Connection Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud and retrieve the connection details. For each connection, you can view the connection details such as name, description, and agent on which the connection is available.

The following table describes the connection services:

Service Name	Select the service to ...
Get Connection	Get the connection details based on the connection ID that you specify.
List Connections	Get a list of all the connections in the organization.

For more information about how to configure the Get Connection or List Connections service in a process, see "Configuring the Get Connection and List Connections services" on page 18.

Data Preview Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform data preview tasks.

Select the Data Preview service to preview data when you design a mapping. You can specify the object type as source or target, the object name and connection ID to preview the data types and values of the object.

Input Fields

- Type, which can be source or target.
- Object name
- Connection ID

Output Fields

DataPreview process object. The process object contains fields connection ID, object name, and field name. The process object also contains the Data process object, which contains the type and value fields.

DNB Workflow Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform DNB workflow tasks.

The following table describes the DNB workflow services:

Service Name	Select service to ...
Create DNB360 Workflow	Create a DNB360 workflow.
Delete DNB360 Workflow	Delete a DNB360 workflow based on workflow ID.
Get DNB360 Workflow	Get the details of a DNB360 workflow based on workflow ID.
List DNB360 Workflows	Get the details of all DNB360 workflows.
Update DNB360 Workflow	Update a DNB360 workflow based on workflow ID.

Field Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to view the field details of objects.

The following table describes the field services:

Service Name	Select service to ...
Get Source Fields	Get the field details for a source object. You can specify the source connection ID and object name to view field details. **Input Fields** - Source connection ID - Source object name. **Output Fields** Field process object. The process object contains field details such as field name, data type, precision, and scale.
Get Target Fields	Get the field details of a target object. You can specify the target connection ID and object name to view field details. **Input Fields** - Target connection ID - Target object name. **Output Fields** Field process object. The process object contains field details such as field name, data type, precision, and scale.

File Record Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Intelligent Cloud Services to upload or delete files.

The following table describes the field record services:

Service Name	Select service to ...
Create FileRecord	Upload an integration template XML file or image file to the organization. You can upload files in binary format and with UTF-8 encoding. **Input Fields** - File as an attachment. - File type, which can be mapping or Image. **Output Fields** FileRecord process object. The process object contains file record details such as name, type, attachment type, and update time.
Delete FileRecord	Delete an integration template XML file or image file from the organization based on file ID.

Job Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to start or stop tasks in Informatica Cloud.

The following table describes the job services:

Service Name	Select service to ...
Start Job	Start a task in Informatica Cloud based on task type, and task ID or task name. **Input Fields** - Task ID - Task type, which you can select from an existing list. - Task name **Output Fields** - Job process object. The process object contains task details such as ID, name, type, and callback URL. - Status
Stop Job	Stop a task in Informatica Cloud based on task type, and task ID or task name. **Input Fields** - Task ID - Task type, which you can select from an existing list. - Task name **Output Fields** - Job process object. The process object contains task details such as ID, name, type, and callback URL. - Status

Mapping Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Intelligent Cloud Services to retrieve the mapping details. For each mapping, you can view details such as ID, name, and agent host on which the mapping is available.

The following table describes the mapping services:

Service Name	Select service to ...
Get Mapping	Get the mapping details based on the mapping ID that you specify.
List Mapping	Get a list of all the mappings in the organization.

Mapplet Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform mapplet-specific tasks.

The following table describes the mapplet services:

Service Name	Select service to ...
Create Mapplet	Create a mapplet based on a mapplet XML file you can upload, and the mapplet name and description that you specify. **Input Fields** - File as attachment. The file should be in binary format and with UTF-8 encoding. - Mapplet name - Mapplet description. **Output Fields** - Mapplet process object. The process object contains mapplet details such as name, ID create time, and Org ID. - Status
Delete Mapplet	Delete a mapplet based on mapplet ID.
Get Mapplet	Get the details of a mapplet based on mapplet ID. **Input Fields** Mapplet ID **Output Fields** - Mapplet process object. The process object contains mapplet details such as name, ID create time, and Org ID. - Status
List Mapplets	Get a list of PowerCenter mapplets. You can view mapplet details such as name, ID create time, and Org ID.
Update Mapplet	Update a mapplet based on the mapplet ID. You can update the mapplet XML file, name, or description. **Input Fields** - File as attachment. The file should be in binary format and with UTF-8 encoding. - Mapplet name - Mapplet description. - Mapplet ID **Output Fields** - Mapplet process object. The process object contains mapplet details such as name, ID create time, and Org ID. - Status

Master Template Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to view or delete integration templates.

The following table describes the master template services:

Service Name	Select service to ...
Delete Integration Template	Delete a integration template based on an integration template ID.
Get Integration Template	Get the details of an integration template based on an integration template ID.
List Integration Templates	Get a list of all the integration templates in the organization.

Monitor Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to view the details about Informatica Cloud activities.

The following table describes the monitor services:

Service Name	Select service to ...
Activity Monitor	Retrieve details about active tasks running in Informatica Cloud.
Get Activity Log	Retrieve the log details of all the tasks that are currently running in the runtime environment. You can specify the maximum number of rows to return. **Input Fields** Row limit **Output Fields** Activity log results process object. The process object contains activity details such as failed source rows, success source rows, runtime environment ID, and Agent ID.
Get Error Log	Get the error logs for a specific activity based on the activity log ID. You can view the error logs as attachments.

Org Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the organization details.

The following table describes the organization services:

Service Name	Select service to ...
Get Organization	Get the details of the Informatica Cloud organization.
Get SubOrganization	Get the details of a sub organization related to the organization based on a sub organization ID.

Runtime Environment Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the runtime environment details.

Select the Get Runtime Environment service to get the details of the runtime environments for an organization.

Salesforce Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the Salesforce version details.

Select the Get Salesforce Version service to get the version details of Salesforce used by Informatica Cloud.

Server Time Service

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to retrieve the timestamp details.

Select the Server Time service to view the local time on the Informatica Cloud server.

Task Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform tasks.

The following table describes the task services:

Service Name	Select service to ...
Create Mapping	Create a mapping task. You can provide the mapping name, agent ID, and mapping ID to create the mapping task. Or, you can specify the parameter details for the task. **Input Fields** CreateMappingTaskRequest process object. The process object contains mapping name, agent ID, mapping ID and the parameter process object. **Output Fields** - MappingConfigTask process object. The process object contains field details such as mapping ID, agent ID, and runtime environment ID. - Status
Delete Mapping	Delete a mapping task based on the task ID.
Get Mapping	Get the details of a mapping task based on the task ID. You can view mapping details such as mapping ID, agent ID, and runtime environment ID.

Service Name	Select service to ...
List Mapping Task	Get a list of all the mapping tasks that use an integration template. You can specify the ID of the integration template to get the list of tasks. **Input Fields** Integration template ID **Output Fields** MappingConfigTask process object. The process object contains field details such as mapping ID, agent ID, and runtime environment ID.
List Tasks	Request the details of the tasks in the organization. You can filter the list based on task type such as mapping, synchronization, and workflow tasks. You can view task details such as name, type, and description.

Workflow Services

Application Integration uses the URL and session ID of the IICS API Version V2 connection to connect to Informatica Cloud to perform workflow tasks.

The following table describes the workflow services:

Service Name	Select service to ...
Create Task Flow	Create a task flow. **Input Fields** Taskflow process object. The process object contains fields such as Org ID, created by, and description. The process object contains other process objects such as SuccessTaskEmail, WarningTaskEmail, and ErrorTaskEmail. **Output Fields** - Taskflow process object. The process object contains fields such as Org ID, created by, and description. The process object contains other process objects such as SuccessTaskEmail, WarningTaskEmail, and ErrorTaskEmail. - Status
Delete Task Flow	Delete a test flow based on task flow ID.
Get Task Flow	Request the details of a task flow based on task flow ID. The Taskflow process object is the output field.

Service Name	Select service to ...
List Task Flows	Request the details of all task flows in the organization. The Taskflow process object is the output field.
Update Task Flow	Update an existing task flow. **Input Fields** - Task flow ID - Taskflow process object. The process object contains fields such as Org ID, created by, and description. The process object contains other process objects such as SuccessTaskEmail, WarningTaskEmail, and ErrorTaskEmail. **Output Fields** - Taskflow process object. The process object contains fields such as Org ID, created by, and description. The process object contains other process objects such as SuccessTaskEmail, WarningTaskEmail, and ErrorTaskEmail. - Status

Process with IICS API Version V2 Connector Example

You can create an Application Integration process to create a mapping task in Informatica Cloud.

You can provide an agent ID for the Secure Agent and a mapping ID for the mapping you want to use in the mapping task. You can also use other services available in IICS API Version V2 Connector for mapping task process orchestration.

For example, you can perform the following tasks to create a mapping task:

1. Create an IICS API Version V2 connection to connect to Informatica Cloud.
2. Create a process and configure the Login service to login to Informatica Cloud.
3. Configure the List Agents service to retrieve all the agents in the organization.
4. Retrieve the agent ID of the Secure Agent on which you want to run the task by configuring a data decision step.
5. Configure the List Mappings service to get a list of all the mappings in the organization.
6. Retrieve the mapping ID of the mapping you want to use in the task by configuring a data decision step.
7. Pass the mapping ID and agent ID to the Create Mapping Configuration Task service.
8. Configure the Logout service to log out of Informatica Cloud.
9. Save, publish, and run the process.

The Create Mapping Configuration Task service uses the agent ID and mapping ID to create a Mapping Configuration task.


Configuring the Get Connection and List Connections services

You can use the Get Connection service in a process to retrieve the connection details by providing the connection ID. You can use the List Connections service in a process to retrieve all the connections in the organization.

To use the Get Connection or List Connections service in a process, perform the following steps:


1. Create an IICS API Version V2 connection to connect to Informatica Cloud.
2. On the **Explore** page, navigate to the process for which you want to use the Get Connection or List Connections service.
3. Add a Service step to configure the Login service to log in to Informatica Cloud.
   To configure the Login service, perform the following steps:
   1. Click the **Service** tab and select **Service Type** as **Connection**.
   2. In the **Connection** field, select the IICS API Version V2 connection.
   3. In the **Action** field, select **Authentication** > **Login**.
4. Add a Service step to configure the Get Connection or List Connections service.
   To configure the Get Connection or List Connections service, perform the following steps:
   1. Click the **Service** tab and select **Service Type** as **Connection**.
   2. In the **Connection** field, select the IICS API Version V2 connection.
   3. In the **Action** field, select **Connection** > **Get Connection** or **Connection** > **List Connections** as required.
   4. Click the **Input Fields** tab, and then select the values as **ICS Server URL** for the **ICS Server URL** field and **ICS Session ID** for the **ICS Session ID** field.

   Additionally, for the Get Connection service, enter the connection ID in the **Connection ID** field for which you want to retrieve the details as shown in the following image:

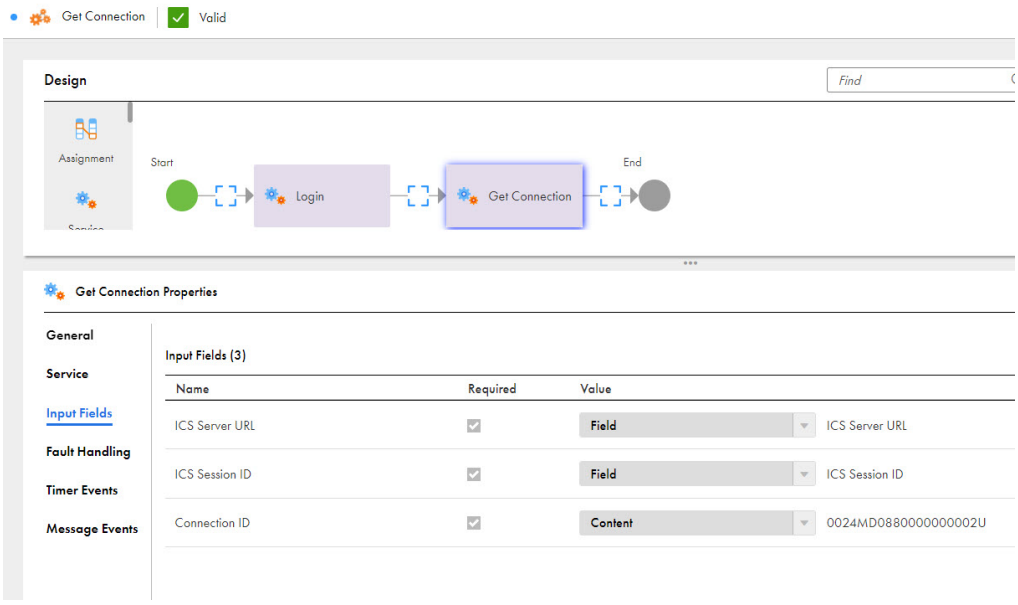

Note: You can get the connection ID by invoking a process that contains a List Connections service.

5. In the Start step, create an output field for the get connection or list of connections as shown in the following image:

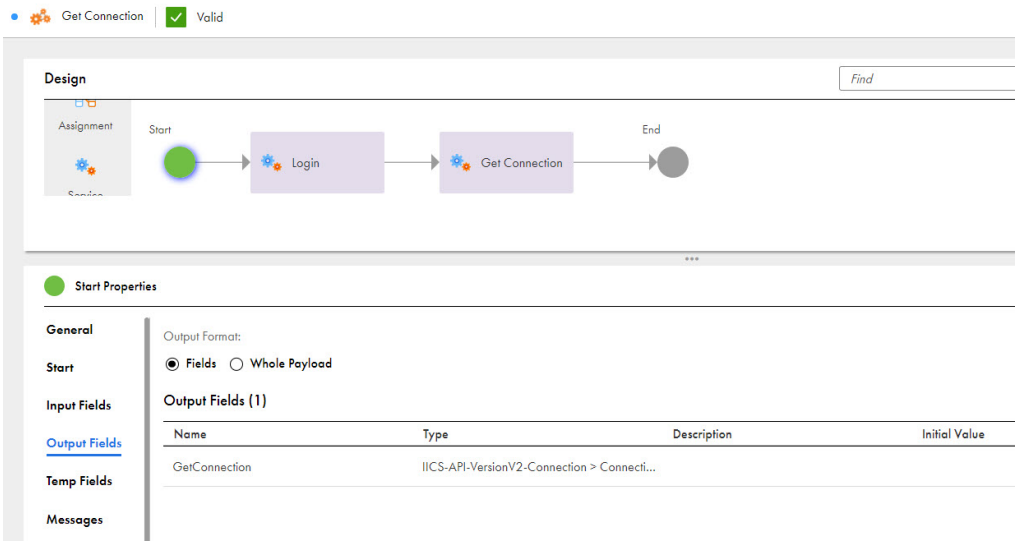


To create an output field, perform the following steps:

1. Click the **Start** step.
2. Click the **Output Fields** tab.
3. Click the **Add** icon.
4. Enter the output field name.
5. In the **Type** column, select **More types**.
   The **Edit Type** dialog box appears.
6. From the **Category** list, select **Connection defined Types**.
7. From the **Connection** list, select the IICS API Version V2 connection.
8. Select the connection output type from the **Types** section.

   Note: You can check the connection object ID in the **Output Fields** section of the **Service** tab.
9. Select **Allow a list of objects of this type** for a list of connections.
10. Click **OK**.
    Based on the selected object, the field is set to the object type or a list of object types.

6. Add an Assignment step and add the output field you created in step 5 with the type **Formula**, and select **Connection** or **Connections** from the **Fields** tab in the **Expression Editor** as required as shown in the following image:

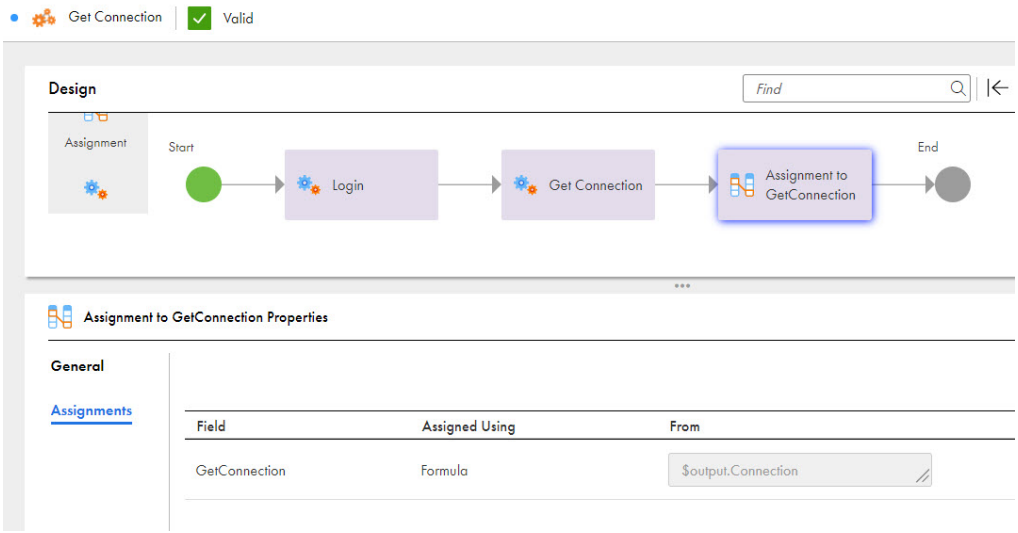

7. Click **Save** and **Publish**.
8. Copy the REST Service URL from the **Properties Details** page, open a browser and paste the service URL. The service returns connection details or a list of connection details as a response.

INDEX

A

agent
  services 8
audit
  services 9
authentication
  services 9

C

connection
  services 9

D

data preview
  services 10
DNB workflow
  services 10

F

field
  services 11
file record
  services 11

I

IICS API Version V2 connections
  basic properties 6
  properties 7
IICS API Version V2 Connector
  example 17
  overview 5
  services 8

J

job
  services 12

M

mapping
  services 12
mapplets
  services 13
master template
  services 14
monitor
  services 14

O

org
  services 14

R

runtime environment
  services 15

S

Salesforce
  services 15
server time
  services 15
service
  Server Time 15
services
  Activity Monitor 14
  Create DNB360 Workflow 10
  Create FileRecord 11
  Create Mapping Task 15
  Create Mapplet 13
  Create Task Flow 16
  Data Preview 10
  Delete DNB360 Workflow 10
  Delete FileRecord 11
  Delete Integration Template 14
  Delete Mapping Task 15
  Delete Mapplet 13
  Delete Task Flow 16
  Get Activity Log 14
  Get Agent 8
  Get Audit Log 9
  Get Connection 9
  Get DNB360 Workflow 10
  Get Error Log 14
  Get Integration Template 14
  Get Mapping 12
  Get Mapping Task 15
  Get Mapplet 13
  Get Organization 14
  Get Runtime Environment 15
  Get Salesforce Version 15
  Get Source Fields 11
  Get SubOrganization 14
  Get Target Fields 11

services *(continued)*
Get Task Flow 16
List Agents 8
List Connections 9
List DNB360 Workflows 10
List Integration Templates 14
List Mapping Configuration Task 15
List Mappings 12
List Mapplets 13
List Task Flows 16
List Tasks 15
Login 9
Logout 9
Logout All 9
Start Job 12
Stop Job 12
Update DNB360 Workflow 10
services *(continued)*
Update Mapplet 13
Update Task Flow 16

T

task
services 15

W

workflow
services 16