Informatica® Cloud Application Integration
April 2025

Azure Event Hubs Connector Guide

Informatica Cloud Application Integration Azure Event Hubs Connector Guide
April 2025

© Copyright Informatica LLC 2025, 2026

Publication Date: 2026-06-16

Table of Contents

Preface 4

Chapter 1: Azure Event Hubs overview 5

Introduction to Azure Event Hubs Connector 5

Chapter 2: Azure Event Hubs connections 6

Basic connection properties 6

Azure Event Hubs connection properties 7

Azure Event Hubs source properties 8

Azure Event Hubs target properties 9

Azure Event Hubs connection metadata 10

Using an Azure Event Hubs connection in a process 10

Preface

Read the *Azure Event Hubs Connector Guide* to learn how to set up and use the Azure Event Hubs connections. This guide assumes that you have an understanding of the Azure Event Hubs concepts.

CHAPTER 1

Azure Event Hubs overview

Azure Event Hubs is a highly scalable, cloud-based event ingestion system that can handle massive amounts of telemetry data from various sources.

Azure Event Hubs offers the following benefits:

- Enables real-time event processing and analytics.
- Supports serverless computing architectures.
- Enables event-driven communication between microservices.
- Handles large volumes of Internet of Things (IoT) device data.

Introduction to Azure Event Hubs Connector

Event Hubs provide a highly scalable infrastructure for streaming data and absorb millions of events per second from several sources. It acts as an entryway for big data that allows publish-subscribe capabilities with low latency and large scale.

Azure Event Hubs Connector includes the following key features:

- Fetching events from Azure Event Hubs in real-time.
- Enables timely insights and decision-making.
- Supports various data formats. For example, JSON, and CSV formats.
- Scales up the data ingestion workflows to handle large volumes of events.

CHAPTER 2

Azure Event Hubs connections

Use the Azure Event Hubs connection to access Azure Event Hub as source or target.

We can use Azure Event Hubs connection to perform data streaming and event ingestion activities, such as receiving and processing events. After you create an Azure Event Hubs connection, you can validate, test, and save the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Azure Event Hubs connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Azure Event Hubs**.
Runtime Environment	Not supported for Azure Event Hubs Connector. You can only run the connection on the Cloud Server.
Connection Test	Indicates whether the connection test was successful or not.
OData-Enabled	Not supported for Azure Event Hubs Connector.

You can configure **Shared Access Signature (SAS)** authentication to grant restricted access rights to Azure Storage resources. When you use **Shared Access Signature (SAS)** authentication, you must provide a shared access signature to clients who need access to certain storage account resources.

The following table describes the properties that you must configure on the **Properties** tab when you select the **Shared Access Signature (SAS)** authentication type:

Property	Description
Shared Access Key Name	The name of the authorization rule.
Shared Access Key	The key used for shared access in the connection.

Azure Event Hubs connection properties

The following table describes the additional properties that you must configure in the **Connection Properties** section:

Property	Description
Namespace	The namespace of the Event Hub. For example, `mynamespace`. The connector automatically appends `.servicebus.windows.net` to the value that you enter.
Blob Account Name	The Azure account name that you use to authenticate with the Azure Blob services.
Blob Access Key	The access key for the associated Azure account name.
Blob Container Name	The name of the Blob container that will be used to store the checkpoint offsets.

The following table describes the schema registry settings that you must configure in the **Schema Registry Settings** section:

Property	Description
Client ID	The unique ID of the registered application that has permission to access the schema registry.
Tenant ID	The Globally Unique Identifier (GUID) that identifies the tenant of the registered application that has permission to access the schema registry.
Client Secret	The secret known only to the application and the authorization server. Enter the client secret of the registered app that has permission to access the schema registry.
Schema Group Name	The schema group name that is available under the same event hub namespace. A schema group might contain different message definitions for the same schema, or message definitions for multiple schemas.

Azure Event Hubs source properties

You can configure an event source in an Azure Event Hubs connection.

After you define an event source for an Azure Event Hubs connection, you can publish the connection on the Cloud Server. You can then access the event source in a process and deploy the process on the Cloud Server to consume the events generated by the event source.

To create event sources for an Azure Event Hubs connection, click **Add Event Source** on the **Event Sources** tab. Select the event source type as **AzureEventHubReader**. You can add one or more event sources for each Azure Event Hubs connection that you create.

The following table describes the basic event source properties that you can configure:

Property	Description
Name	Required. The event source name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Azure Event Hubs event source that appears in the Process Designer.
Enabled	Select **Yes** to make the event source available immediately after it is published. Select **No** to disable the event source until you are ready to use it. Default is **Yes**.

The following table describes the advanced event source properties that you can configure:

Property	Description
Event Hub Name	Required. The name of the Azure event hub from which you want to read messages.
Consumer Group Name	Required. The name of the consumer group. A consumer group is a logical grouping of consumers that read data from an event hub.
Content Format	Required. You can select **Text**, **XML**, or **JSON**. The default content format is text.
Simplify Content	Required. Enable this option if the XML or JSON content to be processed does not match a valid process object structure. The event source modifies the content structure to match the process object format.
Validate Schema	Required. Enable this option to validate the incoming JSON message against the schema before reading from the source. The schema validation is performed by reading the messages at the event source. After the validation becomes successful, the process is invoked. The process is not invoked if the validation fails. All the errors that occur during validation are maintained in log files that you can download from the **Connections** tab in Application Integration Console.

Property	Description
Schema Name	Optional. The schema name for the source.
Schema Version	Optional. The version of the schema.

Azure Event Hubs target properties

After you define an event target for an Azure Events Hubs connection, you can publish the connection on the Cloud Server. You can then access the event target in a process and deploy the process on the Cloud Server to publish the events generated by the event target downstream.

To create event targets for an Azure Events Hubs connection, click **Add Event Target** on the **AzureEventHubWriter** tab. Select the event target type as **Event Target**. You can add one or more event targets for each Azure Events Hubs connection that you create.

The following table describes the basic event source properties that you can configure:

Property	Description
Name	Required. The event target name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Azure Events Hubs event target that appears in the Process Designer.

The following table describes the advanced event target properties that you can configure:


Property	Description
Event Hub Name	Required. The name of the Azure event hub to which you want to write messages.
Consumer Group Name	Required. The name of the producer group. A producer group is a logical grouping of producers that write data to an event hub.
Content Format	Required. The message content type that needs to be processed. You can select **Text**, **XML**, or **JSON**. The default content format is text.
Validate Schema	Required. Enable this option to validate the outgoing JSON message against the schema before writing to the target.
Schema Name	Optional. The schema name for the source.
Schema Version	Optional. The version of the schema.

Azure Event Hubs connection metadata

After you create an Azure Event Hubs connection, you can validate and save the connection. You can then publish the connection and view the generated process objects on the **Metadata** tab.

When publish an Azure Event Hubs connection in Application Integration, a list of **Actions** and **Objects** appear on the **Metadata** tab.


The following image shows the **Metadata** tab for a published Azure Event Hubs connection:

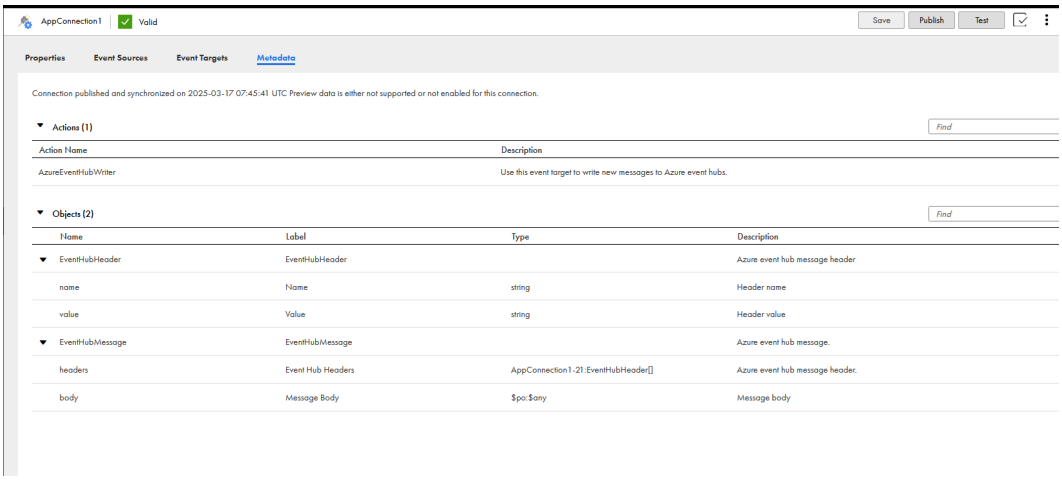

Using an Azure Event Hubs connection in a process

After you create an Azure Event Hubs connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the an Azure Event Hubs connection that you created.
5. From the **Action** list, select the action that you want to perform on Azure Event Hubs Connector. For example, select **AzureEventHubsWriter** to write new messages to Azure Event Hubs as shown in the following image:

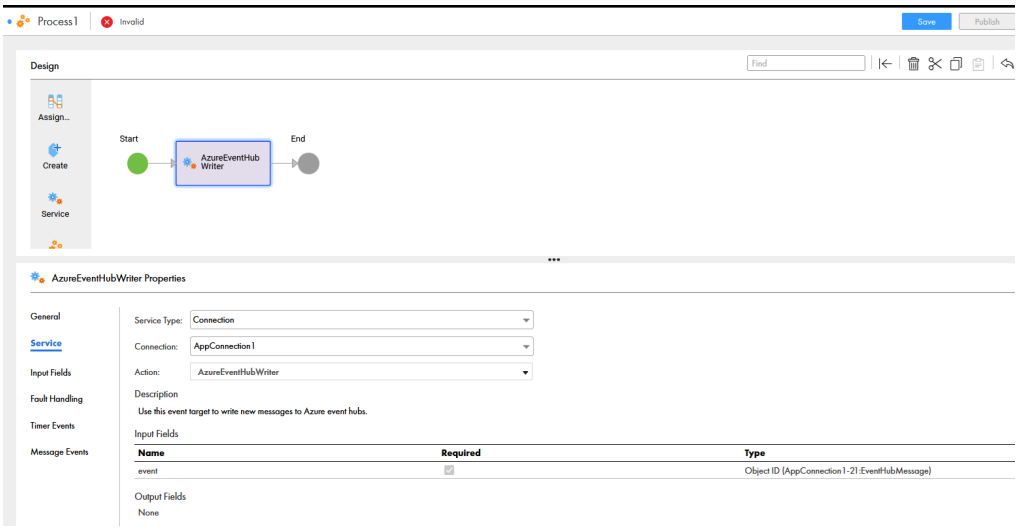

6. Configure further steps as needed.
7. Validate, save, and publish the process.