Informatica® Cloud Application Integration
April 2025

Coupa Connector Guide

Informatica Cloud Application Integration Coupa Connector Guide
April 2025

© Copyright Informatica LLC 2024, 2025

Publication Date: 2025-08-30

Table of Contents

Preface 4

Chapter 1: Introduction to Coupa 5

Coupa overview 5

Chapter 2: Coupa connections overview 6

Basic connection properties 6

Coupa connection properties 7

Coupa connection metadata 7

Publishing Coupa connections 8

Using a Coupa connection in a process 9

Preface

Read the *Coupa Connector Guide* to learn how to securely read data from Coupa. This guide assumes that you have an understanding of Coupa concepts.

CHAPTER 1

Introduction to Coupa

Use Coupa Connector to connect to Coupa from Application Integration. Use Coupa Connector to securely read data from Coupa.

You can use Coupa Connector to achieve use cases, such as procurement management, expense management, invoicing, spend analytics, and supplier management.

Coupa overview

Coupa is a cloud-based spend management platform that helps businesses streamline procurement, invoicing, expense management, supplier management, and other financial processes. Coupa provides a centralized platform that helps organizations optimize costs, drive process efficiencies, and make informed financial decisions.

Coupa provides key features, such as improved spend visibility, streamlined procurement, optimized supplier relationships, and enhanced expense management.

CHAPTER 2

Coupa connections overview

Use a Coupa connection to perform CRUD operations, such as create, read, update, patch, and delete, on existing resources in Coupa.

You can use a Coupa connection to generate an access token, and create, update, query, patch, attach, or delete entities.

After you create a Coupa connection, you can validate, test, and save the connection.

You can then publish the Coupa connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Coupa connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Coupa**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Coupa Connector.
OData-Enabled	Not supported for Coupa Connector.

Coupa connection properties

The following table defines the Coupa connection properties that you must configure in the **Connection Properties** section:


Property	Description
Instance_Domain	The URL to access the Coupa instance.
Client_ID	The Coupa client ID to generate a valid access token.
Client_Secret	The Coupa client secret to generate a valid access token.
Scope	The Coupa security scope to access the resources.

Coupa connection metadata

After you create a Coupa connection, you can validate and save the connection. You can then publish the Coupa connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Coupa connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Coupa connection:

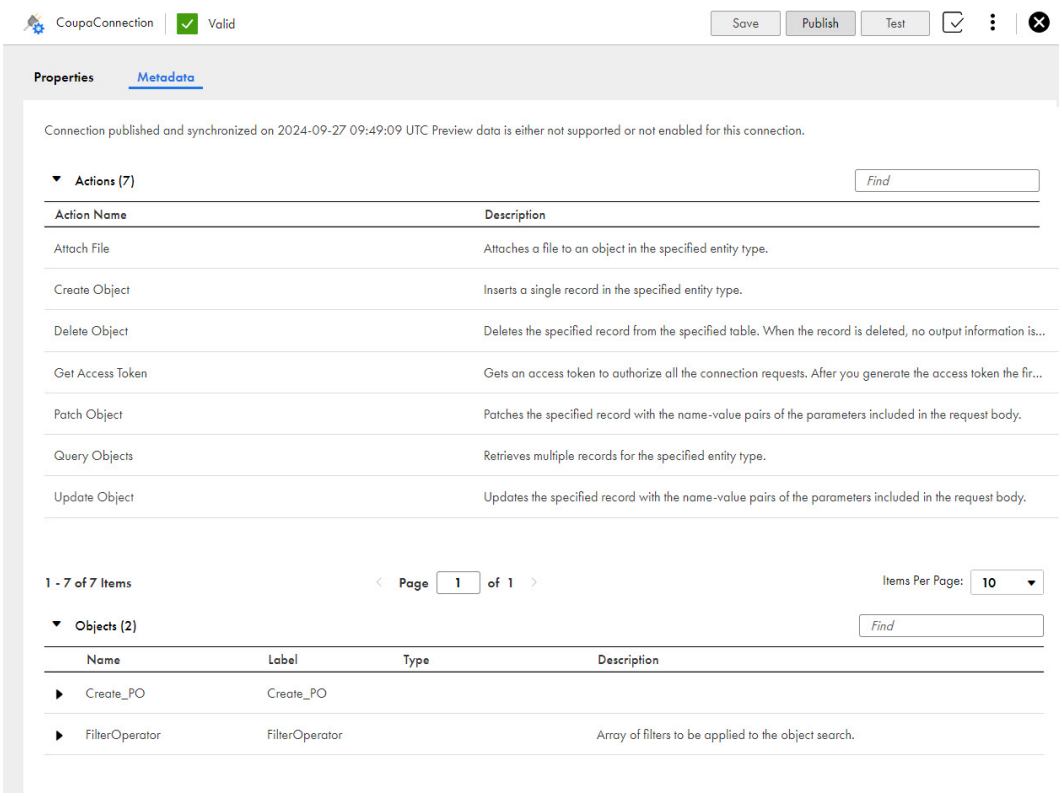

Publishing Coupa connections

When you publish a Coupa connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

Consider the following information when you use specific actions and objects:

- The **Get Access Token** action gets an access token to authorize all the connection requests. After you generate the access token the first time, you can use it for multiple requests for the duration specified in the client credentials.
- The **Query Objects** action retrieves multiple records for the specified entity type.
  Specify the entity type, such as, accounts, contracts, and suppliers to the query objects. Specify the id property to query the objects by ID.

  You can apply filters to query objects by criteria. For example, if you want to apply filters to a po-email that contains an upgrade occurrence with the status is equal to active, use the following snippet as a sample to build a `requestBody` object:

  ```
  <root>
  <filter>
  <propertyName>po-email</propertyName>
  <operator>contains</operator>
  <value>upgrade</value>
  </filter>
  <filter>
  <propertyName>status</propertyName>
  <operator>eq</operator>
  <value>active</value>
  </filter>
  </root>
  ```

  You can specify the maximum number of returned objects by using the property `limit`. You can skip the first n objects using the `offset` property.

  By default, Coupa Connector produces a heavy output for the Query Objects action. This can cause performance issues especially when multiple processes run at the same time. Therefore, Informatica recommends that you query fewer fields.

  You can configure the property **return_object** using one of the following options:

  - none - All the fields including the nested objects will be returned in the output. This is the default option.

  - limited - Only identifiers will be returned in the output.

  - shallow - Nested objects will be returned only with identifiers.

  If you query a list of objects without specifying the `id` property, set the return_object to `limited` for high performance.
- The **Create Object** action inserts a single record of the specified entity type.
  To create an object, specify the entity type and the object list of the specified entity type attributes.
- The **Update Object** action updates the specified record with the name-value pairs of the parameters included in the request body.
  To update an object, specify the entityType, the ID of the entity, and the object list of the specified entity type attributes.
- The **Patch Object** action patches the specified record with the name-value pairs of the parameters included in the request body.
  To patch an object, specify the entity type, the ID of the entity, and the object list of the specified entity type attributes.
- The **Delete Object** action deletes the specified record from the specified table. When the record is deleted, no output information is returned.
  To delete an object, specify the entity type and the ID of the specified entity type.

- The **Attach File** action attaches a file to an object of the specified entity type. To attach a file to an object, specify the entity type, the ID of the entity, and the file properties, such as {*secondaryEntityType*} and {*secondaryId*}.
  Coupa actions might require multiple domain segments.

  `/api/suppliers/:supplier_id/addresses/:id`

  For example, the above Coupa action link contains the following segments:


  - entityType: suppliers
  - ID: supplier_id
  - secondaryEntityType: addresses
  - secondaryId: id

For more information, see the Coupa documentation.

Using a Coupa connection in a process

After you create a Coupa connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Coupa connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Create Object** action to insert a single record in the specified entity type as shown in the following image:

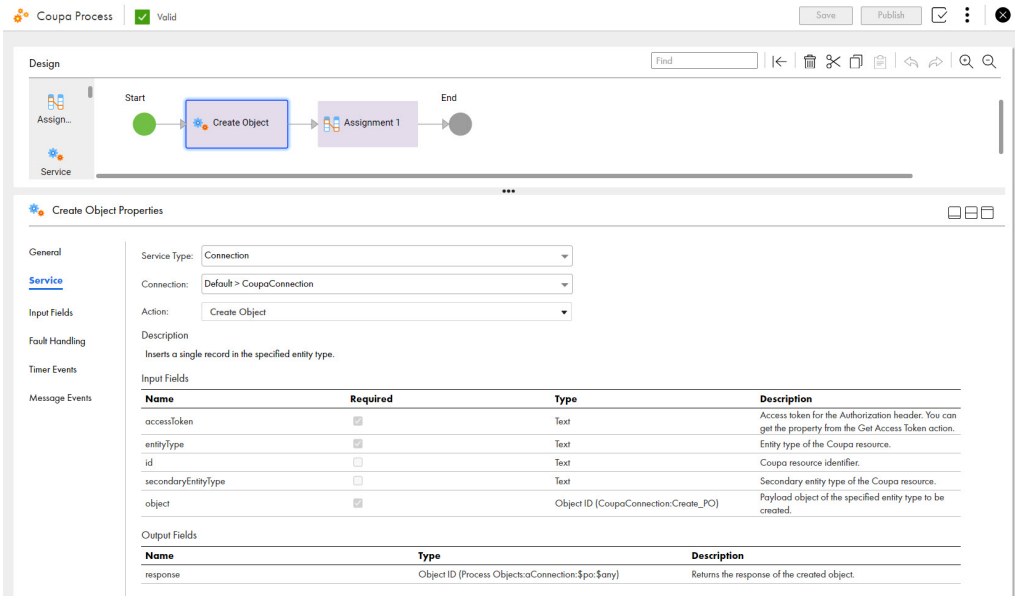

   In this case, Application Integration populates the **response** objects under the output fields.
6. Configure further steps as needed.
7. Validate, save, and publish the process.