Informatica® Cloud Application Integration
April 2025

Dynamics 365 Connector Guide

Informatica Cloud Application Integration Dynamics 365 Connector Guide
April 2025

© Copyright Informatica LLC 2024, 2025

Publication Date: 2025-08-30

Table of Contents

Preface 4

Chapter 1: Introduction to Microsoft Dynamics 365 Connector 5

Dynamics 365 Connector 5

Introduction to Microsoft Dynamics 365 5

Chapter 2: Dynamics 365 connections 6

Dynamics 365 connections overview 6

Basic connection properties 7

Dynamics 365 connection properties 7

Dynamics 365 connection metadata 8

Using a Dynamics 365 connection in a process 8

Rules and guidelines for using the Microsoft Dynamics 365 Connector 9

Preface

Read the *Dynamics 365 Connector Guide* to learn how to set up and use Dynamics 365 connections. Use a Dynamics 365 connection to securely read data from and write data to Dynamics 365 by using Application Integration.

CHAPTER 1

Introduction to Microsoft Dynamics 365 Connector

This chapter includes the following topics:

- Dynamics 365 Connector, 5
- Introduction to Microsoft Dynamics 365, 5

Dynamics 365 Connector

You can use Dynamics 365 Connector to securely read data from and write data to Microsoft Dynamics 365. Dynamics 365 Connector supports create, read, update, and delete operations for all default and custom Dynamics 365 objects.

You can create a Dynamics 365 connection and use it in Application Integration processes. You can synchronize the data and easily schedule real-time Application Integration processes.

After you read data from Microsoft Dynamics 365, you can write the data to other applications, databases, or flat files for analyzing the data.

Introduction to Microsoft Dynamics 365

Microsoft Dynamics 365 is a suite of cloud-based business applications designed to streamline various aspects of business operations.

It integrates Customer Relationship Management (CRM) and Enterprise Resource Planning (ERP) capabilities, providing solutions, such as sales, customer service, field service, finance, operations, and marketing. Dynamics 365 offers modular applications that can be deployed independently or together, allowing businesses to customize their solution to meet their specific requirements. As a cloud-based application, it enables easy access, scalability, and integration with other Microsoft products and third-party software.

CHAPTER 2

Dynamics 365 connections

This chapter includes the following topics:

- Dynamics 365 connections overview, 6
- Basic connection properties, 7
- Dynamics 365 connection properties, 7
- Dynamics 365 connection metadata, 8
- Using a Dynamics 365 connection in a process, 8
- Rules and guidelines for using the Microsoft Dynamics 365 Connector, 9

Dynamics 365 connections overview

Use a Dynamics 365 connection to securely read data from and write data to Dynamics 365 using the Table API. Dynamics 365 connector works only with Dynamics 365 API 9.2 version.

The Table API provides endpoints that allow you to perform CRUD operations such as create, read, update, and delete on Dynamics 365 tables. To publish a Dynamics 365 connection successfully, you must have sufficient roles to access the data in the table specified in the request.

You get an access token to authorize all the connection requests. After you generate the access token once, you can use it for multiple requests such as create, read, update, and delete records on Dynamics 365 tables for the duration specified in the client credentials.

After you create a Dynamics 365 connection, you can validate, test, and save the connection.

You can then publish the Dynamics 365 connection and click the **Metadata** tab to view the generated process objects for the connection.

For more information about the various actions that you can perform using Dynamics 365 Connector, see the Microsoft Dynamics 365 and Power Apps documentation.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Dynamics 365 connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	Optional. The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Dynamics 365**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Dynamics 365 Connector.
OData-Enabled	Not supported for Dynamics 365 Connector.

Dynamics 365 connection properties

The following table defines the Dynamics 365 connection properties that you must configure in the **Connection Properties** section:

Property	Description
Tenant_ID	The Dynamics 365 tenant ID to get the access token. Enter the tenant ID that you generated under **Microsoft Entra ID > App registrations** in Dynamics 365 after creating the client credentials.
Client_ID	The Dynamics 365 client ID to generate a valid access token. Enter the client ID that you generated under **Microsoft Entra ID > App registrations** in Dynamics 365.
Client_Secret	The Dynamics 365 client secret that you generated under **Microsoft Entra ID > App registrations** in Dynamics 365.
Grant_Type	The grant type that is used by the Dynamics 365 instance to get an access token for authorizing third-party clients. Enter the value as **client_credentials**.
Resource_URL	The URL to access the Dynamics 365 instance.


Dynamics 365 connection metadata

After you create a Dynamics 365 connection, you can validate and save the connection. You can then publish the Dynamics 365 connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Dynamics 365 connection in Application Integration, a list of **Actions** and **Objects** appears on the **Metadata** tab.

Dynamics 365 actions contain the CRUD operations that you can perform in Dynamics 365.


The following image shows the **Metadata** tab for a published Dynamics 365 connection:

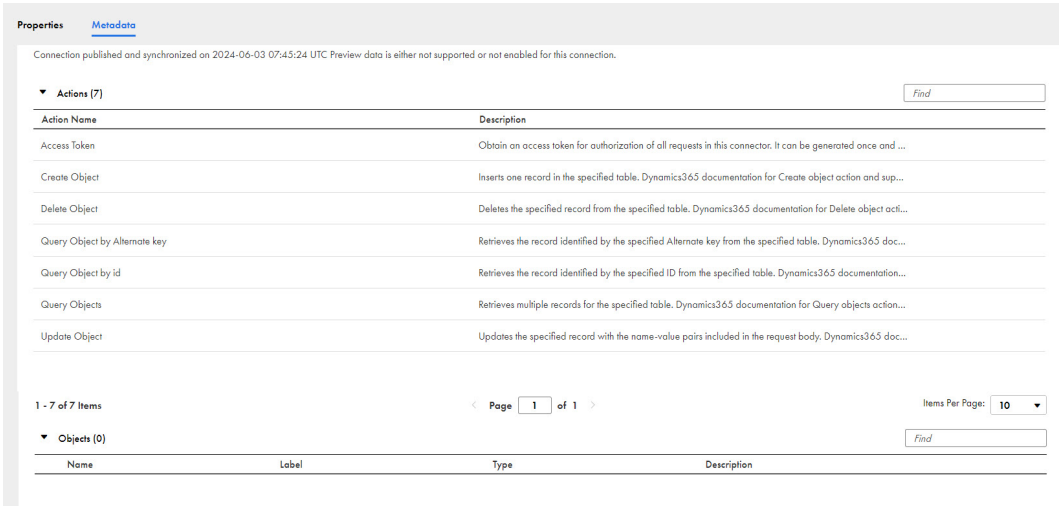

Using a Dynamics 365 connection in a process

After you create a Dynamics 365 connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Dynamics 365 connection that you created.
5. From the **Action** list, select the action that you want to perform on Dynamics 365 Connector. For example, select **Access Token** to authorize the Dynamics 365 requests and other connection requests as shown in the following image:

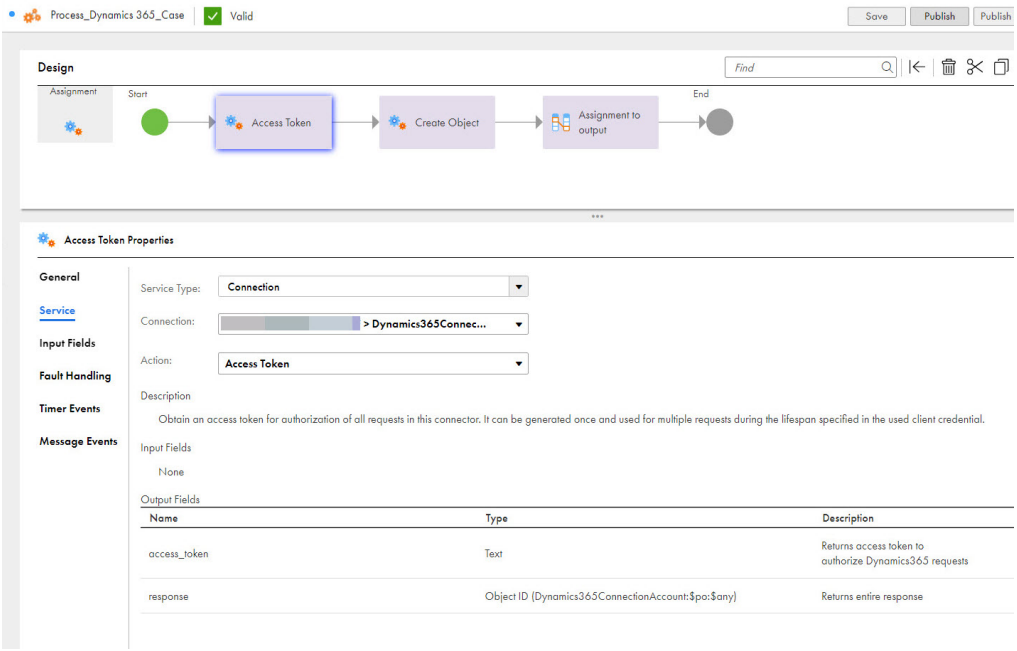

Application Integration populates the **access_token** and **response** object under output fields. The access token enables you to authorize the Dynamics 365 requests and all the other connection requests. You can use the access token to configure further steps, such as create, update, delete, and query objects in Dynamics 365. Similar to the Access Token and Create Object step, you can configure more service steps as required.

6. Configure further steps as needed.
7. Validate, save, and publish the process.

Rules and guidelines for using the Microsoft Dynamics 365 Connector

Consider the following rules and guidelines when working with the Microsoft Dynamics 365 Connector:

- You can create only one record in a single request.
- To handle Integer and Double data types correctly and ensure proper behavior, you must specify annotation attributes or additional parameters in the request as shown in the following sample:

```
<account xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<name>test name</name>
<telephone>000-111-22-33</telephone>
<emailaddress>account@test.com</emailaddress>
<fax>123-456</fax>
<revenue m:type="xs:double">1000.50
</revenue>
</account>

<account xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<name>test name</name>
<telephone1>000-257-35-89</telephone1>
<fax>547-890</fax>
<versionnumber m:type="xs:int">1</versionnumber>
</account>
```

- Informatica recommends that you use an alternate key to retrieve the record using a record identifier for the field to ensure uniqueness and prevent the creation of records with the same field values.