Informatica® Cloud Application Integration
April 2025

Marketo Connector Guide

Informatica Cloud Application Integration Marketo Connector Guide
April 2025

© Copyright Informatica LLC 2024, 2025

Publication Date: 2025-08-30

Table of Contents

Preface 4

Chapter 1: Marketo Connector overview 5

Introduction to Marketo 5

Chapter 2: Marketo connections overview 6

Basic connection properties 6

Marketo connection properties 7

Marketo connection metadata 7

Using a Marketo connection in a process 8

Preface

Read the *Marketo Connector Guide* to learn how to set up and use Marketo connections. This guide assumes that you have an understanding of Marketo concepts.

CHAPTER 1

Marketo Connector overview

Use Marketo Connector to connect Marketo, a marketing automation platform, with other systems or applications. You can use Marketo Connector to achieve your general use cases, such as data synchronization, automated workflows, campaign management, personalized marketing and segmentation based on the audience, and analytics and reporting.

Introduction to Marketo

Marketo is a cloud-based marketing automation software owned by Adobe. It offers a suite of tools designed to help marketers create and manage marketing campaigns, automate repetitive tasks, and measure the performance of their marketing efforts.

Marketo connector supports different entity types within the same action. You must specify entity type and corresponding payload when configuring the connection.

Marketo provides the following key features:

- Integrates with various CRM systems, content management platforms, analytics tools, and other marketing technologies.
- Allows marketers to capture leads from various sources such as websites, forms, and social media.
- Allows you to design, run, and analyze multi-channel marketing campaigns using Marketo.
- Enables marketers to create personalized experiences for their audience by segmenting contacts based on demographics, behavior, and other criteria.
- Offers analytics capabilities to track the performance of campaigns, measure return on investment, and gain insights into customer behavior.

CHAPTER 2

Marketo connections overview

Use a Marketo connection to perform CRUD operations, such as create, read, update, and delete, on Marketo entities.

You can use a Marketo connection to generate an access token, and create, update, describe, query, or delete entities. You must set the correct payload for a particular entity type such as, lead, campaign, or company.

Marketo connector has build-in batch support for create, update, and delete actions. You can create, update, or delete multiple objects at the same time.

After you create a Marketo connection, you can validate, test, and save the connection.

You can then publish the Marketo connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Marketo connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Marketo**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Marketo Connector.
OData-Enabled	Not supported for Marketo Connector.

Marketo connection properties

The following table defines the Marketo connection properties that you must configure in the **Connection Properties** section:


Property	Description
hostName	The munchkin ID of the Marketo instance.
client_id	The Marketo client ID to generate a valid access token. You can find the client ID under the **Admin** > **Integration** > **Launchpoint** menu in Marketo.
client_secret	The Marketo client secret that you generated under the **Admin** > **Integration** > **Launchpoint** menu in Marketo.
grant_type	The grant type that is used by the Marketo instance to get an access token for authorizing third-party clients. Enter the value as **client_credentials**.

Marketo connection metadata

After you create a Marketo connection, you can validate and save the connection. You can then publish the Marketo connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Marketo connection in Application Integration, a list of **Actions** and **Objects** appears on the **Metadata** tab.


The following image shows the **Metadata** tab for a published Marketo connection:

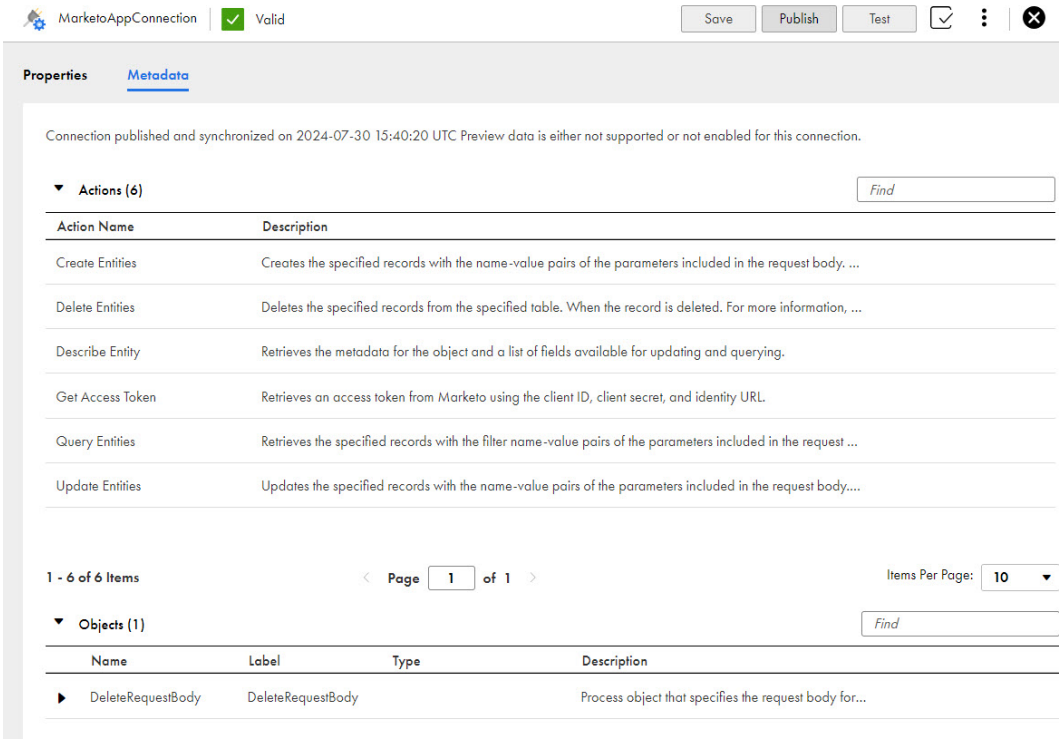

Using a Marketo connection in a process

After you create a Marketo connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Marketo connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Get Access Token** action to return an access token to authorize the Marketo connection requests as shown in the following image:

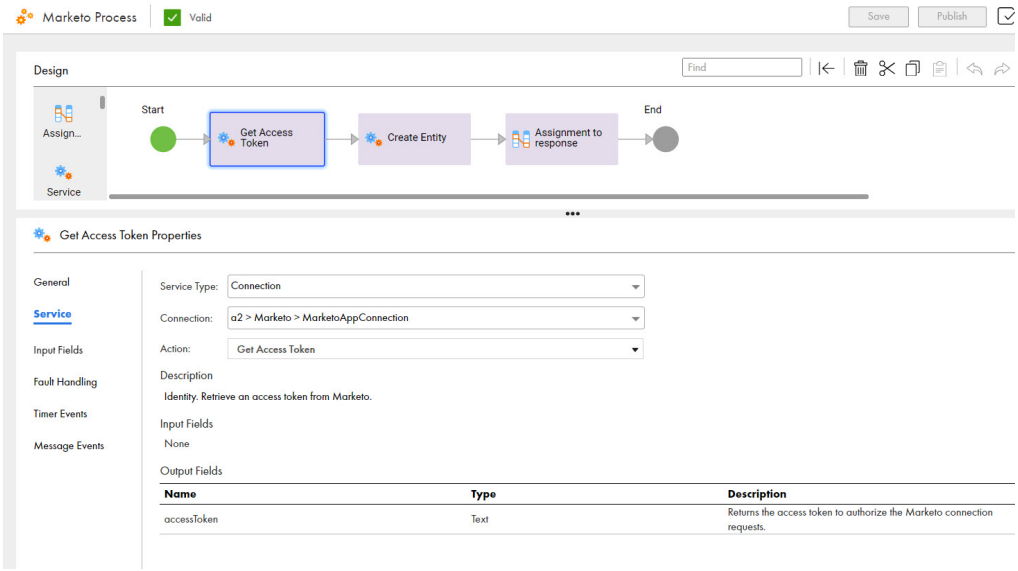

In this case, Application Integration populates the **accessToken** object under the output fields. Similar to the Get Access Token step, you can configure more service steps as required.

6. Configure further steps as needed.
7. Validate, save, and publish the process.

Note: To use fields with data types, such as array, boolean, double, or integer, you must use annotation to set variable types as shown in the following sample code:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <field_array m:isArray="true">
        <property_1> ...</property_1>
    </field_array>
    <field_boolean m:type="xs:boolean">true</field_boolean>
    <field_double m:type="xs:double">10.3</field_double>
    <field_integer m:type="xs:int">5</field_integer>
</root>
```