Informatica® Cloud Application Integration
April 2025

NetSuite Connector Guide

Informatica Cloud Application Integration NetSuite Connector Guide
April 2025

© Copyright Informatica LLC 2025

Publication Date: 2025-09-15

Table of Contents

Preface. 4

Chapter 1: Introduction to NetSuite Connector. 5

NetSuite Connector Overview. 5

Introduction to NetSuite. 6

Chapter 2: NetSuite connections. 7

NetSuite connections overview. 7

Setting up a NetSuite instance. 7

Basic connection properties. 9

NetSuite connection properties. 10

NetSuite connection metadata. 10

Using a NetSuite connection in a process. 11

Rules and guidelines for NetSuite connections. 12

Index. 14

Preface

Read the *NetSuite Connector Guide* to learn how to set up and use NetSuite connections. Use a NetSuite connection to securely read data from or write data to NetSuite by using Application Integration.

CHAPTER 1

Introduction to NetSuite Connector

This chapter includes the following topics:

- NetSuite Connector Overview, 5
- Introduction to NetSuite, 6

NetSuite Connector Overview

You can use NetSuite Connector to securely read data from or write data to NetSuite. NetSuite sources and targets represent records in NetSuite. NetSuite records are tables that correspond to the tabs and other user interface elements on the NetSuite web site. For example, the Account record contains information for the fields in the NetSuite Accounts page.

You can create a NetSuite connection and use it in Application Integration processes. You can synchronize the data and easily schedule real-time Application Integration processes.

When you use NetSuite objects in an Application Integration process, you must configure properties specific to NetSuite.

You can work with the following types of NetSuite objects in Application Integration:

Standard objects

The standard object type for NetSuite. Standard objects, such as Accounts and Customer, are packaged within NetSuite.

Custom objects

A standard object that is customized to hold additional data. NetSuite system administrators and users with required permissions can define custom fields for standard records and custom records.

NetSuite Connector supports create, read, update, and delete operations for all default and custom NetSuite objects.

Introduction to NetSuite

NetSuite is the most used cloud enterprise resource planning, or Enterprise Resource Planning (ERP), solution globally. Its ERP system manages core business functions including finance and accounting, inventory, orders and more.

NetSuite enables customers to grow with their business offering flexibility, scalability, and ease of use. NetSuite can deliver significant benefits with real-time insights, streamlined processes, and a 360-degree view of performance across any business. It helps global businesses with features like multiple languages, currencies, and tax compliance. This facilitates international expansion and ensures regulatory compliance for businesses operating on a global scale.

CHAPTER 2

NetSuite connections

This chapter includes the following topics:

- NetSuite connections overview, 7
- Basic connection properties, 9
- NetSuite connection properties, 10
- NetSuite connection metadata, 10
- Using a NetSuite connection in a process, 11
- Rules and guidelines for NetSuite connections, 12

NetSuite connections overview

Create a NetSuite connection to access NetSuite data.

After you create a NetSuite connection, you can validate, test, and save the connection.

You can then publish the NetSuite connection and click the **Metadata** tab to view the generated process objects for the connection.

You can perform CRUD operations such as create, read, update, and delete on existing tables in NetSuite. To publish a NetSuite connection successfully, you must have sufficient roles to access the data in the table specified in the request.

You get an access token to authorize all the connection requests. After you generate the access token once, you can use it for multiple requests such as create, read, update, and delete records from NetSuite for the duration specified in the client credentials. By default, the access_token is set to 60 minutes.

Setting up a NetSuite instance

Before you set up the NetSuite instance, you must enable OAuth 2.0 and generate an OAuth 2.0 certificate.

Enable OAuth 2.0

Perform the following steps to enable OAuth 2.0:

1. Go to **Setup** > **Company** > **Enable Features**.
2. Click the **SuiteCloud** subtab.
3. In the **Manage Authentication** section, agree to the terms for **OAuth 2.0**.

4. Click **Save**.

   Note: The **Manage OAuth 2.0 Authorized Applications** link is available in the Settings portlet for users with the Log in Using OAuth 2.0 Access Token permission. Users can only list their own authorized applications through this link. Administrators and users with the OAuth 2.0 Authorized Applications Management permission can list all authorized applications in the account at **Setup** > **Users/Roles** > **OAuth 2.0 Authorized Applications**.

After you enable OAuth 2.0, you must set up OAuth roles and create integration records for Applications to use OAuth 2.0. For more information, see the Oracle documentation.

Generate OAuth 2.0 certificate

A certificate for the OAuth 2.0 client credentials flow contains the following keys:

- Public key. An administrator or a user with the OAuth 2.0 Authorized Applications Management permission uploads the public part of the certificate during the client credentials flow mapping process.
- Private key. The private key provides the signature of the JWT token in the POST request to the token endpoint. For more information about POST request to the token endpoint, see the Oracle documentation.

You must ensure that the certificate meets the following requirements:

- The public key is in the x.509 format with a file extension of .pem.
- The length of the Elliptic Curve (EC) key must be 256 bits.
- The maximum certificate validity is two years. If the certificate is valid for a longer time period, the system automatically shortens the validity to two years.
- One certificate can be used only for one combination of integration record, role, and entity. If you want to use the same integration record for multiple entities or roles, you must use a different certificate for each unique combination.


For more information, see OAuth 2.0 Client Credentials Setup.

Perform the following steps to generate the OAuth 2.0 certificate:

1. Open command line as administrator.
2. Navigate to `openssl.exe`.
3. Run the following command:

   ```
   openssl req -new -x509 -newkey ec -pkeyopt ec_paramgen_curve:prime256v1 -nodes -days
   365 -out public.pem -keyout private.pem
   ```

4. Enter the required fields or skip them, as required.

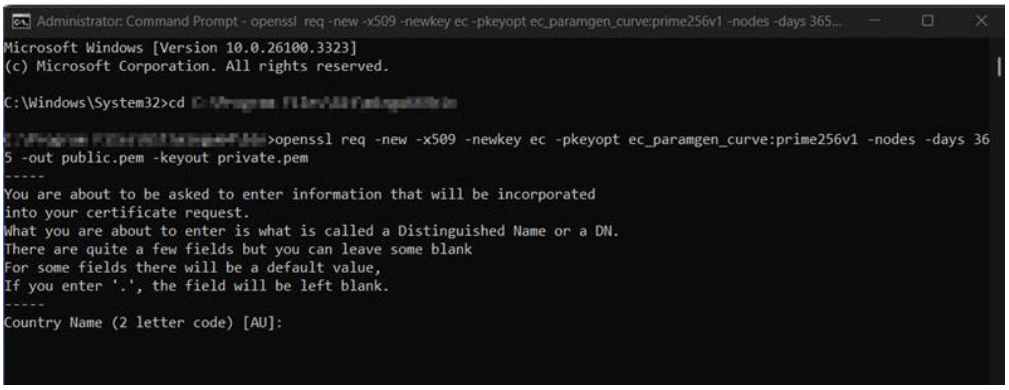

The **public.pem** and **private.pem** files are created in the folder where **openssl** is located.


Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the NetSuite connection. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	Required. The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **NetSuite**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for NetSuite Connector.
OData-Enabled	Not supported for NetSuite Connector.

NetSuite connection properties

The following table defines the NetSuite connection properties that you must configure in the **Connection Properties** section:

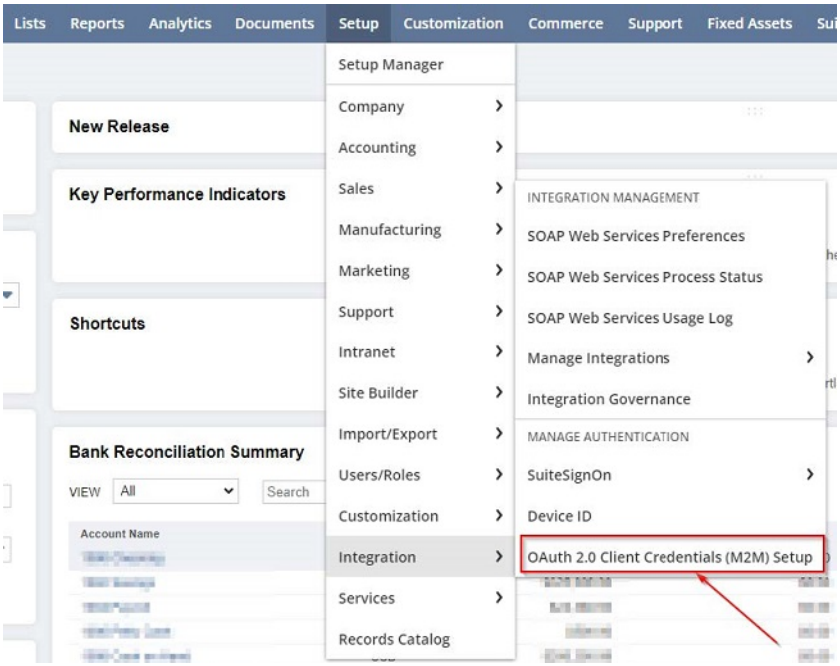Property	Description
Client ID	NetSuite OAuth 2.0 client ID to generate a valid access token. Enter the client ID that you generated from the **Integration** page in NetSuite.
Certificate ID	NetSuite certificate ID that you generated using **OAuth 2.0 Client Credentials**. NetSuite certificate ID that you generated under **Setup** > **Integration** > **Manage Authentication** > **OAuth 2.0 Client Credentials (M2M) Setup** in NetSuite, as shown in the following image: 
Instance URL	NetSuite applications suite instance URL. Enter the instance URL in the following format: `https://[accountid].suitetalk.api.netsuite.com`
Certificate Private Key	NetSuite certificate private key. Enter the PKCS8 certificate as a Base64-encoded string in the following format: `-----BEGIN PRIVATE KEY----- ..... -----END PRIVATE KEY-----`


NetSuite connection metadata

After you create a NetSuite connection, you can validate and save the connection. You can then publish the NetSuite connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a NetSuite connection in Application Integration, a list of **Actions** and **Objects** appears on the **Metadata** tab.

NetSuite actions contain the CRUD operations that you can perform on the NetSuite tables.

The following image shows the **Metadata** tab for a published NetSuite connection:

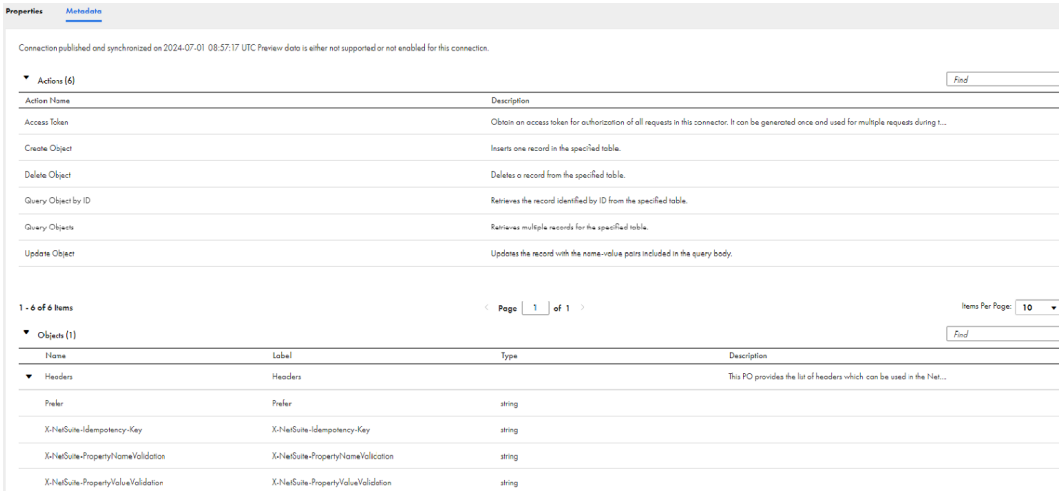


Using a NetSuite connection in a process

After you create a NetSuite connection, you can use it in a Service step in a process.

Perform the following steps to use a NetSuite connection in a process:

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the NetSuite connection that you created.
5. From the **Action** list, select the action that you want to perform on NetSuite Connector. For example, select **Access Token** to authorize the NetSuite REST requests and other connection requests as shown in the following image:

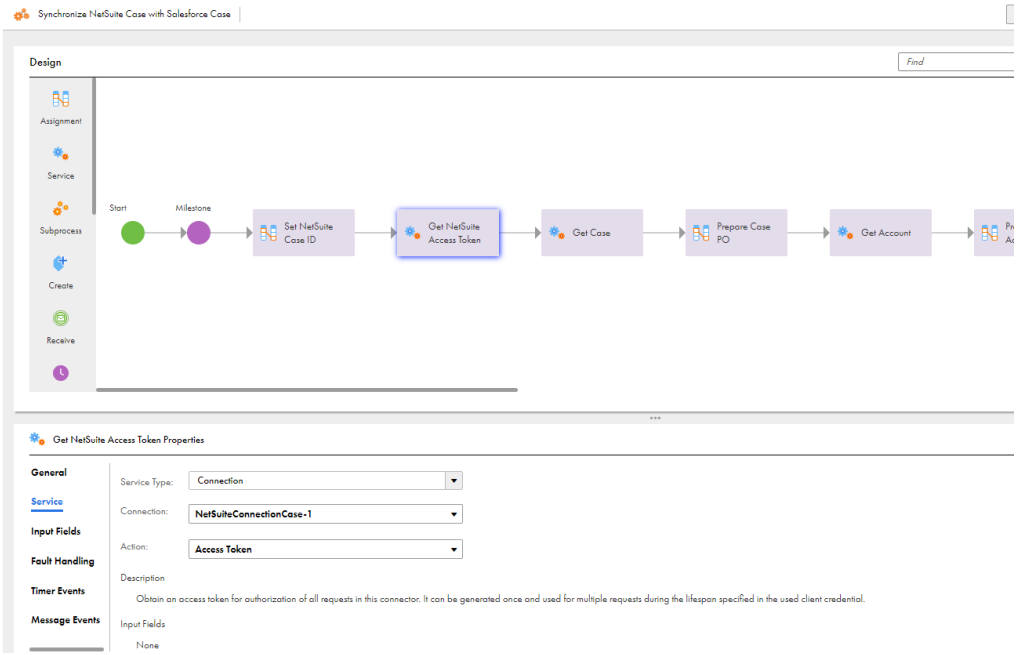

Application Integration populates the **access_token** and **response** object under output fields. The access token enables you to authorize the NetSuite REST requests and all the other connection requests. The access token enables you to authorize all CRUD NetSuite REST requests. Similar to the Access Token and Create Object step, you can configure more service steps as required.

6. Configure further steps as needed.
7. Validate, save, and publish the process.

Rules and guidelines for NetSuite connections

Consider the following preconditions for NetSuite connections:

- Set up Connection Properties before performing create, read, update, and delete operations.
- The access token expires after one hour. If the process using the connection runs longer than one hour, you need to generate a new access token to avoid authentication errors.
- Query Input Field: Enclose the value in double quotes to filter values with special symbols (e.g., email CONTAIN "@").
- Query parameters do not allow filtering on sublist fields, such as addressBook fields (state, city, zip).
- The Fields parameter does not return sublist fields, such as addressBook fields (state, city, zip).

Consider the following rules and guidelines for NetSuite connections:

To handle Array, Integer, Double, and Boolean data types correctly and ensure proper behavior, you must specify annotation attributes in the request as shown in the following sample.

Example of an Array data type:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <field_array m:isArray="true">
        <property_1> ...</property_1>
```

```
    </field_array>
</root>
```

Example of an Integer data type:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <field_integer m:type="xs:int">10</field_integer>
</root>
```

Example of a Double data type:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <field_double m:type="xs:double">20.2</field_double>
</root>
```

Example of a Boolean data type:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <field_boolean m:type="xs:boolean">true</field_boolean>
</root>
```

INDEX

C

connections
NetSuite 5, 6

N

NetSuite Connector
overview 5, 6