Informatica® Cloud Application Integration
April 2025

ServiceNow Connector Guide

Informatica Cloud Application Integration ServiceNow Connector Guide
April 2025

© Copyright Informatica LLC 2024, 2025

Publication Date: 2025-08-30

Table of Contents

Preface 4

Chapter 1: Introduction to ServiceNow Connector 5

ServiceNow Connector 5

Introduction to ServiceNow 5

Chapter 2: ServiceNow connections 6

ServiceNow connections overview 6

Basic connection properties 7

ServiceNow connection properties 7

ServiceNow connection metadata 8

Using a ServiceNow connection in a process 9

Preface

Read the *ServiceNow Connector Guide* to learn how to set up and use ServiceNow connections. Use a ServiceNow connection to securely read data from or write data to ServiceNow by using Application Integration.

CHAPTER 1

Introduction to ServiceNow Connector

This chapter includes the following topics:

- ServiceNow Connector, 5
- Introduction to ServiceNow, 5

ServiceNow Connector

You can use ServiceNow Connector to securely read data from and write data to ServiceNow, and to connect to any cloud application.

You can create a ServiceNow connection and use it in Application Integration processes. You can synchronize the data and easily schedule real-time Application Integration processes.

You can synchronize ServiceNow data with on-premise systems such as SAP, or cloud-based applications such as Salesforce CRM, Microsoft SharePoint, Altassian JIRA, or Microsoft Team Foundation Server (TFS).

ServiceNow Connector supports create, read, update, and delete operations for all default and custom ServiceNow objects.

Introduction to ServiceNow

ServiceNow is a software-as-a-service (SaaS) provider of enterprise service management software.

ServiceNow automates enterprise operations and creates a single system of record for all service management processes within an organization. ServiceNow applications are built on a single platform, which offers a consistent and intuitive user experience through the entire service management lifecycle for services, such as Incident Management, Problem Management, Change Management, User Administration, Configuration Management Database (CMBD), and Service Management.

CHAPTER 2

ServiceNow connections

This chapter includes the following topics:

- ServiceNow connections overview, 6
- Basic connection properties, 7
- ServiceNow connection properties, 7
- ServiceNow connection metadata, 8
- Using a ServiceNow connection in a process, 9

ServiceNow connections overview

Use a ServiceNow connection to securely read data from or write data to ServiceNow using the Table API.

After you create a ServiceNow connection, you can validate, test, and save the connection.

You can then publish the ServiceNow connection and click the **Metadata** tab to view the generated process objects for the connection.

The Table API provides endpoints that allow you to perform CRUD operations such as create, read, update, and delete on existing tables in ServiceNow. However, you cannot perform CRUD operations on the child records of existing child tables. To publish a ServiceNow connection successfully, you must have sufficient roles to access the data in the table specified in the request.

You get an access token to authorize all the connection requests. After you generate the access token once, you can use it for multiple requests such as create, read, update, and delete records from ServiceNow for the duration specified in the client credentials.

For more information about the various actions that you can perform using ServiceNow Connector, see TableAPI in the ServiceNow documentation.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the ServiceNow connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	Optional. The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **ServiceNow**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for ServiceNow Connector.
OData-Enabled	Not supported for ServiceNow Connector.

Along with these basic properties, you must also define the properties applicable to ServiceNow Connector.

ServiceNow connection properties

The following table defines the ServiceNow connection properties that you must configure in the **Connection Properties** section:

Property	Description
Client_ID	The ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client_Secret	The ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User_Name	The ServiceNow active user name that can generate client credentials in the ServiceNow instance.
Password	The password associated with the ServiceNow user account.


Property	Description
Service_URL	The URL to access the ServiceNow instance.
Grant_Type	The grant type that is used by the ServiceNow instance to get an access token for authorizing third-party client. Enter the value as **password**.

ServiceNow connection metadata

After you create a ServiceNow connection, you can validate and save the connection. You can then publish the ServiceNow connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a ServiceNow connection in Application Integration, a list of **Actions** and **Objects** appears on the **Metadata** tab.
ServiceNow actions contain the CRUD operations that you can perform with the TableAPI in ServiceNow.

The following image shows the **Metadata** tab for a published ServiceNow connection:

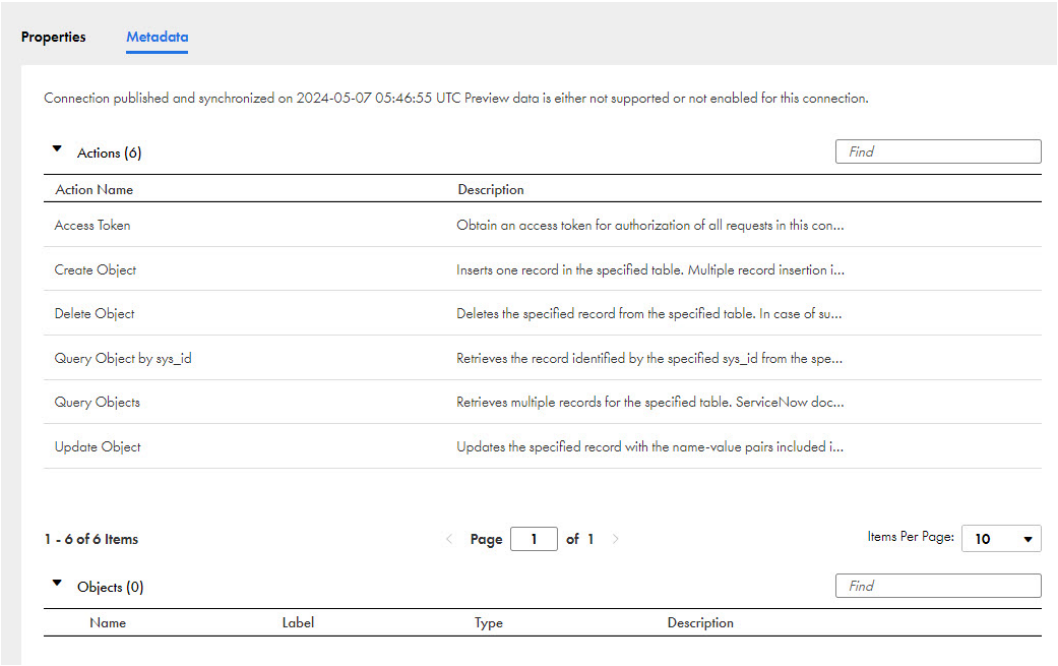


Using a ServiceNow connection in a process

After you create a ServiceNow connection, you can use it in a Service step in a process.

Perform the following steps to use a ServiceNow connection in a process:

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the ServiceNow connection that you created.
5. From the **Action** list, select the action that you want to perform on ServiceNow Connector. For example, select **Access Token** to authorize the ServiceNow REST requests and other connection requests as shown in the following image:

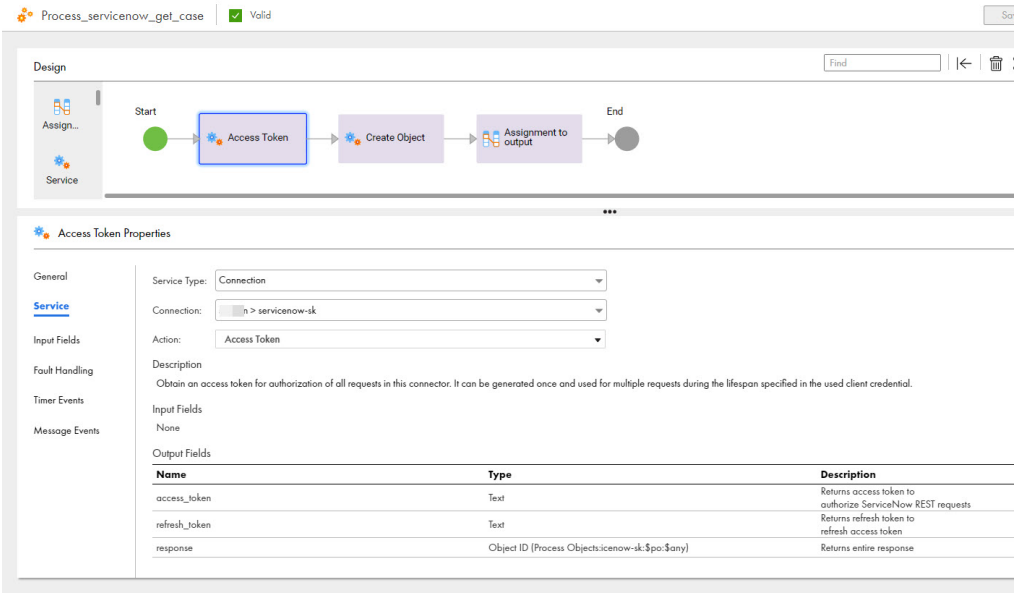

Application Integration populates the **access_token**, **refresh_token**, and **response** object under output fields. The access token enables you to authorize the ServiceNow REST requests and all the other connection requests. You can use the access token to configure further steps, such as create, update, delete, and query objects in ServiceNow. Similar to the Access Token and Create Object step, you can configure more service steps as required.

6. Configure further steps as needed.
7. Validate, save, and publish the process.