Informatica® Cloud Application Integration
April 2025

Shopify Connector Guide

Informatica Cloud Application Integration Shopify Connector Guide
April 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to Shopify Connector 6

Shopify overview 6

Chapter 2: Shopify connections 7

Basic connection properties 7

Shopify connection properties 8

Get a Shopify Admin API access token 8

Shopify connection metadata 9

Shopify connection actions and objects 10

Using a Shopify connection in a process 19

Preface

Read the *Shopify Connector Guide* to learn how to set up and use Shopify connections. Use Shopify Connector to read data from Shopify. This guide assumes that you have an understanding of Shopify concepts.

CHAPTER 1

Introduction to Shopify Connector

Shopify Connector enables seamless integration between Shopify and other applications. It allows businesses to automate workflows, synchronize data, and enhance e-commerce operations. Users can also efficiently manage products, orders, customers, and inventory across platforms.

You can use Shopify Connector for e-commerce automation, CRM and marketing integration, multi-channel selling, and real-time notifications.

Shopify Connector provides the following key features:

- Create, update, and retrieve Shopify orders automatically.
- Keep product listings and stock levels updated across systems.
- Synchronize customer information between Shopify and other platforms.
- Trigger actions based on order status, inventory changes, or customer interactions.
- Ensure consistency across integrated applications.

Shopify overview

Shopify is a leading cloud-based e-commerce platform that enables businesses of all sizes to create, manage, and scale online stores. It offers a comprehensive suite of tools for store customization, product management, payment processing, order fulfillment, and marketing, providing a seamless solution for online selling.

Shopify supports various use cases including online store management, multi-channel selling, automated order processing, customer engagement, and business growth and scalability. Its solutions are designed to meet the needs of small businesses and startups, retail brands, dropshipping businesses, and global enterprises.

CHAPTER 2

Shopify connections

Use Shopify Connector to connect to Shopify from Application Integration and read data. These connections help manage inventory, payments, marketing, customer data, and analytics efficiently.

The Shopify GraphQL Admin API connector can perform GraphQL operations, such as queries and mutations, on existing Shopify resources, such as Shopify objects, media files, and file upload operations.

You can also perform actions, such as fetch, advanced fetch, modify, advanced modify, and upload files objects.

After you create a Shopify connection, you can validate, test, and save the connection.

You can then publish the Shopify connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Shopify connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Shopify**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Shopify Connector.
OData-Enabled	Not supported for Shopify Connector.

Shopify connection properties

To use Shopify, you need the store name, version, and access token to access the Shopify instance.

The following table defines the Shopify connection properties that you must configure in the **Connection Properties** section:

Property	Description
store_name	The unique identifier for a Shopify store. It is a subdomain of the store's `.myshopify.com` domain. For example, if the store's domain is `example-store.myshopify.com`, `example-store` is the store name.
version	The Shopify GraphQL Admin API version. For example, 2025-01.
access_token	The secure credential that is used to authenticate API requests to a Shopify store. You can obtain the access token during the OAuth authentication process when installing an app on a Shopify store.

Get a Shopify Admin API access token

A Shopify API access token is a security credential that allows an application to authenticate itself when making requests to the Shopify API. The Shopify API is a set of web-based protocols and utilities designed to enable developers to programmatically interact with and manipulate data on a Shopify store.

To interact with the Shopify Admin API, you must have an access token for authentication.

To get a Shopify API access token, perform the following steps:

1. Create a Shopify app
2. Configure API scopes
3. Get the API access token

Step 1. Create a Shopify app

1. Log in to the **Shopify Admin** panel.
2. Go to **Settings** > **Apps and sales channels**.
3. Click **Develop apps**.
   If you haven't enabled custom app development, Shopify will prompt you to allow it.
4. Click **Create an app** and provide a name for your app.


Step 2. Configure API scopes

1. Open the newly created app.
2. Go to the **API credentials** tab.
3. Under **Admin API access scopes**, select the permissions required for your app. For example, `read_products` and `write_orders`.
4. Click **Save**.

Step 3. Get the API access token

1. After setting permissions, go to the **API credentials** tab.

2. Under **Admin API access token**, click **Install App**.
   Shopify generates an **Admin API access token** as shown in the following image:

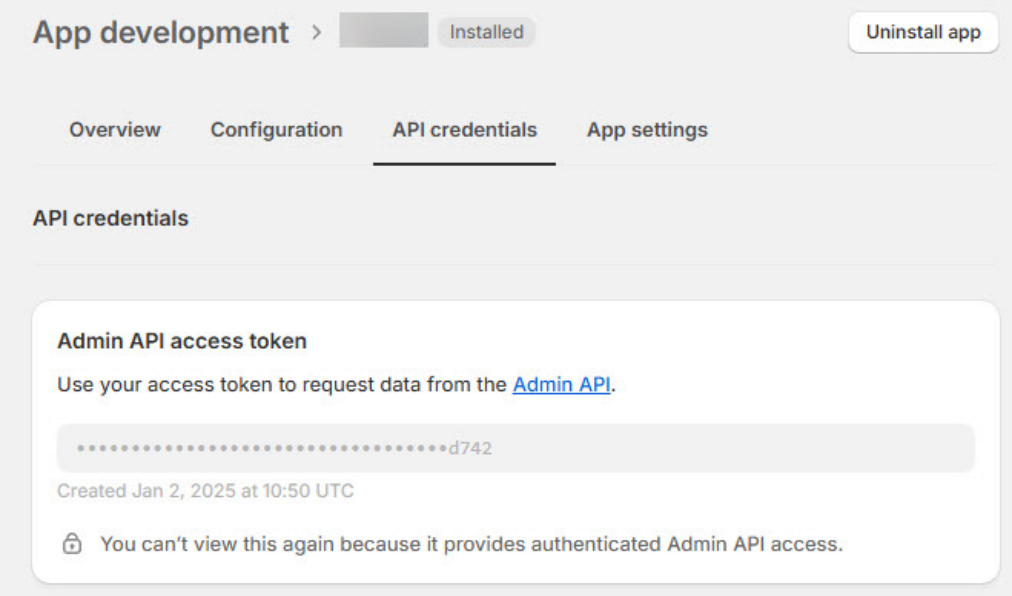


   You can save the Admin API access token for future use.

Shopify connection metadata

After you create a Shopify connection, you can validate and save the connection. You can then publish the Shopify connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Shopify connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Shopify connection:

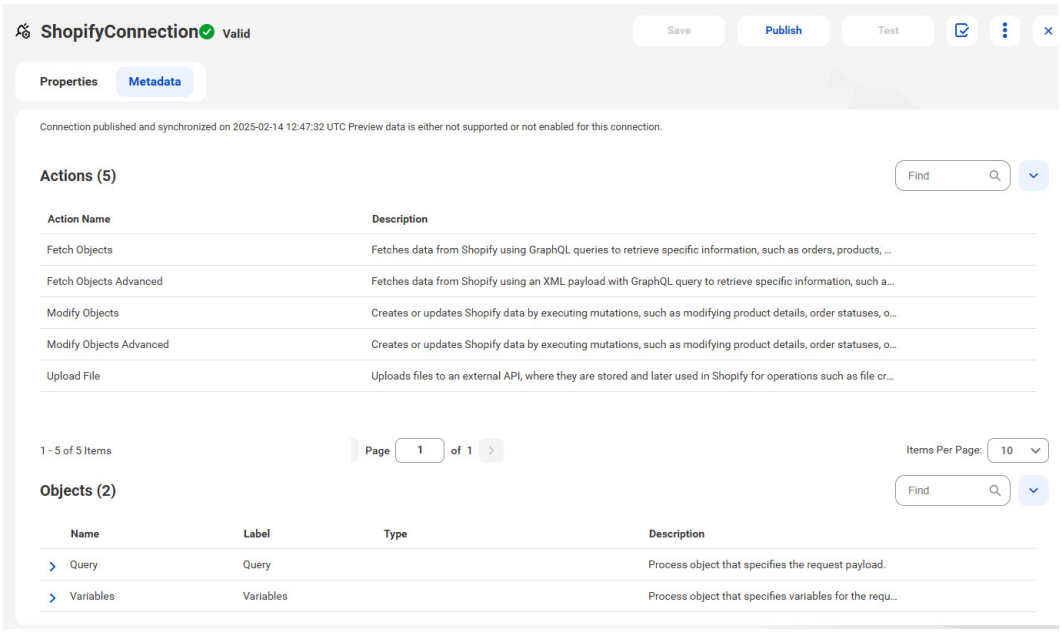

Shopify connection actions and objects

When you publish a Shopify connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

Consider the following information when you use specific actions and objects:

- The **Advanced Fetch Objects** action fetches data from Shopify using an XML payload with a GraphQL query to retrieve specific information, such as orders, products, or customers. It is similar to **Query Objects**, however, it requires an XML-formatted request body instead of JSON.
  The following snippet is a sample request body:

```
<root>
<query>query {{ orders(first: 10, query: "created_at:&gt;2025-1-25") {{ edges {{ node
{{ id createdAt updatedAt }} }} }} }}</query>
</root>
```

  The following snippet is a sample request body with variables:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<query>query orders($first: Int, $query: String) {{ orders(first: $first, query:
$query) {{ edges {{ node {{ id createdAt updatedAt }} }} }} }}
</query>
<variables>
<first m:type="xs:int">10</first>
<query>created_at:&gt;2025-1-25</query>
</variables>
</root>
```

  The following snippet is a sample response:

```
{
    "data": {
        "orders": {
            "edges": [
                {
                    "node": {
                        "updatedAt": "2025-01-27T11:18:41Z",
                        "id": "gid://shopify/Order/6536052572445",
```

```
                        "createdAt": "2025-01-27T11:18:40Z"
                    }
                },
                {
                    "node": {
                        "updatedAt": "2025-01-27T14:50:57Z",
                        "id": "gid://shopify/Order/6536220377373",
                        "createdAt": "2025-01-27T14:50:56Z"
                    }
                },
                {
                    "node": {
                        "updatedAt": "2025-01-28T08:55:21Z",
                        "id": "gid://shopify/Order/6537230254365",
                        "createdAt": "2025-01-28T08:55:20Z"
                    }
                }
            ]
        }
    },
    "extensions": {
        "cost": {
            "requestedQueryCost": "6",
            "actualQueryCost": "4",
            "throttleStatus": {
                "currentlyAvailable": "1996",
                "maximumAvailable": "2000",
                "restoreRate": "100"
            }
        }
    }
}
```


- The **Advanced Modify Objects** action creates or updates Shopify data by executing mutations, such as modifying product details, order statuses, or customer information, using an XML payload with a GraphQL query. It executes GraphQL mutation requests using an XML payload. It is similar to **Modify Objects**, however, it requires an XML-formatted request body instead of JSON. This is useful for systems that prefer XML over JSON.
  The following snippet is a sample request body:

```
<root>
<query>mutation {{ productCreate(product: {{title: "Cool socks", productOptions:
[{{name: "Color", values: [{{name: "Red"}}, {{name: "Blue"}}]}}, {{name: "Size",
values: [{{name: "Small"}}, {{name: "Large"}}]}}]}}) {{ product {{ id title options
{{ id name position optionValues {{ id name hasVariants }} }} }} userErrors {{ field
message }} }} }}</query>
</root>
```

  The following snippet is a sample request body with variables:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<query>mutation CreateProductWithOptions($input: ProductInput!)
{{ productCreate(input: $input) {{ product {{ id title options {{ id name position
optionValues {{ id name hasVariants }} }} }} userErrors {{ field message }} }} }}</
query>
<variables>
<input>
<title>Cool gloves</title>
<productOptions m:isArray="true">
<name>Color</name>
<values m:isArray="true">
<name>Red</name>
</values>
<values m:isArray="true">
<name>Blue</name>
</values>
</productOptions>
<productOptions m:isArray="true">
<name>Size</name>
<values m:isArray="true">
```

```
<name>Small</name>
</values>
<values m:isArray="true">
<name>Large</name>
</values>
</productOptions>
</input>
</variables>
</root>
```

The following snippet is a sample response:

```
{
    "data": {
        "productCreate": {
            "product": {
                "title": "Cool socks",
                "id": "gid://shopify/Product/9731439198493",
                "options": [
                    {
                        "position": "1",
                        "name": "Color",
                        "optionValues": [
                            {
                                "hasVariants": "true",
                                "name": "Red",
                                "id": "gid://shopify/ProductOptionValue/
4580599955741"
                            },
                            {
                                "hasVariants": "false",
                                "name": "Blue",
                                "id": "gid://shopify/ProductOptionValue/
4580599988509"
                            }
                        ],
                        "id": "gid://shopify/ProductOption/12238988345629"
                    },
                    {
                        "position": "2",
                        "name": "Size",
                        "optionValues": [
                            {
                                "hasVariants": "true",
                                "name": "Small",
                                "id": "gid://shopify/ProductOptionValue/
4580600021277"
                            },
                            {
                                "hasVariants": "false",
                                "name": "Large",
                                "id": "gid://shopify/ProductOptionValue/
4580600054045"
                            }
                        ],
                        "id": "gid://shopify/ProductOption/12238988378397"
                    }
                ]
            },
            "userErrors": ""
        }
    },
    "extensions": {
        "cost": {
            "requestedQueryCost": "12",
            "actualQueryCost": "12",
            "throttleStatus": {
                "currentlyAvailable": "1988",
                "maximumAvailable": "2000",
                "restoreRate": "100"
            }
```

```
        }
    }
}
```

You must escape special characters inside values as shown in the following table:

Special characters	Escape with
<	<
>	>
{	{{
}	}}
&	&

To use fields with data types, such as array, boolean, double, or integer, you must use an annotation as shown in the following sample code:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<field_array m:isArray="true">
<property_1> ...</property_1>
</field_array>
<field_boolean m:type="xs:boolean">true</field_boolean>
<field_double m:type="xs:double">10.3</field_double>
<field_integer m:type="xs:int">5</field_integer>
</root>
```

- The **Fetch Objects** action fetches data from Shopify using GraphQL queries to retrieve specific information, such as orders, products, or customers. It executes GraphQL query requests using a JSON payload. The request body must contain a valid GraphQL query formatted in JSON.
  The following snippet is a sample request body:

```
{ "query": "query { orders(first: 10, query: \"created_at:>2025-1-25\") { edges
{ node { id createdAt updatedAt } } } }" }
If variables need to be used, the requestBody payload should look like this:
{
   "query": "query orders($first: Int, $query: String) { orders(first: $first, query:
$query) { edges { node { id createdAt updatedAt } } } }",
   "variables": {
     "first": 3,
     "query": "created_at:>2025-1-25"
   }
}
```

  The following snippet is a sample response:

```
<root>
   <extensions>
      <cost>
         <throttleStatus>
            <restoreRate>100</restoreRate>
            <currentlyAvailable>1996</currentlyAvailable>
            <maximumAvailable>2000</maximumAvailable>
         </throttleStatus>
         <requestedQueryCost>4</requestedQueryCost>
         <actualQueryCost>4</actualQueryCost>
      </cost>
   </extensions>
   <data>
      <orders>
         <edges>
            <node>
               <createdAt>2025-01-27T11:18:40Z</createdAt>
```

```
                <id>gid://shopify/Order/6536052572445</id>
                <updatedAt>2025-01-27T11:18:41Z</updatedAt>
             </node>
          </edges>
          <edges>
             <node>
                <createdAt>2025-01-27T14:50:56Z</createdAt>
                <id>gid://shopify/Order/6536220377373</id>
                <updatedAt>2025-01-27T14:50:57Z</updatedAt>
             </node>
          </edges>
          <edges>
             <node>
                <createdAt>2025-01-28T08:55:20Z</createdAt>
                <id>gid://shopify/Order/6537230254365</id>
                <updatedAt>2025-01-28T08:55:21Z</updatedAt>
             </node>
          </edges>
       </orders>
    </data>
</root>
```

Note: Special characters inside values, such as quotation marks ("), must be escaped (\"). The **query** field value cannot contain a line break. Otherwise, an error occurs.

- The **Modify Objects** action creates or updates Shopify data by executing mutations, such as updating product details, changing order statuses, or modifying customer information. It executes GraphQL mutation requests using a JSON payload.
  The following snippet is a sample request body:

```
{
"query": "mutation { productCreate(product: {title: \"Cool gloves\", productOptions:
[{name: \"Color\", values: [{name: \"Red\"}, {name: \"Blue\"}]}, {name: \"Size\",
values: [{name: \"Small\"}, {name: \"Large\"}]}]}) { product { id title options { id
name position optionValues { id name hasVariants } } } userErrors { field
message } } }"
}
```

  The following snippet is a sample request body with variables:

```
{
"query": "mutation CreateProductWithOptions($input: ProductInput!)
{ productCreate(input: $input) { product { id title options { id name position
optionValues { id name hasVariants } } } userErrors { field message } } }",
"variables" : {
    "input": {
        "title": "Cool gloves",
        "productOptions": [
          {
            "name": "Color",
            "values": [
              {"name": "Red"},
              {"name": "Blue"}
            ]
          },
          {
            "name": "Size",
            "values": [
              {"name": "Small"},
              {"name": "Large"}
            ]
          }
        ]
    }
  }
}
```

  The following snippet is a sample response:

```
{
  "data": {
```

```
    "productCreate": {
      "product": {
        "title": "Cool gloves",
        "id": "gid://shopify/Product/9727927714077",
        "options": [
          {
            "position": "1",
            "name": "Color",
            "optionValues": [
              {
                "hasVariants": "true",
                "name": "Red",
                "id": "gid://shopify/ProductOptionValue/4572342026525"
              },
              {
                "hasVariants": "false",
                "name": "Blue",
                "id": "gid://shopify/ProductOptionValue/4572342059293"
              }
            ],
            "id": "gid://shopify/ProductOption/12234878517533"
          },
          {
            "position": "2",
            "name": "Size",
            "optionValues": [
              {
                "hasVariants": "true",
                "name": "Small",
                "id": "gid://shopify/ProductOptionValue/4572342092061"
              },
              {
                "hasVariants": "false",
                "name": "Large",
                "id": "gid://shopify/ProductOptionValue/4572342124829"
              }
            ],
            "id": "gid://shopify/ProductOption/12234878550301"
          }
        ]
      },
      "userErrors": ""
    }
  },
  "extensions": {
    "cost": {
      "requestedQueryCost": "12",
      "actualQueryCost": "12",
      "throttleStatus": {
        "currentlyAvailable": "1988",
        "maximumAvailable": "2000",
        "restoreRate": "100"
      }
    }
  }
}
```


Note: Special characters inside values, such as quotation marks ("), must be escaped (\"). The **query** field value cannot contain a line break. Otherwise, an error occurs.

- The **Upload Files** action uploads files to an external URL, where the files are stored and later used in Shopify for operations, such as creating files or adding product media. This action uploads files using the parameters returned by the stagedUploadsCreate mutation. A request is sent to stagedUploadsCreate to obtain temporary upload credentials, and then the file is uploaded using those parameters.
  The following snippet is a sample of the stagedUploadsCreate mutation:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<query>mutation stagedUploadsCreate($input: [StagedUploadInput!]!)
{{ stagedUploadsCreate(input: $input) {{ stagedTargets {{ url resourceUrl parameters
{{ name value }} }} }} }}</query>
```

```
<variables>
<input m:isArray="true">
<filename>test.jpg</filename>
<mimeType>image/jpg</mimeType>
<httpMethod>POST</httpMethod>
<resource>IMAGE</resource>
</input>
</variables>
</root>
```

The following snippet is a sample response:

```
{
    "data": {
        "stagedUploadsCreate": {
            "stagedTargets": {
                "resourceUrl": "https://shopify-staged-
uploads.storage.googleapis.com/tmp/91830288669/products/221ae463-1c45-4f5b-9f44-
ea378f103c01/test.jpg",
                "parameters": [
                    {
                        "name": "Content-Type",
                        "value": "image/jpg"
                    },
                    {
                        "name": "success_action_status",
                        "value": "201"
                    },
                    {
                        "name": "acl",
                        "value": "private"
                    },
                    {
                        "name": "key",
                        "value": "tmp/91830288669/products/221ae463-1c45-4f5b-9f44-
ea378f103c01/test.jpg"
                    },
                    {
                        "name": "x-goog-date",
                        "value": "20250203T175505Z"
                    },
                    {
                        "name": "x-goog-credential",
                        "value": "merchant-assets@shopify-
tiers.iam.gserviceaccount.com/20250203/auto/storage/goog4_request"
                    },
                    {
                        "name": "x-goog-algorithm",
                        "value": "GOOG4-RSA-SHA256"
                    },
                    {
                        "name": "x-goog-signature",
                        "value":
"a8f9db54283dd3aa2b0682935f3fc7816ae5e46fa714d21125caa3d70bdf5b75a48ea7999b653147e6678
9a5d212ed8c71d2885925b9d83ee000f177148fa28c2435cbf070dc3c13e9e91bb5d0c8a4529a6a56c4ead
2b6107f438d8cd314a906d8ab3f69fbd12393c8f73c07dd81f4708e0327379a79f165b487ccc6f6bc1ea41
5f2b5468542185e3191cfa0ea7c1892c0fc01979f1d9362f6264bb03b1c45eb59a1f710b188f6517ca84cf
f60ad1e25b2e340418c7beec5697780f292d3ab2433fc7c9927d64c725cfa8088fcde6828edc9dbd5c14b7
aecd3abbb6af2bcb99a7df2354e28b44848968b3b7ab6ed546adb1b1dfe5fd577ce08ca034b4f6f4a08"
                    },
                    {
                        "name": "policy",
                        "value":
"eyJjb25kaXRpb25zIjpbeyJDb250ZW50LVR5cGUiOiJpbWFnZVwvanBnIn0seyJzdWNjZXNzX2FjdGlvbl9zd
GF0dXMiOiIyMDEifSx7ImFjbCI6InByaXZhdGUifSxbImNvbnRlbnQtbGVuZ3RoLXJhbmdlIiwxLDIwOTcxNTI
wXSx7ImJ1Y2tldCI6InNob3BpZnktc3RhZ2VkLXVwbG9hZHMifSx7ImtleSI6InRtcFwvOTE4MzAyODg2NjlcL
3Byb2R1Y3RzXC8yMjFhZTQ2My0xYzQ1LTRmNWItOWY0NC1lYTM3OGYxMDNjMDFcL3Rlc3QuanBnIn0seyJ4LWd
vb2ctZGF0ZSI6IjIwMjUwMjAzVDE3NTUwNVoifSx7IngtZ29vZy1jcmVkZW50aWFsIjoibWVyY2hhbnQtYXNzZ
XRzQHNob3BpZnktdGllcnMuaWFtLmdzZXJ2aWNlYWNjb3VudC5jb21cLzIwMjUwMjAzXC9hdXRvXC9zdG9yYWd
lXC9nb29nNF9yZXF1ZXN0In0seyJ4LWdvb2ctYWxnb3JpdGhtIjoiR09PRzQtUlNBLVNIQTI1NiJ9XSwiZXhwa
XJhdGlvbiI6IjIwMjUtMDItMDRUMTc6NTU6MDVaIn0="
```

```
                    }
                ],
                "url": "https://shopify-staged-uploads.storage.googleapis.com/"
            }
        }
    },
    "extensions": {
        "cost": {
            "requestedQueryCost": "11",
            "actualQueryCost": "11",
            "throttleStatus": {
                "currentlyAvailable": "1989",
                "maximumAvailable": "2000",
                "restoreRate": "100"
            }
        }
    }
}
```

Enter the field values from the stagedUploadsCreate response and attach the file for upload.

The following snippet is a sample of the file upload response:

```
<PostResponse>
   <Location>https://storage.googleapis.com/shopify-staged-uploads/tmp/91830288669/
products/221ae463-1c45-4f5b-9f44-ea378f103c01/test.jpg</Location>
   <Bucket>shopify-staged-uploads</Bucket> i
   <Key>tmp/91830288669/products/221ae463-1c45-4f5b-9f44-ea378f103c01/test.jpg</Key>
   <ETag>"6b75954c15f7fed43b8dbeeaf091caff"</ETag>
</PostResponse>
```

The following snippet is a sample of the stagedUploadsCreate mutation with the video file:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<query>mutation stagedUploadsCreate($input: [StagedUploadInput!]!)
{{ stagedUploadsCreate(input: $input) {{ stagedTargets {{ url resourceUrl parameters
{{ name value }} }} }} }}</query>
<variables>
<input m:isArray="true">
<filename>test.mp4</filename>
<mimeType>video/mp4</mimeType>
<resource>VIDEO</resource>
            <fileSize>702231</fileSize>
</input>
</variables>
</root>
```

The following snippet is a sample of a video file upload response:

```
{
    "data": {
        "stagedUploadsCreate": {
            "stagedTargets": {
                "resourceUrl": "https://shopify-video-production-core-
originals.storage.googleapis.com?external_video_id=42058667",
                "parameters": [
                    {
                        "name": "GoogleAccessId",
                        "value": "video-production@video-
production-225115.iam.gserviceaccount.com"
                    },
                    {
                        "name": "key",
                        "value": "c/o/v/74717c3362734849bdcb63d5657e7254.mp4"
                    },
                    {
                        "name": "policy",
                        "value":
"eyJjb25kaXRpb25zIjpbWyJlcSIsIiRidWNrZXQiLCJzaG9waWZ5LXZpZGVvLXByb2R1Y3Rpb24tY29yZS1vc
mlnaW5hbHMiXSxbImVxIiwiJGtleSIsImMvby92Lzc0NzE3YzMzNjI3MzQ4NDliZGNiNjNkNTY1N2U3MjU0Lm1
wNCJdLFsiY29udGVudC1sZW5ndGgtcmFuZ2UiLDcwMjIzMSw3MDIyMzFdXSwiZXhwaXJhdGlvbiI6IjIwMjUtM
DItMDRUMTM6MTU6NThaIn0="
                    },
```

```
                    {
                        "name": "signature",
                        "value":
"NECjI7NoxOAlJOetjwnNNR0B50DivgcGAX581Q3aNeK3DOl4qWiVHozbHuEUn8r+qBgHA6m7YZGNoYqi
+d3y8n5OBdboTTgrBAKS02xtTfyhu/hw0zLpUif78UBEw+wv9t15j
+dV08uMsNWrI0HW2UBJ9yyqo3EtBFBjCCGIN2MaMhLR/
BQfClT2RB2NrIuOpYb3k4IQIC9WXqeXuij0xF9PbDjGen6YUjlA
+aPZduiUKqFRrOOXrhAYk8ggmADKq2reFkXWGI7P2aFLXEjAIdRWAqDImmNaO/YKoob
+4YLJY4shdtojtzePP8PeLJ/WhGHXUvsm0gTzl2Y0xDrJXg=="
                    }
                ],
                "url": "https://shopify-video-production-core-
originals.storage.googleapis.com"
            }
        }
    },
    "extensions": {
        "cost": {
            "requestedQueryCost": "11",
            "actualQueryCost": "11",
            "throttleStatus": {
                "currentlyAvailable": "1989",
                "maximumAvailable": "2000",
                "restoreRate": "100"
            }
        }
    }
}
```


Enter the field values from the stagedUploadsCreate response and attach the file for upload.

The response contains only the status code 204 without any content. Therefore, you must save the resourceUrl parameter from the stagedUploadsCreate response as a link to the uploaded video file.

For example, the next step could be to use the fileCreate mutation to add this file to Shopify Admin as shown in the following snippet:

```
<root>
<query>mutation fileCreate($files: [FileCreateInput!]!) {{ fileCreate(files: $files)
{{ files {{ id fileStatus alt createdAt }} }} }}</query>
<variables>
<files>
<alt>Test video upload</alt>
<contentType>VIDEO</contentType>
<originalSource> https://shopify-video-production-core-
originals.storage.googleapis.com/?external_video_id=42057131</originalSource>
</files>
</variables>
</root>
```

The following snippet is a sample response:



```
{
    "data": {
        "fileCreate": {
            "files": {
                "alt": "Test video upload",
                "fileStatus": "UPLOADED",
                "id": "gid://shopify/Video/52421481005341",
                "createdAt": "2025-02-04T16:31:34Z"
            }
        }
    },
    "extensions": {
        "cost": {
            "requestedQueryCost": "20",
            "actualQueryCost": "20",
            "throttleStatus": {
                "currentlyAvailable": "1980",
                "maximumAvailable": "2000",
                "restoreRate": "100"
            }
```

```
        }
    }
}
```

Using a Shopify connection in a process

After you create a Shopify connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Shopify connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Modify Objects** action to create or update Shopify data by executing mutations, such as modifying product details, order statuses, or customer information as shown in the following image:

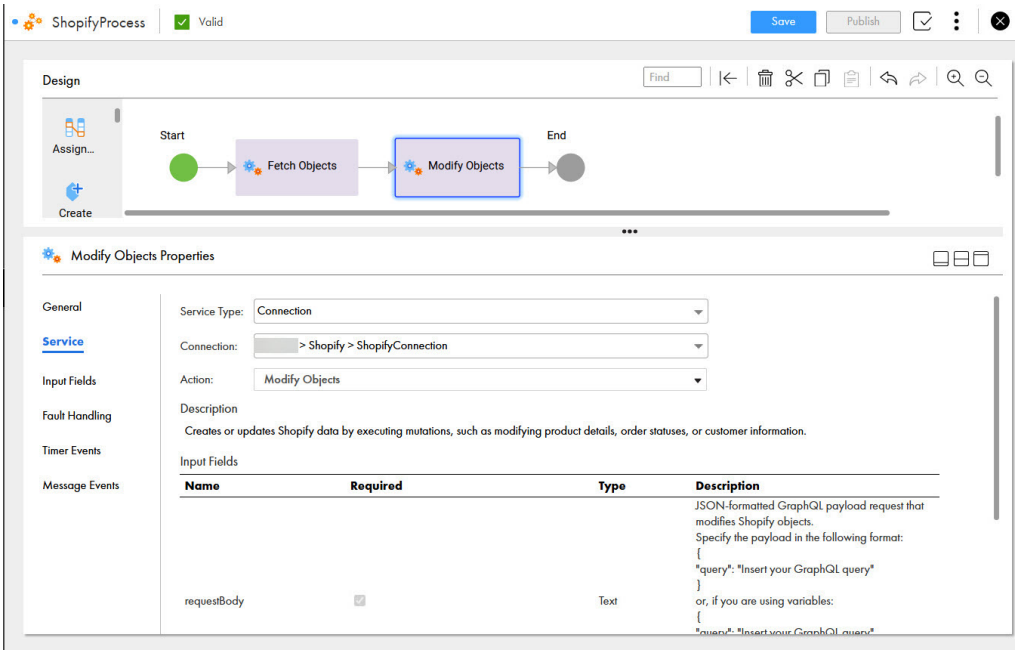

   In this case, Application Integration populates the **requestBody** object under the input fields and the **responseBody** object under the output fields.
6. Configure further steps as needed.
7. Validate, save, and publish the process.