Informatica® Cloud Application Integration
April 2025

Veeva Connector Guide

Informatica Cloud Application Integration Veeva Connector Guide
April 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to Veeva Connector 6

Veeva overview 6

Chapter 2: Veeva connections 7

Basic connection properties 7

Veeva connection properties 8

Veeva connection metadata 8

Veeva connection actions and objects 9

Using a Veeva connection in a process 13

Preface

Read the *Veeva Connector Guide* to learn how to set up and use Veeva connections. This guide assumes that you have an understanding of Veeva concepts.

CHAPTER 1

Introduction to Veeva Connector

Use Veeva Connector to facilitate seamless data exchange between Veeva systems and other enterprise platforms.

The Veeva Connector simplifies integrating Veeva systems with external applications, ensuring efficient workflows and accurate data synchronization. You can use Veeva Connector for pharmaceutical sales, clinical trials, and regulatory submissions.

Veeva Connector provides the following key features:

- Streamlines data flow between Veeva Vault and other systems like ERP, analytics tools, and marketing platforms.
- Reduces manual effort by automating data transfers, updates, and synchronization tasks.
- Maintains regulatory compliance by adhering to industry standards such as 21 CFR Part 11 and GDPR.
- Enables real-time data synchronization to ensure consistency across platforms.
- Supports custom configurations to align with specific business processes and workflows.

Veeva overview

Veeva is a leading provider of cloud-based software for the life sciences industry. It offers solutions for customer relationship management (CRM), content management, and regulatory compliance.

Veeva specializes in applications that help organizations streamline operations, manage content, maintain compliance, and drive customer engagement. Its offerings cater to the pharmaceutical, biotech, medical device industries, and other related sectors.

Application Integration currently supports the Veeva Vault component. Veeva Vault is a cloud-based enterprise content management (ECM) platform. It is used for managing documents, workflows, and processes in a compliant and secure manner.

CHAPTER 2

Veeva connections

Use a Veeva connection to enable seamless integration between Veeva and other enterprise systems, applications, and tools.

You can use the Veeva Vault REST APIs for programmatic access to Vault data. You can also perform CRUD operations, such as create, read, update, and delete, on existing Veeva resources, such as Vault Objects and Documents.

You can also perform the following actions:

- Get session ID and version list
- Create object, update object, delete object, and retrieve objects
- Create object attachment and submit query

After you create a Veeva connection, you can validate, test, and save the connection.

You can then publish the Veeva connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Veeva connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Veeva**.

Property	Description
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Veeva Connector.
OData-Enabled	Not supported for Veeva Connector.

Veeva connection properties

To use Veeva, you need the instance domain and Vault REST API version to access the Veeva instance.

The following table defines the Veeva connection properties that you must configure in the **Connection Properties** section:


Property	Description
InstanceDomain	The instance domain address that is assigned to your Veeva Vault account.
Version	The Vault REST API version.
Username	The Vault user name assigned by your administrator.
Password	The Vault password associated with your assigned Vault user name.

Veeva connection metadata

After you create a Veeva connection, you can validate and save the connection. You can then publish the Veeva connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Veeva connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Veeva connection:

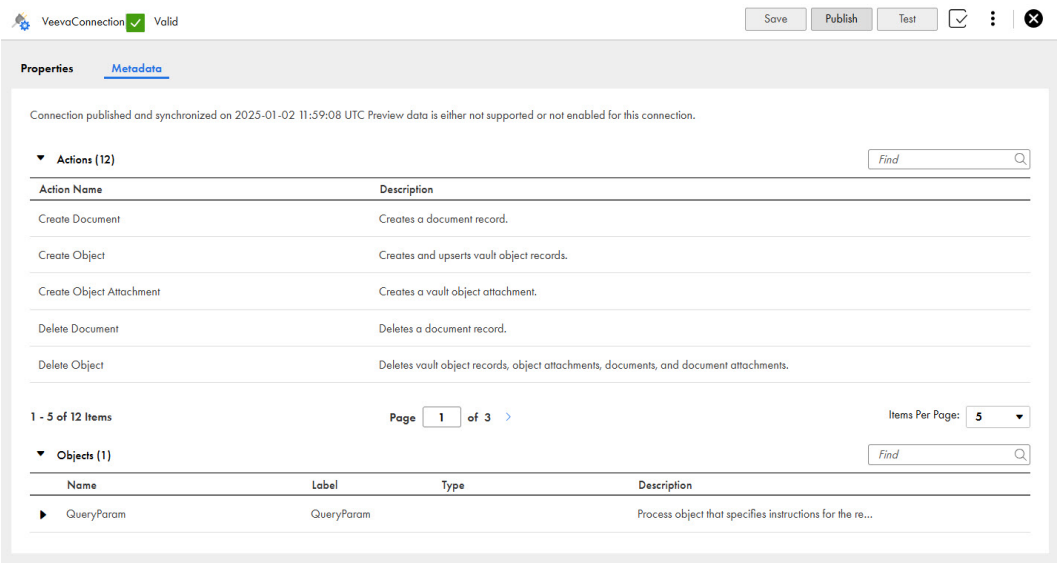

Veeva connection actions and objects

When you publish a Veeva connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

Consider the following information when you use specific actions and objects:

- The **Get Session ID** action authenticates the account using your Vault user name and password to get a Vault session ID. The action returns a `SessionId` that is required to authenticate subsequent Veeva Connector actions.
  The following snippet is a sample response:

  ```
  <VersionedAuthRestResult xmlns:rest="http://schemas.activebpel.org/REST/2007/12/01/
  aeREST.xsd">
  <responseStatus>SUCCESS</responseStatus>
  <sessionId>C22891F9D8F97B053A96A85FD45A07B2470E7159EB6295172FF719A04FB3425BFC807375F4D
  238E01723D71C693D457693B07017FF8</sessionId>
  <userId>22222</userId>
  <vaultIds>
  <vault>
  <id>22222</id>
  <name>vaultcrm01</name>
  <url>https://domain.veevavault.com/api</url>
  </vault>
  </vaultIds>
  <vaultId>222222</vaultId>
  </VersionedAuthRestResult>
  ```

  Note: If you enter an invalid user name or password in the connection properties and test the connection, the `responseStatus` value is returned as `FAILURE`. However, the `statusCode` value is returned as `200` irrespective of the HTTP response status. This is the default Veeva behavior. You must read the response status value, `SUCCESS` or `FAILURE`, to learn about the connection status. If the response status is FAILURE, you must handle the failure issue while configuring the Application Integration process.
- The **Get Version List** action retrieves a list of supported versions of the Vault REST API.
  To retrieve a list of supported versions, specify the `SessionId` to authenticate the request.

The following snippet is a sample response:

```
<MapRestResult xmlns:rest="http://schemas.activebpel.org/REST/2007/12/01/aeREST.xsd">
<responseStatus>SUCCESS</responseStatus>
<values>
<v23.1>https://vvtechpartner-informatica.veevavault.com/api/v23.1</v23.1>
<v23.2>https://vvtechpartner-informatica.veevavault.com/api/v23.2</v23.2>
<v23.3>https://vvtechpartner-informatica.veevavault.com/api/v23.3</v23.3>
<v24.1>https://vvtechpartner-informatica.veevavault.com/api/v24.1</v24.1>
<v24.2>https://vvtechpartner-informatica.veevavault.com/api/v24.2</v24.2>
<v24.3>https://vvtechpartner-informatica.veevavault.com/api/v24.3</v24.3>
</values>
</MapRestResult>
```

- The **Retrieve Objects** action retrieves objects, vault object records, documents, attachments, and object metadata.
  To use this action, specify the following details:
  - SessionId to authenticate the request.
  - Entity type and required segments to construct a proper GET URL according to the Veeva documentation.
  - QueryParam input field to specify URL query key-value pairs.
  - Accept the input field to specify the content type of the request according to the Veeva documentation. Default is `application/json`.

  The following snippet is a sample response:

```
<root>
<metadata>
<objects>
<name>state</name>
<description>Lifecycle State</description>
<properties>
<name>name v</name>
<type>string</type>
</properties>
<properties>
<minValue>1</minValue>
<onCreateEditable>true</onCreateEditable>
<maxValue>60</maxValue>
<editable>true</editable>
<name>label_v</name>
<description>Lifecycle state name</description>
<type>string</type>
<required>true</required>
</properties>
</objects>
</metadata>
<responseStatus>SUCCESS</responseStatus>
<responseMessage>Success</responseMessage>
</root>
```

- The **Create Object** action creates and upserts vault object records. You must use the entity type and segments to construct the correct URL request.
  The following snippet is a sample of the Create Object action's rawData input field:

```
<root>
<records>
<id>604</id>
<minor_version_number__v>1</minor_version_number__v>
<major_version_number____v>0</major_version_number____v>
</records>
</root>
```

  The following snippet is a sample response:

```
<root>
<job_id>131513</job_id>
```

```
<responseStatus>SUCCESS</responseStatus>
<url>/api/v24.2/services/jobs/131513</url>
</root>
```

- The **Update Object** action updates Vault object records and attachment descriptions. You must use the entity type and segments to construct the correct URL request.
  The following snippet is a sample response:

```
<root>
<data>
<data>
<id>VAL000000003044</id>
<url>/api/v24.2/vobjects/product_v/VAL000000003044</url>
</data>
<responseStatus>SUCCESS</responseStatus>
</data>
<responseStatus>SUCCESS</responseStatus>
</root>
```

- The **Delete Object** action deletes vault object records, object attachments, documents, and document attachments. You must use the entity type and segments to construct the correct URL request.
  The following snippet is a sample of the Delete Object action's rawData input field:

```
<root>
<records>
<id>VAL000000003044</id>
</records>
</root>
```

  The following snippet is a sample response:

```
<root>
<data>
<data>
<id>VAL000000003044</id>
</data>
<responseStatus>SUCCESS</responseStatus>
</data>
<responseStatus>SUCCESS</responseStatus>
</root>
```

- The **Create Object Attachment** action creates a vault object attachment. You must use the entity type and segments to construct the correct URL request and the file field to specify the attachment.
  The following snippet is a sample response:

```
<root>
<data>
<version__v>1</version__v>
<id>622</id>
</data>
<responseStatus>SUCCESS</responseStatus>
</root>
```

- The **Post Object with Form** action posts a vault object using x-www-form-urlencoded Content-Type.
  The following snippet is a sample response:

```
<DocumentPropertiesRestResult xmlns:rest="http://schemas.activebpel.org/REST/
2007/12/01/aeREST.xsd">
<responseStatus>SUCCESS</responseStatus>
<properties>
<property>
<name>batch_number_v</name>
<scope>DocumentVersion</scope>
<type>ObjectReference</type>
<required>false</required>
<repeating>true</repeating>
<systemAttribute>true</systemAttribute>
<editable>true</editable>
<setOnCreateOnly>false</setOnCreateOnly>
<disabled>false</disabled>
<objectType>batch__v</objectType>
```

```
<label>Batch Number</label>
</property>
</properties>
</DocumentPropertiesRestResult>
```

- The **Submit Query** action sends a query with the object to query, the fields to retrieve from that object, and the filters to determine whether a given object must be queried.
  The action constructs and executes queries using Vault Query Language (VQL). You must use the `paginationId`, `pagesize`, and `pageoffset` input fields for pagination.

  The following snippet is a sample of the Submit Query action's `q` input field:

  ```
  SELECT id FROM product__v PAGESIZE 5 PAGEOFFSET 10
  ```

  The following snippet is a sample response:

  ```
  <VqlQueryRestResult xmlns:rest="http://schemas.activebpel.org/REST/2007/12/01/
  aeREST.xsd">
  <warnings>
  <warning>
  <type>MANUAL_PAGINATION</type>
  <message>Manual pagination detected. Use previous_page/next_page instead.</message>
  </warning>
  </warnings>
  <responseDetails>
  <next_page>/api/v24.2/query/ced263f0-91f7-4129-afa3-e5867c544171?
  pagesize=2&pageoffset=15</next_page>
  <pageoffset>10</pageoffset>
  <pagesize>5</pagesize>
  <previous_page>/api/v24.2/query/ced263f0-91f7-4129-afa3-e5867c544171?
  pagesize=5&pageoffset=5</previous_page>
  <size>5</size>
  <total>39</total>
  </responseDetails>
  <data>
  <row>
  <id>VAL000000008005</id>
  </row>
  <row>
  <id>VAL000000008006</id>
  </row>
  </data>
  </VqlQueryRestResult>
  ```

- The **Create Document** action creates a Veeva document record using the .csv file as an attachment.
  The following snippet is a sample response:

  ```
  <IdRestResult xmlns:rest="http://schemas.activebpel.org/REST/2007/12/01/aeREST.xsd">
  <responseStatus>SUCCESS</responseStatus>
  <responseMessage>successfully created document</responseMessage>
  <id>623</id>
  </IdRestResult>
  ```

- The **Update Document** action updates a Veeva document record. You must specify values for the fields to be updated.
  The following snippet is a sample response:

  ```
  <root>
  <id>623</id>
  <responseStatus>SUCCESS</responseStatus>
  </root>
  ```

- The **Delete Document** action deletes a Veeva document record. You must specify the `document_id` field of the document to be deleted.
  The following snippet is a sample response:

  ```
  <root>
  <id>623</id>
  <responseStatus>SUCCESS</responseStatus>
  </root>
  ```


Fields such as `Accept` and `ContentType` are used to specify the corresponding request headers. Fields such as `entityType`, `segment1`,..., and `segment8` are commonly used to construct the action URLs that are available in the corresponding API requests.

For more information about the fields, API requests, and required attributes for different objects, see the Veeva documentation.

Using a Veeva connection in a process

After you create a Veeva connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Veeva connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Get Version List** action to retrieve a list of supported versions of the Vault REST API as shown in the following image:

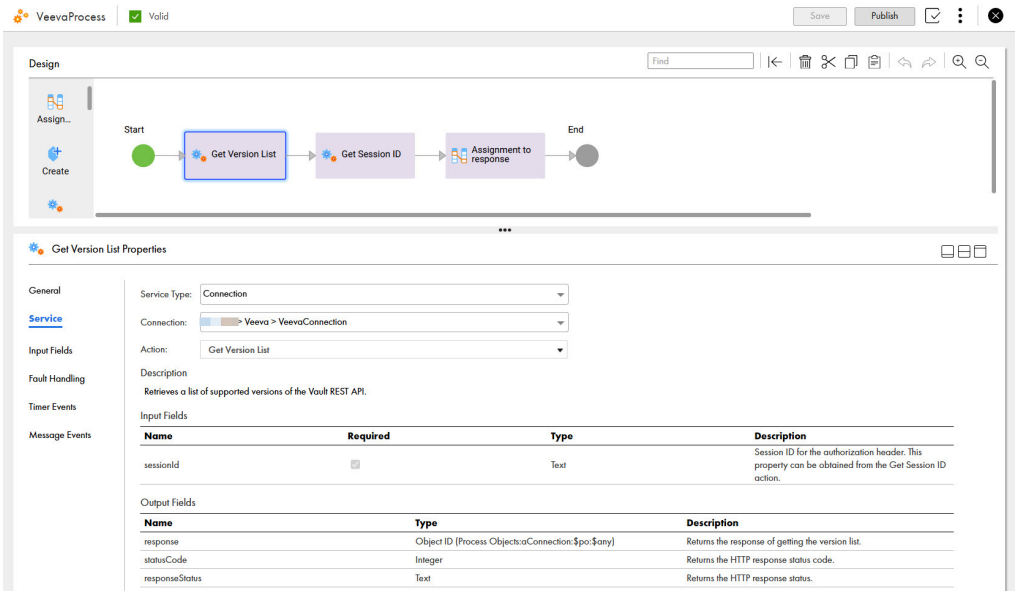

   In this case, Application Integration populates the **sessionId** object under the input fields and **response**, **statusCode**, and **responseStatus** objects under the output fields.
6. Configure further steps as needed.
7. Validate, save, and publish the process.