Informatica® Cloud Application Integration
April 2025

Zendesk Connector Guide

Informatica Cloud Application Integration Zendesk Connector Guide
April 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to Zendesk Connector 6

Zendesk overview 6

Chapter 2: Zendesk connections 7

Basic connection properties 7

Zendesk connection properties 8

Generate API token 8

Zendesk connection metadata 9

Zendesk connection actions and objects 10

Using a Zendesk connection in a process 13

Preface

Read the *Zendesk Connector Guide* to learn how to set up and use Zendesk connections. Use a Zendesk connection to read data from or write data to Zendesk. This guide assumes that you have an understanding of Zendesk concepts.

CHAPTER 1

Introduction to Zendesk Connector

Use Zendesk Connector to facilitate seamless integration between Zendesk and other applications. It allows businesses to automate workflows, synchronize data, and enhance customer support processes.

You can efficiently manage tickets, contacts, and interactions across platforms with Zendesk Connector.

Zendesk Connector streamlines customer support operations, improving efficiency, reducing response times, and ensuring a seamless support experience. You can use Zendesk Connector for customer support automation, help desk optimization, and real-time notifications.

Zendesk Connector provides the following key features:

- Create, update, and retrieve Zendesk tickets automatically.
- Manage customer and organization data efficiently.
- Automate workflows based on ticket updates or customer interactions.
- Ensure real-time data consistency across integrated applications.

Zendesk overview

Zendesk is a cloud-based customer service platform that enhances customer relationships and optimizes support operations. It enables businesses to manage customer interactions across multiple channels, including email, chat, phone, and social media.

With features such as ticketing, automation, reporting, and self-service, Zendesk empowers organizations to deliver efficient, personalized customer experiences. It supports various use cases, including customer support, help desk management, sales and engagement, and self-service solutions.

Zendesk is designed for customer service, support, and sales teams across industries, helping businesses improve response times and streamline workflows.

CHAPTER 2

Zendesk connections

Use Zendesk Connector to connect to Zendesk from Application Integration. With the Zendesk connection, you can read data from Zendesk and write data back to Zendesk. Additionally, you can use it to integrate data with other applications and databases.

You can perform CRUD operations, such as create, read, update, and delete, on existing Zendesk resources, such as Tickets, Accounts, Organizations, and Custom Objects.

You can also perform actions, such as creating, deleting, retrieving, and updating objects.

After you create a Zendesk connection, you can validate, test, and save the connection.

You can then publish the Zendesk connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Zendesk connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Zendesk**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Zendesk Connector.
OData-Enabled	Not supported for Zendesk Connector.

Zendesk connection properties

To use Zendesk, you need the email address to authenticate requests, API token, and instance domain to access the Zendesk instance.

The following table defines the Zendesk connection properties that you must configure in the **Connection Properties** section:


Property	Description
Email	Zendesk user's email address to authenticate requests.
Api_Token	Zendesk API token to authenticate requests. You can generate this value on the Zendesk Admin page.
Instance_Domain	The instance domain of Zendesk. Enter the instance domain in the following format: `https://{domain}.zendesk.com`

Generate API token

Generate an API token to connect to Zendesk through an API.

To generate an API token, you must be an administrator with API token access enabled in your account.


1. Log in to your Zendesk account.
2. Go to **Admin** > **Admin Center**.
3. Click **Apps and integrations** and select **APIs** > **Zendesk API**.
   The following image shows the Zendesk API option in the Apps and integrations section:

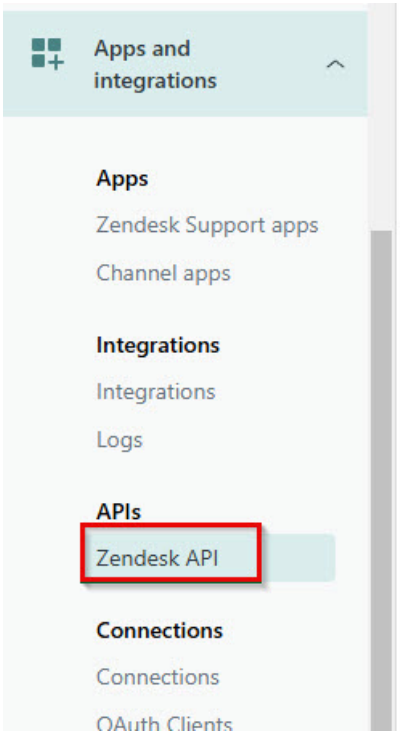

4. On the **Settings** tab, click **Add API token** next to **Active API tokens**.

The token is generated and displayed.

The following image shows the Zendesk API token:

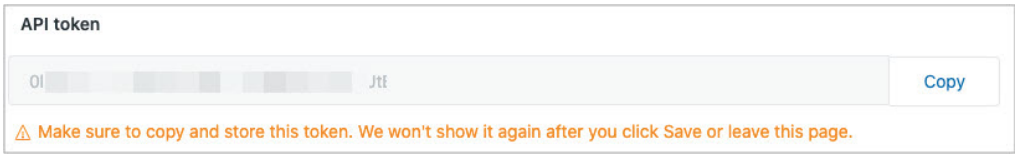


5. Optionally, enter a description for the API token.
6. Click **Copy**.
7. Click **Save**.

Zendesk connection metadata

After you create a Zendesk connection, you can validate and save the connection. You can then publish the Zendesk connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Zendesk connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Zendesk connection:

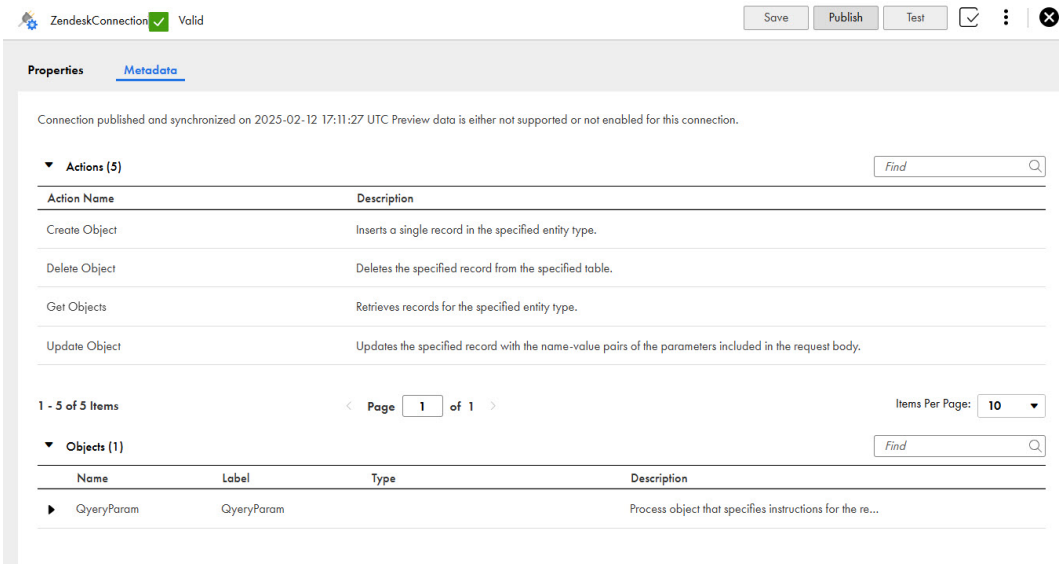

Zendesk connection actions and objects

When you publish a Zendesk connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

To use input field payload with data types, such as array, boolean, double, or integer, you must use annotation as shown in the following sample code:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<field_array m:isArray="true">
<property_1>... </property_1>
</field_array>
<field_boolean m:type="xs:boolean">true</field_boolean>
<field_double m:type="xs:double">20.2</field_double>
<field_integer m:type="xs:int">10</field_integer>
</root>
```

Consider the following information when you use specific actions and objects:

- The **Create Object** action creates a single record of the specified entity type.
  The following snippet is a sample request payload to create a single ticket:

  ```
  <root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
  <ticket>
  <subject>My laptop is broken</subject>
  <description>Keyboard buttons have no effect</description>
  <comments>
  <value>Escape btn doesn't work</value>
  </comments>
  </ticket>
  </root>
  ```

  The following snippet is a sample response payload example of the created ticket:

  ```
  <root>
     <ticket>
        <encoded_id>VVEYX4-DDWEE</encoded_id>
        <from_messaging_channel>false</from_messaging_channel>
        <subject>My laptop is broken</subject>
        <email_cc_ids/>
        <created_at>2025-02-07T00:26:45Z</created_at>
        <description>Keyboard buttons have no effect</description>
        <custom_status_id>13206351</custom_status_id>
        <external_id/>
        <type/>
        <via>
           <channel>api</channel>
           <source>
              <rel/>
              <from/>
              <to/>
           </source>
        </via>
        <allow_attachments>true</allow_attachments>
        <updated_at>2025-02-07T00:26:45Z</updated_at>
        <problem_id/>
        <follower_ids/>
        <due_at/>
        <id>69947</id>
        <generated_timestamp>0</generated_timestamp>
        <assignee_id/>
        <raw_subject>My laptop is broken</raw_subject>
        <forum_topic_id/>
        <custom_fields>
           <id>1900001016587</id>
           <value/>
        </custom_fields>
        <custom_fields>
           <id>5313441454221</id>
  ```

```
            <value/>
         </custom_fields>
         <allow_channelback>false</allow_channelback>
         <satisfaction_rating>
            <score>unoffered</score>
         </satisfaction_rating>
         <submitter_id>363369298572</submitter_id>
         <priority/>
         <collaborator_ids/>
         <url>https://d3v-infacloud.zendesk.com/api/v2/tickets/69947.json</url>
         <tags/>
         <brand_id>360000485092</brand_id>
         <ticket_form_id>360000143632</ticket_form_id>
         <sharing_agreement_ids/>
         <group_id/>
         <organization_id>360044286132</organization_id>
         <followup_ids/>
         <recipient/>
         <is_public>true</is_public>
         <has_incidents>false</has_incidents>
         <fields>
            <id>1900001016587</id>
            <value/>
         </fields>
         <fields>
            <id>5313441454221</id>
            <value/>
         </fields>
         <status>new</status>
         <requester_id>363369298572</requester_id>
      </ticket>
      <audit>
         <created_at>2025-02-07T00:26:45Z</created_at>
         <id>34106895877517</id>
         <ticket_id>69947</ticket_id>
         <author_id>363369298572</author_id>
         <events>
            <audit_id>34106895877517</audit_id>
            <attachments/>
            <public>true</public>
            <html_body>&lt;div class="zd-comment" dir="auto"&gt;&lt;p
dir="auto"&gt;Keyboard buttons have no effect&lt;/p&gt;&lt;/div&gt;</html_body>
            <plain_body>Keyboard buttons have no effect</plain_body>
            <id>34106895877645</id>
            <type>Comment</type>
            <body>Keyboard buttons have no effect</body>
            <author_id>363369298572</author_id>
         </events>
         <via>
            <channel>api</channel>
            <source>
               <rel/>
               <from/>
               <to/>
            </source>
         </via>
      </audit>
   </root>
```


- The **Delete Object** action deletes a single object for the specified entity type and entity ID.
  For example, to delete the ticket with ID 69947, you must set the entityType as tickets and entityId as 69947 as shown in the following URL:

  ```
  https://{domain}.zendesk.com/api/v2/tickets/69947
  ```

  If the object is deleted successfully, the object returns the response status code 204 without content.
- The **Get Objects** action retrieves records for the specified entity type. You can construct a request URL using segments 1- 6. You can also pass query parameters to the action using the queryParams object.

The following snippet is a sample response to the query ticket by ID:

```
<root>
    <tickets>
        <encoded_id>N36MXW-YG5M</encoded_id>
        <from_messaging_channel>false</from_messaging_channel>
        <subject>Test Ticket</subject>
        <email_cc_ids/>
        <created_at>2018-04-20T09:46:12Z</created_at>
        <description>This is a test ticket IGNORE</description>
        <custom_status_id>13206391</custom_status_id>
        <external_id/>
        <type>incident</type>
        <via>
            <channel>api</channel>
            <source>
                <rel/>
                <from/>
                <to/>
            </source>
        </via>
        <allow_attachments>true</allow_attachments>
        <updated_at>2018-04-20T09:46:12Z</updated_at>
        <problem_id/>
        <follower_ids/>
        <due_at/>
        <id>335</id>
        <generated_timestamp>1524217572</generated_timestamp>
        <assignee_id/>
        <raw_subject>Test Ticket</raw_subject>
        <forum_topic_id/>
        <custom_fields>
            <id>1900000951887</id>
            <value/>
        </custom_fields>
        <custom_fields>
            <id>5313441454221</id>
            <value/>
        </custom_fields>
        <status>open</status>
        <requester_id>363369298572</requester_id>
    </tickets>
    <count>69143</count>
    <previous_page/>
</root>
```

- The **Update Object** action updates the specified record with the name-value pairs of the parameters included in the request body.
  The following snippet is a sample request payload to update a single ticket:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <ticket>
        <external_id>1234</external_id>
    </ticket>
</root>
```

  The following snippet is a sample response to the update ticket action:


```
<root>
    <ticket>
        <encoded_id>VVEYX4-DDWEE</encoded_id>
        <from_messaging_channel>false</from_messaging_channel>
        <subject>My laptop is broken</subject>
        <email_cc_ids/>
        <created_at>2025-02-07T00:26:45Z</created_at>
        <description>Keyboard buttons have no effect</description>
        <custom_status_id>13206351</custom_status_id>
        <external_id>1234</external_id>
        <type/>
        <via>
            <channel>api</channel>
            <source>
```

```
                <rel/>
                <from/>
                <to/>
            </source>
        </via>
        <allow_attachments>true</allow_attachments>
        <updated_at>2025-02-07T00:47:27Z</updated_at>
        <problem_id/>
        <follower_ids/>
        <due_at/>
        <id>69947</id>
        <generated_timestamp>1738888005</generated_timestamp>
        <assignee_id/>
        <raw_subject>My laptop is broken</raw_subject>
        <forum_topic_id/>
        <custom_fields>
            <id>1900001016587</id>
            <value/>
        </custom_fields>
        <custom_fields>
            <id>5313441454221</id>
            <value/>
        </custom_fields>
        <allow_channelback>false</allow_channelback>
        <satisfaction_rating>
            <score>unoffered</score>
        </satisfaction_rating>
        <submitter_id>363369298572</submitter_id>
        <priority/>
        <collaborator_ids/>
        <url>https://d3v-infacloud.zendesk.com/api/v2/tickets/69947.json</url>
        <tags/>
        <brand_id>360000485092</brand_id>
        <ticket_form_id>360000143632</ticket_form_id>
        <sharing_agreement_ids/>
        <group_id/>
        <organization_id>360044286132</organization_id>
        <followup_ids/>
        <recipient/>
        <is_public>true</is_public>
        <has_incidents>false</has_incidents>
        <fields>
            <id>1900001016587</id>
            <value/>
        </fields>
        <status>new</status>
        <requester_id>363369298572</requester_id>
    </ticket>
</root>
```


Using a Zendesk connection in a process

After you create a Zendesk connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Zendesk connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Create Object** action to insert a single record in the specified entity type as shown in the following image:

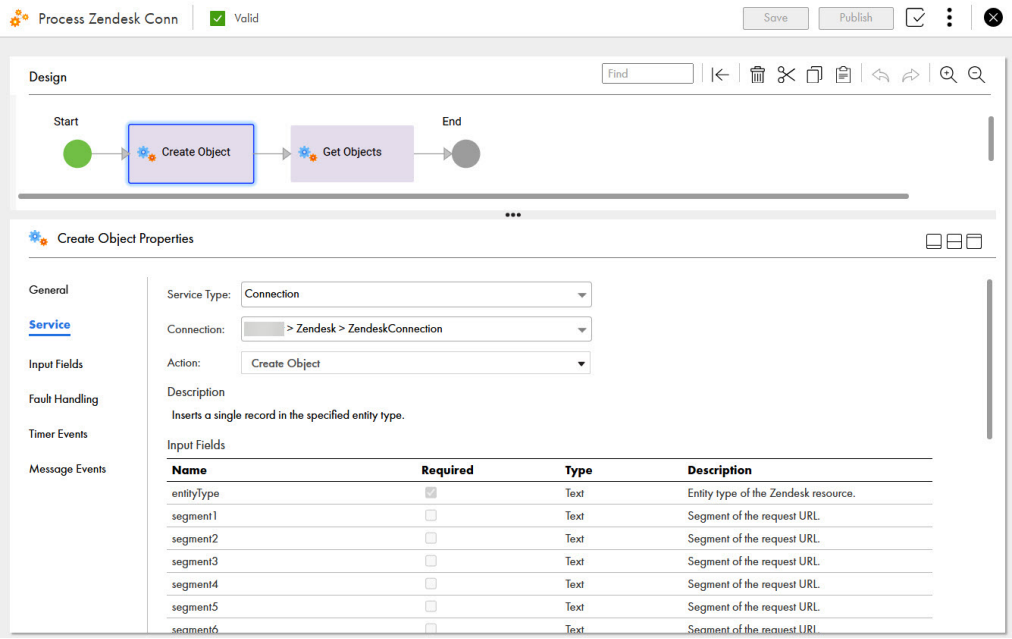

In this case, Application Integration populates the **entityType**, **segment1**, …., **segment6**, **rawData**, and **queryParams** objects under the input fields and the **response** and **statusCode** objects under the output fields.

6. Configure further steps as needed.
7. Validate, save, and publish the process.