Informatica® Cloud Application Integration
April 2025

Zuora Connector Guide

Informatica Cloud Application Integration Zuora Connector Guide
April 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to Zuora Connector 6

Zuora overview 6

Chapter 2: Zuora connections 7

Basic connection properties 7

Zuora connection properties 8

Zuora connection metadata 8

Zuora connection actions and objects 9

Using a Zuora connection in a process 15

Preface

Read the *Zuora Connector Guide* to learn how to set up and use Zuora connections. Use a Zuora connection to securely read data from or write data to Zuora.

CHAPTER 1

Introduction to Zuora Connector

Use Zuora Connector for businesses that operate on subscription-based models. Zuora Connector connects Zuora and other business applications, such as Enterprise Resource Planning (ERP), Customer Relationship Management (CRM), or custom systems. You can use Zuora Connector for subscription management, accounting and financial reconciliation, revenue recognition, customer experience enhancement, and business intelligence.

Zuora Connector provides the following key features:

- Synchronizes data between Zuora and external systems, such as customer accounts, product catalogs, subscription details, and invoices. It ensures real-time or scheduled updates with minimal discrepancies.
- Automates workflows, such as order-to-cash, billing, payment collection, and revenue recognition.
- Provides flexibility for custom integrations through REST or SOAP APIs.
- Provides built-in error reporting and data validation facilities to ensure robust data transfer.
- Supports custom fields, rules, and workflows to meet specific business needs.

Zuora overview

Zuora is a cloud-based subscription management platform that provides businesses with tools to manage the complexities of subscription-based models. Zuora is a leading solution for automating billing, payments, revenue recognition, and subscription lifecycle management.

Zuora provides the following key features:

- Allows businesses to create and iterate pricing models, including usage-based, flat-rate, or hybrid plans.
- Ensures compliance with financial reporting standards.
- Designed for industries such as SaaS, the Internet of Things (IoT), media, and e-commerce.
- Enhances customer experience with self-service portals for managing subscriptions. It also provides personalized communication for renewals, invoices, and upgrades.

CHAPTER 2

Zuora connections

Use a Zuora connection to securely read data from or write data to Zuora.

Zuora Connector contains a variety of entity types. You can perform data manipulation using CRUD operations, such as create, read, update, and delete, on existing Zuora resources, such as Products, Accounts, and Orders.

You can also perform the following actions:

- Get access token
- Create objects, update objects, modify objects, fetch objects, query objects, and delete objects
- Create attachment, update attachment, delete attachment, and get attachments information
- Get file content
- Modify order async and get async job status

After you create a Zuora connection, you can validate, test, and save the connection.

You can then publish the Zuora connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Zuora connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Zuora**.

Property	Description
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Zuora Connector.
OData-Enabled	Not supported for Zuora Connector.

Zuora connection properties

To use Zuora, you need the client ID, client secret, and base URL to access the Zuora instance.

The following table defines the Zuora connection properties that you must configure in the **Connection Properties** section:


Property	Description
client_id	The client ID of the OAuth client that you created in the Zuora UI.
client_secret	The client secret that was generated when the OAuth client was created.
baseURL	The URL to access the Zuora instance. All API requests occur in a test or production environment. Each environment uses a different base URL. For example, the US Developer and Central Sandbox use the base URL rest.test.zuora.com.

Zuora connection metadata

After you create a Zuora connection, you can validate and save the connection. You can then publish the Zuora connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Zuora connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Zuora connection:

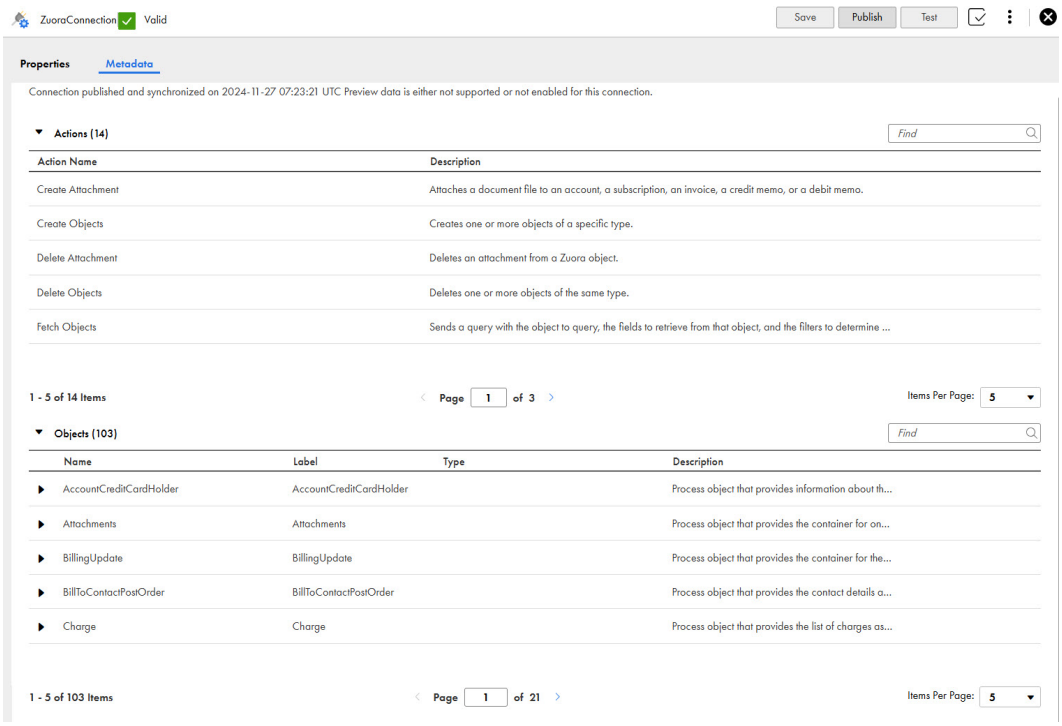

Zuora connection actions and objects

When you publish a Zuora connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

To use the actions, you must specify the required fields in the **headers** input field where necessary.

The following snippet is a sample of the **Create Objects** action:

```
<root>
<Idempotency-Key>Specify the generated Idempotency-Key.</Idempotency-Key>
</root>
```

Consider the following information when you use specific actions and objects:

- The **Get Access Token** action creates a bearer token that enables an OAuth client to authenticate with the Zuora REST API. You must create an OAuth client in the Zuora UI to obtain the client ID and secret before using the Get Access Token action to create an OAuth token.
  You must enter the grant_type input field value as **client_credentials**. Avoid using this operation to generate a large number of bearer tokens in a short period of time. You must use each token until it expires.

  The following snippet is a sample to build a `requestBody` object:

```
<root>
   <access_token>170ca2ab632b4f08823b7d07b65c2615</access_token>
   <scope>service.usage.write service.events.write entity.bfa53c1e-
a283-4471-9ce0-704862d7d81e service.usage.update platform.write
service.notifications.read service.usage.delete service.notifications.write
user.d5321eafec654260b0bafa750687925a service.events.read tenant.10004016</scope>
   <token_type>bearer</token_type>
   <expires_in>3598</expires_in>
```

```
   <jti>170ca2ab632b4f08823b7d07b65c2615</jti>
</root>
```

- The **Create Objects** action creates one or more objects of a specific type. You can specify different types in different create calls, but each create call must apply to only one object type.
  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <type>Product</type>
  <objects>
  <Description>Portable tablet designed for kids' learning with pre-installed
  educational apps and games. </Description>
  <EffectiveEndDate>2034-11-01</EffectiveEndDate>
  <EffectiveStartDate>2024-11-01</EffectiveStartDate>
  <Name>SmartLearn Tablet</Name>
  <SKU>SmartLearnTablet-SKU1</SKU>
  <Category>Base Products</Category>
  </objects>
  </root>
  ```

  The following snippet is a sample response:

  ```
  <root>
  <_1>
  <Id>8a8aa38092f6570f019306a0fd9f06fc</Id>
  <Success>true</Success>
  </_1>
  </root>
  ```

- The **Delete Objects** action deletes one or more objects of the same type. You can specify different types in different delete calls, but each delete call must apply only to one object type.
  The following information applies to this call:

  - You must identify the object IDs that you want to delete.

  - You can't pass null IDs.

  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <type>Product</type>
  <ids>8a8aa38092f6570f019306a0fd9f06fc</ids>
  </root>
  ```

  The following snippet is a sample response:

  ```
  <root>
  <_1>
  <success>true</success>
  <id>8a8aa38092f6570f019306a0fd9f06fc</id>
  </_1>
  </root>
  ```

- The **Fetch Objects** action allows you to fetch objects using Zuora Object Query Language (ZOQL) queries and retrieve additional results. It sends a query with the object to query, the fields to retrieve from that object, and the filters to determine whether a given object must be queried. It also requests additional results from a previous fetch call if it returns more than 2000 results.
  To use this action, specify the fetchObjectType field as a query to send a query expression. You must specify the object to query, the fields to retrieve from that object, and the filters to determine whether a given object must be queried.

  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <queryString>select Name, EffectiveEndDate from Product where Id =
  '8a8aa38092f6570f019306a0fd9f06fc'</queryString>
  </root>
  ```

  If the initial query call returns more than 2000 results, you can use the queryMore value in the fetchObjectType field to query for additional results.

The following snippet is a sample to build a `requestBody` object to query for additional results:

```
<root>
<queryLocator>8a8aa06d932a0b8201932fef8c3a4015-2000</queryLocator>
</root>
```

The following snippet is a sample response:

```
<root>
<size>1</size>
<records>
<EffectiveEndDate>2044-11-01</EffectiveEndDate>
<Id>8a8aa38092f6570f019306a0fd9f06fc</Id>
<Name>SmartLearn Tablet</Name>
</records>
<done>true</done>
</root>
```

- The **Update Objects** action updates the information in one or more objects of a specific type. You can specify different types in different update calls, but each update call must apply to only one object type.
  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <type>Product</type>
  <objects>
  <Id>8a8aa38092f6570f019306a0fd9f06fc</Id>
  <EffectiveEndDate>2044-11-01</EffectiveEndDate>
  </objects>
  </root>
  ```

  The following snippet is a sample response:

  ```
  <root>
  <_1>
  <Id>8a8aa38092f6570f019306a0fd9f06fc</Id>
  <Success>true</Success>
  </_1>
  </root>
  ```

- The **Modify Order** action creates and modifies customer orders, including new subscriptions, amendments, and related charges.
  To create or modify an order specify the requestBody input field.

  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <orderDate>2024-11-07</orderDate>
  <processingOptions>
  <runBilling>true</runBilling>
  <collectPayment>true</collectPayment>
  <billingOptions>
  <targetDate>2024-11-07</targetDate>
  </billingOptions>
  </processingOptions>
  <existingAccountNumber>A00000024</existingAccountNumber>
  <subscriptions>
  <orderActions>
  <type>CreateSubscription</type>
  <triggerDates>
  <name>ContractEffective</name>
  <triggerDate>2024-11-07</triggerDate>
  </triggerDates>
  <triggerDates>
  <name>ServiceActivation</name>
  <triggerDate>2024-11-07</triggerDate>
  </triggerDates>
  <triggerDates>
  <name>CustomerAcceptance</name>
  <triggerDate>2024-11-07</triggerDate>
  </triggerDates>
  <createSubscription>
  <terms>
  ```

```
<initialTerm>
<startDate>2024-11-07</startDate>
<period>12</period>
<periodType>Month</periodType>
<termType>TERMED</termType>
</initialTerm>
<renewalSetting>RENEW_WITH_SPECIFIC_TERM</renewalSetting>
<renewalTerms>
<period>12</period>
<periodType>Month</periodType>
</renewalTerms>
</terms>
<subscribeToRatePlans>
<productRatePlanId>8a3692f28805d79501880999a7971cc8</productRatePlanId>
</subscribeToRatePlans>
</createSubscription>
</orderActions>
</subscriptions>
</root>
```

The following snippet is a sample response:

```
<root>
<orderNumber>O-00000062</orderNumber>
<orderId>244baafa56a92f656ee3071ec53eefe3</orderId>
<invoiceNumbers>INV00000038</invoiceNumbers>
<accountNumber>A00000024</accountNumber>
<subscriptionNumbers>A-S00000035</subscriptionNumbers>
<accountId>8a8aa052927933d801928be9e4324e20</accountId>
<success>true</success>
<subscriptionIds>244baafa56a92f656ee3071ec57cefe7</subscriptionIds>
<paymentId>8a8aa2bb92f657070193071ec7f43352</paymentId>
<paidAmount>3459.69</paidAmount>
<paymentNumber>P-00000036</paymentNumber>
<status>Completed</status>
<invoiceIds>8a8aa14a92d671dc0192d87f676e2ce0</invoiceIds>
</root>
```

- The **Query Objects** action queries objects in your Zuora tenant in an efficient, consistent, and flexible manner.
  You must specify the object type in the queryObjectType field of the objects you want to query, such as products, product-rate-plans, and orders.

  To retrieve the details of a specific object, set an ID or a number for the object.

  The expand input field values, such as productrateplans and productrateplans.productrateplancharges, and filter input field values, such as name.IN:[SmartLearn Tablet] and category.EQ:Base Products, allow you to retrieve related object information in a single call and define the returned response as required. The sort input field value, such as name.ASC, allows you to sort the results in ascending or descending order based on the specified field.

  The following snippet is a sample response:

```
<root>
<effectiveEndDate>2044-11-01</effectiveEndDate>
<description>Portable tablet designed for kids' learning with pre-installed
educational apps and games.</description>
<productNumber>PC-00000021</productNumber>
<updatedDate>2024-11-07T13:36:41Z</updatedDate>
<updatedById>0530b5f1f68142069c6eee8d41fedc37</updatedById>
<createdDate>2024-11-07T13:36:41Z</createdDate>
<effectiveStartDate>2024-11-01</effectiveStartDate>
<name>SmartLearn Tablet</name>
<allowFeatureChanges>false</allowFeatureChanges>
<id> 8a8aa38092f6570f019306a0fd9f06fc </id>
<category>Base Products</category>
<sKU>SmartLearnTablet-SKU1</sKU>
<createdById>0530b5f1f68142069c6eee8d41fedc37</createdById>
</root>
```

- The **Create Attachment** action attaches a document file to an account, a subscription, an invoice, a credit memo, or a debit memo.
  You can specify an associatedObjectType, number or ID of the associatedObjectKey object to which you want to attach a document file and optionally a description.

  The following snippet is a sample response:

  ```
  <root>
  <success>true</success>
  <id>8a8aa2c292f65709019306e5641240ef</id>
  <fileId>8a8aa2c292f65709019306e5640c40ee</fileId>
  </root>
  ```

- The **Get Attachments Information** action retrieves information about an attachment or attachments on an account, an invoice, a subscription, a credit memo, or a debit memo.
  To retrieve the attachment information, specify the attachmentId.

  To get a list of attachments of an account, an invoice, a subscription, a credit memo, or a debit memo, specify the objectType and the number or ID of the objectKey.

  The following snippet is a sample response for retrieving attachment information by attachmentId:

  ```
  <root>
  <fileName>Test.csv</fileName>
  <updatedBy>0530b5f1f68142069c6eee8d41fedc37</updatedBy>
  <createdBy>0530b5f1f68142069c6eee8d41fedc37</createdBy>
  <success>true</success>
  <description>An Attachment for Account</description>
  <updatedOn>2024-11-07 13:51:56</updatedOn>
  <id>8a8aa2c292f65709019306e5641240ef</id>
  <createdOn>2024-11-07 13:51:56</createdOn>
  <fileContentType>text/csv</fileContentType>
  <fileId>8a8aa2c292f65709019306e5640c40ee</fileId>
  </root>
  ```

- The **Get File Content** action retrieves files, such as export results, invoices, and accounting period reports. In the fileId field, specify the ID of the file that you want to retrieve. The response content type depends on the type of file that you retrieve.

- The **Delete Attachment** action deletes an attachment from a Zuora object.
  In the attachmentId field, specify the ID of the attachment that you want to delete.

  The following snippet is a sample response:

  ```
  <root>
     <success>true</success>
  </root>
  ```

- The **Modify Order Async** action creates or modifies an order asynchronously.
  To create or modify an order asynchronously specify the requestBody input field.

  The following snippet is a sample to build a `requestBody` object:

  ```
  <root>
  <orderDate>2024-11-07</orderDate>
  <processingOptions>
  <runBilling>true</runBilling>
  <collectPayment>true</collectPayment>
  <billingOptions>
  <targetDate>2024-11-07</targetDate>
  </billingOptions>
  </processingOptions>
  <existingAccountNumber>A00000024</existingAccountNumber>
  <subscriptions>
  <orderActions>
  <type>CreateSubscription</type>
  <triggerDates>
  <name>ContractEffective</name>
  <triggerDate>2024-11-07</triggerDate>
  </triggerDates>
  <triggerDates>
  ```

```
<name>ServiceActivation</name>
<triggerDate>2024-11-07</triggerDate>
</triggerDates>
<triggerDates>
<name>CustomerAcceptance</name>
<triggerDate>2024-11-07</triggerDate>
</triggerDates>
<createSubscription>
<terms>
<initialTerm>
<startDate>2024-11-07</startDate>
<period>12</period>
<periodType>Month</periodType>
<termType>TERMED</termType>
</initialTerm>
<renewalSetting>RENEW_WITH_SPECIFIC_TERM</renewalSetting>
<renewalTerms>
<period>12</period>
<periodType>Month</periodType>
</renewalTerms>
</terms>
<subscribeToRatePlans>
<productRatePlanId>8a3692f28805d79501880999a7971cc8</productRatePlanId>
</subscribeToRatePlans>
</createSubscription>
</orderActions>
</subscriptions>
</root>
```

The following snippet is a sample response:

```
<root>
   <jobId>8a8aa16b933ef1b70193439219af176f</jobId>
   <success>true</success>
</root>
```

- The **Get Async Job Status** action retrieves the asynchronous job status and response.
  To get the status and response of an asynchronous job, specify an asynchronous jobId.

  The following snippet is a sample response:

```
<root>
   <result>
      <orderNumber>O-00000078</orderNumber>
      <invoiceNumbers>INV00000051</invoiceNumbers>
      <accountNumber>A00000024</accountNumber>
      <subscriptionNumbers>A-S00000050</subscriptionNumbers>
      <paidAmount>154.84</paidAmount>
      <paymentNumber>P-00000050</paymentNumber>
      <status>Completed</status>
   </result>
   <success>true</success>
   <errors/>
   <status>Completed</status>
</root>
```

- The **Update Attachment** action makes changes to the descriptive fields of an attachment, such as the description and the file name.
  You can specify a request body and the attachment ID of the attachment to be updated in the requestBody and the attachmentId fields.

  The following snippet is a sample response:


```
<root>
   <success>true</success>
</root>
```

For more information about the required attributes for different objects, see the Zuora documentation.

Using a Zuora connection in a process

After you create a Zuora connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Zuora connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Create Objects** action to create one or more objects of a specific type as shown in the following image:

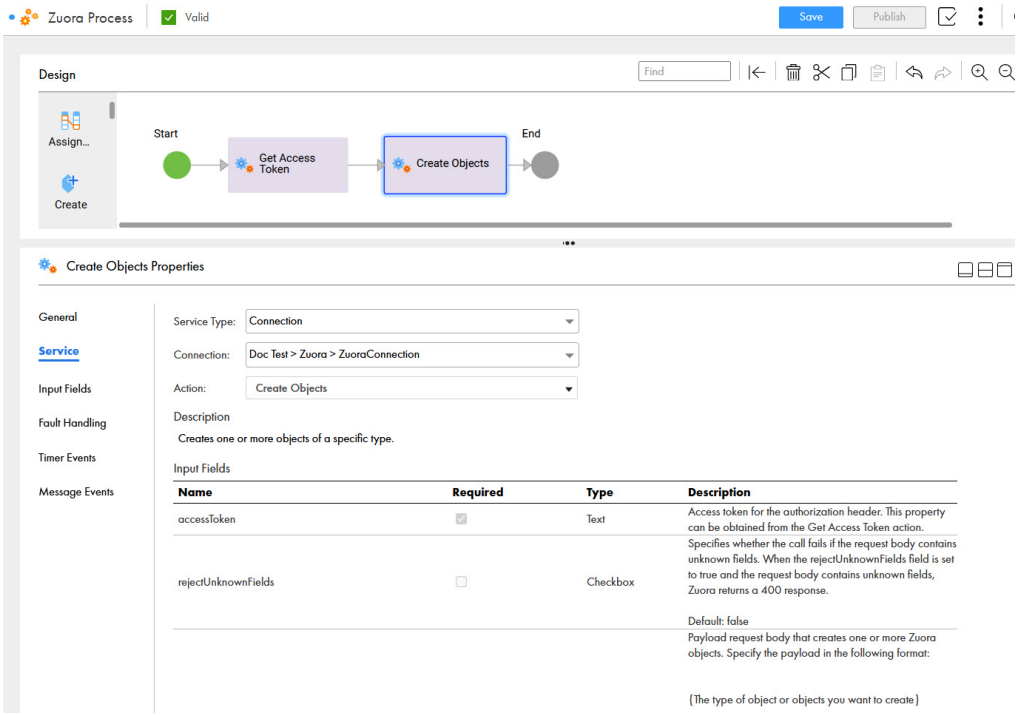

   In this case, Application Integration populates the **access_token**, **rejectUnknownFields**, **requestBody**, and **headers** objects under the input fields and **response** and **statusCode** objects under the output fields.
6. Configure further steps as needed.
7. Validate, save, and publish the process.