Informatica® Cloud Application Integration
May 2025

Slack Connector Guide

Informatica Cloud Application Integration Slack Connector Guide
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-09-03

Table of Contents

Preface 5

Chapter 1: Introduction to Slack Connector 6

Slack overview 6

Chapter 2: Slack connections 7

Basic connection properties 7

Slack connection authentication properties 8

Slack connection properties 9

Slack connection metadata 9

Slack connection actions and objects 10

Using a Slack connection in a process 17

Preface

Read the *Slack Connector Guide* to learn how to set up and use Slack connections. Use a Slack connection to read data from or write data to Slack. This guide assumes that you have an understanding of Slack concepts.

CHAPTER 1

Introduction to Slack Connector

Use Slack Connector to securely read data from and write data to Slack.

The Slack Connector serves as a bridge between Slack and various external applications or services, enabling seamless data exchange and interaction. It can be used to automate tasks, synchronize information, and enhance the functionality of both Slack and connected systems.

Slack Connector provides the following key features:

- Connects Slack to various applications, such as CRM, project management, and customer support. It also supports pre-built integrations and custom API connections.
- Automates repetitive tasks, trigger events based on actions.
- Configures alerts to keep team members updated. Works with updates from both Slack and external applications.
- Keeps data updated between Slack and integrated systems.
- Allows creation of custom commands within Slack. It also executes tasks or retrieves data from connected apps.
- Enables team interaction with data and task execution in Slack.

Slack overview

Slack is a collaboration and messaging platform designed to facilitate communication between teams and organizations.

Slack provides a space where team members can communicate, share files, and integrate with various tools and services to streamline workflows. It enables businesses to manage customer interactions across multiple channels, including email, chat, phone, and social media.

CHAPTER 2

Slack connections

Use Slack Connector to connect to Slack from Application Integration. With the Slack connection, you can read data from Slack and write data back to Slack. Additionally, you can integrate Slack with other applications, services, or tools to enhance functionality and streamline workflows.

You can perform CRUD operations, such as create, read, update, and delete, on existing Slack resources, such as Users, Conversations, and Files.

You can also perform actions, such as fetch and update objects, upload file, add remote file, set user photo, and unfurl message.

After you create a Slack connection, you can validate and save the connection.

You can then publish the Slack connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Slack connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Slack**.
Run On	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.

Property	Description
Connection Test	Not supported for Slack Connector.
OData-Enabled	Not supported for Slack Connector.

After you configure the basic properties, you can define the OAuth2 authentication properties for the Slack connection.

Slack connection authentication properties

When you create a Slack connection, you can configure the connection using OAuth2 authentication properties.

To authenticate the Slack connection using OAuth2 authentication, select **OAuth2** from the **Authentication Type** list and configure the following properties:

Property	Description
Grant Type	Required. Select the required grant type based on your use case.
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://slack.com/oauth/v2/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://slack.com/api/oauth.v2.access` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the OAuth provider.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space.

Property	Description
Session duration	Optional. Enter the number of minutes to wait before refreshing the session. This is used if you cannot obtain the token expiration from the OAuth provider. Default is 60 minutes.
Other Parameters	Optional. Enter parameters to customize the authorization request, separated with semicolons. You can provide extra information or specify requirements of the OAuth provider.
Authorization Status	Optional. Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

For more information about OAuth 2.0, refer to the OAuth documentation.

Note: In the OAuth provider, set the redirect URL to the host of the Application Integration POD in which you create a connection. The redirect URL must contain the `/oauthcallback` string. For example:

```
https://<Informatica Cloud Application Integration
    URL>/oauthcallback
```

Slack connection properties


To use the Slack connection, you need the base URL. Enter the base URL in the **Base_URL** property in the **Connection Properties** section. The base URL connects to the Slack API and sets the primary endpoint for all Slack requests. For example, `https://slack.com/api`.

Slack connection metadata

After you create a Slack connection, you can validate and save the connection. You can then publish the Slack connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Slack connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Slack connection:

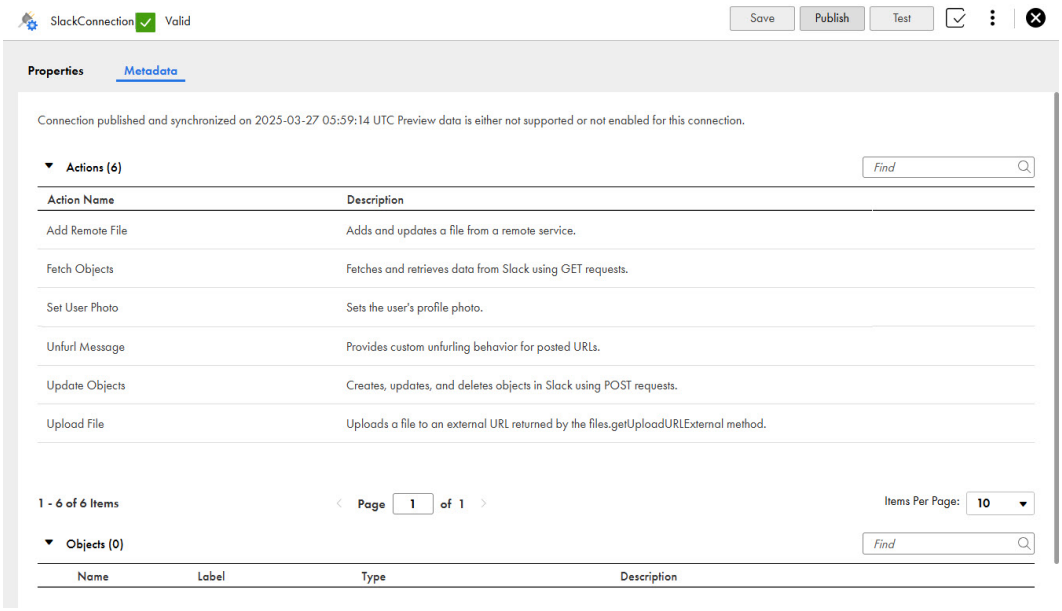

Slack connection actions and objects

When you publish a Slack connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

You must escape special characters in payloads as shown in the following table:

Symbol	Character	Replacement
<	left angle bracket or less than	<
>	right anlge bracket or greater than	>
{	left curly bracket or opening brace	{{
}	right curly bracket or closing brace	}}
&	ampersand	&

Consider the following information when you use specific actions and objects:

- The **Fetch Objects** action fetches and retrieves data from Slack using GET requests or GET Slack web API methods.
  The following example shows how to retrieve a list of conversations using the conversations.list method.

```
Query Parameters Example:
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<team_id>T08FENVBW00</team_id>
<limit m:type="xs:int">2</limit>
</root>
```

The GET requests send all the parameters as URL query parameters, whether they are for sorting, filtering, or any other method-specific requirement. They are included in a single queryParameters field in the payload, and will already be encoded.

The following snippet is a sample response:

```
<root>
   <channels>
    <is_private>false</is_private>
    <purpose>
      <last_set>1740574620</last_set>
      <creator>U08ENPG9HBP</creator>
      <value>This is the random channel, anything goes!</value>
    </purpose>
   ......
   ......
<response_metadata>
    <next_cursor>dGVhbTpDMDhGNzJOUU42OA==</next_cursor>
   </response_metadata>
   <ok>true</ok>
 </root>
```

- The **Update Objects** action creates, updates, and deletes objects in Slack using the POST request or POST Slack Web API methods.
  The following example shows how to use the chat.postMessage method to send a message to the conversation whose ID we retrieved earlier.

  RequestBody:

```
<root>
<channel>C08ERTAC10B</channel>
<team_id>T08FENVBW00</team_id>
<text>Hello World!</text>
</root>
```

  The following snippet is a sample response:

```
<root>
  <channel>C08ERTAC10B</channel>
  <message>
   <bot_profile>
     <deleted>false</deleted>
     <name>PiP App</name>
     <team_id>T08FENVBW00</team_id>
     <id>B08EJK1N2T0</id>
     <icons>
      <image_36>https://a.slack-edge.com/80588/img/plugins/app/bot_36.png</image_36>
      <image_48>https://a.slack-edge.com/80588/img/plugins/app/bot_48.png</image_48>
      <image_72>https://a.slack-edge.com/80588/img/plugins/app/service_72.png</
image_72>
     </icons>
     <app_id>A08ENRX7XTP</app_id>
     <updated>1740409976</updated>
   </bot_profile>
   <blocks>
     <elements>
      <elements>
        <text>Hello World!</text>
        <type>text</type>
      </elements>
      <type>rich_text_section</type>
     </elements>
     <type>rich_text</type>
     <block_id>rOn</block_id>
   </blocks>
   <team>T08FENVBW00</team>
   <text>Hello World!</text>
   <type>message</type>
   <user>U08FESD94GG</user>
   <app_id>A08ENRX7XTP</app_id>
   <bot_id>B08EJK1N2T0</bot_id>
```

```
   <ts>1741701746.069729</ts>
  </message>
  <ok>true</ok>
  <ts>1741701746.069729</ts>
</root>
```

The following snippet shows a sample request body that requires a JSON-based array of structured elements instead of plain text.

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<channel>C08ERTAC10B</channel>
<blocks m:isArray="true">
<type>header</type>
<text>
<type>plain_text</type>
<text>Test block header 2</text>
<emoji m:type="xs:boolean">true</emoji>
</text>
</blocks>
  <blocks m:isArray="true">
<type>section</type>
<text>
<type>mrkdwn</type>
<text>This is a section block with a button.</text>
</text>
<accessory>
<type>button</type>
<text>
<type>plain_text</type>
<text>Click Me</text>
<emoji m:type="xs:boolean">true</emoji>
</text>
<value>click_me_123</value>
<url>https://google.com</url>
<action_id>button-action</action_id>
</accessory>
  </blocks>
</root>
```

The following snippet is a sample response:

```
<root>
  <channel>C08ERTAC10B</channel>
  <message>
   <bot_profile>
     <deleted>false</deleted>
     <name>PiP App</name>
     <team_id>T08FENVBW00</team_id>
     <id>B08EJK1N2T0</id>
     <icons>
      <image_36>https://a.slack-edge.com/80588/img/plugins/app/bot_36.png</image_36>
      <image_48>https://a.slack-edge.com/80588/img/plugins/app/bot_48.png</image_48>
      <image_72>https://a.slack-edge.com/80588/img/plugins/app/service_72.png</
image_72>
     </icons>
     <app_id>A08ENRX7XTP</app_id>
     <updated>1740409976</updated>
   </bot_profile>
    .....
    .....
   <team>T08FENVBW00</team>
   <text>Test block header 2 This is a section block with a button. Click Me button</
text>
   <type>message</type>
   <user>U08FESD94GG</user>
   <app_id>A08ENRX7XTP</app_id>
   <bot_id>B08EJK1N2T0</bot_id>
   <ts>1741702782.618649</ts>
  </message>
  <ok>true</ok>
  <ts>1741702782.618649</ts>
</root>
```

- The **Upload File** action uploads a file to an external URL returned by the files.getUploadURLExternal method.
  You must first obtain an external URL using the Fetch Objects action with the files.getUploadURLExternal method.

  The following snippet shows the Fetch Objects queryParams example:

  ```
  <root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
  <filename>Test.csv</filename>
  <length m:type="xs:int">500</length>
  </root>
  ```

  The following snippet is a sample response:

  ```
  <root>
    <file_id>F08HVLW0C8Y</file_id>
    <upload_url>https://files.slack.com/upload/v1/
  CwABAAAAXAoAAeMuftzrryIGCgACGCvGdudUbLgMAAMLAAEAAAALRTA4RUpGTEtKOE4LAAIAAAALVTA4RkVTRD
  k0R0cLAAMAAAALRjA4SFZMVzBDOFkACgAEAAAAAAAAAfQACwACAAAAFISJ62ujD8U8X7hjk7dkW_PrqDE2AA</
  upload_url>
    <ok>true</ok>
  </root>
  ```

  In the response, you obtained the URL and `file_id` for future use.

  In the Upload File action input fields, you must specify the URL and attach the file to upload.

  Response:

  ```
  <result xml="false">OK - 500</result>
  ```

  To complete the file upload, you must use the Update Object action with the files.completeUploadExternal method.

  The following snippet shows the Update Objects requestBody example:

  ```
  <root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
  <files m:isArray="true">
  <id>F08HVLW0C8Y</id>
  </files>
  <channel_id>C08ERTAC10B</channel_id>
  </root>
  ```

  The following snippet is a sample response:

  ```
  <root>
    <files>
     <preview>Usage: Account Number,Usage: Created By ID,Usage: Created Date,Usage:
  Description,Usage: End Date,Usage: File Name,Usage: ID,Usage: Import ID,Usage:
  Quantity,Usage: RBE Status,Usage: Source Type,Usage: Start Date,Usage: Submission
  Date,Usage: Unit of Measure,Usage: Updated By ID,Usage: Updated Date&#xD;
  A00000022,b3e9bf3ea720389dbd8e504ef8cd8ab5,10/14/2024,Automated Usage
  load,,,8a8aa2ca927956ff01928be9eb8d44b6,,8,Processed,API,10/29/2024,10/31/
  2024,Each,b3e9bf3ea720389dbd8e504ef8cd8ab5,10/29/2024&#xD;
  </preview>
     <filetype>csv</filetype>
     <title>Test.csv</title>
     <edit_link>https://pip-sandbox.enterprise.slack.com/files/U08FESD94GG/F08HVLW0C8Y/
  test.csv/edit</edit_link>
     <file_access>visible</file_access>
     <ims/>
     <mode>snippet</mode>
     ......
      ......
     <has_more_shares>false</has_more_shares>
     <is_external>false</is_external>
     <groups/>
     <pretty_type>CSV</pretty_type>
     <external_type/>
     <url_private_download>https://files.slack.com/files-pri/T08EJFLKJ8N-F08HVLW0C8Y/
  download/test.csv</url_private_download>
     <user_team>E08EJFLKJ8N</user_team>
     <permalink_public>https://slack-files.com/T08EJFLKJ8N-F08HVLW0C8Y-689f43783d</
  ```

```
permalink_public>
   <has_rich_preview>false</has_rich_preview>
   <is_starred>false</is_starred>
   <size>500</size>
   <channels>C08ERTAC10B</channels>
   <comments_count>0</comments_count>
   <name>Test.csv</name>
   <is_public>true</is_public>
   <mimetype>text/csv</mimetype>
   <public_url_shared>false</public_url_shared>
   <permalink>https://pip-sandbox.enterprise.slack.com/files/U08FESD94GG/F08HVLW0C8Y/
test.csv</permalink>
   <user>U08FESD94GG</user>
   <username/>
  </files>
  <ok>true</ok>
</root>
```

- The **Add Remote File** action adds and updates a file from a remote service.
  You can add a remote file using the **files.remote.add** method as shown in the following example. You must specify the fields that are required and optional.

  ```
  external_id: 8d79fd98-ff7b-437c-9fe8-4a22ae837888
  external_url: http://imgs.xkcd.com/comics/regex_golf.png
  title: regex_golf image
  ```

  The following snippet is a sample response:

  ```
  <root>
    <file>
     <filetype>remote</filetype>
     <external_id>8d79fd98-ff7b-437c-9fe8-4a22ae837888</external_id>
     <title>regex_golf image</title>
     <file_access>visible</file_access>
     <ims/>
     <mode>external</mode>
     <shares/>
     <external_url>http://imgs.xkcd.com/comics/regex_golf.png</external_url>
     <media_display_type>unknown</media_display_type>
     <url_private>http://imgs.xkcd.com/comics/regex_golf.png</url_private>
     <id>F08GSJC59GF</id>
     <display_as_bot>false</display_as_bot>
     <timestamp>1741706445</timestamp>
     <created>1741706445</created>
     <editable>false</editable>
     <has_more_shares>false</has_more_shares>
     <is_external>true</is_external>
     <groups/>
     <pretty_type>Remote</pretty_type>
     <external_type>app</external_type>
     <user_team>E08EJFLKJ8N</user_team>
     <has_rich_preview>false</has_rich_preview>
     <is_starred>false</is_starred>
     <size>0</size>
     <channels/>
     <comments_count>0</comments_count>
     <name>regex_golf_image</name>
     <is_public>false</is_public>
     <mimetype>application/vnd.slack-remote</mimetype>
     <public_url_shared>false</public_url_shared>
     <permalink>https://pip-sandbox.enterprise.slack.com/files/U08FESD94GG/F08GSJC59GF/
  regex_golf_image</permalink>
     <user>U08FESD94GG</user>
     <username/>
    </file>
    <warning>superfluous_charset</warning>
    <response_metadata>
     <warnings>superfluous_charset</warnings>
    </response_metadata>
    <ok>true</ok>
  </root>
  ```

To update an existing remote file, use the same action as the files.remote.update method. Specify the file by providing its ID in the file field and the field(s) you want to update, such as the title field.

Response:

```
<root>
  <file>
   <filetype>remote</filetype>
   <external_id>8d79fd98-ff7b-437c-9fe8-4a22ae837888</external_id>
   <title>regex_golf image updated</title>
   <file_access>visible</file_access>
   <ims/>
   <mode>external</mode>
   <shares/>
   <external_url>http://imgs.xkcd.com/comics/regex_golf.png</external_url>
   <media_display_type>unknown</media_display_type>
   <url_private>http://imgs.xkcd.com/comics/regex_golf.png</url_private>
   <id>F08GSJC59GF</id>
   <display_as_bot>false</display_as_bot>
   <timestamp>1741706445</timestamp>
   <created>1741706445</created>
   <editable>false</editable>
   <has_more_shares>false</has_more_shares>
   <is_external>true</is_external>
   <groups/>
   <pretty_type>Remote</pretty_type>
   <external_type>app</external_type>
   <user_team>E08EJFLKJ8N</user_team>
   <has_rich_preview>false</has_rich_preview>
   <is_starred>false</is_starred>
   <size>0</size>
   <channels/>
   <comments_count>0</comments_count>
   <name>regex_golf_image</name>
   <is_public>false</is_public>
   <mimetype>application/vnd.slack-remote</mimetype>
   <public_url_shared>false</public_url_shared>
   <permalink>https://pip-sandbox.enterprise.slack.com/files/U08FESD94GG/F08GSJC59GF/
regex_golf_image</permalink>
   <user>U08FESD94GG</user>
   <username/>
  </file>
  <warning>superfluous_charset</warning>
  <response_metadata>
   <warnings>superfluous_charset</warnings>
  </response_metadata>
  <ok>true</ok>
</root>
```

To share a remote file, use the Fetch Objects action with the files.remote.share method.

The following snippet is a queryParams example:

```
<root>
<channels>C08ERTAC10B</channels>
<file>F08GSJC59GF</file>
</root>
```

The following snippet is a sample response:

```
<root>
  <file>
   <filetype>remote</filetype>
   <external_id>8d79fd98-ff7b-437c-9fe8-4a22ae837888</external_id>
   <title>regex_golf image updated</title>
   <file_access>visible</file_access>
   <ims/>
   <mode>external</mode>
   <shares>
     <public>
      <C08ERTAC10B>
        <channel_name>business</channel_name>
```

```
          <share_user_id>U08FESD94GG</share_user_id>
          <reply_users/>
          <reply_users_count>0</reply_users_count>
          <team_id>T08FENVBW00</team_id>
          <source>UNKNOWN</source>
          <reply_count>0</reply_count>
          <ts>1741707399.987439</ts>
        </C08ERTAC10B>
      </public>
    </shares>
    <external_url>http://imgs.xkcd.com/comics/regex_golf.png</external_url>
    <media_display_type>unknown</media_display_type>
    <url_private>http://imgs.xkcd.com/comics/regex_golf.png</url_private>
    <id>F08GSJC59GF</id>
    <display_as_bot>false</display_as_bot>
    <timestamp>1741706445</timestamp>
    <created>1741706445</created>
    <editable>false</editable>
    <has_more_shares>false</has_more_shares>
    <is_external>true</is_external>
    <groups/>
    <pretty_type>Remote</pretty_type>
    <external_type>app</external_type>
    <user_team>E08EJFLKJ8N</user_team>
    <has_rich_preview>false</has_rich_preview>
    <is_starred>false</is_starred>
    <size>0</size>
    <channels>C08ERTAC10B</channels>
    <comments_count>0</comments_count>
    <name>regex_golf_image</name>
    <is_public>true</is_public>
    <mimetype>application/vnd.slack-remote</mimetype>
    <public_url_shared>false</public_url_shared>
    <permalink>https://pip-sandbox.enterprise.slack.com/files/U08FESD94GG/F08GSJC59GF/
regex_golf_image</permalink>
    <user>U08FESD94GG</user>
    <username/>
  </file>
  <ok>true</ok>
</root>
```

- The **Set User Photo** action sets the user's profile photo.
  Attach an image to the **image** field and optionally crop it using the crop fields.

  The following snippet is a sample response:

```
<root>
  <profile>
    <image_32>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_32.jpg</image_32>
    <image_original>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_original.jpg</image_original>
    <image_1024>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_1024.jpg</image_1024>
    <image_24>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_24.jpg</image_24>
    <image_192>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_192.jpg</image_192>
    <image_48>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_48.jpg</image_48>
    <image_72>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_72.jpg</image_72>
    <avatar_hash>aa3744ce61fd</avatar_hash>
    <image_512>https://avatars.slack-edge.com/
2025-03-11/8596614448865_aa3744ce61fdf7bed774_512.jpg</image_512>
  </profile>
  <ok>true</ok>
</root>
```

- The **Unfurl Message** action provides custom unfurling behavior for posted URLs.
  For example, you sent a message containing a link and retrieved its timestamp (ts).

The following snippet is a sample requestBody:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<channel>C08ERTAC10B</channel>
<ts>1741349416.035149</ts>
<unfurls>
<url_to_unfurl url="https://www.nytimes.com/2025/03/06/dining/secret-to-best-
pancakes.html">
<blocks m:isArray="true">
<type>section</type>
<text>
<type>mrkdwn</type>
<text>Take a look at this unfurled message!</text>
</text>
<accessory>
<type>image</type>
<image_url>https://images.pexels.com/photos/376464/pexels-photo-376464.jpeg</
image_url>
<alt_text>pancakes_image</alt_text>
</accessory>
</blocks>
</url_to_unfurl>
</unfurls>
</root>
```

The following snippet is a sample response:


```
<root>
  <ok>true</ok>
</root>
```

Note: Unfurling links work only if the links are registered in the app settings on the Event Subscriptions page.

Using a Slack connection in a process

After you create a Slack connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Slack connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Upload File** action to upload a file to an external URL returned by the files.getUploadURLExternal method as shown in the following image:

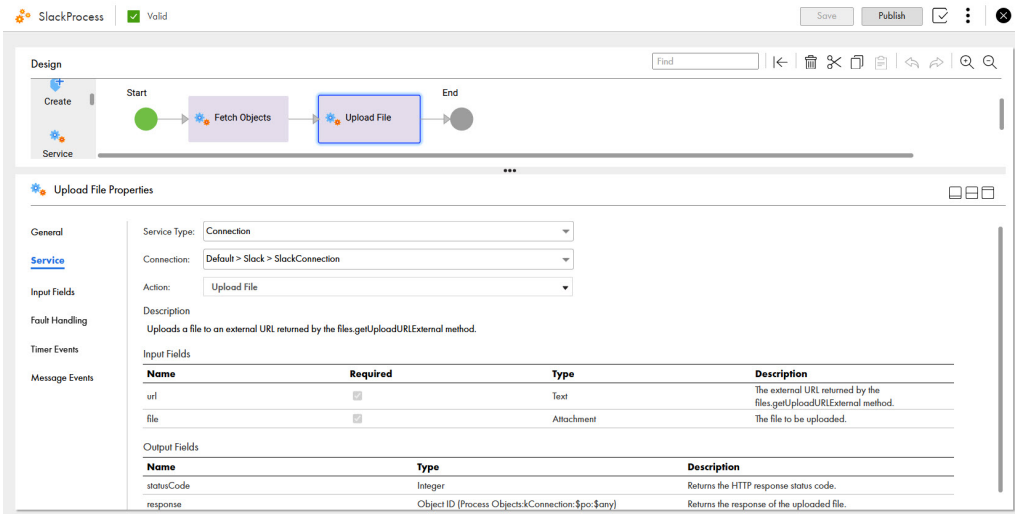

In this case, Application Integration populates the **url** and **file** objects under the input fields and the **statusCode** and **response** objects under the output fields.

6. Configure further steps as needed.
7. Validate, save, and publish the process.