Informatica® Cloud Application Integration
November 2025

Databricks Mosaic AI Connector Guide

Informatica Cloud Application Integration Databricks Mosaic AI Connector Guide
November 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-11-21

Table of Contents

Preface 5

Chapter 1: Introduction to Databricks Mosaic AI Connector 6

Databricks Mosaic AI overview 6

Chapter 2: Databricks Mosaic AI connections 7

Create an OAuth application 7

Basic connection properties 10

Databricks Mosaic AI connection authentication properties 10

Databricks Mosaic AI connection properties 11

Databricks Mosaic AI connection metadata 11

Databricks Mosaic AI connection actions and objects 12

Using a Databricks Mosaic AI connection in a process 17

Preface

Read the *Databricks Mosaic AI Connector Guide* to learn how to set up and use Databricks Mosaic AI connections. Use a Databricks Mosaic AI connection to interact with Databricks Mosaic AI services. This guide assumes that you have an understanding of Databricks Mosaic AI concepts.

CHAPTER 1

Introduction to Databricks Mosaic AI Connector

Use Databricks Mosaic AI Connector to interact with Databricks Mosaic AI services. The connector specification is designed for use with an integration platform, such as Informatica IICS.

The Databricks Mosaic AI Connector is an integration tool that connects Databricks' Unified Analytics platform with Mosaic's advanced AI and geospatial libraries. It enables users to perform advanced spatial data processing and AI-driven analytics directly within the Databricks environment, enhancing the ability to analyze, visualize, and derive insights from complex geospatial datasets. This connector streamlines workflows by combining big data analytics with spatial intelligence, supporting scalable, collaborative, and efficient data-driven decision-making.

Databricks Mosaic AI Connector provides the following key features:

- Connects Databricks with Mosaic's AI and geospatial libraries for streamlined big data and spatial analytics.
- Leverages AI models to analyze spatial and non-spatial data for smarter, predictive insights.
- Utilizes Databricks' scalable architecture with optimized spatial processing for efficient large-scale data handling.
- Supports advanced geospatial functions, such as spatial joins, indexing, and geometry operations.
- Enables collaboration across data science, engineering, and business teams with multi-user support.

Databricks Mosaic AI overview

Databricks is a unified, open analytics platform for building, deploying, sharing, and maintaining enterprise-grade data, analytics, and AI solutions at scale. The Databricks Data Intelligence Platform integrates with cloud storage and security in your cloud account, and manages and deploys cloud infrastructure for you.

Databricks Mosaic AI Connector is ideal for industries, such as transportation, environmental science, and urban planning where the spatial context is crucial.

CHAPTER 2

Databricks Mosaic AI connections

Use Databricks Mosaic AI Connector to connect to Databricks from Application Integration. With the Databricks Mosaic AI connection, you can read data from Databricks and write data back to Databricks.

You can perform the following actions using the Databricks Mosaic AI Connector:

- Chat completions
- Create and get a conversation message
- Create embeddings
- Create, get, and list a vector endpoint
- Create, list, and query vector index
- Execute message SQL
- Function calling
- Get Genie space
- Get message attachment result
- List model serving endpoints
- Start a conversation with Genie
- Structured output
- Update AI gateway


After you create a Databricks Mosaic AI connection, you can validate, test, and save the connection.

You can then publish the Databricks Mosaic AI connection and click the **Metadata** tab to view the generated process objects for the connection.


Create an OAuth application

To use the Databricks Mosaic AI connector, you must create an OAuth application for a Databricks Mosaic AI connector.

1. Log in to your Databricks account.
2. From the **workspace** list, select **Manage account** as shown in the following image:

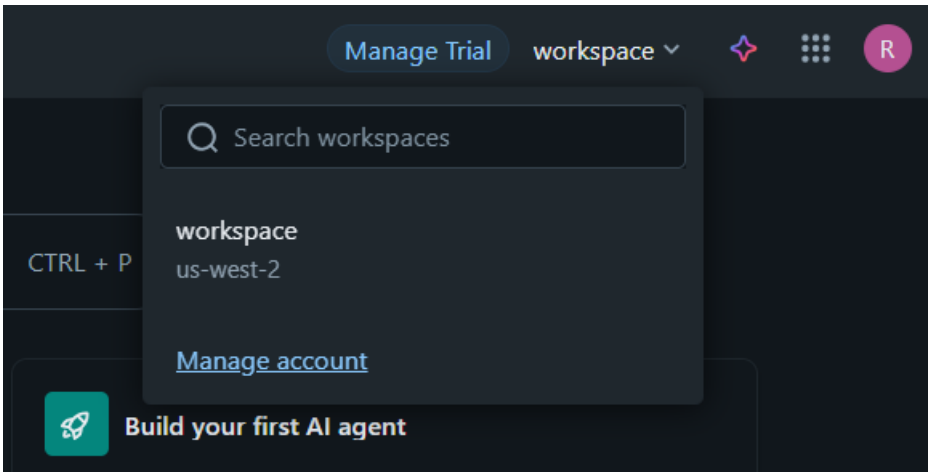

3. Go to **Settings** > **App connections** and click **Add connection**.
4. Enter the OAuth connection details, such as application name and redirect URLs as shown in the following image:

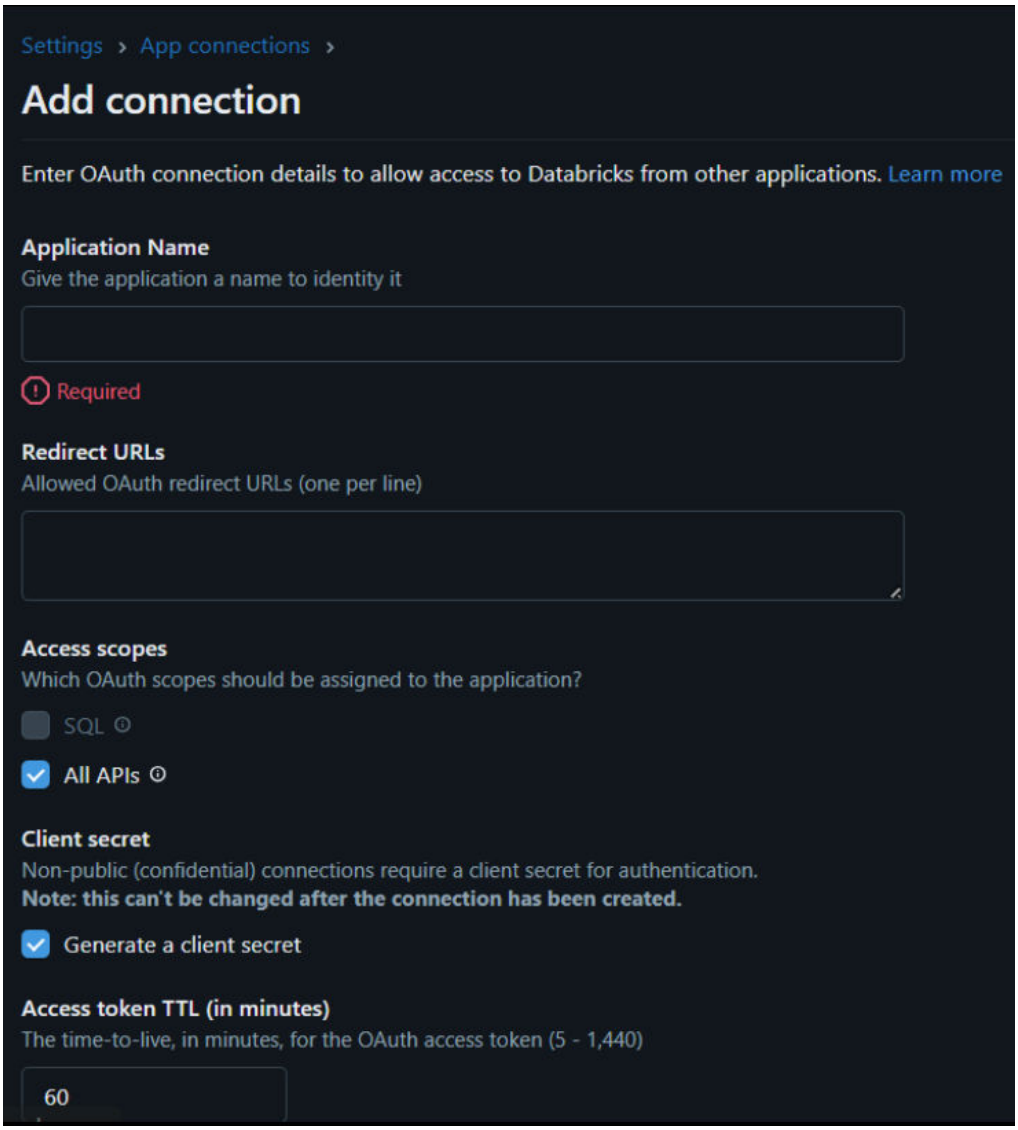

5. After you add the connection, Databricks generates your client ID and client secret.
6. Copy the **Client ID** and **Client secret**. You will need these details to configure the Databricks Mosaic AI connection.
7. Use the client ID and client secret to connect your Databricks Mosaic AI connector application securely.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Databricks Mosaic AI connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Databricks Mosaic AI**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for Databricks Mosaic AI Connector.
OData-Enabled	Not supported for Databricks Mosaic AI Connector.

After you configure the basic properties, you can define the OAuth 2.0 authentication properties for the Databricks Mosaic AI connection.

Databricks Mosaic AI connection authentication properties

When you create a Databricks Mosaic AI connection, you can configure the connection using OAuth 2.0 authentication properties.

To authenticate the Databricks Mosaic AI connection using OAuth 2.0 authentication, select **OAuth2** in the **Authentication Type** list and configure the following properties:

Property	Description
Grant Type	Required. Select the required grant type based on your use case.
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://<databricks-instance>/oidc/v1/authorize`

Property	Description
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example:`https://<databricks-instance>/oidc/v1/token` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider that you copied after creating the OAuth application.
Client Secret	Required. Enter the client secret to connect to the OAuth provider that you copied after creating the OAuth application.
Scope	Required. Specify the scope as `all-apis+offline_access`.
Authorization Status	Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

Databricks Mosaic AI connection properties


To configure the Databricks Mosaic AI connection, enter the host URL in the **Host** property within the **Connection Properties** section. The host name is used to access the Databricks Mosaic AI instance.

Databricks Mosaic AI connection metadata

After you create a Databricks Mosaic AI connection, you can validate and save the connection. You can then publish the Databricks Mosaic AI connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Databricks Mosaic AI connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Databricks Mosaic AI connection:

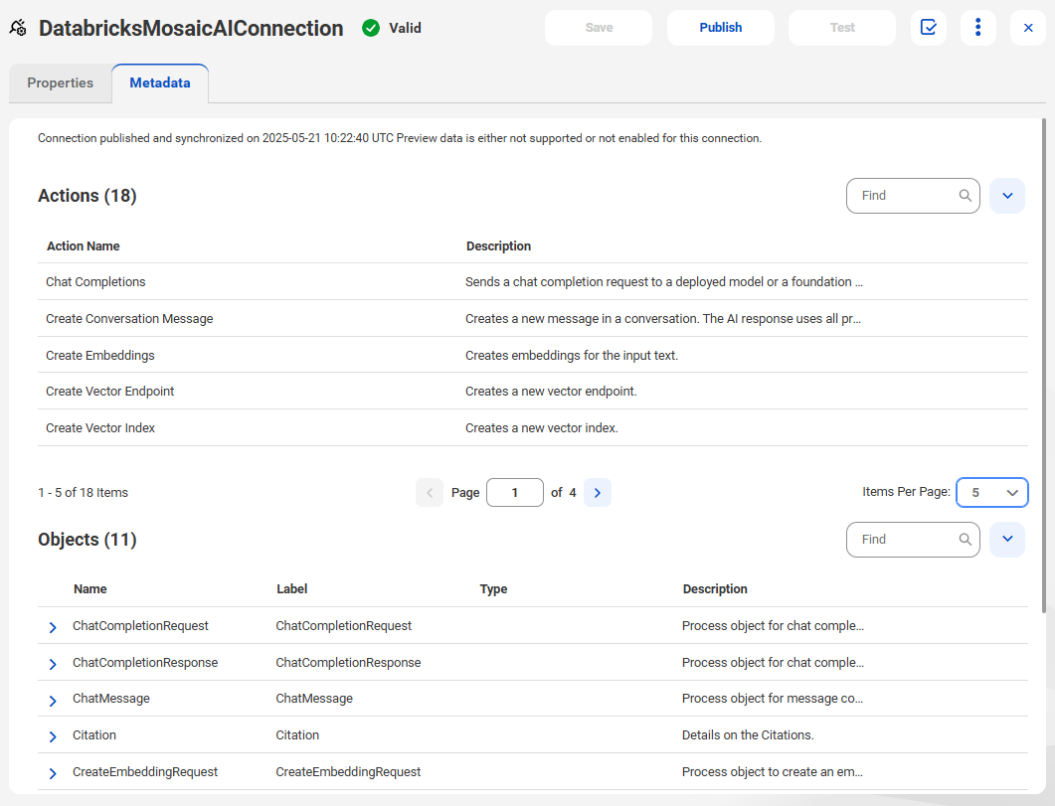

Databricks Mosaic AI connection actions and objects

When you publish a Databricks Mosaic AI connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

Consider the following information when you use specific actions and objects:

- The **Chat Completions** action sends a chat completion request to a deployed model or a foundation model.
  The request body contains a series of messages. The model generates a response to the last message, using earlier messages as context.

  The following snippet is a request body example:

```
<chatCompletionRequest xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <messages>
        <role>system</role>
        <content>You are an AI that helps with complex problem solving.</content>
    </messages>
    <messages>
        <role>user</role>
        <content>Can you explain how quantum computing works?</content>
    </messages>
    <max_tokens m:type="xs:int">150</max_tokens>
    <temperature m:type="xs:double">0.7</temperature>
    <top_p m:type="xs:int">1</top_p>
    <n m:type="xs:int">1</n>
</chatCompletionRequest>
```

- The **List Model Serving Endpoints** action lists all the available model serving endpoints.


The following snippet is a sample response:

```
<root>
   <endpoints>
      <permission_level>CAN_MANAGE</permission_level>
      <endpoint_type>FOUNDATION_MODEL_API</endpoint_type>
      <task>llm/v1/chat</task>
      <creation_timestamp>1699610000000</creation_timestamp>
      <name>databricks-llama-4-maverick</name>
      <last_updated_timestamp>1699610000000</last_updated_timestamp>
      <state>
         <config_update>NOT_UPDATING</config_update>
         <ready>READY</ready>
      </state>
      <config>
         <served_entities>
            <name>databricks-llama-4-maverick</name>
            <type>FOUNDATION_MODEL</type>
            <foundation_model>
               <input_price>7.143</input_price>
               <price_unit>DBUs per 1M tokens</price_unit>
               <docs>https://docs.databricks.com/machine-learning/foundation-models/
supported-models.html#llama-4-maverick</docs>
               <price>21.429</price>
               <pricing_model>Pay-per-token</pricing_model>
               <name>llama-4-maverick</name>
               <description>Llama 4 Maverick is a state-of-the-art mixture of experts
(MoE) language model trained and released by Meta. The model has 17B active
parameters, 128 experts, and 400 billion total parameters. The model supports a
context length of 128K tokens. The model is optimized for multilingual dialogue use
cases, supporting 12 languages, and is aligned with human preferences for helpfulness
and safety. It is not intended for use in languages other than English. Llama 4 is
licensed under the Meta Llama 4 Community License, Copyright Â© Meta Platforms, Inc.
All Rights Reserved. Customers are responsible for ensuring compliance with
applicable model licenses.</description>
               <display_name>Llama 4 Maverick</display_name>
            </foundation_model>
         </served_entities>
      </config>
   </endpoints>
</root>
```


- The **Get Genie Space** action gets details of a Genie Space.
  You must enter the space ID in the spaceID input field.

  To find the space ID, perform the following steps:

  1. Click **Genie**.
  2. Select the space.
     The following image shows the Genie space with the list of available spaces:

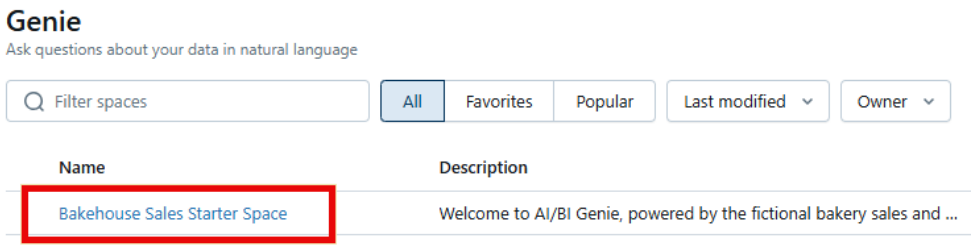

  3. Copy the space ID as shown in the following image:



- The **Start Conversation with Genie** action starts a new conversation with the AI Genie.
  You must enter the following input fields:

  - ConversationPrompt

    ```
    <startConversationGenieRequest xmlns:m="urn:informatica:ae:xquery:json2xml:meta-
    data">
      <content>Which product sold the most units?</content>
    </startConversationGenieRequest>
    ```

  - spaceID

- The **List Vector Index** action lists all the indexes at the given endpoint.
  The following snippet is a sample request:

  ```
  <root
     xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
     <endpoint_name>docs-endpoint4</endpoint_name>
     <delta_sync_index_spec>
             <columns_to_sync>review</columns_to_sync>
             <columns_to_sync>franchiseID</columns_to_sync>
             <columns_to_sync>review_date</columns_to_sync>
             <columns_to_sync>new_id</columns_to_sync>
         <embedding_source_columns m:isArray="true">
              <embedding_model_endpoint_name>databricks-bge-large-en</
  embedding_model_endpoint_name>
              <name>review</name>
          </embedding_source_columns>
         <pipeline_type>TRIGGERED</pipeline_type>
         <source_table>workspace.bakehouse2.media_customer_reviews</source_table>
     </delta_sync_index_spec>
     <index_type>DELTA_SYNC</index_type>
     <name>workspace.bakehouse2.media_customer_reviews_indexes</name>
     <primary_key>franchiseID</primary_key>
  </root>
  ```

- The **List Vector Endpoints** action lists all the vector endpoints.
- The **Create Vector Endpoint** action creates a new vector endpoint.
  The following snippet is a sample request:

  ```
  <CreateVectorEndpoint xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
       <name>docs-endpoint4</name>
       <endpoint_type>STANDARD</endpoint_type>
   </CreateVectorEndpoint >
  ```

- The **Get Vector Endpoint** action gets a vector endpoint.
- The **Create Vector Index** action creates a new vector index.
  The following snippet is a sample request:

  ```
  <root
     xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
     <endpoint_name>docs-endpoint4</endpoint_name>
     <delta_sync_index_spec>
             <columns_to_sync>review</columns_to_sync>
             <columns_to_sync>franchiseID</columns_to_sync>
             <columns_to_sync>review_date</columns_to_sync>
             <columns_to_sync>new_id</columns_to_sync>
         <embedding_source_columns m:isArray="true">
              <embedding_model_endpoint_name>databricks-bge-large-en</
  embedding_model_endpoint_name>
              <name>review</name>
          </embedding_source_columns>
         <pipeline_type>TRIGGERED</pipeline_type>
         <source_table>workspace.bakehouse2.media_customer_reviews</source_table>
     </delta_sync_index_spec>
     <index_type>DELTA_SYNC</index_type>
     <name>workspace.bakehouse2.media_customer_reviews_indexes</name>
     <primary_key>franchiseID</primary_key>
  </root>
  ```

- The **Query Vector Index** action queries the specified vector index.

You must provide the following inputs:

- indexName. For example: `workspace.bakehouse2.media_customer_reviews_indexes`
- queryVectorIndexRequest
  The following snippet is a sample request:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <num_results>5</num_results>
    <columns>review</columns>
    <columns>franchiseID</columns>
    <query_text>Oatmeal Cookies</query_text>
</root>
```

- The **Create Embeddings** action creates embeddings for the input text.
  The following snippet is a sample request:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
    <input>Databricks</input>
</root>
```

- The **Update AI Gateway** action updates the AI Gateway of a serving endpoint.
  The following snippet is a sample request:

```
<updateAIGatewayRequest xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<usage_tracking_config>
    <enabled>true</enabled>
</usage_tracking_config>
<rate_limits m:isArray="true">
    <calls>15</calls>
    <key>user</key>
    <renewal_period>minute</renewal_period>
</rate_limits>
</updateAIGatewayRequest>
```

- The **Create Conversation Message** action creates a new message in a conversation. The AI response uses all previously created messages in the conversation to respond.
  You must enter the following input fields:
  - space_id
  - conversation_id
  - content

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<content>What is the top 10 products sold?</content>
</root>
```

- The **Get Conversation Message** action gets the message from the conversation.
  You must enter the following input fields:
  - space_id
  - conversation_id
  - message_id
- The **Execute Message SQL** action executes the SQL query for a message query attachment. Use this action when the query attachment has expired and needs to be executed again.
  You must enter the following input fields:
  - space_id
  - conversation_id
  - message_id
  - attachment_id
- The **Get Message Attachment Result** action gets the result of an SQL query if the message has a query attachment. This is only available if the message has a query attachment and the message status is EXECUTING_QUERY or COMPLETED.

You must enter the following input fields:

- space_id
- conversation_id
- message_id
- attachment_id

- The **Function Calling** action provides an option to control the LLM outputs, ensuring that they generate structured responses more reliably.
  The following snippet is a sample request:

```
<ChatCompletionRequest xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
     <model>databricks-llama-2-70b-chat</model>
     <max_tokens m:type="xs:int">150</max_tokens>
     <temperature m:type="xs:double">0.7</temperature>

     <messages m:isArray="true">
         <role>system</role>
         <content>You are a helpful assistant. When asked for the age, you must use
the available function.</content>
     </messages>
     <messages m:isArray="true">
         <role>user</role>
         <content>my name is john and I am 35 years old</content>
     </messages>
     <tools m:isArray="true">
         <type>function</type>
         <function>
             <name>get_age_name</name>
             <description>Get name and age of the person</description>
             <parameters>
                 <type>object</type>
                 <properties>
                     <age>
                         <type>integer</type>
                         <description>The age of the person</description>
                     </age>
                     <name>
                         <type>string</type>
                         <description>The name of the person</description>
                      </name>
                 </properties>
                 <required m:isArray="true">age</required>
                 <required m:isArray="true">name</required>
             </parameters>
         </function>
     </tools>
     <tool_choice>auto</tool_choice>
 </ChatCompletionRequest>
```

- The **Structured Output** action provides an option to generate structured data in the form of JSON objects from the input data.
  The following snippet is a sample request:


```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
      <max_tokens m:type="xs:int">150</max_tokens>
     <temperature m:type="xs:double">0.7</temperature>
     <messages m:isArray="true">
         <role>system</role>
         <content>You are an expert text analysis assistant. Your task is to extract
specific entities from the provided text and present them using the available
'extract_entities' tool. Only use the tool provided. Do not add any conversational
fluff before or after calling the tool.</content>
     </messages>
     <messages m:isArray="true">
         <role>user</role>
         <content>The contact person is Jane Doe, a Software Engineer at Acme Corp.
You can reach her at jane.doe@acme.com for further inquiries.</content>
```

```
    </messages>
    <tools m:isArray="true">
        <type>function</type>
        <function>
            <name>extract_entities</name>
            <description>Extracts named entities like person name, company, role,
and email from a given text.</description>
            <parameters>
                <type>object</type>
                <properties>
                    <person_name>
                        <type>string</type>
                        <description>The full name of the person mentioned.</
description>
                    </person_name>
                    <company_name>
                        <type>string</type>
                        <description>The name of the company mentioned.</description>
                    </company_name>
                    <role_title>
                        <type>string</type>
                        <description>The job title or role of the person.</
description>
                    </role_title>
                    <contact_email>
                        <type>string</type>
                        <description>The email address mentioned.</description>
                    </contact_email>
                </properties>
                <required>person_name</required>
                <required>company_name</required>
                <required>role_title</required>
                <required>contact_email</required>
            </parameters>
        </function>
    </tools>
    <tool_choice>
        <type>function</type>
        <function>
            <name>extract_entities</name>
        </function>
    </tool_choice>
</root>
```

Using a Databricks Mosaic AI connection in a process

After you create a Databricks Mosaic AI connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Databricks Mosaic AI connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Create Vector Endpoint** action to creates a new vector endpoint as shown in the following image:

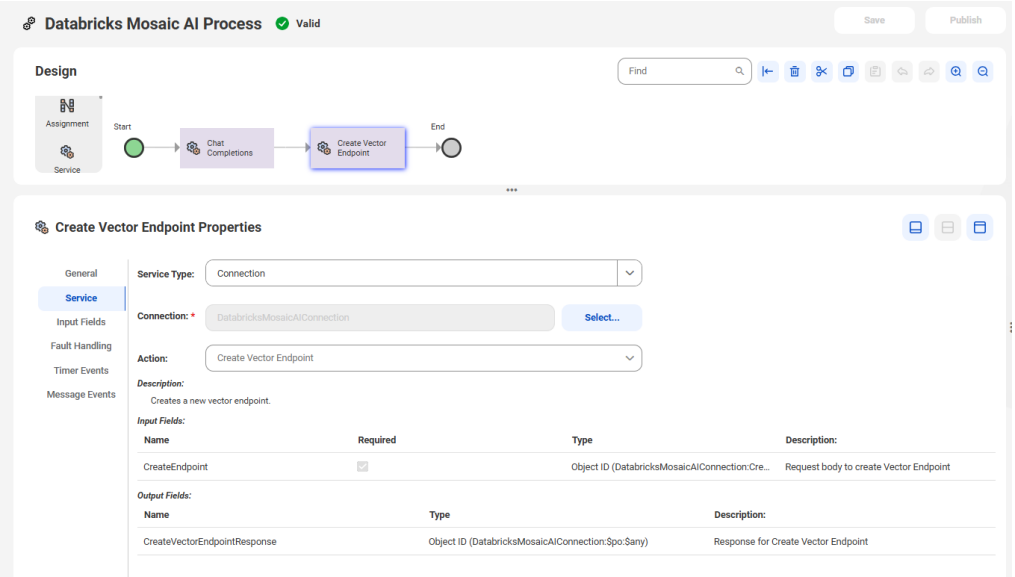

In this case, Application Integration populates the **CreateEndpoint** object under the input fields and the **CreateVectorEndpointResponse** object under the output fields.

6. Configure further steps as needed.
7. Validate, save, and publish the process.